

## 1.2 A Slew Rate Controlled Load Switch in PPAK SC75-6, and TDFN4 1.2 mm x 1.6 mm

### DESCRIPTION

The SiP4282 series is a slew rate controlled high side switch. The switch is of a low ON resistance P-Channel MOSFET that supports continuous current up to 1.2 A.

The SiP4282 series operates with an input voltage from 1.8 V to 5.5 V. It offers under voltage lock out that turns the switch off when an input under voltage condition exists. The "A" option without UVLO extends the minimum operation voltage from 1.8 V down to 1.5 V. The SiP4282 is available in two different versions of slew rates, 100  $\mu$ s and 1 ms. The SiP4282 series integrates load discharge circuit to ensure the discharge of capacitive load when the switch is disabled. The SiP4282 features low input logic level to interface with low control voltage from microprocessors. This device has a very low operating current (typically 2.5  $\mu$ A for SiP4282 and 50 pA for SiP4282A).

The SiP4282 is available in lead (Pb)-free package options including 6 pin PPAK SC75-6, and 4 pin TDFN4 1.2 mm x 1.6 mm DFN4 packages. The operation temperature range is specified from - 40  $^{\circ}$ C to + 85  $^{\circ}$ C.

The SiP4282 compact package options, operation voltage range, and low operating current make it a good fit for battery power applications.

### FEATURES

- 1.8 V to 5.5 V input voltage range for SiP4282
- 1.5 V to 5.5 V input voltage range for SiP4282A
- Very low  $R_{DS(ON)}$ , typically 105 m $\Omega$  at 5 V and 175 m $\Omega$  at 3 V
- Slew rate controlled turn-on time options: 100  $\mu$ s, and 1 ms
- Fast shutdown load discharge
- Low quiescent current, 4  $\mu$ A for SiP4282
- Low quiescent current, 1  $\mu$ A for SiP4282A
- Low shutdown current < 1  $\mu$ A
- UVLO of 1.4 V for SiP4282
- PowerPAK SC-75 1.6 mm x 1.6 mm and TDFN4 1.2 mm x 1.6 mm packages
- Compliant to RoHS directive 2002/95/EC


**RoHS**  
COMPLIANT

### APPLICATIONS

- Cellular telephones
- Digital still cameras
- Personal digital assistants (PDA)
- Hot swap supplies
- Notebook computers
- Personal communication devices
- Portable Instruments

### TYPICAL APPLICATION CIRCUIT

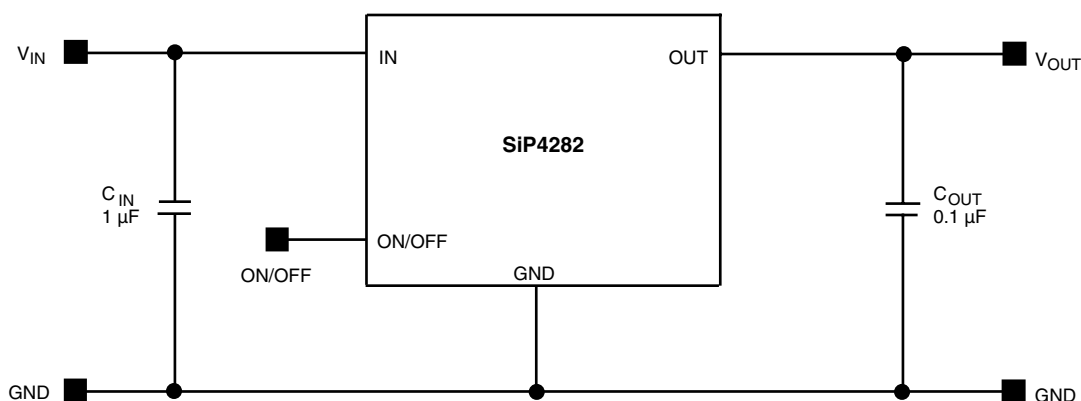


Figure 1 - SiP4282 Typical Application Circuit

**ORDERING INFORMATION**

| Temperature Range | Package         | Slew Rate (typ.) | Under Voltage Lockout | Marking | Part Number        |
|-------------------|-----------------|------------------|-----------------------|---------|--------------------|
| - 40 °C to 85 °C  | PPAK SC75-6     | 1 ms             | No                    | LDxxx   | SiP4282ADVP2-T1GE3 |
|                   |                 | 100 $\mu$ s      | No                    | LExxx   | SiP4282ADVP3-T1GE3 |
|                   |                 | 100 $\mu$ s      | Yes                   | LFxxx   | SiP4282DVP3-T1GE3  |
|                   | TDFN4 1.2 x 1.6 | 1 ms             | No                    | AAx     | SiP4282ADNP2-T1GE4 |
|                   |                 | 100 $\mu$ s      | No                    | ABx     | SiP4282ADNP3-T1GE4 |
|                   |                 | 100 $\mu$ s      | Yes                   | ACx     | SiP4282DNP3-T1GE4  |

Notes:

xxx = Lot Code

**ABSOLUTE MAXIMUM RATINGS**

| Parameter                                         | Limit                                    | Unit |
|---------------------------------------------------|------------------------------------------|------|
| Supply Input Voltage ( $V_{IN}$ )                 | - 0.3 to 6                               | V    |
| Enable Input Voltage ( $V_{ON/OFF}$ )             | - 0.3 to 6                               |      |
| Output Voltage ( $V_{OUT}$ )                      | - 0.3 to $V_{IN} + 0.3$                  |      |
| Maximum Continuous Switch Current ( $I_{MAX}$ )   | 1.4                                      | A    |
| Maximum Pulsed Current ( $I_{DM}$ ) $V_{IN}$      | $V_{IN} \geq 2.5$ V                      |      |
|                                                   | $V_{IN} < 2.5$ V                         |      |
| ESD Rating (HBM)                                  | 4000                                     | V    |
| Junction Temperature ( $T_J$ )                    | - 40 to 125                              | °C   |
| Thermal Resistance ( $\theta_{JA}$ ) <sup>a</sup> | 6 pin PPAK SC75 <sup>b</sup>             | °C/W |
|                                                   | 4 pin TDFN4 1.2 mm x 1.6 mm <sup>c</sup> |      |
| Power Dissipation ( $P_D$ ) <sup>a</sup>          | 6 pin PPAK SC75 <sup>b</sup>             | mW   |
|                                                   | 4 pin TDFN4 1.2 mm x 1.6 mm <sup>c</sup> |      |

Notes:

a. Device mounted with all leads and power pad soldered or welded to PC board.

b. Derate 11.1 mW/°C above  $T_A = 70$  °C.c. Derate 5.9 mW/°C above  $T_A = 70$  °C, see PCB layout.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating/conditions for extended periods may affect device reliability.

**RECOMMENDED OPERATING RANGE**

| Parameter                                             | Limit      | Unit |
|-------------------------------------------------------|------------|------|
| Input Voltage Range ( $V_{IN}$ ) for SiP4282 Version  | 1.8 to 5.5 | V    |
| Input Voltage Range ( $V_{IN}$ ) for SiP4282A Version | 1.5 to 5.5 | V    |
| Operating Temperature Range                           | - 40 to 85 | °C   |

| SPECIFICATIONS                         |                        |                                                                                                                                                |                            |                   |                   |        |
|----------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------------------|-------------------|--------|
| Parameter                              | Symbol                 | Test Conditions Unless Specified<br>V <sub>IN</sub> = 5.0, T <sub>A</sub> = - 40 °C to 85 °C<br>(Typical values are at T <sub>A</sub> = 25 °C) | Limits<br>- 40 °C to 85 °C |                   |                   | Unit   |
|                                        |                        |                                                                                                                                                | Min. <sup>a</sup>          | Typ. <sup>b</sup> | Max. <sup>a</sup> |        |
| Operating Voltage <sup>c</sup>         | V <sub>IN</sub>        | For SiP4282xxx                                                                                                                                 | 1.8                        | -                 | 5.5               | V      |
| Operating Voltage                      |                        | For SiP4282Axxx                                                                                                                                | 1.5                        | -                 | 5.5               |        |
| Under Voltage Voltage                  | V <sub>UVLO</sub>      | For SiP4282xxx, V <sub>IN</sub> falling                                                                                                        | 1.0                        | 1.4               | 1.8               |        |
| Under Voltage Lockout Hysteresis       | V <sub>UVLO(hyh)</sub> | For SiP4282xxx                                                                                                                                 | -                          | 250               | -                 | mV     |
| Quiescent Current                      | I <sub>Q</sub>         | For SiP4282xxx, On/Off = active                                                                                                                | -                          | 2.5               | 4                 | μA     |
|                                        |                        | For SiP4282Axxx, On/Off = active                                                                                                               | -                          | 0.00005           | 1                 |        |
| On-Resistance                          | R <sub>DS(on)</sub>    | V <sub>IN</sub> = 5 V, I <sub>L</sub> = 500 mA, T <sub>A</sub> = 25 °C                                                                         | -                          | 105               | 230               | mΩ     |
|                                        |                        | V <sub>IN</sub> = 4.2 V, I <sub>L</sub> = 500 mA, T <sub>A</sub> = 25 °C                                                                       | -                          | 110               | 250               |        |
|                                        |                        | V <sub>IN</sub> = 3 V, I <sub>L</sub> = 500 mA, T <sub>A</sub> = 25 °C                                                                         | -                          | 135               | 290               |        |
|                                        |                        | V <sub>IN</sub> = 1.8 V, I <sub>L</sub> = 500 mA, T <sub>A</sub> = 25 °C                                                                       | -                          | 230               | 480               |        |
|                                        |                        | For SiP4282Axxx, V <sub>IN</sub> = 1.5 V,<br>I <sub>L</sub> = 500 mA, T <sub>A</sub> = 25 °C                                                   | -                          | 350               | 520               |        |
| On-Resistance Temp-Coefficient         | TC <sub>RDS</sub>      |                                                                                                                                                | -                          | 2800              | -                 | ppm/°C |
| On/Off Input Low Voltage <sup>d</sup>  | V <sub>IL</sub>        | For SiP4282Axxx,<br>V <sub>IN</sub> ≥ 1.5 V to < 1.8 V                                                                                         | -                          | -                 | 0.3               | V      |
|                                        |                        | V <sub>IN</sub> ≥ 1.8 V to < 2.7 V                                                                                                             | -                          | -                 | 0.4               |        |
|                                        |                        | V <sub>IN</sub> ≥ 2.7 V to ≤ 5.5 V                                                                                                             | -                          | -                 | 0.6               |        |
| On/Off Input High Voltage <sup>d</sup> | V <sub>IH</sub>        | V <sub>IN</sub> ≥ 1.5 V to < 2.7 V                                                                                                             | 1.3                        | -                 | -                 |        |
|                                        |                        | V <sub>IN</sub> ≥ 2.7 V to < 4.2 V                                                                                                             | 1.5                        | -                 | -                 |        |
|                                        |                        | V <sub>IN</sub> ≥ 4.2 V to ≤ 5.5 V                                                                                                             | 1.8                        | -                 | -                 |        |
| On/Off Input Leakage                   | I <sub>SINK</sub>      | V <sub>On/Off</sub> = 5.5 V                                                                                                                    | -                          | -                 | 1                 | μA     |
| Output Pull-Down Resistance            | R <sub>PD</sub>        | On/Off = Inactive, T <sub>A</sub> = 25 °C                                                                                                      | -                          | 180               | 250               | Ω      |
| SiP4282Axxx2 Versions                  |                        |                                                                                                                                                |                            |                   |                   |        |
| Output Turn-On Delay Time              | t <sub>d(on)</sub>     | V <sub>IN</sub> = 5 V, R <sub>LOAD</sub> = 10 Ω, T <sub>A</sub> = 25 °C                                                                        | -                          | 20                | 40                | μs     |
| Output Turn-On Rise Time               | t <sub>(on)</sub>      | V <sub>IN</sub> = 5 V, R <sub>LOAD</sub> = 10 Ω, T <sub>A</sub> = 25 °C                                                                        | -                          | 1100              | 1500              |        |
| Output Turn-Off Delay Time             | t <sub>d(off)</sub>    | V <sub>IN</sub> = 5 V, R <sub>LOAD</sub> = 10 Ω, T <sub>A</sub> = 25 °C                                                                        | -                          | 4                 | 10                |        |
| SiP4282xxx3 and SiP4282Axxx3 Versions  |                        |                                                                                                                                                |                            |                   |                   |        |
| Output Turn-On Delay Time              | t <sub>d(on)</sub>     | V <sub>IN</sub> = 5 V, R <sub>LOAD</sub> = 10 Ω, T <sub>A</sub> = 25 °C                                                                        | -                          | 20                | 40                | μs     |
| Output Turn-On Rise Time               | t <sub>(on)</sub>      | V <sub>IN</sub> = 5 V, R <sub>LOAD</sub> = 10 Ω, T <sub>A</sub> = 25 °C                                                                        | -                          | 140               | 180               |        |
| Output Turn-Off Delay Time             | t <sub>d(off)</sub>    | V <sub>IN</sub> = 5 V, R <sub>LOAD</sub> = 10 Ω, T <sub>A</sub> = 25 °C                                                                        | -                          | 4                 | 10                |        |

Notes:

- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing
- Part requires minimum start-up of  $V_{IN} \geq 2.0\text{ V}$  to ensure operation down to  $1.8\text{ V}$ .
- For  $V_{IN}$  outside this range consult typical ON/OFF threshold curve.

## PIN CONFIGURATION

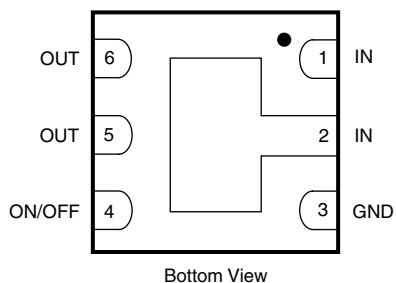


Figure 2 - PPAK SC75-6 Package

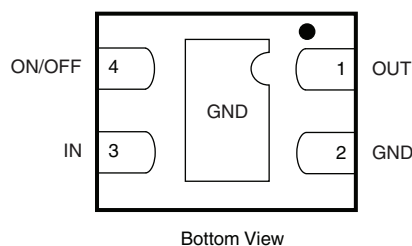


Figure 3 - TDFN4 1.2 mm x 1.6 mm Package

## PIN DESCRIPTION

| Pin Number |       | Name   | Function                                                                                             |
|------------|-------|--------|------------------------------------------------------------------------------------------------------|
| PPAK       | TDFN4 |        |                                                                                                      |
| 1, 2       | 3     | IN     | This pin is the p-channel MOSFET source connection. Bypass to ground through a 1 $\mu$ F capacitor.  |
| 3          | 2     | GND    | Ground connection                                                                                    |
| 4          | 4     | ON/OFF | Enable input                                                                                         |
| 5, 6       | 1     | OUT    | This pin is the p-channel MOSFET drain connection. Bypass to ground through a 0.1 $\mu$ F capacitor. |

## TYPICAL CHARACTERISTICS internally regulated, 25 °C, unless otherwise noted

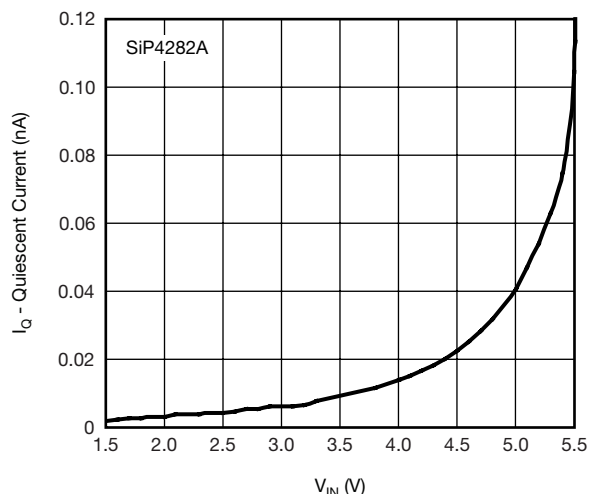


Figure 4 - Quiescent Current vs. Input Voltage

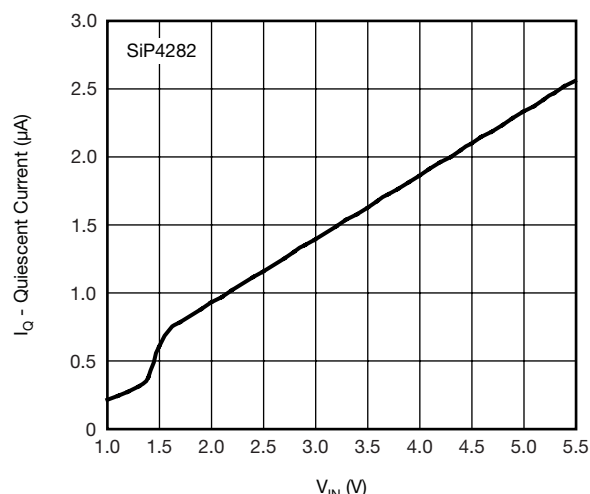


Figure 5 - Quiescent Current vs. Input Voltage

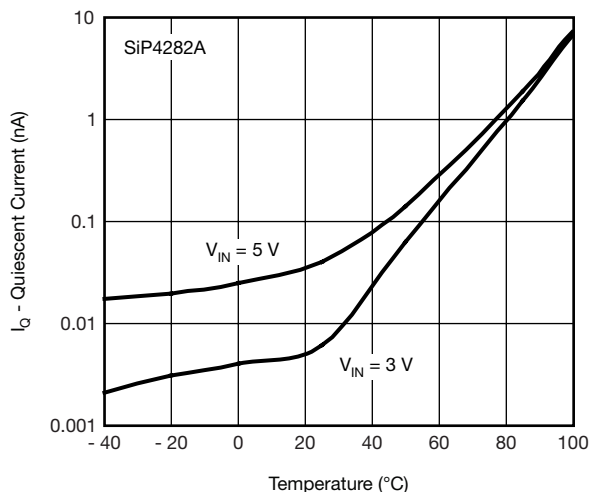


Figure 6 - Quiescent Current vs. Temperature



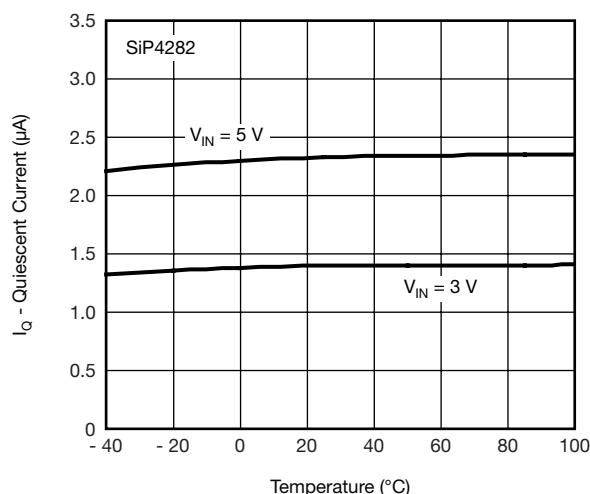


Figure 7 - Quiescent Current vs. Temperature


**TYPICAL CHARACTERISTICS** internally regulated, 25 °C, unless otherwise noted

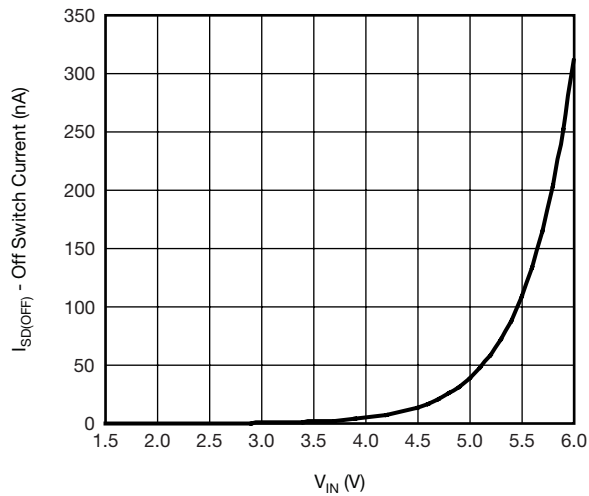


**Figure 8 - Off Switch Current vs. Input Voltage**

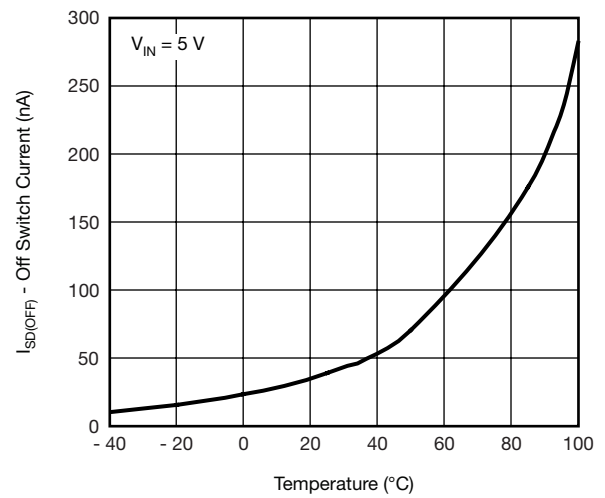


**Figure 9 - Off Switch Current vs. Temperature**

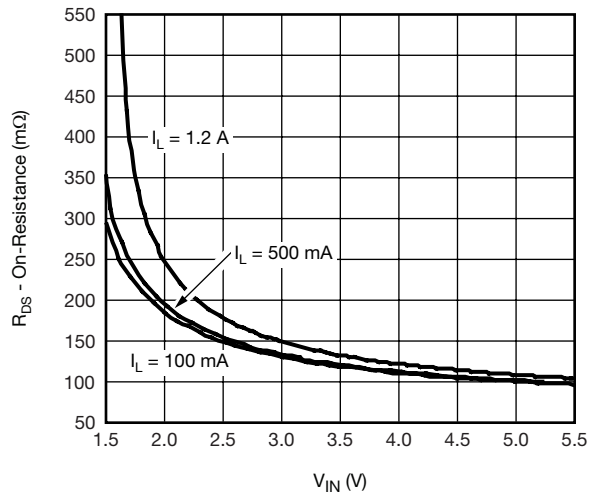


**Figure 10 -  $R_{DS(ON)}$  vs. Input Voltage**

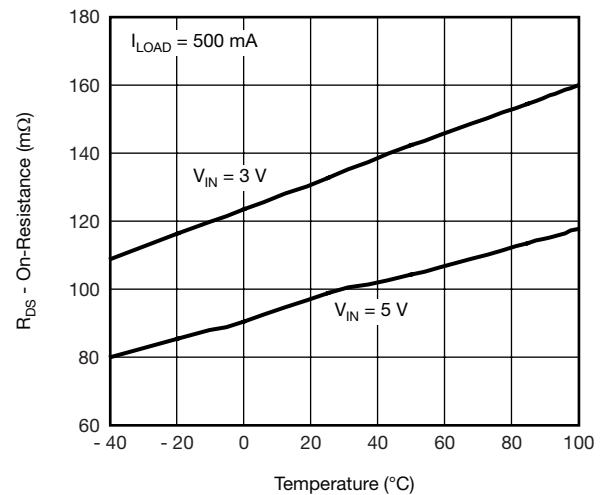

**Figure 11 -  $R_{DS(ON)}$  vs. Temperature**






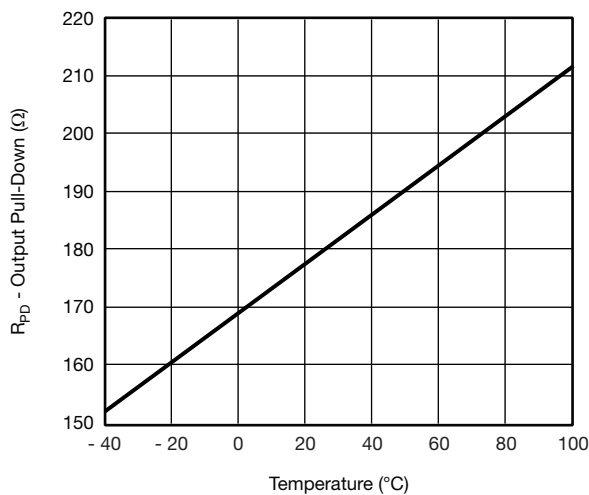


**Figure 12 - Output Pull-Down Resistance vs. Temperature**

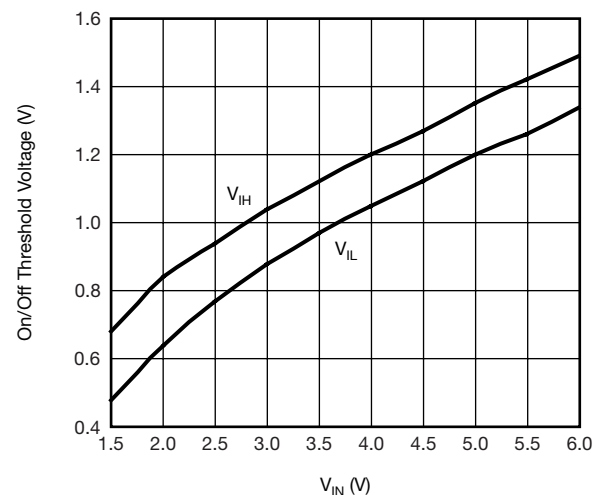

**Figure 13 - ON/OFF Threshold vs. Input Voltage**

## TYPICAL WAVEFORMS

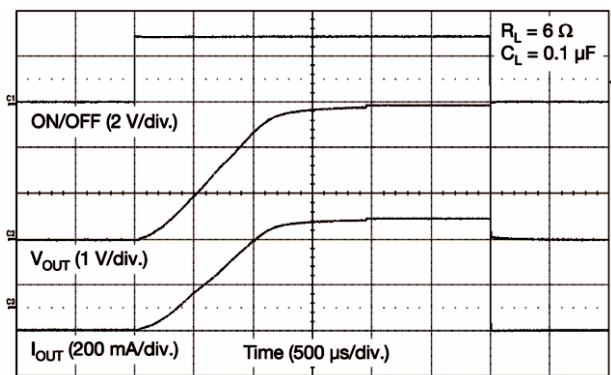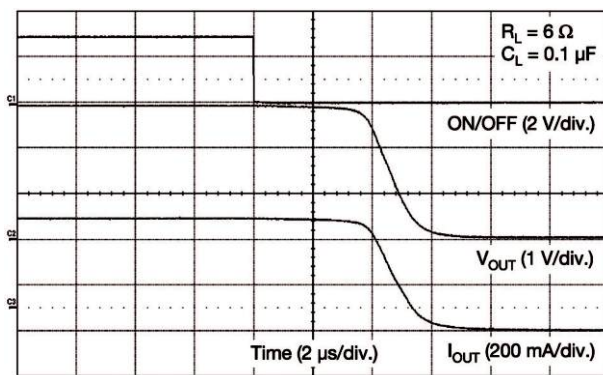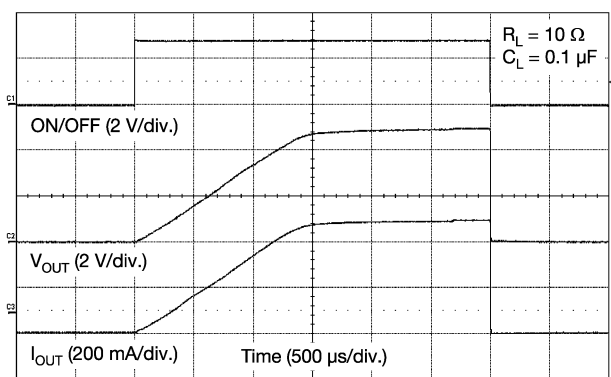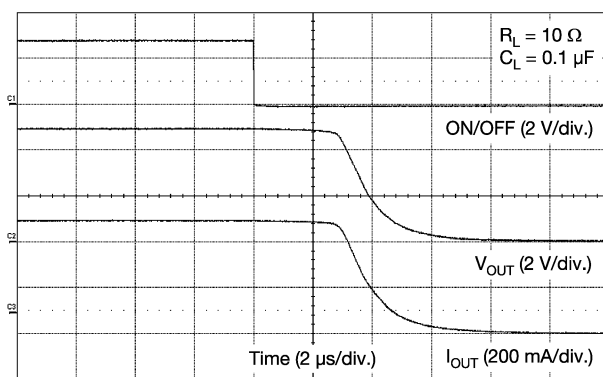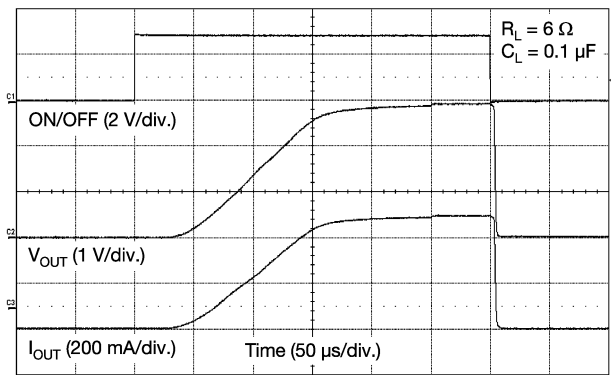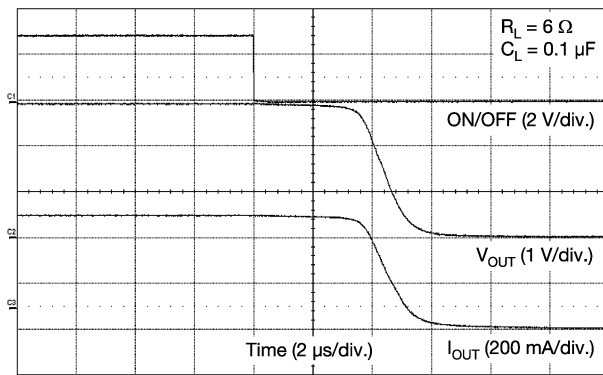Figure 14 - SiP4282Axxx2 Switching ( $V_{IN} = 3\text{ V}$ )Figure 15 - SiP4282Axxx2 Turn-Off ( $V_{IN} = 3\text{ V}$ )Figure 16 - SiP4282Axxx2 Switching ( $V_{IN} = 5\text{ V}$ )Figure 17 - SiP4282Axxx2 Turn-Off ( $V_{IN} = 5\text{ V}$ )Figure 18 - SiP4282xxx3 and SiP4282Axxx3 Switching ( $V_{IN} = 3\text{ V}$ )Figure 19 - SiP4282xxx3 and SiP4282Axxx3 Turn-Off ( $V_{IN} = 3\text{ V}$ )

## TYPICAL WAVEFORMS

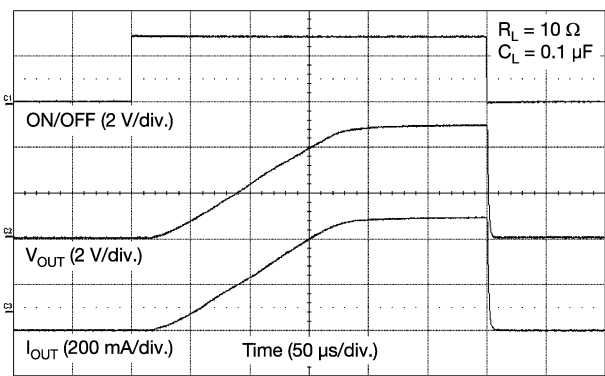


Figure 20 - SiP4282xxx3 and SiP4282Axxx3 Switching ( $V_{IN} = 5$  V)

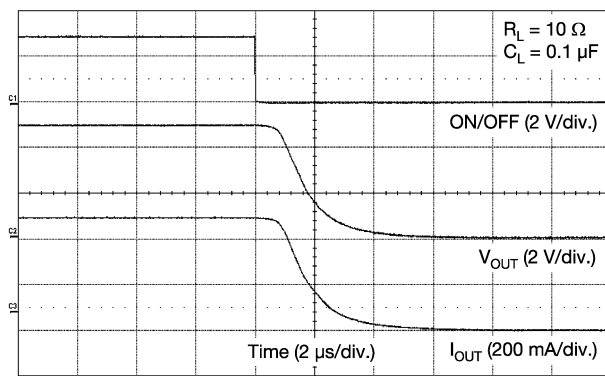


Figure 21 - SiP4282xxx3 and SiP4282Axxx3 Turn-Off ( $V_{IN} = 5$  V)

## BLOCK DIAGRAM



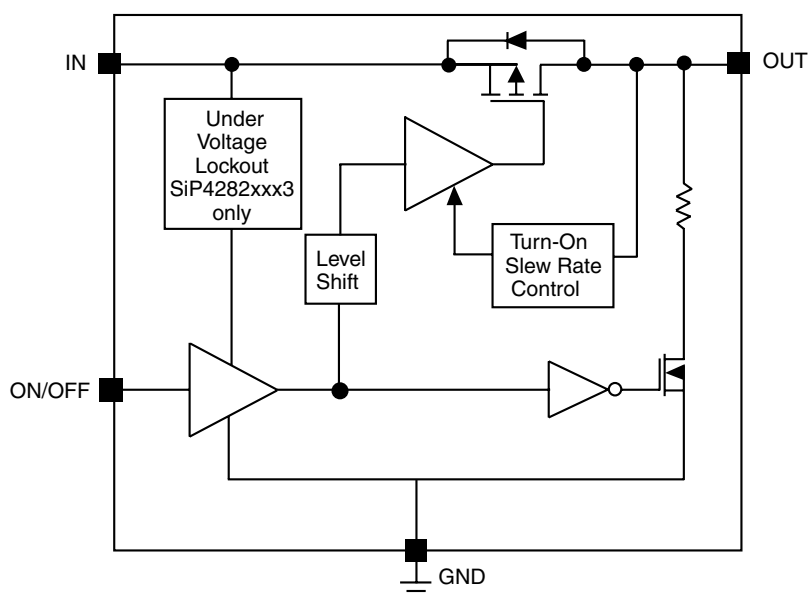


Figure 22 - SiP4282 Functional Block Diagram

## PCB LAYOUT

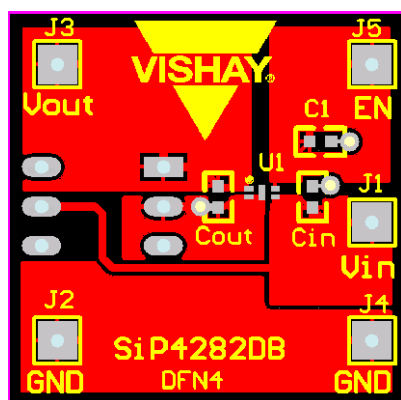

Top

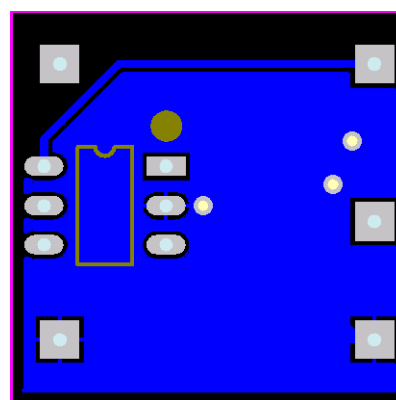

Bottom

Figure 23 - TDFN4 1.2 mm x 1.6 mm PCB Layout

## DETAILED DESCRIPTION

The SiP4282 is a P-Channel MOSFET power switches designed for high-side slew rate controlled load-switching applications. Once turned on, the slew-rate control circuitry is activated and current is ramped in a linear fashion until it reaches the level required for the output load condition. This is accomplished by first elevating the gate voltage of the MOSFET up to its threshold voltage and then by linearly increasing the gate voltage until the MOSFET becomes fully enhanced. At this point, the gate voltage is then quickly increased to the full input voltage to reduce  $R_{DS(ON)}$  of the MOSFET switch and minimize any associated power losses. The SiP4282A-2 version has a modest 1 ms turn on slew rate feature, which significantly reduces in-rush current at turned on time and permits the load switch to be implemented with a small input capacitor, or no input capacitor at all, saving cost and space. All versions features a shutdown output discharge circuit which is activated at shutdown (when the part is disabled through the On/Off pin) and discharges the output pin through a small internal resistor hence, turning off the load.

For SiP4282-3, in instances where the input voltage falls below 1.4 V (typically) the under voltage lock-out circuitry protects the MOSFET switch from entering the saturation region or operation by shutting down the chip.

## APPLICATION INFORMATION

### Input Capacitor

While a bypass capacitor on the input is not required, a 1  $\mu$ F or larger capacitor for  $C_{IN}$  is recommended in almost all applications. The bypass capacitor should be placed as physically close as possible to the SiP4282 to be effective in minimizing transients on the input. Ceramic capacitors are recommended over tantalum because of their ability to withstand input current surges from low impedance sources such as batteries in portable devices.

### Output Capacitor

A 0.1  $\mu$ F capacitor or larger across  $V_{OUT}$  and GND is recommended to insure proper slew operation.  $C_{OUT}$  may be increased without limit to accommodate any load transient condition with only minimal affect on the SiP4282 turn on slew rate time. There are no ESR or capacitor type requirement.

### Enable

The On/Off pin is compatible with both TTL and CMOS logic voltage levels.

### Protection Against Reverse Voltage Condition

The P-channel MOSFET pass transistor has an intrinsic diode that is reversed biased when the input voltage is greater than the output voltage. Should  $V_{OUT}$  exceed  $V_{IN}$ , this intrinsic diode will become forward biased and allow excessive current to flow into the IC thru the  $V_{OUT}$  pin and potentially damage the IC device. Therefore extreme care should be taken to prevent  $V_{OUT}$  from exceeding  $V_{IN}$ .

In conditions where  $V_{OUT}$  exceeds  $V_{IN}$  a Schottky diode in parallel with the internal intrinsic diode is recommended to protect the SiP4282.

### Thermal Considerations

The SiP4282 is designed to maintain a constant output load current. Due to physical limitations of the layout and assembly of the device the maximum switch current is 1.2 A, as stated in the Absolute Maximum Ratings table. However, another limiting characteristic for the safe operating load current is the thermal power dissipation of the package. To obtain the highest power dissipation (and a thermal resistance of 90  $^{\circ}$ C/W) the power pad of the device should be connected to a heat sink on the printed circuit board.

The maximum power dissipation in any application is dependant on the maximum junction temperature,  $T_{J(MAX)} = 125^{\circ}$ C, the junction-to-ambient thermal resistance for the SC-75 PPAK package,  $\theta_{JA} = 90^{\circ}$ C/W, and the ambient temperature,  $T_A$ , which may be formulaically expressed as:

$$P(\text{max.}) = \frac{T_J(\text{max.}) - T_A}{\theta_{JA}} = \frac{125 - T_A}{90}$$

It then follows that, assuming an ambient temperature of 70  $^{\circ}$ C, the maximum power dissipation will be limited to about 610 mW.

So long as the load current is below the 1.2 A limit, the maximum continuous switch current becomes a function two things: the package power dissipation and the  $R_{DS(ON)}$  at the ambient temperature.

As an example let us calculate the worst case maximum load current at  $T_A = 70^{\circ}$ C. The worst case  $R_{DS(ON)}$  at 25  $^{\circ}$ C occurs at an input voltage of 1.8 V and is equal to 480 m $\Omega$ . The  $R_{DS(ON)}$  at 70  $^{\circ}$ C can be extrapolated from this data using the following formula

$$R_{DS(ON)}(\text{at } 70^{\circ}\text{C}) = R_{DS(ON)}(\text{at } 25^{\circ}\text{C}) \times (1 + T_C \times \Delta T)$$

Where  $T_C$  is 3300 ppm/ $^{\circ}$ C. Continuing with the calculation we have

$$R_{DS(ON)}(\text{at } 70^{\circ}\text{C}) = 480 \text{ m}\Omega \times (1 + 0.0033 \times (70^{\circ}\text{C} - 25^{\circ}\text{C})) = 551 \text{ m}\Omega$$

The maximum current limit is then determined by

$$I_{LOAD}(\text{max.}) < \sqrt{\frac{P(\text{max.})}{R_{DS(ON)}}}$$

which in case is 1.05 A. Under the stated input voltage condition, if the 1.05 A current limit is exceeded the internal die temperature will rise and eventually, possibly damage the device.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.


Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.


The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.


## TDFN4 1.2 x 1.6 CASE OUTLINE

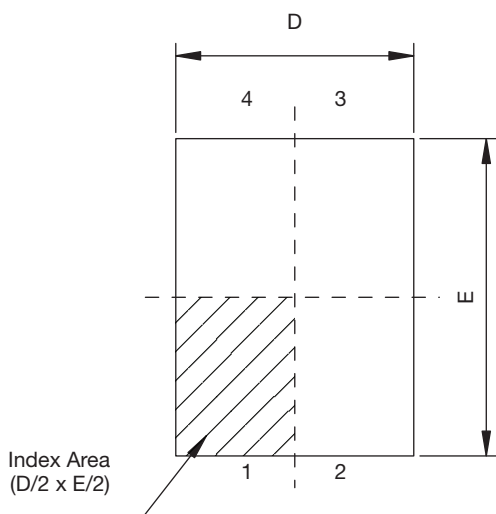

Top View

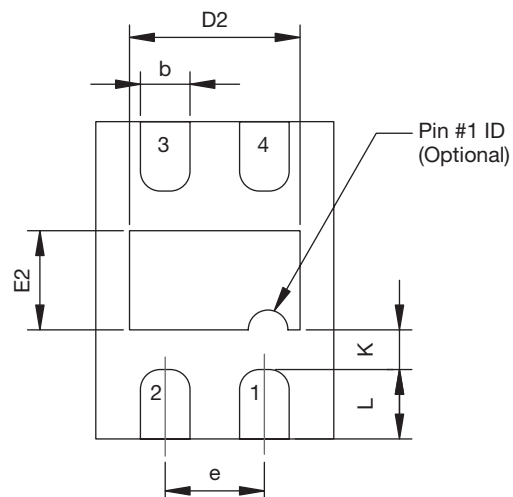


Bottom View

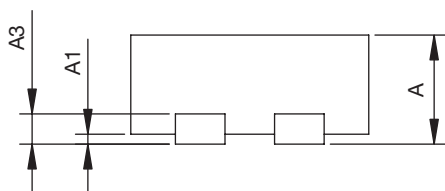

Side View

| DIM.                                         | MILLIMETERS |      |      | INCHES |       |       |
|----------------------------------------------|-------------|------|------|--------|-------|-------|
|                                              | MIN.        | NOM. | MAX. | MIN.   | NOM.  | MAX.  |
| A                                            | 0.50        | 0.55 | 0.60 | 0.020  | 0.022 | 0.024 |
| A1                                           | 0.00        | -    | 0.05 | 0.00   | -     | 0.002 |
| A3                                           | 0.15 REF    |      |      | 0.006  |       |       |
| b                                            | 0.20        | 0.25 | 0.30 | 0.008  | 0.010 | 0.012 |
| D                                            | 1.15        | 1.20 | 1.25 | 0.045  | 0.047 | 0.049 |
| D2                                           | 0.81        | 0.86 | 0.91 | 0.032  | 0.034 | 0.036 |
| e                                            | 0.50 BSC    |      |      | 0.020  |       |       |
| E                                            | 1.55        | 1.60 | 1.65 | 0.061  | 0.063 | 0.065 |
| E2                                           | 0.45        | 0.50 | 0.55 | 0.018  | 0.020 | 0.022 |
| K                                            | 0.20        | -    | -    | 0.008  | -     | -     |
| L                                            | 0.30        | 0.35 | 0.40 | 0.012  | 0.014 | 0.016 |
| ECN: C10-0043-Rev. A, 08-Feb-10<br>DWG: 5995 |             |      |      |        |       |       |

## PowerPAK® SC75-6L (Power IC only)

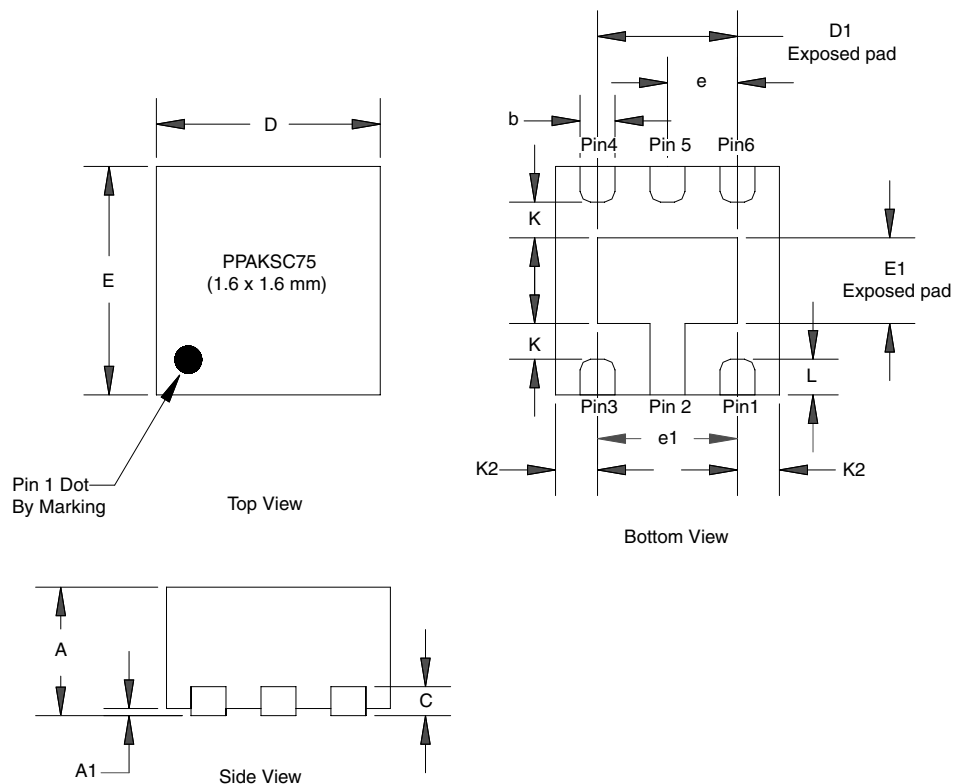

| DIM                            | MILLIMETERS |      |      | INCHES    |       |       |
|--------------------------------|-------------|------|------|-----------|-------|-------|
|                                | Min         | Nom  | Max  | Min       | Nom   | Max   |
| A                              | 0.70        | 0.75 | 0.80 | 0.028     | 0.030 | 0.032 |
| A1                             | 0           | -    | 0.05 | 0         | -     | 0.002 |
| b                              | 0.20        | 0.25 | 0.30 | 0.008     | 0.010 | 0.012 |
| C                              | 0.15        | 0.20 | 0.25 | 0.006     | 0.008 | 0.010 |
| D                              | 1.55        | 1.60 | 1.65 | 0.0061    | 0.063 | 0.065 |
| D1                             | 0.95        | 1.00 | 1.05 | 0.037     | 0.039 | 0.041 |
| E                              | 1.55        | 1.60 | 1.65 | 0.061     | 0.063 | 0.065 |
| E1                             | 0.55        | 0.60 | 0.65 | 0.022     | 0.024 | 0.026 |
| e                              | 0.50 BSC    |      |      | 0.020 BSC |       |       |
| e1                             | 1.00 BSC    |      |      | 0.039 BSC |       |       |
| K                              | 0.15        | -    | -    | 0.006     | -     | -     |
| K2                             | 0.20        | -    | -    | 0.008     |       |       |
| L                              | 0.20        | 0.25 | 0.30 | 0.008     | 0.010 | 0.012 |
| ECN: S-60845-Rev. B, 22-May-06 |             |      |      |           |       |       |
| DWG: 5953                      |             |      |      |           |       |       |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.