



SMT PLUG RECEPTACLE

REEL OF 750

R223.434.800

Series : MMBX

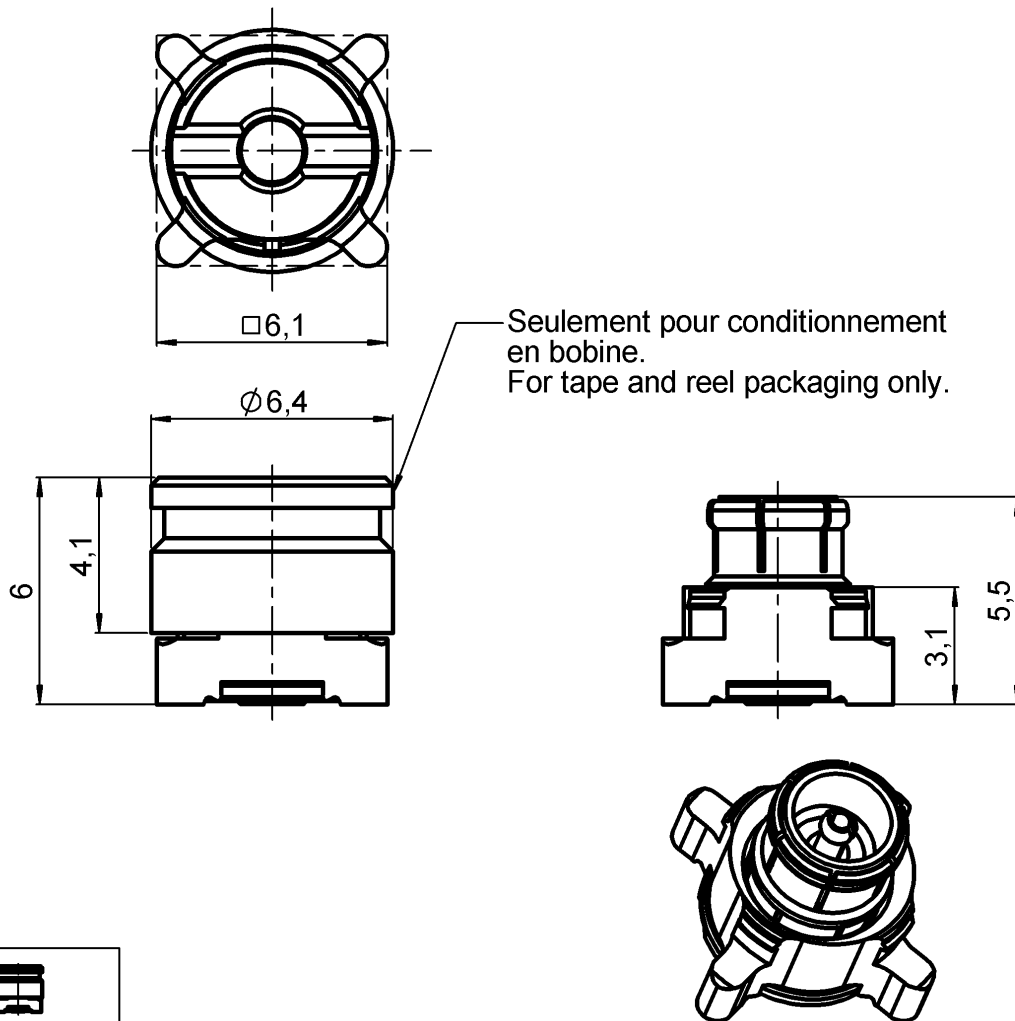

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (μm)
BODY	BRONZE, BRASS	NPGR
CENTER CONTACT	BERYLLIUM COPPER, BRASS	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	LIQUID CRISTAL POLYMER	-
GASKET	-	-
OTHERS PARTS	PTFE	-
-	-	-
-	-	-

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SMT PLUG RECEPTACLE**REEL OF 750****R223.434.800**

Series : MMBX

PACKAGING

Standard	Unit	Other
750		Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50 Ω
Frequency	0-12.4 GHz
VSWR	1.15 * + 0,0000 x F(GHz) Maxi
Insertion loss	0.05 $\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (100** - F(GHz)) dB Maxi
Voltage rating	330 Veff Maxi
Dielectric withstanding voltage	1000 Veff mini
Insulation resistance	1000 M Ω mini

ENVIRONMENTAL

Operating temperature	-55/+155° ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

OTHERS CHARACTERISTICS

Assembly instruction

Others :

* to 2 GHz

** Interface only, up to 2.5GHz

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	10 N mini
Axial force – Opposite end	10 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Mating life	500 Cycles mini
Weight	0,5800 g

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SMT PLUG RECEPTACLE

REEL OF 750

R223.434.800

Series : MMBX


SOLDER PROCEDURE OF MMBX RECEPTACLE IN INDUSTRIAL ENVIRONMENT

1. Deposit solder paste 'SnAg4Cu0.5' on mounting zone by screen printing application.
We recommend a low residue flux.
We advise a thickness of 150 micromm (5.850 microinch). Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type.

A video camera is recommended for positioning of the component.

Adhesive agents must not be used on the receptacle.
3. This process of soldering has been tested with convection oven.
Below please find, the typical profile to use.
4. The cleaning of printed circuit boards is not obliged.
5. Verification of solder joints and position of the component by visual inspection.

TEMPERATURE PROFILE

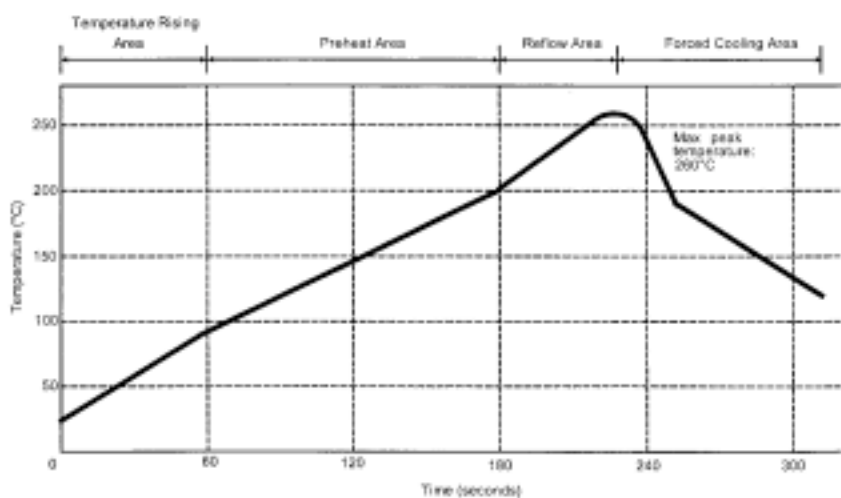

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SMT PLUG RECEPTACLE


R223.434.800

REEL OF 750

Series : MMBX


MMBX SERIES INFORMATIONS

PCB

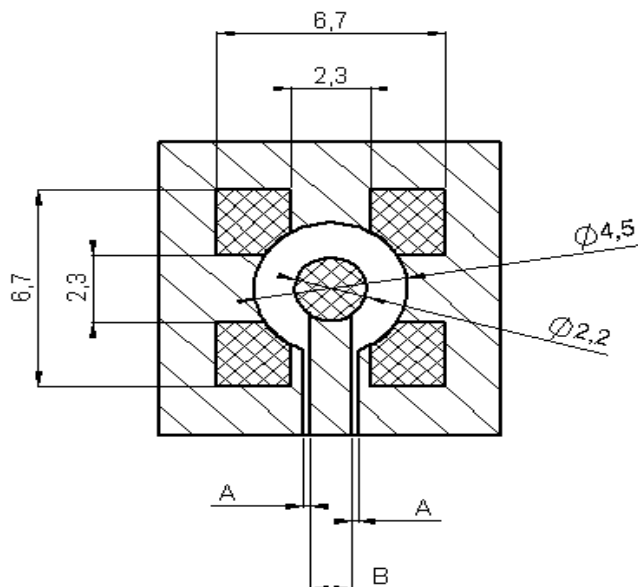

COPLANAR LINE

Pattern and signal are on the same side
 The material of PCB is epoxy resin (FR4)
 . (Er = 4.6)
 The solder resist should be printed
 Except for the land pattern on the PCB



Pattern



Land for solder paste

APPLICATION 75Ω

WITH B = 0,55mm

PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,350
1,0	0,360
1,2	0,365
1,6	0,375

APPLICATION 50Ω


WITH B = 1,2mm

PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,190
1,0	0,200
1,2	0,205
1,6	0,210

SHADOW FOR VIDEO CAMERA



ASPIRATION PORT

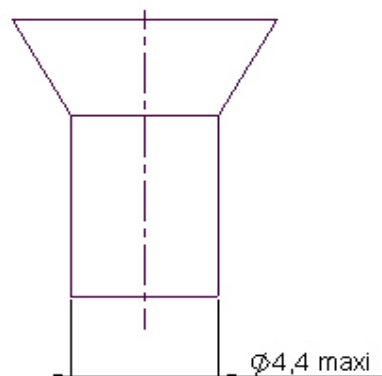
Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




SMT PLUG RECEPTACLE

REEL OF 750




R223.434.800

Series : MMBX

MMBX SERIES INFORMATIONS

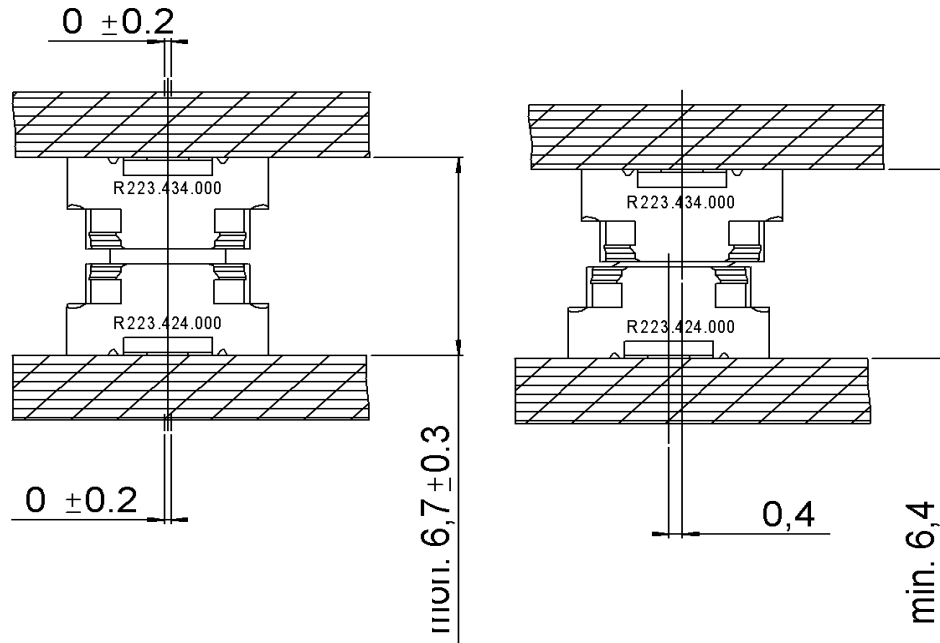

A VIEW

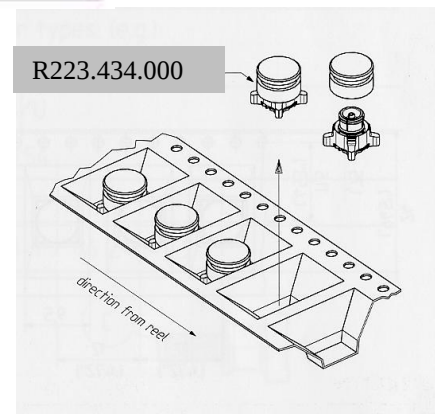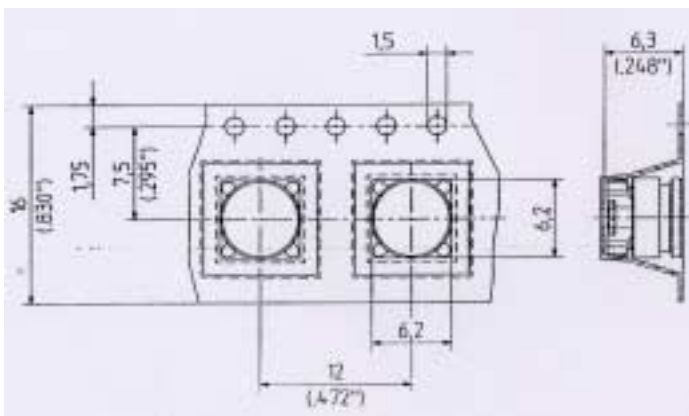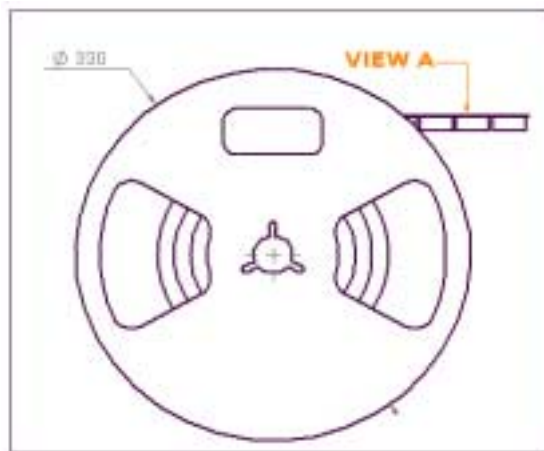

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.