

PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMABILITY: UL94V-0
COLOR: BLACK

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:
PITCH: .437
WIRE RANGE: 14-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LB

ELECTRICAL PROPERTIES:
MAX CURRENT: 25A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP: -40°C TO 120°C

- 1


SEE FIGURE.
- 2

PRELIMINARY PART NUMBER.
- 3

STAINLESS STEEL SCREWS.
- 4

WHITE INK STAMP.
- 5

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA.

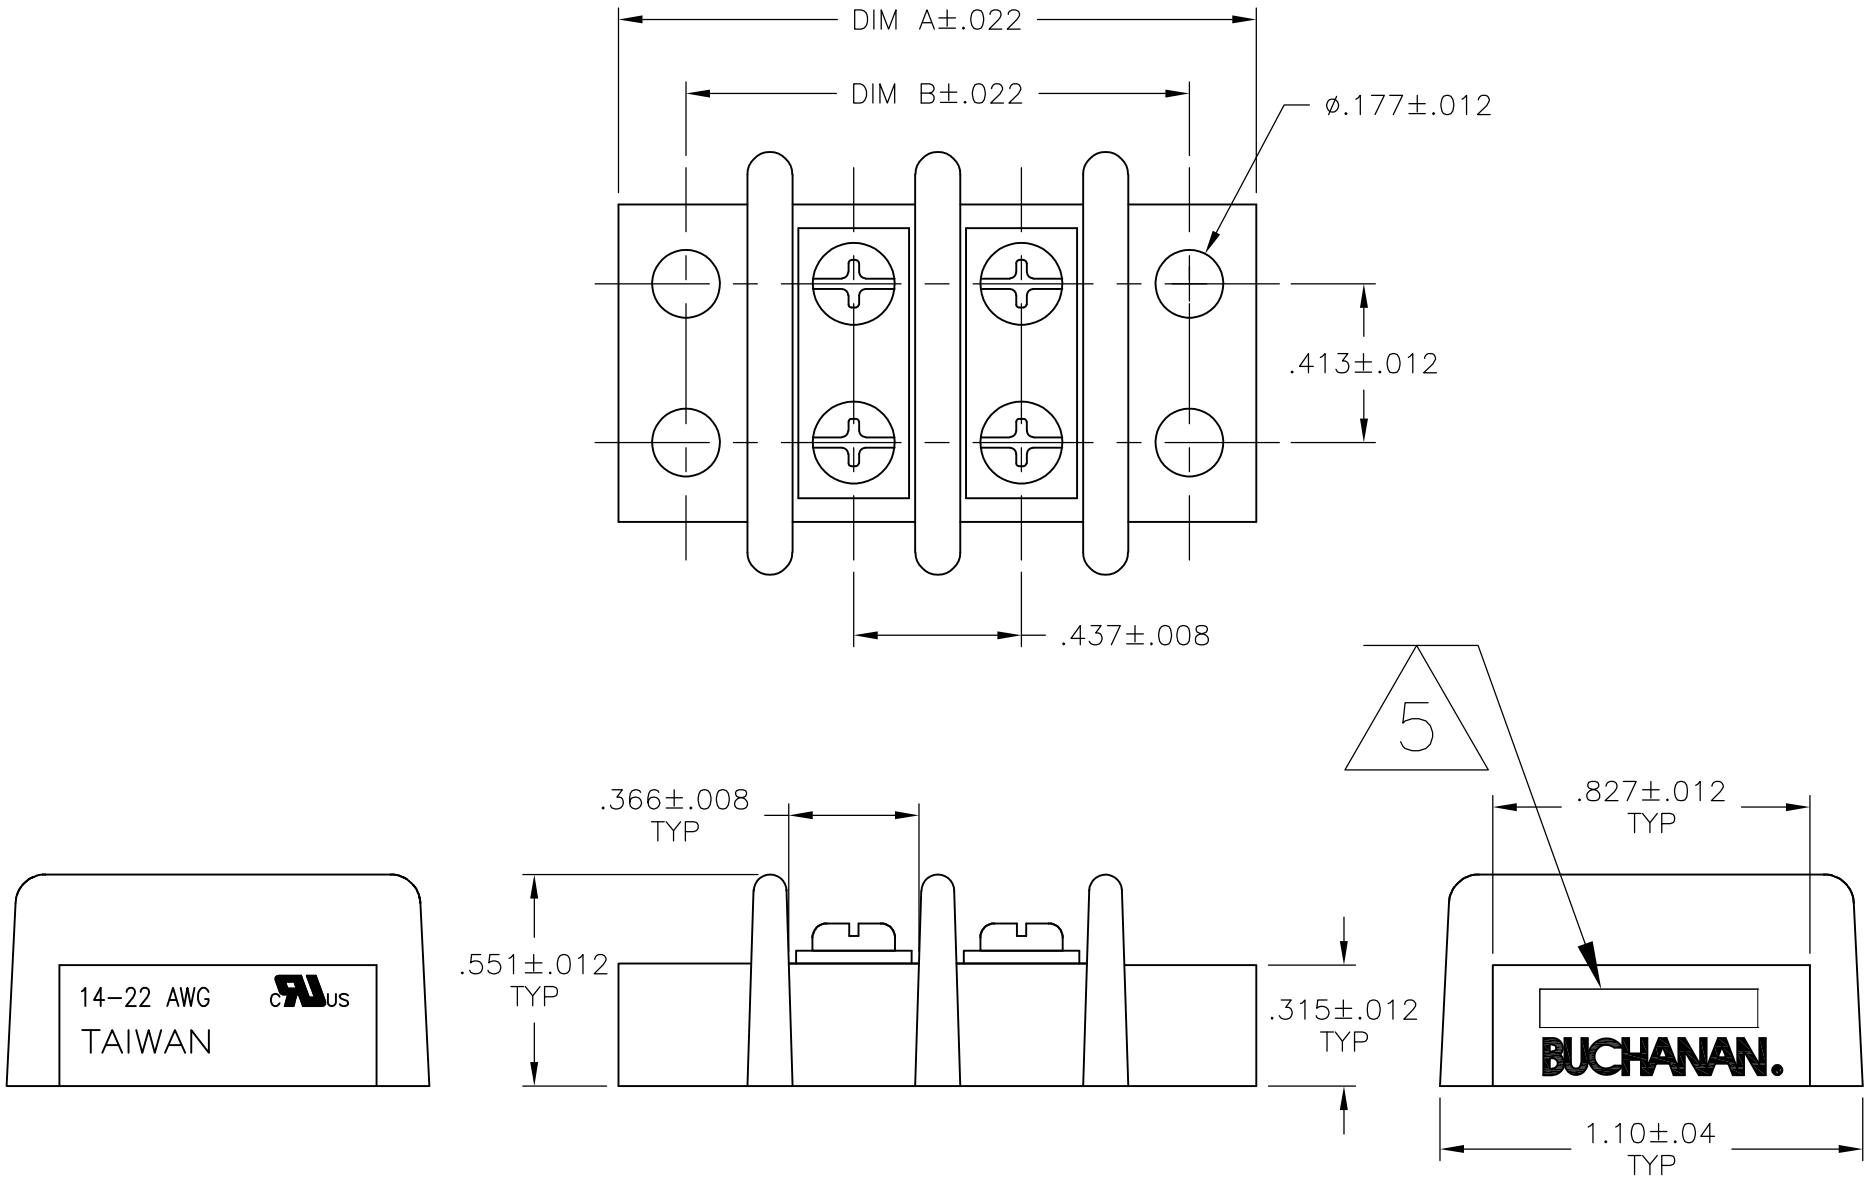

	5.646	5.992	12	4-1546670-2
	9.142	9.488	20	2-1546670-0
	8.705	9.051	19	1-1546670-9
2	8.268	8.614	18	3-1546670-0
	8.268	8.614	18	1-1546670-8
	7.831	8.177	17	1-1546670-7
	7.394	7.740	16	1-1546670-6
	6.957	7.303	15	1-1546670-5
	6.520	6.866	14	1-1546670-4
	6.083	6.429	13	1-1546670-3
	5.646	5.992	12	1-1546670-2
	5.209	5.555	11	1-1546670-1
4 2 1	4.772	5.118	10	4-1546670-3
2 1	4.772	5.118	10	3-1546670-8
	4.772	5.118	10	1-1546670-0
2 1	4.335	4.681	9	3-1546670-5
2 1	4.335	4.681	9	3-1546670-2
	4.335	4.681	9	1546670-9
1	3.898	4.244	8	4-1546670-1
3 2	3.898	4.244	8	3-1546670-6
2 1	3.898	4.244	8	3-1546670-4
2 1	3.898	4.244	8	3-1546670-3
	3.898	4.244	8	1546670-8
	3.461	3.807	7	1546670-7
1	3.024	3.370	6	3-1546670-1
	3.024	3.370	6	1546670-6
1	2.587	2.933	5	2-1546670-8
1	2.587	2.933	5	2-1546670-7
	2.587	2.933	5	1546670-5
2 1	2.496	2.933	4	3-1546670-9
1	2.150	2.496	4	2-1546670-9
	2.150	2.496	4	1546670-4
	1.713	2.059	3	1546670-3
	1.276	1.622	2	1546670-2
	DIM B	DIM A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S SCHEGEL

4/4/03

CHK

C RICHARD

4/4/03

APVD

C RICHARD

4/4/03

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± .01

3 PLC ± .005

4 PLC ± -

ANGLES ± 3°

FINISH -

MATERIAL

-

DWN

S SCHEGEL

4/4/03

CHK

C RICHARD

4/4/03

APVD

C RICHARD

4/4/03

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=1546670

RESTRICTED TO

-

SCALE

NTS

SHEET


1 of 3

REV



K18

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		—	SEE SHEET 1	—	—	—

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

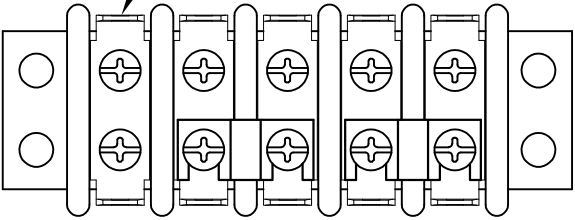


JUMPER QTY 2

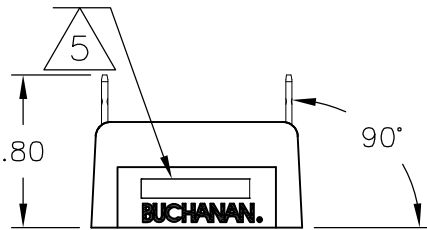
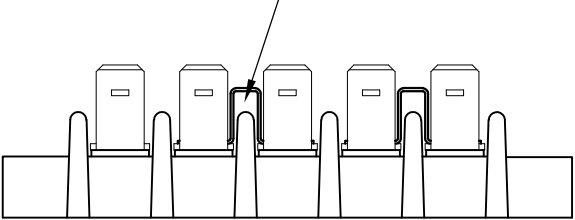


2-1546670-7

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5


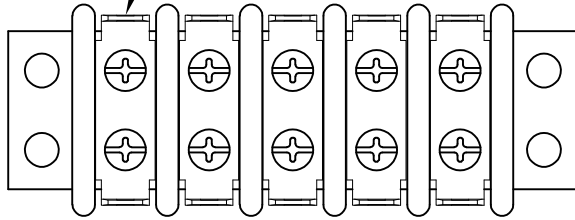


.250
TYP

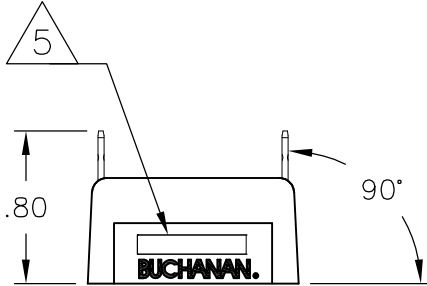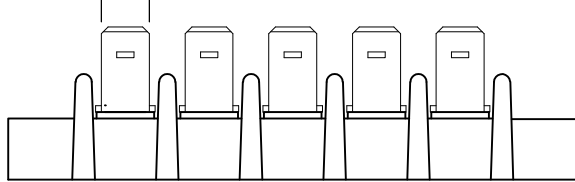

2-1546670-8


JUMPER, QTY 1

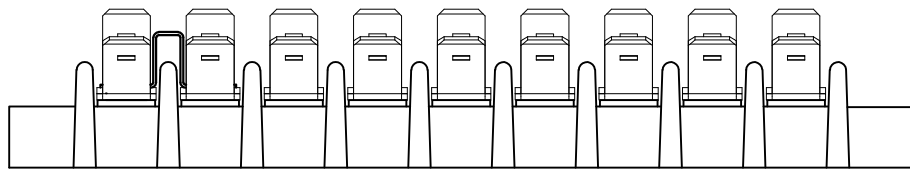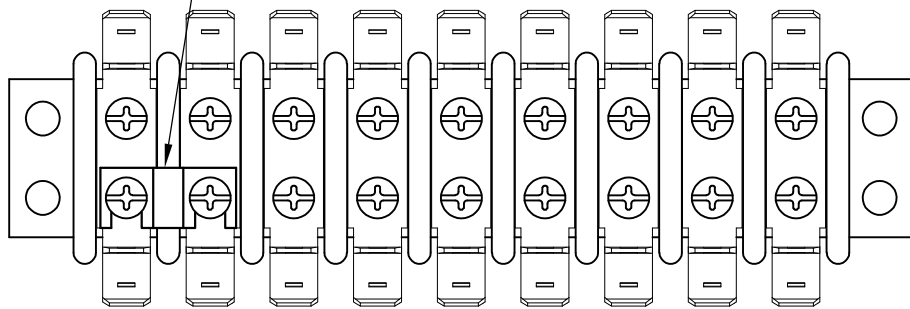


3-1546670-2

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9


DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 9

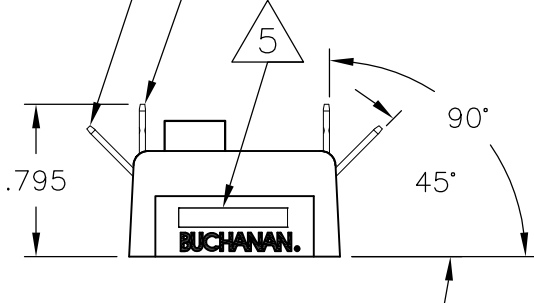

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

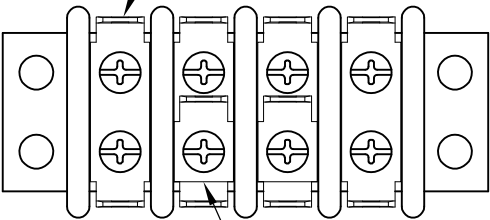


SINGLE SIDED, SINGLE HOLE
QC TAB, QTY 2


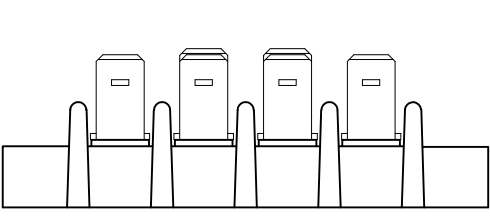


2-1546670-9

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 6

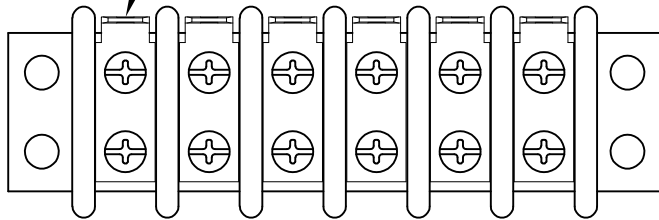



.250
TYP

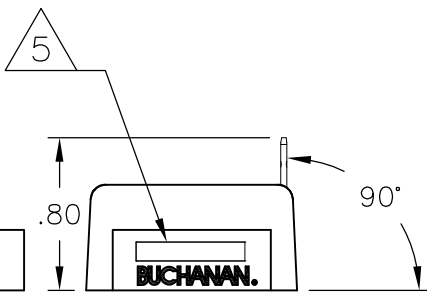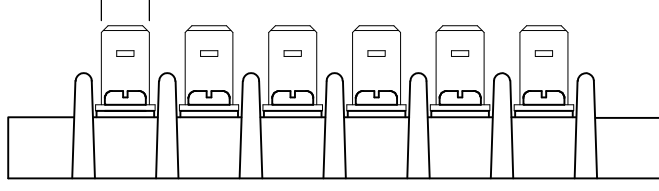

3-1546670-1

DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.


JUMPER, QTY 2

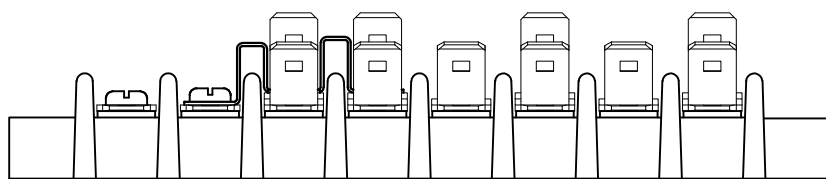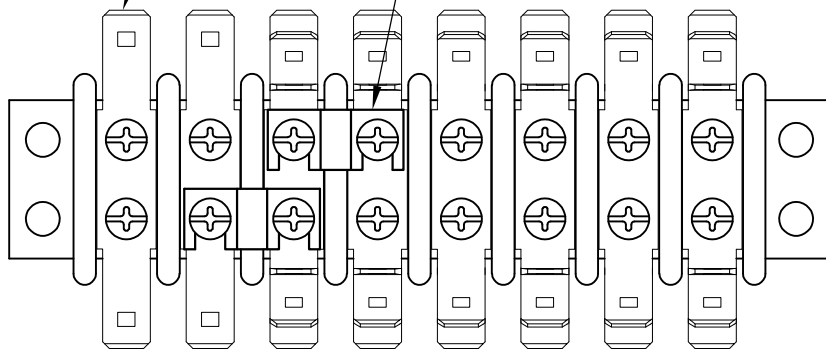


3-1546670-3

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 6


DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 4

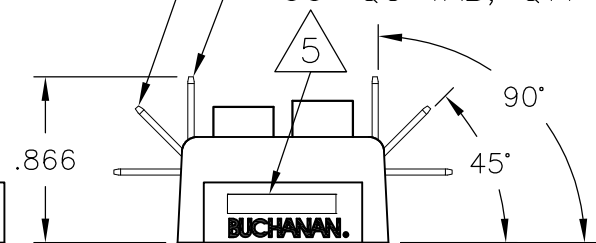

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 18


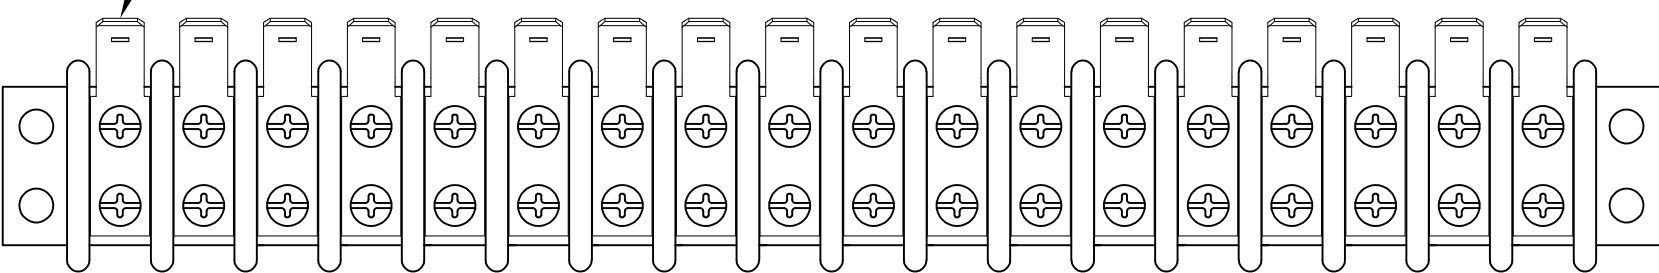


.250
TYP

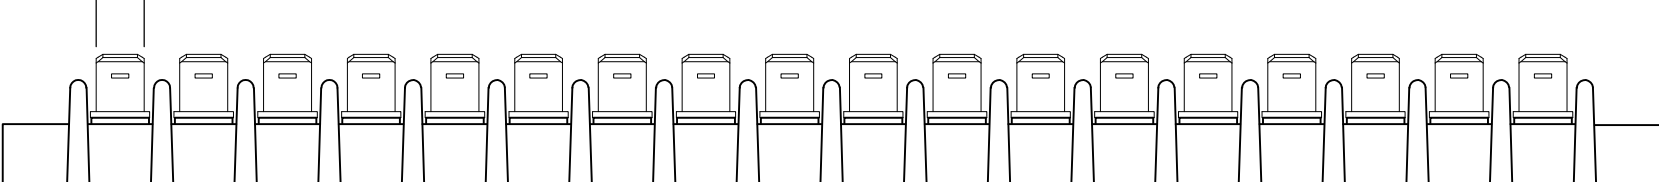


3-1546670-0

DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.

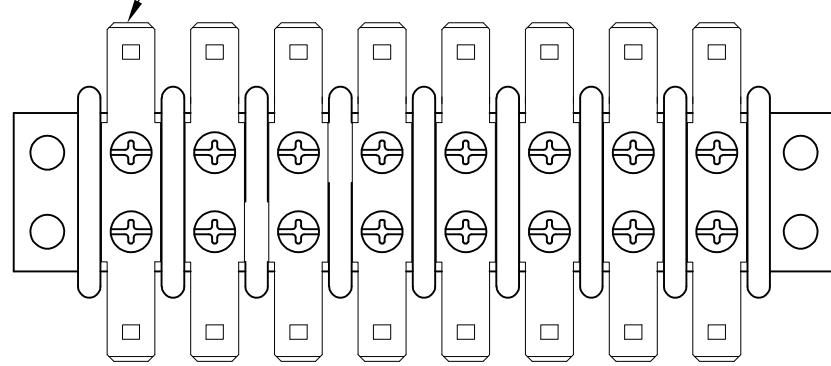

3-1546670-4

11.764	12.110	26	2-1546670-6
11.327	11.673	25	2-1546670-5
10.90	11.236	24	2-1546670-4
10.453	10.799	23	2-1546670-3
10.016	10.362	22	2-1546670-2
9.579	9.925	21	2-1546670-1
9.142	9.488	20	3-1546670-7
DIM B	DIM A	NO OF POS	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	S	SCHEGEL	4/4/03	 TE Connectivity			
DIMENSIONS: INCHES				CHK	C	RICHARD	4/4/03				
				APVD	C	RICHARD	4/4/03	NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING			
				PRODUCT SPEC							
				APPLICATION SPEC							
MATERIAL —				FINISH —				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				WEIGHT —				A2	00779	C=1546670	—
CUSTOMER DRAWING				SCALE				NTS	SHEET	2 OF 3	REV
										K18	

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

D


DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 9.

JUMPER, QTY 1

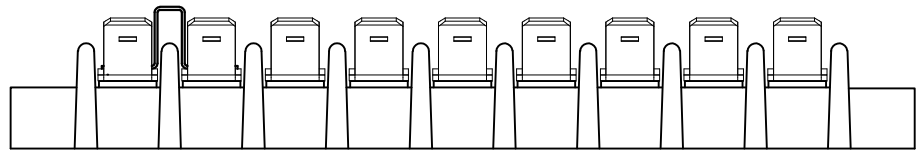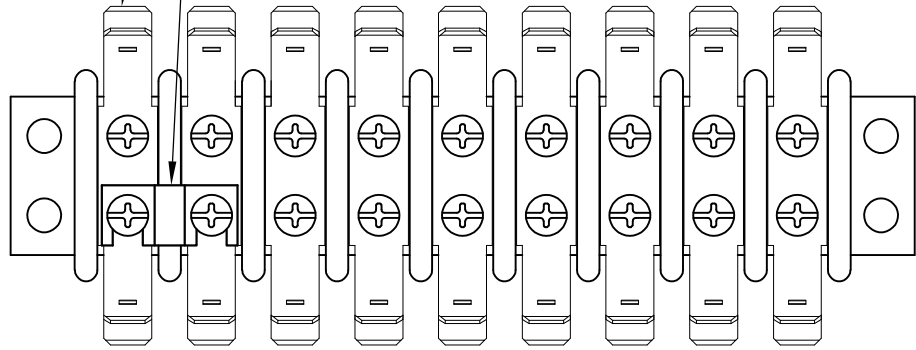


3-1546670-5

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9

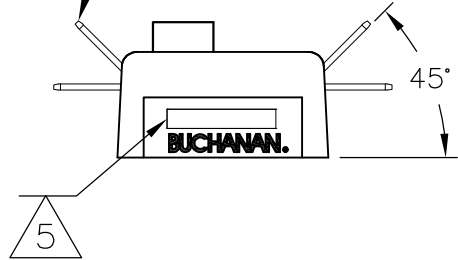


C

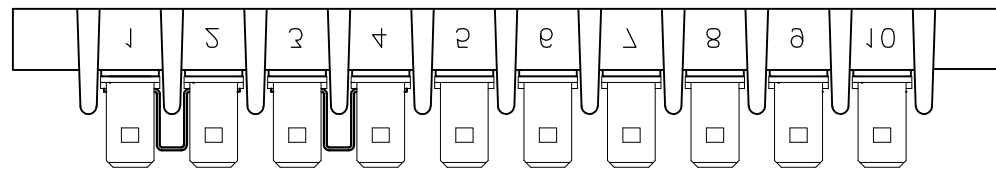


SINGLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 10

SINGLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 10

JUMPER, QTY 4

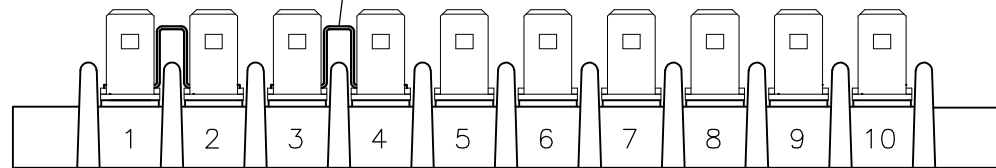


4-1546670-3

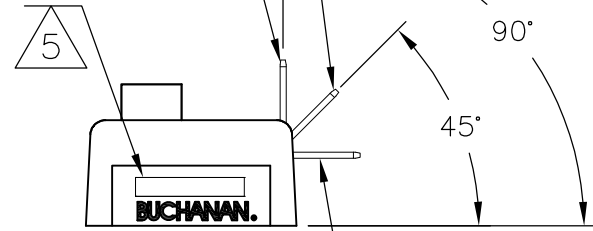


SINGLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 10


B

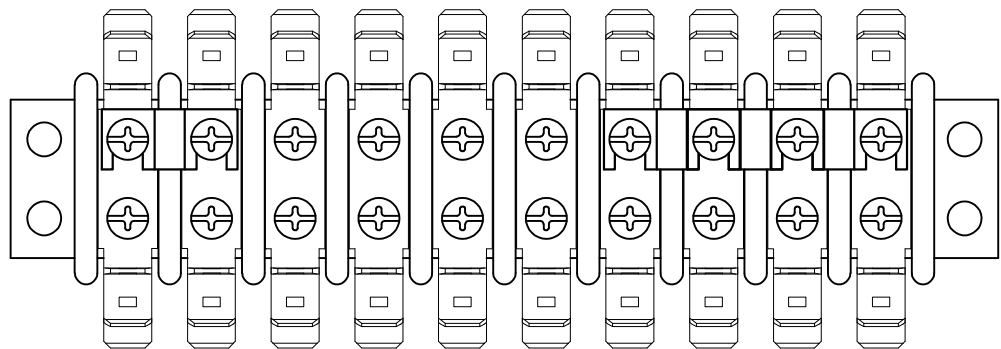



3-1546670-8

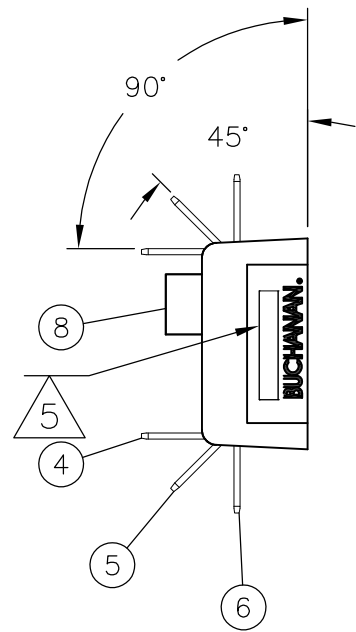


A

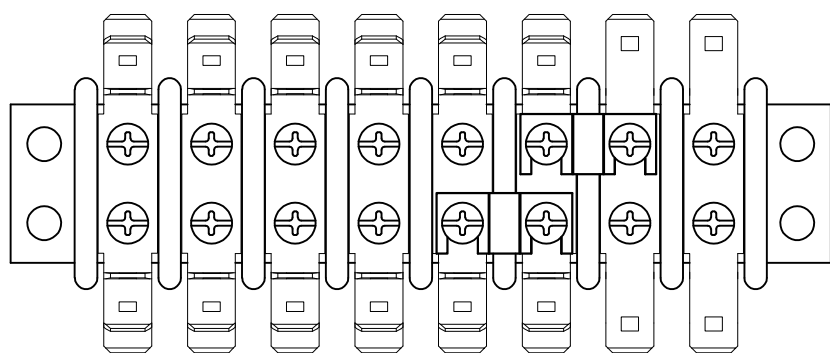

4-1546670-1

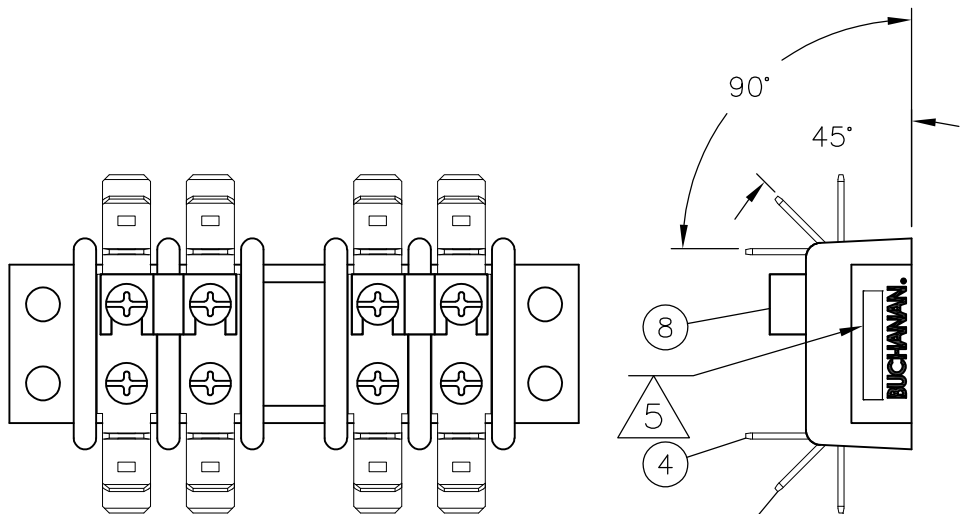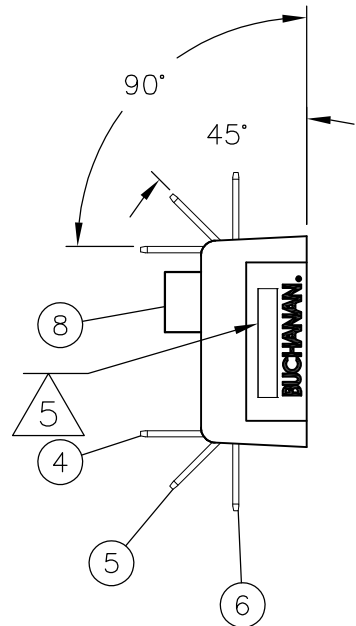

3-1546670-9

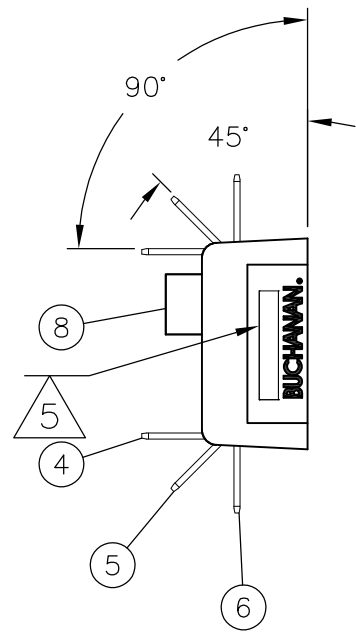

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S	SCHEGEL	4/4/03	 TE Connectivity					
		CHK	C	RICHARD	4/4/03						
		APVD	C	RICHARD	4/4/03						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME		DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING			
		PRODUCT SPEC				—					
		APPLICATION SPEC				—					
MATERIAL —		FINISH —				SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO	
		WEIGHT —				A2	00779	C-1546670		—	
CUSTOMER DRAWING						SCALE	NTS		SHEET	3 of 3	
										REV	K18



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.