

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0894858002

Status:

Active

Description:

Universal Serial Bus (USB) Shielded I/O Type A Receptacle, Single Upright, Right Angle, Terminal Length 2.50mm (.098"), Without Mylar, Gold (Au) Flash, Tray Package, Lead Free

Documents:

3D Model

Drawing (PDF)

Product Specification PS-89485 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

UL

LR19980

E29179

General

Product Family

Series

Application

Comments

Component Type

Product Name

Type

I/O Connectors

89485

Wire-to-Board

Without Mylar

Receptacle

USB

A

Physical

Boot Color

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Flammability

Gender

Lock to Mating Part

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Panel Mount

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Polarized to Mating Part

Polarized to PCB

Ports

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Waterproof / Dustproof

N/A

4

4

Black

94V-0

Male

Yes

Gold

Tin

High Temperature Thermoplastic

1

Upright

0.098 In

2.50 mm

Yes

Yes

0.062 In

1.60 mm

Tray

No

0.079 In, 0.098 In

2.00 mm, 2.50 mm

0.055 In

1.40 mm

Yes

Yes


1

No

125°C

Through Hole

No



Series

image - Reference only

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

89485Series

Mates With

88740 USB Type A Cable Plug

Electrical

Current - Maximum per Contact	1A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	750V AC (RMS)


Material Info


Reference - Drawing Numbers

Packaging Specification	PK-89485-002
Product Specification	PS-89485
Sales Drawing	SD-89485-003

This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

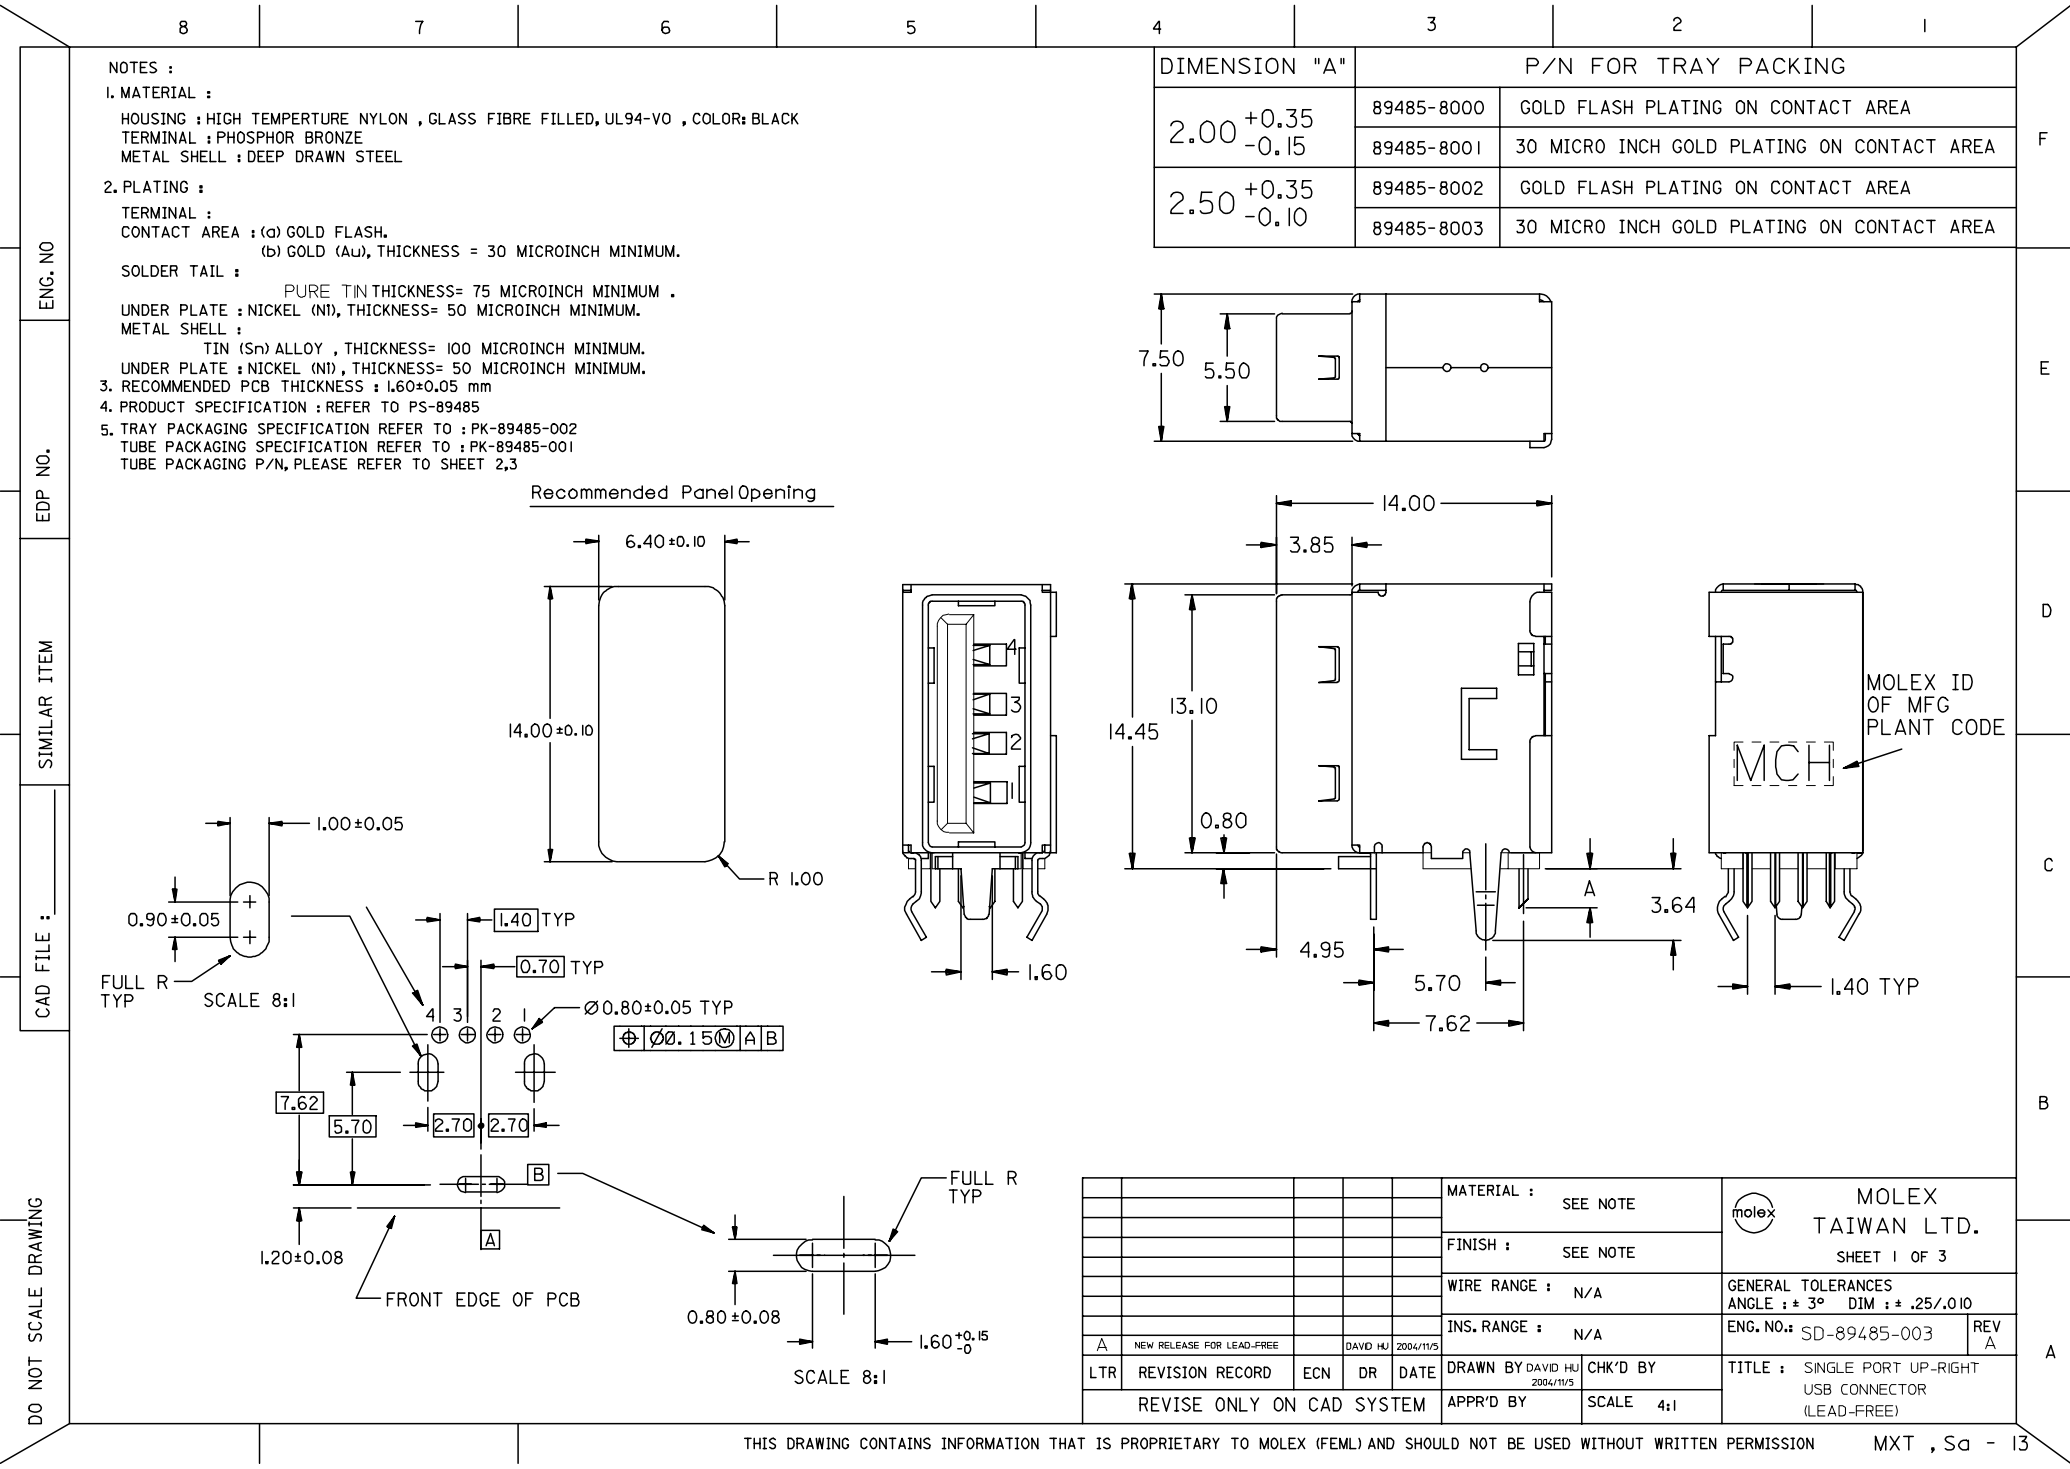

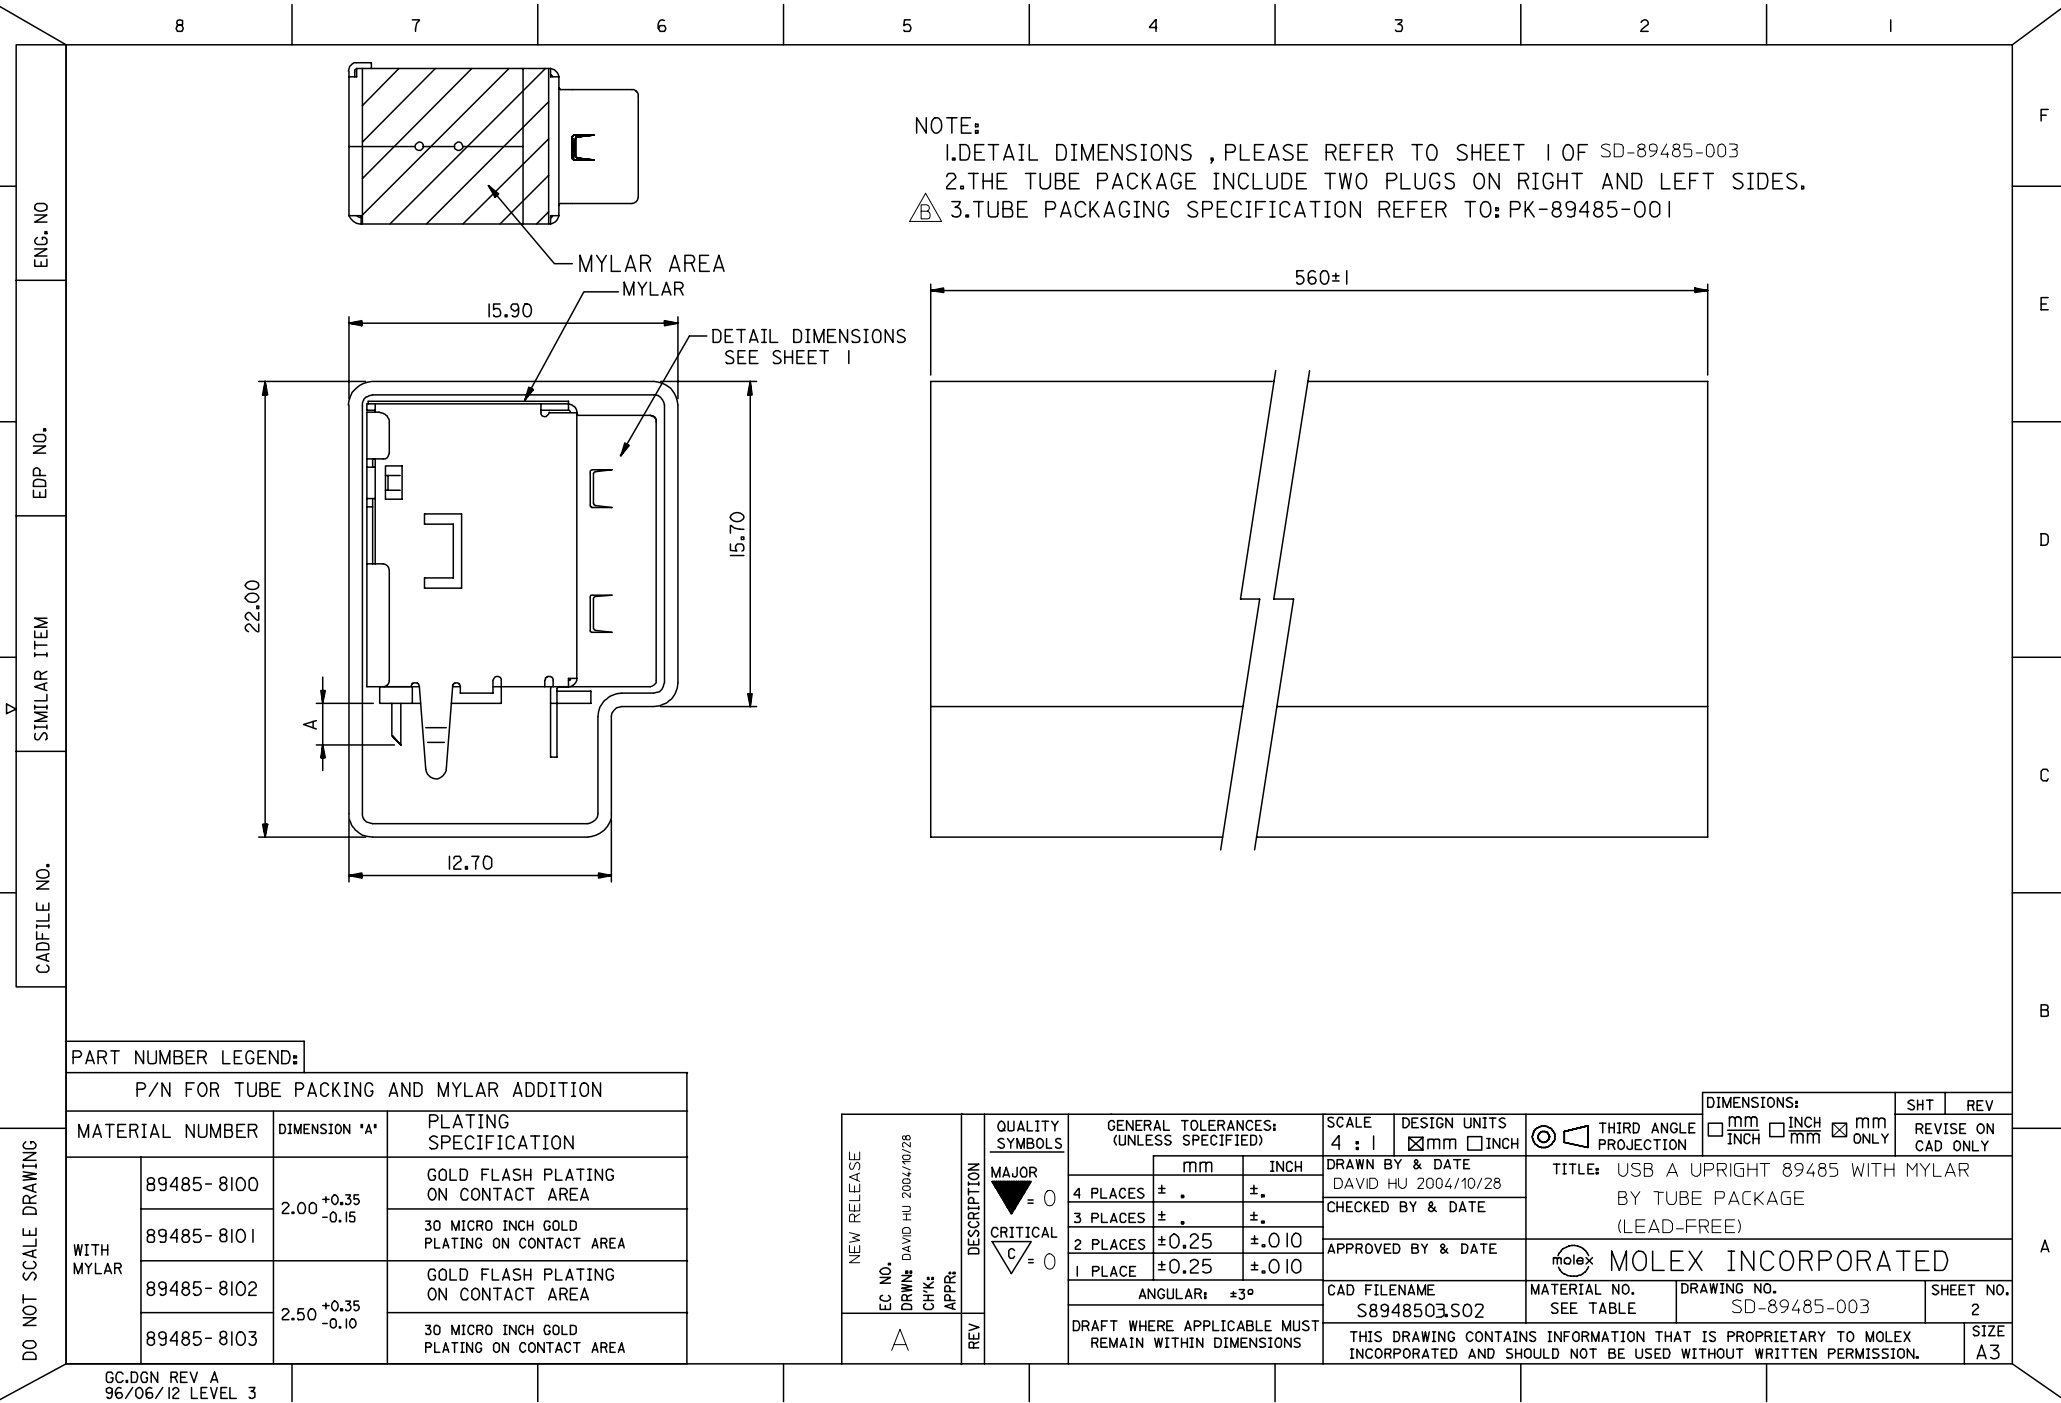

NOTE:

1.MATERIAL:

HOUSING:HIGH TEMPERATURE NYLON,GLASS FIBRE FILLED,UL94-V0,COLOR:BLACK
TERMINAL:PHOSPHOR BRONZE
METAL SHELL:DEEP DRAWN STEEL

2.PLATING:

TERMINAL:

(a)GOLD FLASH ON THE CONTACT AREA,AND 75MICROINCH MINIMUM
PURE TIN ON SOLDER TAIL, UNDER 50MICROINCH MINIMUM Ni
PLATE.

(b)30MICROINCH MINIMUM GOLD(Au) ON THE CONTACT AREA,
AND 75MICROINCH MINIMUM PURE TIN ON SOLDER TAIL,UNDER
50MICROINCH MINIMUM Ni UNDER PLATE.

(c)GOLD FLASH ON THE CONTACT AREA,AND 75MICROINCH MINIMUM
MATTE TIN ON SOLDER TAIL,UNDER 50MICROINCH MINIMUM Ni
PLATE.

METAL SHELL:

(d)100MICROINCH MINIMUM BRIGHT TIN ON THE METAL SHELL,AND
50MICROINCH MINIMUM Ni AND 100MICROINCH MINIMUM Cu PLATE.

(e)100MICROINCH MINIMUM MATTE TIN ON THE METAL SHELL,AND
50MICROINCH MINIMUM Ni AND 100MICROINCH MINIMUM Cu PLATE.

3.RECOMMENDED PCB THICKNESS:1.60 ±0.05mm






4.PRODUCT SPECIFICATION:REFER TO PS-89485

5. TRAY PACKAGING SPECIFICATION REFER TO:PK-89485-002

TUBE PACKAGING SPECIFICATION REFER TO:PK-89485-001

TUBE PACKAGING P/N,PLEASE REFER TO:SHEET2,3

DIMENSION"A"	P/N	PLATING	TERMINAL CONTACT PLATING	TERMINAL SOLDER PLATING	METAL SHELL PLATING
2.00 ^{+0.35} _{-0.15}	89485-8000	SEE NOTES(a)+(d)	GOLD FLASH	75 MICRO INCH BRIGHT TIN	100 MICRO INCH BRIGHT TIN
	89485-8001	SEE NOTES(b)+(d)	30 MICRO INCH GOLD		
2.50 ^{+0.35} _{-0.10}	89485-8002	SEE NOTES(a)+(d)	GOLD FLASH	75 MICRO INCH BRIGHT TIN	100 MICRO INCH BRIGHT TIN
	89485-8003	SEE NOTES(b)+(d)	30 MICRO INCH GOLD		
	89485-8012	SEE NOTES(c)+(e)	GOLD FLASH	75 MICRO INCH MATTE TIN	100 MICRO INCH MATTE TIN

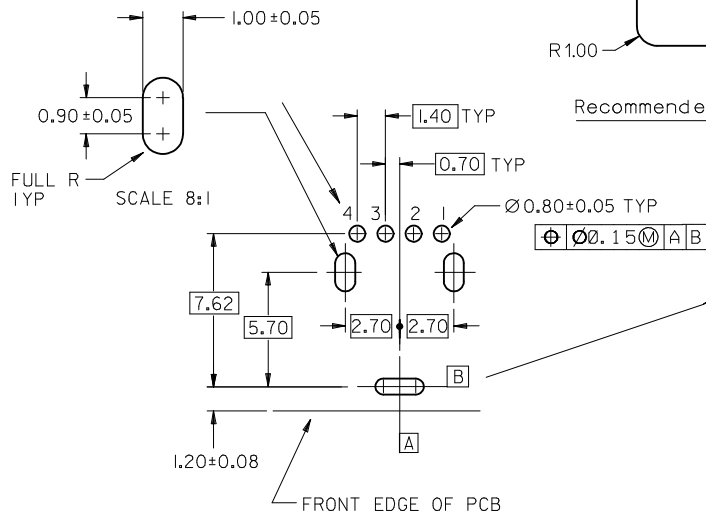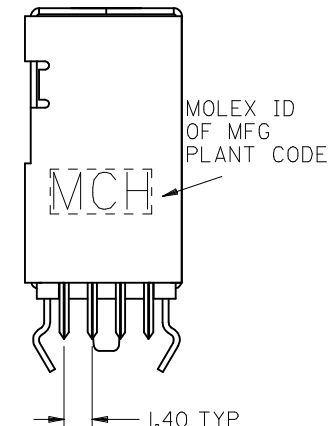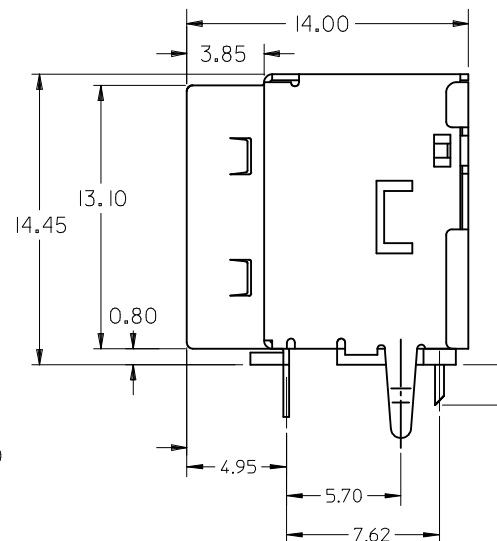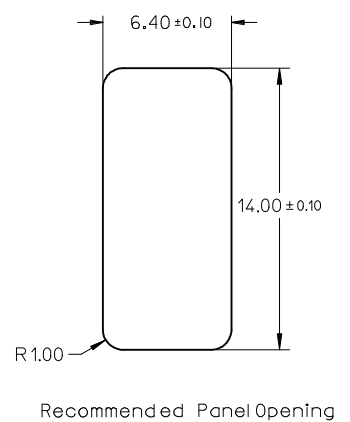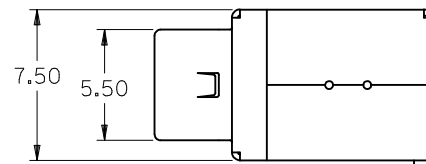

NEW RELEASE
EC NO: SH2009-0233
DRAWN:ZHAO
CHKD:ZHANG
APPR:HWANG
2008/12/02
2008/12/12
2008/12/17

QUALITY
SYMBOLS
▽=0
C=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± .010
1 PLACE	± 0.25	± .010

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY
DAVID HU

CHECKED BY

APPROVED BY

MATERIAL NO.
SEE TABLE

SIZE
A3

SCALE
4:1

DESIGN UNITS
METRIC

THIRD ANGLE
PROJECTION


TITLE
SINGLE PORT UP-RIGHT
USB CONNECTOR
LEAD-FREE

MOLEX INCORPORATED

DOCUMENT NO.
SD-89485-003

SHEET NO.
1 OF 3



10 9 8 7 6 5 4 3 2 1



MYLAR AREA

NOTE:

- 1.DETAIL DIMENSIONS ,PLEASE REFER TO SHEET 1 OF SD-89485-003
- 2.THE TUBE PACKAGE INCLUDE TWO PLUGS ON RIGHT AND LEFT SIDES.
- 3.TUBE PACKAGING SPECIFICATION REFER TO: PK-89485-001

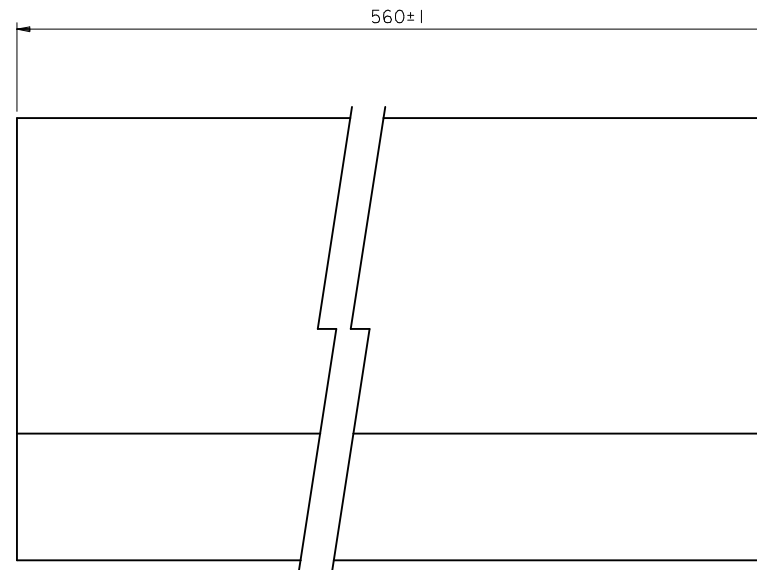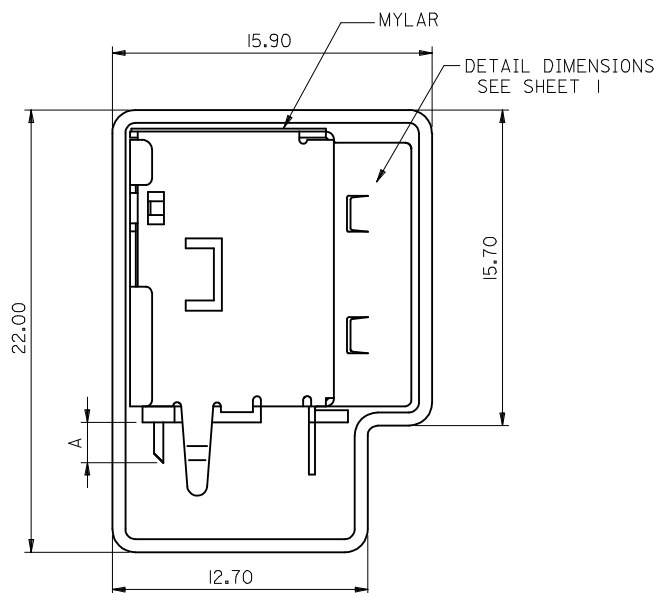

PART NUMBER LEGEND:

P/N FOR TUBE PACKING AND MYLAR ADDITION

MATERIAL NUMBER		DIMENSION 'A'	PLATING SPECIFICATION
WITH MYLAR	89485- 8100	2.00 ^{+0.35} _{-0.15}	GOLD FLASH PLATING ON CONTACT AREA
	89485- 8101		30 MICRO INCH GOLD PLATING ON CONTACT AREA
	89485- 8102	2.50 ^{+0.35} _{-0.10}	GOLD FLASH PLATING ON CONTACT AREA
	89485- 8103		30 MICRO INCH GOLD PLATING ON CONTACT AREA

NEW RELEASE
EC NO: SH2009-0233
DR:WNEZHAO 2008/12/02
CHKD:RZHANG 2008/12/12
APPR:HWANG 2008/12/17

QUALITY SYMBOLS
▽=0
▽C=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± .010
1 PLACE	± 0.25	± .010
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY	DATE
DAVID HU	
CHECKED BY	DATE
APPROVED BY	DATE

MATERIAL NO.
SEE TABLE

SCALE
4:1

DOCUMENT NO.
SD-89485-003

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

SINGLE PORT UP-RIGHT
USB CONNECTOR
LEAD-FREE

MOLEX INCORPORATED

SHEET NO.
2 OF 3

10 9 8 7 6 5 4 3 2 1

F



E

D


C

B

A

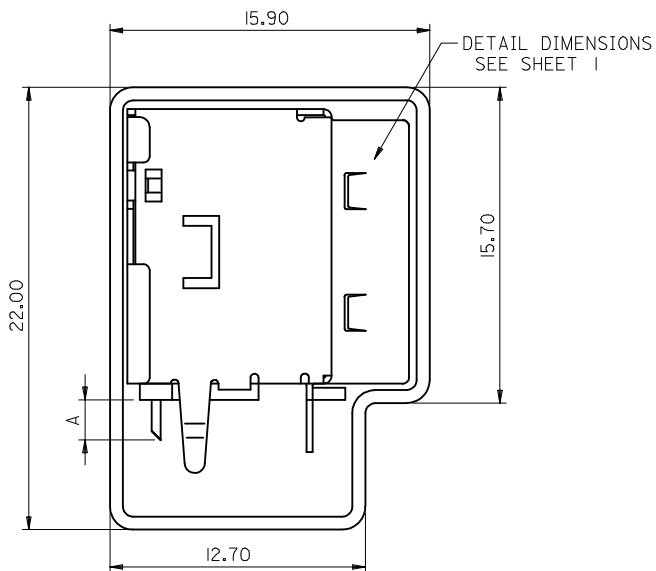

NOTE:
1.DETAIL DIMENSIONS , PLEASE REFER TO SHEET 1 OF SD-89485-003
2.THE TUBE PACKAGE INCLUDE TWO PLUGS ON RIGHT AND LEFT SIDES.
3.TUBE PACKAGING SPECIFICATION REFER TO: PK-89485-001

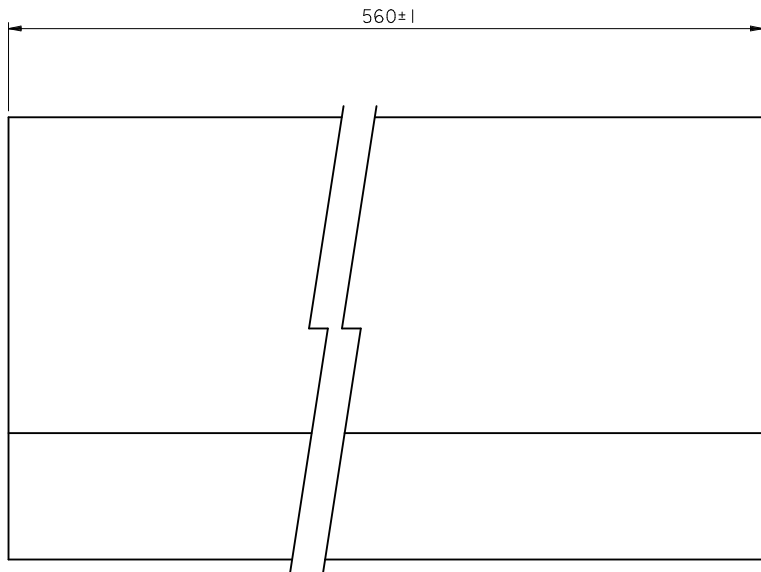

PART NUMBER LEGEND:

P/N FOR TUBE PACKING		
MATERIAL NUMBER	DIMENSION *A	PLATING SPECIFICATION
WITHOUT MYLAR	2.00 ^{+0.35} _{-0.15}	89485-8200 GOLD FLASH PLATING ON CONTACT AREA
		89485-8201 30 MICRO INCH GOLD PLATING ON CONTACT AREA
	2.50 ^{+0.35} _{-0.10}	89485-8202 GOLD FLASH PLATING ON CONTACT AREA
		89485-8203 30 MICRO INCH GOLD PLATING ON CONTACT AREA

tb_frame_A3_P_AM_T
Rev. E 2006/04/15

NEW RELEASE EC NO: SH2009-0233 DRW:NEZHAO 2008/12/02 CHKD:RZHANG 2008/12/12 APPR:HWANG 2008/12/17	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY DAVID HU	DATE	TITLE SINGLE PORT UP-RIGHT USB CONNECTOR LEAD-FREE				
			4 PLACES	± ---	± ---	CHECKED BY	DATE					
			3 PLACES	± ---	± ---							
			2 PLACES	± 0.25	± .010							
			1 PLACE	± 0.25	± .010	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED				
			ANGULAR ± 3 °									
			D	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-89485-003		SHEET NO. 3 OF 3		
						THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.