

# 2 to 18 GHz SM Bandpass Filters


## Part numbers B028RF2S to B148QF0S

### Description

Utilizing DLI's high permittivity, NP0 ceramics allow for small size, temperature stable performance over frequency and high reliability in environmentally challenging conditions. This series of bandpass filters was designed to span the popular 2-18 GHz frequency range. The compact size and surface mount attachment allow for low cost of manufacturing without sacrificing performance and repeatability. Designed for use on PCB 8-12 mils thick with a permittivity of 3.0-3.8.


### Features

- Small Size
- Fully Shielded Component
- Frequency Stable over Temperature
- Operating Temp: -55°C to +125°C

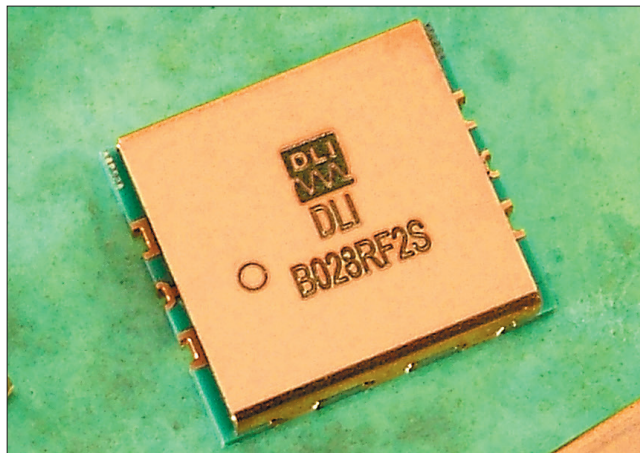

### Specifications

Part Number	Center Frequency	Passband	Insertion Loss (@Fc)		VSWR 50Ω System	Rejection		Length Inches (mm)	Width Inches (mm)	Height Inches (mm)
			@ 25°C	-40°C to +85°C						
<b>B028RF2S</b>	3 GHz	2 to 4 GHz	2.5 dB	3.0 dB	1.63:1 2 to 4 GHz	dc to 1.25 GHz (40 dB)	4.85 to 6 GHz (40 dB)	0.450 (11.43)	0.400 (10.16)	0.113 (2.87)
<b>B033ND5S</b>	3.3 GHz	3.1 to 3.5 GHz	2.0 dB	3.2 dB	2.0:1 3.1 to 3.5 GHz	dc to 2.6 GHz (30 dB)	4 to 6 GHz (40 dB)	0.393 (9.98)	0.353 (8.97)	0.128 (3.25)
<b>B056RC4S</b>	6 GHz	4 to 8 GHz	3.0 dB	3.5 dB	1.5:1 4 to 8 GHz	dc to 3 GHz (40 dB)	9.5 to 12 GHz (40 dB)	0.450 (11.43)	0.230 (5.84)	0.100 (2.54)
<b>B096QC2S</b>	10 GHz	8 to 12 GHz	2.5 dB	3.0 dB	2.0:1 8 to 12 GHz	dc to 6 GHz (40 dB)	14 to 18 GHz (40 dB)	0.400 (10.86)	0.180 (4.57)	0.100 (2.54)
<b>B148QF0S</b>	15 GHz	12 to 18 GHz	3.6 dB	3.6 dB	1.63:1 12 to 18 GHz	dc to 7.6 GHz (40 dB)	22.5 to 25 GHz (30 dB)	0.550 (13.97)	0.150 (3.81)	0.098 (2.49)

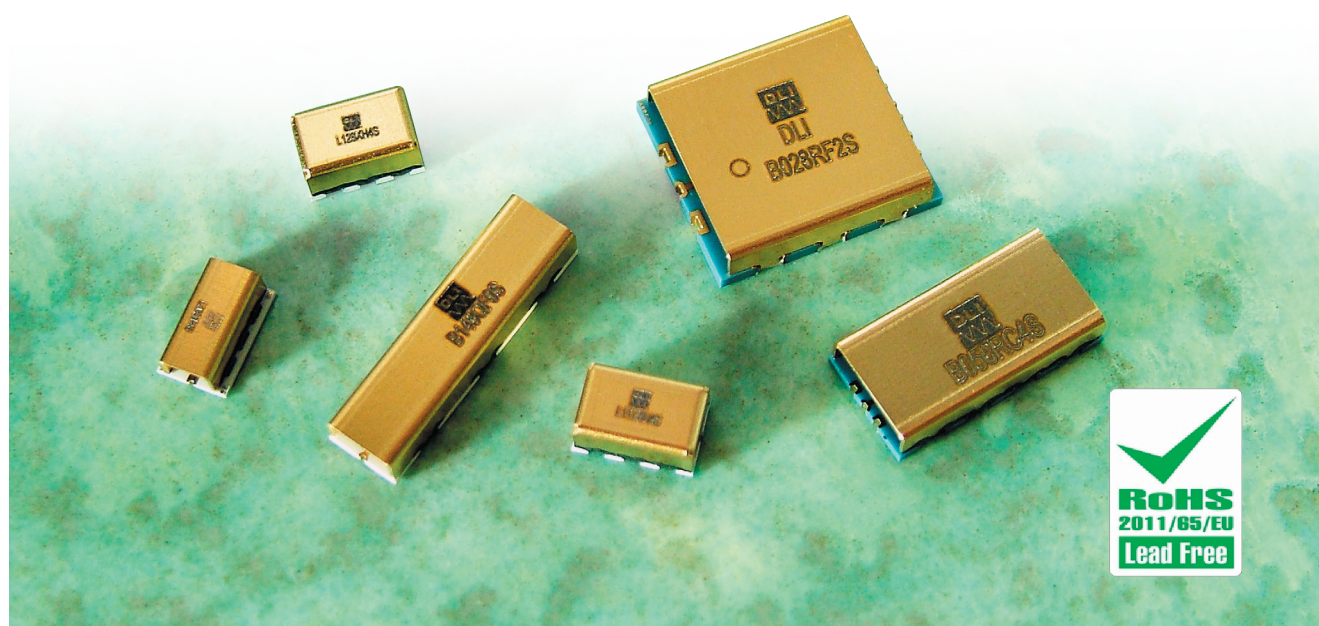

# 2 to 18 GHz SM Bandpass Filters

## Soldering Information

DLI solderable components are compatible with both SnPb and 100% Sn mounting methods. Unless otherwise specified, component termination metal is Ni/Au. Gold layer is less than 6 micro-inch to eliminate any Au embrittlement concern. A detailed application note is available at [dilabs.com](http://dilabs.com).

## Use of Silver Loaded Epoxy Adhesives

Use of conductive epoxy in place of solders is not recommended on our solder surface mountable components. Isolation must be maintained between the ground plane and signal traces when mounted on PCB. Epoxy may bleed out and degrade performance.

## Board Layout Design (SMT)

Board layout for each surface mountable device will require a ground plane with RF I/O traces. Each catalog part number may require a different PCB pattern recommendation and the individual datasheet and pattern recommendation should be reviewed. Devices are designed for a single ended 50 ohm system unless otherwise stated. Proper transmission line impedance is required to meet published electrical specifications.

Published test data of component on Rogers RO4350B® 10 mil thick material. Components were designed to work with other board materials when source impedance are matched to 50Ω. Please contact DLI Applications Engineering with any questions on use of other RF layer.

See [dilabs.com](http://dilabs.com) for more detailed application note on board mounting recommendations.

## RoHS

All products are RoHS compliant.

## Chip and Wire Information

DLI wire bond devices are designed for silver loaded epoxy adhesives to ground plane. A wire bond to I/O pad with thermo compression ball or wedge bonding on MIL-STD gold thickness (min 50 micro-inch). Device is also compatible with standard die attach methods but not compatible with Sn or SnPb solderable methods. Follow typical microwave wire bonding practices to minimize added inductance that may adversely impact electrical performance.

## Packaging

Components will be packaged in best standard commercial practices unless otherwise noted or requested. Packaging options include bulk and tape and reel.

## Handling & Storage


Components should never be handled with fingers; perspiration and skin oils can inhibit solderability or wire bond ability and will aggravate cleaning.

Ceramic components should never be handled with metallic instruments. Metal tweezers should never be used as these can chip the product and leave abraded metal tracks on the product surface. Plastic, carbon fiber and plastic coated metal types are readily available and recommended.

Devices are designed to withstand typical storage conditions. Devices may be stored between -55°C and +125°C and in a non-condensing environment.

Taped product should be stored out of direct sunlight, which might promote deterioration in tape performance.

Product, stored under the conditions recommended above, in its "as received" packaging, has a minimum shelf life of 2 years.

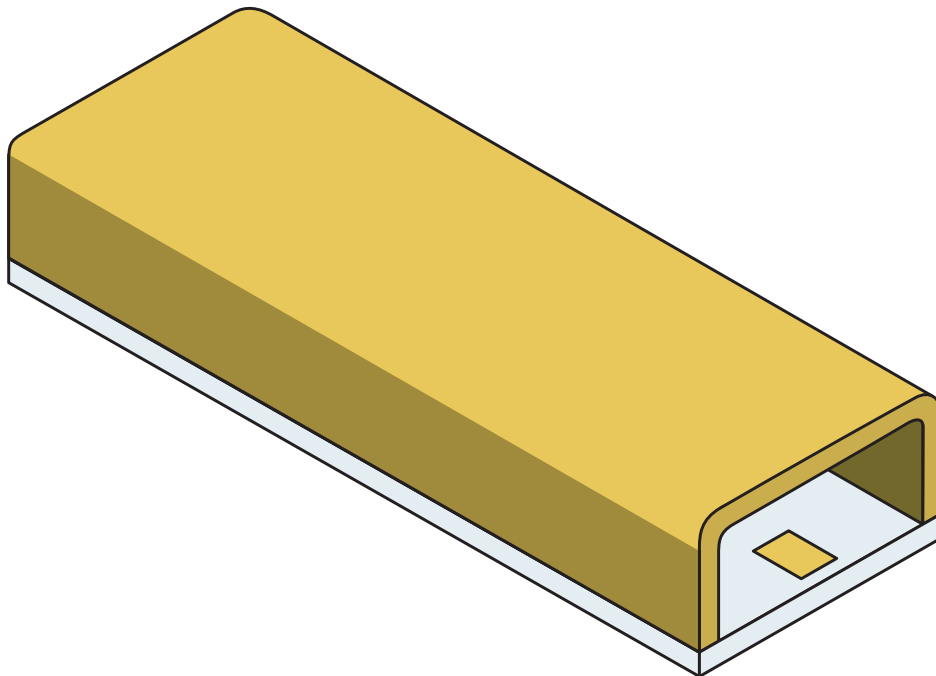

**Knowles (Cazenovia)**

**2777 Route 20 East, Cazenovia, NY 13035**

Phone: +1.315.655.8710 | Email: [DLISales@knowles.com](mailto:DLISales@knowles.com) | [www.dilabs.com](http://www.dilabs.com)  
9629-1/15



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.