

General Specifications

Electrical Capacity (Resistive Load)

Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 80 milliohms maximum
Insulation Resistance: 500 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 100,000 operations minimum for momentary;
Electrical Life: 100,000 operations minimum
Nominal Operating Force: 1.8N
Travel: Pretravel .051" (1.3mm); Overtravel .020" (0.5mm); Total Travel .071" (1.8mm)

Materials & Finishes

Housing: Glass fiber reinforced polyamide
Base: Glass fiber reinforced polyamide
Movable Contact: Phosphor bronze with gold plating
Switch Terminals: Phosphor bronze with gold plating
Lamp Terminals: Steel with silver plating

Environmental Data

Operating Temperature Range: -25°C through +50°C (-13°F through +122°F)
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Cap Installation Force: 15.0N (3.37 lbf) maximum downward force on cap

PCB Processing

Soldering: Wave Soldering: See Profile A in Supplement section.
Manual Soldering: See Profile B in Supplement section.
Cleaning: These devices are not process sealed. Hand clean locally using alcohol based solution.

Standards & Certifications

The HB2 pushbuttons have not been tested for UL recognition or CSA certification.
These switches are designed for use in a low-voltage, low-current, logic-level circuit.
When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Quiet actuation combined with crisp tactile feedback suited for broadcast equipment.

Full face illumination with choice of red/green or red/yellow bicolor LEDs, as well as simultaneous bicolor illumination which produces amber.


Option of legends on caps or film insert.

Compact design with short body .669" (17.0mm) from PCB to top of cap and .295" (7.5mm) square cap.


Sliding Twin Crossbar (STC) mechanism provides unequalled logic-level reliability, contact stability, smooth positive detent actuation, and long life.

Crimped power terminals ensure secure PCB mounting and prevent dislodging during soldering.



Suitable applications include broadcast, telecommunication, and medical equipment, as well as measuring instruments, etc.

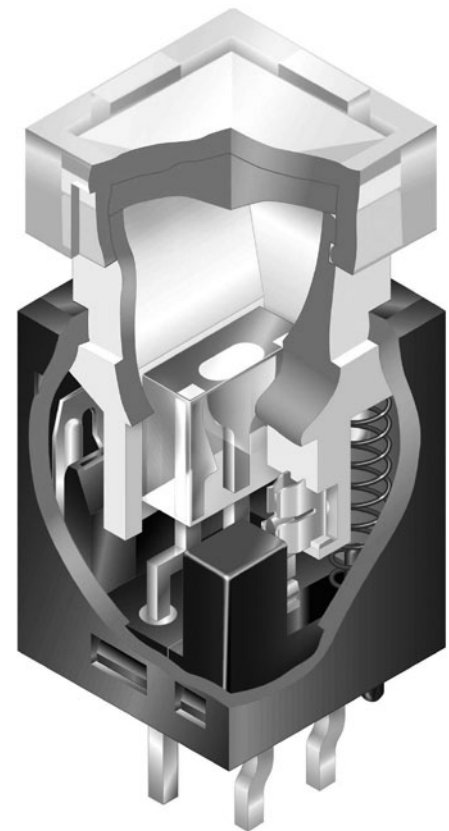

Actual Size



TYPICAL SWITCH ORDERING EXAMPLE

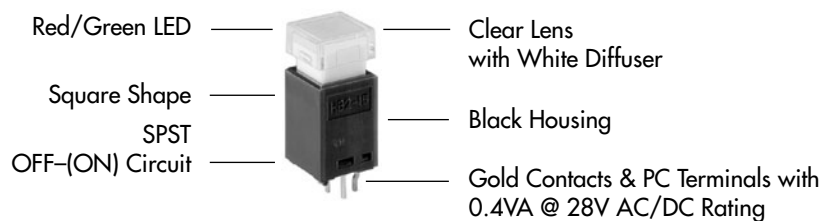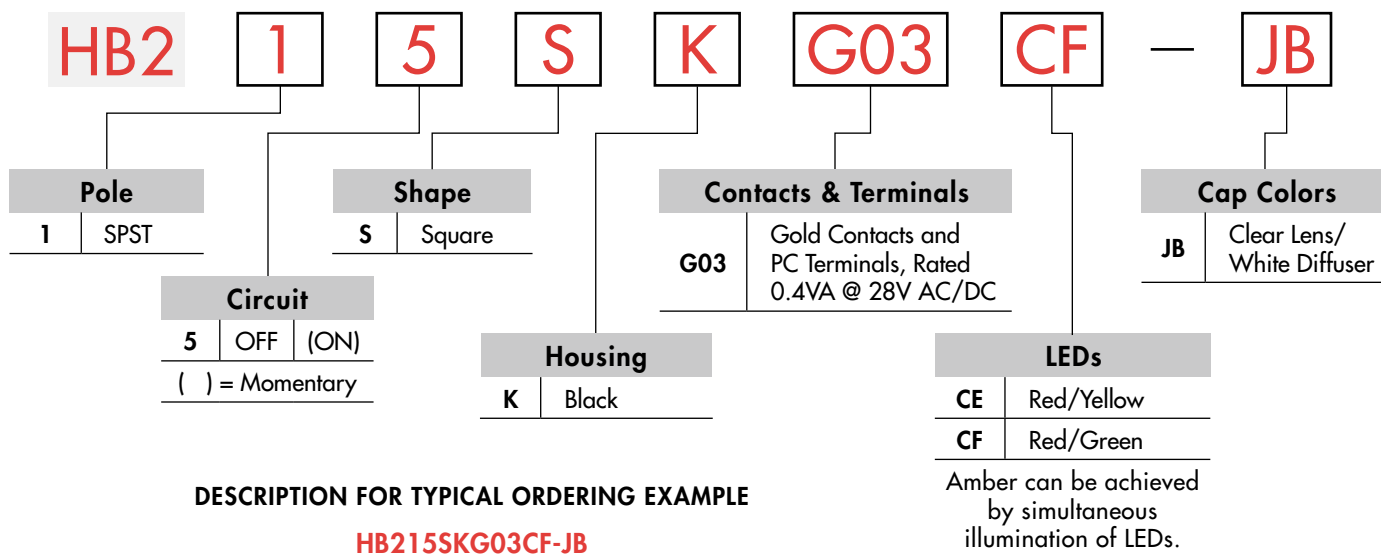

POLE & CIRCUIT

Pole	Model	Plunger Position () = Momentary		Connected Terminals		Throw & Switch/Lamp Schematics
		Normal	Down	Normal	Down	
SP	HB215	OFF	(ON)	OPEN	1-2	SPST

Notes: Switch terminals are not marked on the switch. Red LED terminal is marked with "R". Lamp circuit is isolated and requires external power source.

HOUSING SHAPE & COLOR


S .307" (7.8mm) Square Body

K Black Housing


CONTACT MATERIALS, RATINGS & TERMINALS

G03 Gold Contacts Logic Level 0.4VA maximum @ 28V AC/DC maximum


Switch Terminal




Lamp Terminal



PCB Footprint



BICOLOR LEDS & SPECIFICATIONS



$$R = \frac{E - V_F}{I_F}$$

Where: R = Resistor Value (Ohms)
 E = Source Voltage (V)
 V_F = Forward Voltage (V)
 I_F = Forward Current (A)

LED is an integral part of the switch.

	Color	CE Red/Yellow	CF Red/Green	Unit
Forward Peak Current	I _{FM}	30/30	30/30	mA
Typical Forward Current	I _F	20/20	20/20	mA
Forward Voltage	V _F	2.0/2.1	2.0/2.1	V
Reverse Peak Voltage	V _{RM}	4/4	4/4	V
Current Reduction Rate Above 25°C	ΔI _F	0.33/0.33	0.33/0.33	mA/°C
Ambient Temperature Range		-25° ~ +50°C		

The electrical specifications shown are determined at a basic temperature of 25°C.

LED circuit is isolated and requires external power source.

If the source voltage exceeds the rated voltage, a ballast resistor is required.


The resistor value can be calculated by using the formula in the Supplement section.

CAP COLORS




Clear Transparent Lens

**AT3081
Square Lens**



White Translucent Diffuser

**AT3082
Square Diffuser**




Lens & Diffuser Material: Polycarbonate

Lens Finish: Glossy


Diffuser Finish: Frosted

TYPICAL SWITCH DIMENSIONS

Single Pole

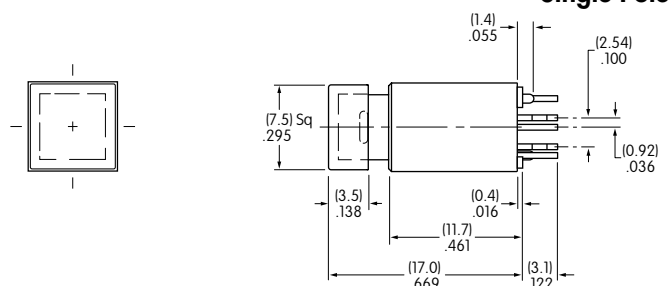

Square



HB215SKG03CF-JB

LEGENDS


NKK Switches can provide custom legends for caps. Contact factory for more information.

Suggested Printable Area for HB2 Lens & Film Insert


Recommended Methods: Screen Print or Pad Print on Lens; Laser Print on Film Insert.

Epoxy based ink is recommended.


Film Insert: Clear Polyester, 4 mil max. thickness



Lens



Film Insert



Shaded areas are printable areas.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.