



EJECT-A-DIP™ Lock/Eject DIP Socket w/Collet Contacts & Solder Pin Tails

FEATURES


- Rugged, Solderable Socket with a Unique Ejector/Latch for Fast In-field Board Maintenance
- Latch Locks-in Connector or Device for High-vibration Environments
- Ejector/Latch removes DIP Packages without Damage

GENERAL SPECIFICATIONS

- **LATCH & BODY:** Black UL-94V-0 Glass-filled 4/6 Nylon
- **PIN BODY:** Brass 360 1/2-hard per UNS C36000 ASTM B16/B16M-05
- **PIN BODY PLATING:** 10μ [0.25μ] min. Au per MIL-G-45204 –OR– 200μ [5.08μ] min. 93/7 Sn/Pb per ASTM B545 –OR– 200μ [5.08μ] min. Sn per ASTM B545 Type 1 over 100μ [2.54μ] min. Ni per SAE AMS-QQ-N-290B
- **6-FINGER COLLECT CONTACTS:** BeCu per UNS C17200 ASTM B194-08
- **CONTACT PLATING:** 200μ [5.08μ] min. 93/7 Sn/Pb per ASTM B545 –OR– 200μ [5.08μ] min. Sn per ASTM B545 Type 1 –OR– 10μ [0.25μ] min. Au per MIL-G-45204 over 50μ [1.27μ] min. Ni per SAE AMS-QQ-N-290B. Heavy 30μ [0.76μ] Au plating on contacts also available.
- **CONTACT CURRENT RATING:** 3 amps
- **INSULATION RESISTANCE:** 10,000 MΩ at 500VDC
- **WITHSTANDING VOLTAGE:** 1000Vrms
- **OPERATING TEMPERATURE:** -67°F to 221°F [-55°C to 105°C] for Sn plating; -67°F to 257°F [-55°C to 125°C] for Au plating
- **INSERTION FORCE:** 67g/pin, based on 0.018 [0.46] dia. test lead
- **WITHDRAWAL FORCE:** 30g/pin, based on 0.018 [0.46] dia. test lead
- **NORMAL FORCE:** 45g/pin, based on 0.018 [0.46] dia. test lead

MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE:** 0.030 ±0.002 [0.76 ±0.05] dia.

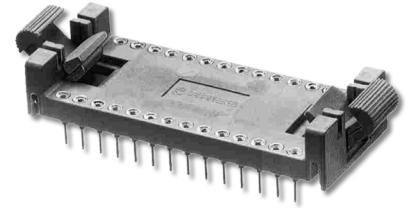

ORDERING INFORMATION

XX-CXXX-X XXX XX

Optional Plating

H = Heavy Au Collet
T = Sn Collet & Shell
TL = Sn/Pb Collet & Shell

Plating

0 = Au Collet, Sn Shell
OTL = Au Collet, Sn/Pb Shell
1 = Au Collet & Shell

Termination

1 = Solder Pin Tail

Dim. "H"

(See Table)

No. of Pins

(See Table)

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

FOR COLLECT SOCKETS w/SURFACE MOUNT PINS, SEE [DATA SHEET 12023](#)

FOR COLLET SOCKET w/WIRE WRAP PINS, SEE [DATA SHEET 12025](#)

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



ARIES
ELECTRONICS, INC.

2609 Bartram Road • Bristol, PA 19007-6810 USA

TEL 215-781-9956 • FAX 215-781-9845


WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



12024
Rev. 7.2
1 of 2



EJECT-A-DIP™ Lock/Eject DIP Socket w/Collet Contacts & Solder Pin Tails

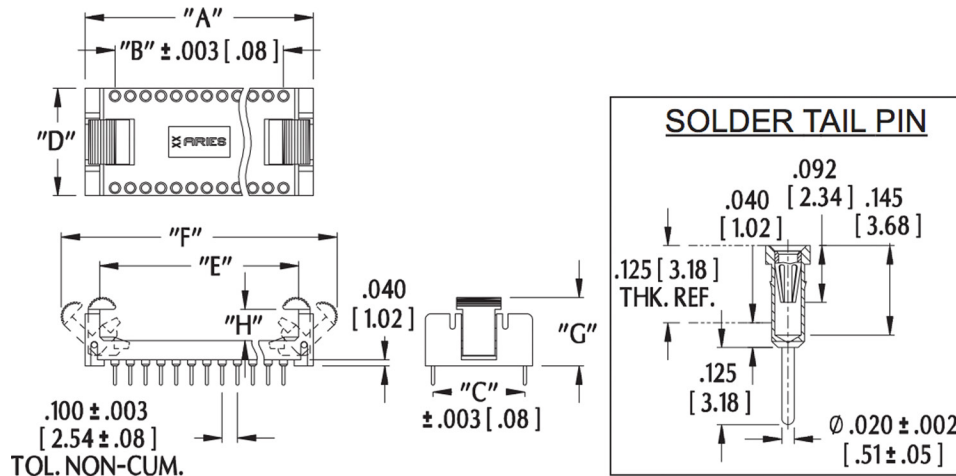

No. of pins	Catalog No.	Dim. "A"	Dim. "B"	Centers "C"	Dim. "D"	Dim. "E"	Dim. "F"	Dim "G"	Dim "H"
14	14-C280-XX	0.950 [24.10]	0.600 [15.24]	0.300 [7.62]	0.400 [10.16]	0.770 [19.56]	1.300 [33.02]	0.490 [12.45]	0.280 [7.11]
14	14-C195-XX	0.950 [24.10]	0.600 [15.24]	0.300 [7.62]	0.400 [10.16]	0.770 [19.56]	1.300 [33.02]	0.450 [11.43]	0.195 [4.95]
16	16-C280-XX	1.050 [26.70]	0.700 [17.78]	0.300 [7.62]	0.400 [10.16]	0.870 [22.10]	1.540 [39.12]	0.490 [12.45]	0.280 [7.11]
16	16-C195-XX	1.050 [26.70]	0.700 [17.78]	0.300 [7.62]	0.400 [10.16]	0.870 [22.10]	1.390 [35.31]	0.450 [11.43]	0.195 [4.95]
24	24-C300-XX	1.490 [37.85]	1.100 [27.94]	0.600 [15.24]	0.700 [17.78]	1.300 [33.02]	1.970 [50.04]	0.570 [14.48]	0.300 [7.62]
24	24-C212-XX	1.490 [37.85]	1.100 [27.94]	0.600 [15.24]	0.700 [17.78]	1.300 [33.02]	1.850 [47.00]	0.490 [12.45]	0.212 [5.39]
24	24-C182-XX	1.490 [37.85]	1.100 [27.94]	0.600 [15.24]	0.700 [17.78]	1.300 [33.02]	1.800 [45.72]	0.460 [11.68]	0.182 [4.62]
28	28-C300-XX	1.690 [42.90]	1.300 [33.02]	0.600 [15.24]	0.700 [17.78]	1.500 [38.10]	2.170 [55.12]	0.570 [14.48]	0.300 [7.62]
28	28-C212-XX	1.690 [42.90]	1.300 [33.02]	0.600 [15.24]	0.700 [17.78]	1.500 [38.10]	2.050 [52.07]	0.490 [12.45]	0.212 [5.39]
28	28-C182-XX	1.690 [42.90]	1.300 [33.02]	0.600 [15.24]	0.700 [17.78]	1.500 [38.10]	2.000 [50.80]	0.460 [11.68]	0.182 [4.62]
32	32-C300-XX	1.890 [48.00]	1.500 [38.10]	0.600 [15.24]	0.700 [17.78]	1.700 [43.18]	2.540 [64.52]	0.570 [14.48]	0.300 [7.62]
32	32-C212-XX	1.890 [48.00]	1.500 [38.10]	0.600 [15.24]	0.700 [17.78]	1.700 [43.18]	2.070 [52.58]	0.490 [12.45]	0.212 [5.39]
32	32-C182-XX	1.890 [48.00]	1.500 [38.10]	0.600 [15.24]	0.700 [17.78]	1.700 [43.18]	2.200 [55.88]	0.460 [11.68]	0.182 [4.62]
40	40-C300-XX	2.290 [58.20]	1.900 [48.26]	0.600 [15.24]	0.700 [17.78]	2.100 [53.34]	2.780 [70.61]	0.570 [14.48]	0.300 [7.62]
40	40-C212-XX	2.290 [58.20]	1.900 [48.26]	0.600 [15.24]	0.700 [17.78]	2.100 [53.34]	2.650 [67.31]	0.490 [12.45]	0.212 [5.39]
40	40-C182-XX	2.290 [58.20]	1.900 [48.26]	0.600 [15.24]	0.700 [17.78]	2.100 [53.34]	2.600 [66.04]	0.460 [11.68]	0.182 [4.62]

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED

FOR COLLECT SOCKETS w/SURFACE MOUNT PINS, SEE [DATA SHEET 12023](#)

FOR COLLET SOCKET w/WIRE WRAP PINS, SEE [DATA SHEET 12025](#)

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



ARIES
ELECTRONICS, INC.

2609 Bartram Road • Bristol, PA 19007-6810 USA
 TEL 215-781-9956 • FAX 215-781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



12024
Rev. 7.2
2 of 2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.