

### MLE Varistor Series



#### Size Table

| Metric | EIA  |
|--------|------|
| 1005   | 0402 |
| 1608   | 0603 |
| 2012   | 0805 |
| 3216   | 1206 |

#### Applications

- Protection of components and circuits sensitive to ESD Transients occurring on power supplies, control and signal lines
- Suppression of ESD events such as specified in IEC-61000-4-2 or MIL-STD-883 Method-3015.7, for electromagnetic compliance (EMC)
- Used in mobile communications, computer/EDP products, medical products, hand held/portable devices, industrial equipment, including diagnostic port protection and I/O interfaces

#### Additional Information



**Datasheet**



**Resources**



**Samples**

#### Description

The MLE Series family of transient voltage suppression devices are based on the Littelfuse multilayer fabrication technology. These components are designed to suppress ESD events, including those specified in IEC 61000-4-2 or other standards used for Electromagnetic Compliance testing. The MLE Series is typically applied to protect integrated circuits and other components at the circuit board level operating at 18V<sub>DC</sub> or less.

The fabrication method and materials of these devices result in capacitance characteristics suitable for high frequency attenuation/low-pass filter circuit functions, thereby providing suppression and filtering in a single device.

The MLE Series is manufactured from semiconducting ceramics and is supplied in a leadless, surface mount package. The MLE Series is compatible with modern reflow and wave soldering procedures.

Littelfuse Inc. manufactures other Multilayer Series products. See the ML Series data sheet for higher energy/ peak current transient applications. See the AUML Series for automotive applications and the MLN Quad Array. For high-speed applications see the MHS Series.

#### Features

- Halogen-Free and RoHS Compliant
- Rated for ESD (IEC-61000-4-2)
- Characterized for impedance and capacitance
- -40°C to +125°C
- operating temp. range
- Leadless 0402, 0603, 0805, and 1206 sizes
- Operating voltages up to 18V<sub>M(DC)</sub>
- Multilayer ceramic construction technology

#### Absolute Maximum Ratings

- For ratings of individual members of a series, see device ratings and specifications table.

| Continuous  | MLE Series  | Units |
|---|-------------|-------|
| <b>Steady State Applied Voltage:</b>                  |             |       |
| DC Voltage Range (V <sub>M(DC)</sub> )                | ≤18         | V     |
| Operating Ambient Temperature Range (T <sub>A</sub> ) | -40 to +125 | °C    |
| Storage Temperature Range (T <sub>STG</sub> )         | -40 to +150 | C     |

### Device Ratings and Specifications

| Part Number          | Max Continuous Working Voltage -55°C to 125°C | Performance Specifications (25°C) |                     |  |                                    |                   |                             |
|----------------------|---|-----------------------------------|---------------------|--|------------------------------------|-------------------|-----------------------------|
|                      |   | Nominal Voltage                   |                     | Maximum Clamping Voltage at Specified Current (8/20µs) | Maximum ESD Clamp Voltage (Note 2) |                   | Typical Capacitance at 1MHz |
|                      |   | (Note 1) $V_{M(DC)}$              | $V_{NOM}$ at 1mA DC | $V_c$  | 8kV Contact (Note 3)               | 15kV Air (Note 4) |                             |
| (V)                  | MIN (V)                                       | MAX (V)                           | (V)                 | (V)  | Clamp (V)                          | (pF)              |                             |
| V18MLE0402N          | 18  | 22                                | 28                  | 50 at 1A   | <125                               | <110              | <55                         |
| V18MLE0402F (Note 8) | 18  | 22                                | 28                  | 50 at 1A   | <125                               | <110              | <55                         |
| V18MLE0603N          | 18  | 22                                | 28                  | 50 at 1A   | <75                                | <110              | <125                        |
| V18MLE0603F (Note 8) | 18  | 22                                | 28                  | 50 at 1A   | <75                                | <110              | <125                        |
| V18MLE0603LN         | 18  | 22                                | 28                  | 50 at 1A   | <100                               | <140              | <100                        |
| V18MLE0805N          | 18  | 22                                | 28                  | 50 at 1A   | <70                                | <75               | <500                        |
| V18MLE0805LN         | 18  | 22                                | 28                  | 50 at 1A   | <75                                | <135              | <290                        |
| V18MLE1206N          | 18  | 22                                | 28                  | 50 at 1A   | <65                                | <65               | <1700                       |

**NOTES:**

- For applications of 18V<sub>DC</sub> or less. Higher voltages available, contact your Littelfuse Sales Representative.
- Tested with IEC-61000-4-2 Human Body Model (HBM) discharge test circuit.
- Direct discharge to device terminals (IEC preferred test method).
- Corona discharge through air (represents actual ESD event).
- Capacitance may be customized, contact your Littelfuse Sales Representative.
- Leakage current ratings are at 18 V<sub>DC</sub> and 25µA maximum.
- The typical capacitance rating is the discrete component test result.
- Items are lead free, and available as "R" packing option only.

### Peak Current and Energy Derating Curve

For applications exceeding 125°C ambient temperature, the peak surge current and energy ratings must be reduced as shown below.

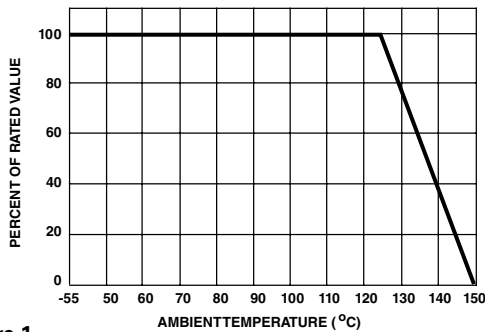


Figure 1

### Standby Current at Normalized Varistor Voltage and Temperature

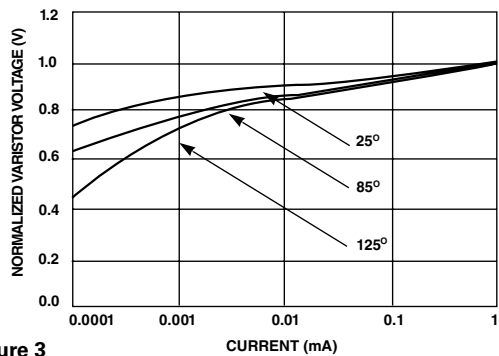


Figure 3

### Nominal Voltage Stability to Multiple ESD Impulses (8kV Contact Discharges per IEC 61000-4-2)

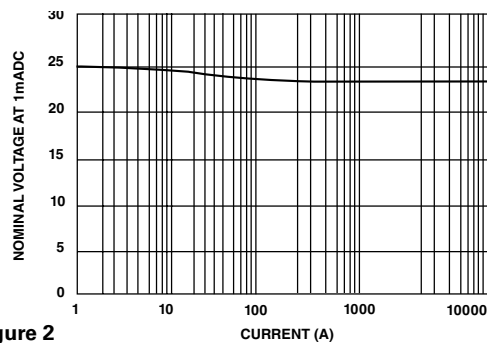


Figure 2

### Impedance (Z) vs Frequency Typical Characteristic

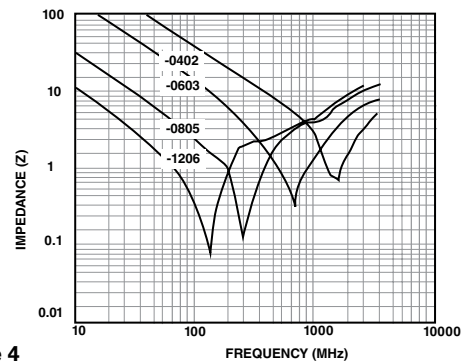


Figure 4

**Device Characteristics**

At low current levels, the V-I curve of the multilayer transient voltage suppressor approaches a linear (ohmic) relationship and shows a temperature dependent effect. At or below the maximum working voltage, the suppressor is in a high resistance model (approaching  $10^6\Omega$  at its maximum rated working voltage). Leakage currents at maximum rated voltage are below  $100\mu A$ , typically  $25\mu A$ ; for 0402 size below  $20\mu A$ , typically  $5\mu A$ .

Typical Temperature Dependence of the Characteristic Curve in the Leakage Region

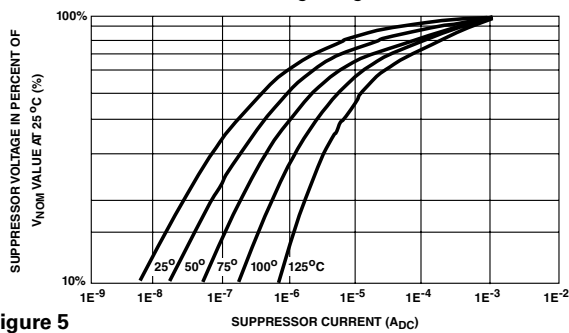


Figure 5

**Speed of Response**

The Multilayer Suppressor is a leadless device. Its response time is not limited by the parasitic lead inductances found in other surface mount packages. The response time of the  $Z_{N}O$  dielectric material is less than 1ns and the MLE can clamp very fast  $dV/dT$  events such as ESD. Additionally, in "real world" applications, the associated circuit wiring is often the greatest factor effecting speed of response. Therefore, transient suppressor placement within a circuit can be considered important in certain instances.

Multilayer Internal Construction

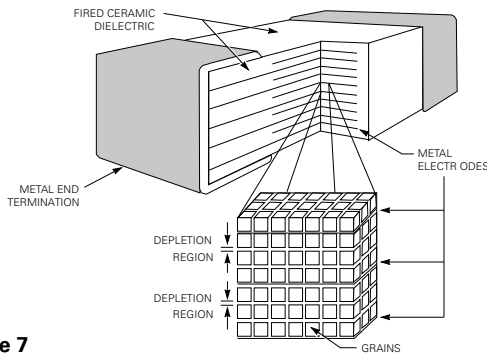


Figure 7

**Clamping Voltage Over Temperature ( $V_c$  at 10A)**

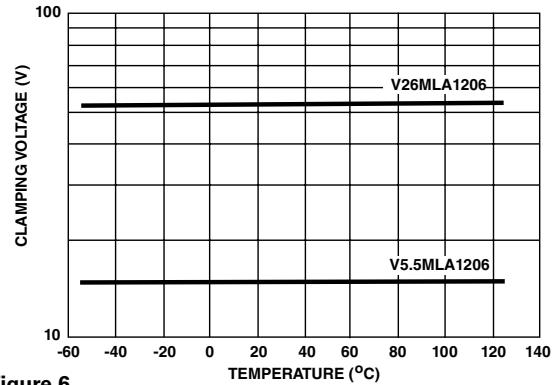


Figure 6

**Energy Absorption/Peak Current Capability**

Energy dissipated within the MLE is calculated by multiplying the clamping voltage, transient current and transient duration. An important advantage of the multilayer is its interdigitated electrode construction within the mass of dielectric material. This results in excellent current distribution and the peak temperature per energy absorbed is very low. The matrix of semiconducting grains combine to absorb and distribute transient energy (heat) (see Speed of Response). This dramatically reduces peak temperature; thermal stresses and enhances device reliability.

As a measure of the device capability in energy and peak current handling, the V26MLA1206A part was tested with multiple pulses at its peak current rating (3A, 8/20 $\mu s$ ). At the end of the test, 10,000 pulses later, the device voltage characteristics are still well within specification.

Repetitive Pulse Capability

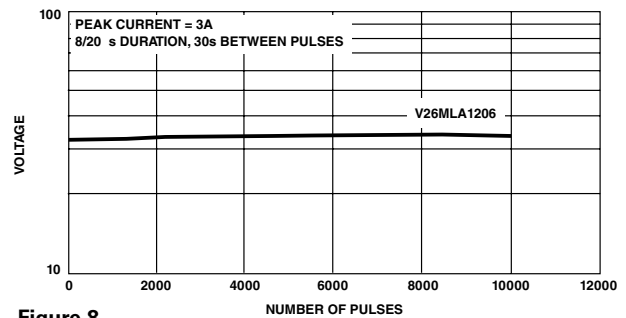


Figure 8

**Lead (Pb) Soldering Recommendations**

The principal techniques used for the soldering of components in surface mount technology are IR Re-flow and Wave soldering. Typical profiles are shown on the right.

The recommended solder for the MLE suppressor is a 62/36/2 (Sn/Pb/Ag), 60/40 (Sn/Pb) or 63/37 (Sn/Pb). Littelfuse also recommends an RMA solder flux.

Wave soldering is the most strenuous of the processes. To avoid the possibility of generating stresses due to thermal shock, a preheat stage in the soldering process is recommended, and the peak temperature of the solder process should be rigidly controlled.

When using a reflow process, care should be taken to ensure that the MLE chip is not subjected to a thermal gradient steeper than 4 degrees per second; the ideal gradient being 2 degrees per second. During the soldering process, preheating to within 100 degrees of the solder's peak temperature is essential to minimize thermal shock.

Once the soldering process has been completed, it is still necessary to ensure that any further thermal shocks are avoided. One possible cause of thermal shock is hot printed circuit boards being removed from the solder process and subjected to cleaning solvents at room temperature. The boards must be allowed to cool gradually to less than 50°C before cleaning.

**Reflow Solder Profile**

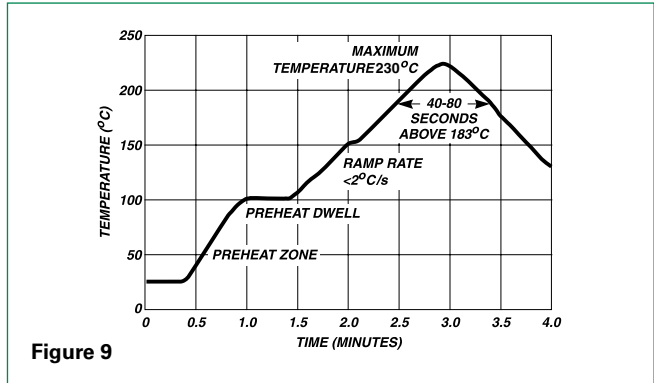


Figure 9

**Wave Solder Profile**

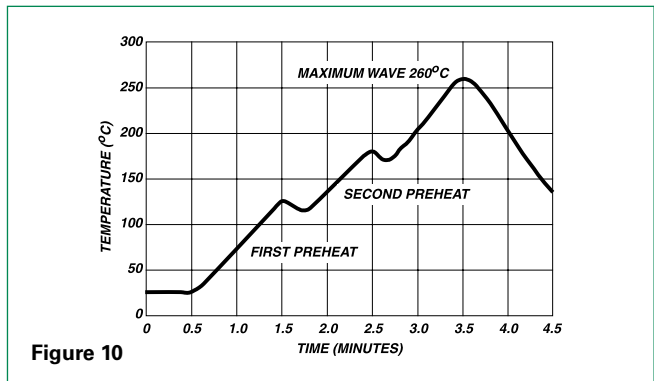


Figure 10

**Lead-free (Pb-free) Soldering Recommendations**

Littelfuse offers the Nickel Barrier Termination finish for the optimum Lead-free solder performance.

The preferred solder is 96.5/3.0/0.5 (SnAgCu) with an RMA flux, but there is a wide selection of pastes and fluxes available with which the Nickel Barrier parts should be compatible.

The reflow profile must be constrained by the maximums in the Lead-free Reflow Profile. For Lead-free Wave soldering, the Wave Solder Profile still applies.

Note: the Lead-free paste, flux and profile were used for evaluation purposes by Littelfuse, based upon industry standards and practices. There are multiple choices of all three available, it is advised that the customer explores the optimum combination for their process as processes vary considerably from site to site.

**Lead-free Re-flow Profile**


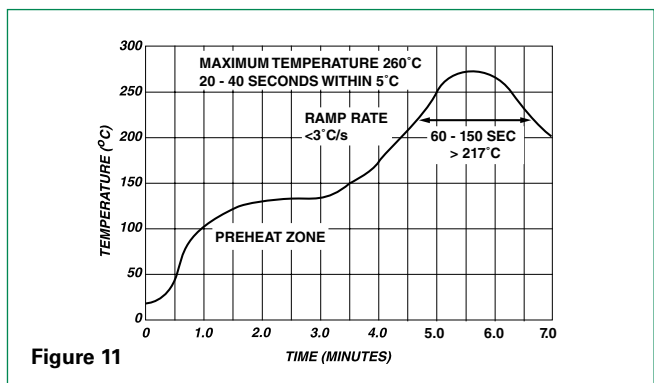


Figure 11


### Product Dimensions (mm)

PAD LAYOUT DEMENSIONS

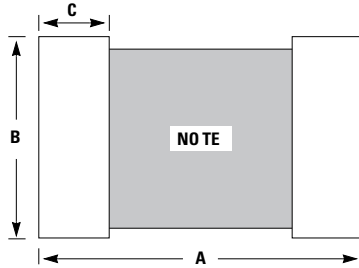


Note: Avoid metal runs in this area, parts are not recommended for use in applications using Silver (Ag) epoxy paste.

CHIP LAYOUT DIMENSIONS



| Dimension       | 1206 Size       |               | 0805 Size       |               | 0603 Size       |              | 0402 Size       |               |
|-----------------|-----------------|---------------|-----------------|---------------|-----------------|--------------|-----------------|---------------|
|                 | IN              | MM            | IN              | MM            | IN              | MM           | IN              | MM            |
| <b>A</b>        | 0.160           | 4.06          | 0.120           | 3.05          | 0.100           | 2.54         | 0.067           | 1.70          |
| <b>B</b>        | 0.065           | 1.65          | 0.050           | 1.27          | 0.030           | 0.76         | 0.020           | 0.51          |
| <b>C</b>        | 0.040           | 1.02          | 0.040           | 1.02          | 0.035           | 0.89         | 0.024           | 0.61          |
| <b>D (max.)</b> | 0.071           | 1.80          | 0.043           | 1.10          | 0.040           | 1.00         | 0.024           | 0.60          |
| <b>E</b>        | 0.02 +/- 0.01   | 0.50 +/- 0.25 | 0.02 +/- 0.01   | 0.50 +/- 0.25 | 0.015 +/- 0.008 | 0.4 +/- 0.2  | 0.010 +/- 0.006 | 0.25 +/- 0.15 |
| <b>L</b>        | 0.125 +/- 0.012 | 3.20 +/- 0.03 | 0.079 +/- 0.008 | 2.01 +/- 0.2  | 0.063 +/- 0.006 | 1.6 +/- 0.15 | 0.039 +/- 0.004 | 1.0 +/- 0.1   |
| <b>W</b>        | 0.06 +/- 0.011  | 1.60 +/- 0.28 | 0.049 +/- 0.008 | 1.25 +/- 0.2  | 0.032 +/- 0.006 | 0.8 +/- 0.15 | 0.020 +/- 0.004 | 0.5 +/- 0.1   |

### Part Numbering System


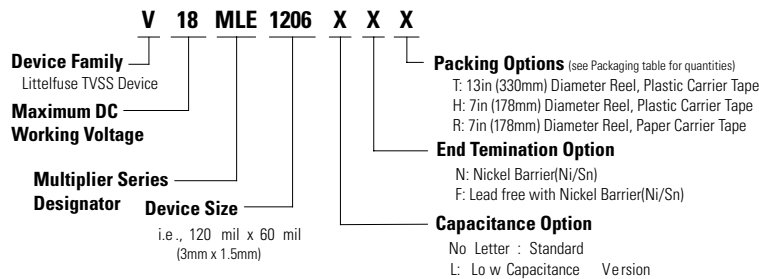


### Packaging\*

| Device Size | Quantity                   |                           |                           |                        |
|-------------|----------------------------|---------------------------|---------------------------|------------------------|
|             | 13" Inch Reel ('T' Option) | 7" Inch Reel ('H' Option) | 7" Inch Reel ('R' Option) | Bulk Pack ('A' Option) |
| 1206        | 10,000                     | 2,500                     | N/A                       | 2500                   |
| 0805        | 10,000                     | 2,500                     | N/A                       | 2500                   |
| 0603        | 10,000                     | 2,500                     | 4,000                     | 2500                   |
| 0402        | N/A                        | N/A                       | 10,000                    | N/A                    |

\*(Packaging) It is recommended that parts be kept in the sealed bag provided and that parts be used as soon as possible when removed from bags.

### Tape and Reel Specifications

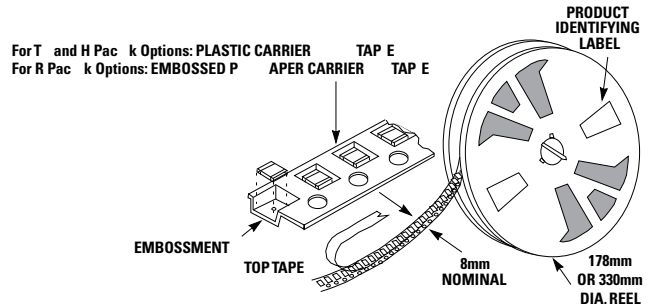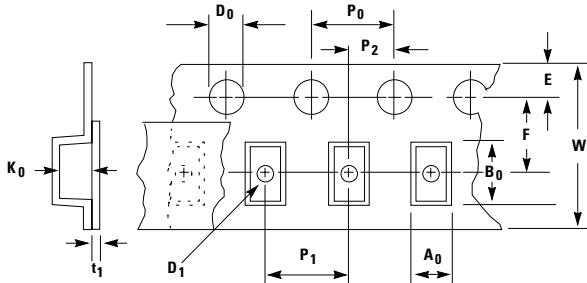

| Symbol         | Description  | Dimensions in Millimeters                    |                         |
|----------------|--|--|-------------------------|
|                |  | 0402 Size                                    | 0603, 0805 & 1206 Sizes |
| A <sub>0</sub> | Width of Cavity  | Dependent on Chip Size to Minimize Rotation. |                         |
| B <sub>0</sub> | Length of Cavity   | Dependent on Chip Size to Minimize Rotation. |                         |
| K <sub>0</sub> | Depth of Cavity  | Dependent on Chip Size to Minimize Rotation. |                         |
| W              | Width of Tape  | 8 -/+ 0.2                                    | 8 -/+ 0.3               |
| F              | Distance Between Drive Hole Centers and Cavity Centers           | 3.5 -/+ 0.05                                 | 3.5 -/+ 0.05            |
| E              | Distance Between Drive Hole Centers and Tape Edge                | 1.75 -/+ 0.1                                 | 1.75 -/+ 0.1            |
| P <sub>1</sub> | Distance Between Cavity Centers                                  | 2 -/+ 0.05                                   | 4 -/+ 0.1               |
| P <sub>2</sub> | Axial Drive Distance Between Drive Hole Centers & Cavity Centers | 2 -/+ 0.1                                    | 2 -/+ 0.1               |
| P <sub>0</sub> | Axial Drive Distance Between Drive Hole Centers                  | 4 -/+ 0.1                                    | 4 -/+ 0.1               |
| D <sub>0</sub> | Drive Hole Diameter  | 1.55 -/+ 0.05                                | 1.55 -/+ 0.05           |
| D <sub>1</sub> | Diameter of Cavity Piercing                                      | N/A  | 1.05 -/+ 0.05           |
| T <sub>1</sub> | Top Tape Thickness   | 0.1 Max                                      | 0.1 Max                 |

**Notes :**

- Conforms to EIA-481-1, Revision A
- Can be supplied to IEC publication 286-3



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.