

### SZP6SMB Series



#### Agency Approvals

| Agency                                                                            | Agency File Number |
|-----------------------------------------------------------------------------------|--------------------|
|  | E128662            |

#### Maximum Ratings and Thermal Characteristics

| Parameter                                                                                                                | Symbol          | Value       | Unit                            |
|--------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|---------------------------------|
| Peak Power Dissipation (Note 1) @ $T_L = 25^\circ\text{C}$ , Pulse Width = 1 ms                                          | $P_{PK}$        | 600         | W                               |
| DC Power Dissipation @ $T_L = 75^\circ\text{C}$<br>Measured Zero Lead Length (Note 2)<br>Derate Above $75^\circ\text{C}$ | $P_D$           | 3.0<br>40   | W<br>$\text{mW}/^\circ\text{C}$ |
| Thermal Resistance from Junction-to-Lead                                                                                 | $R_{\theta JL}$ | 25          | $^\circ\text{C}/\text{W}$       |
| DC Power Dissipation (Note 3) @ $T_A = 25^\circ\text{C}$<br>Derate Above $25^\circ\text{C}$                              | $P_D$           | 0.55<br>4.4 | W<br>$\text{mW}/^\circ\text{C}$ |
| Thermal Resistance from Junction-to-Ambient                                                                              | $R_{\theta JA}$ | 226         | $^\circ\text{C}/\text{W}$       |
| Forward Surge Current (Note 4) @ $T_A = 25^\circ\text{C}$                                                                | $I_{FSM}$       | 100         | A                               |
| Operating and Storage Temperature Range                                                                                  | $T_J, T_{stg}$  | -65 to +150 | $^\circ\text{C}$                |

Stresses exceeding those listed in the Maximum Ratings table may damage the component. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 10/1000  $\mu\text{s}$ , non-repetitive.
- 1" square copper pad, FR-4 board.
- FR-4 board, using Littelfuse minimum recommended footprint
- 1/2 sine wave (or equivalent square wave), PW = 8.3 ms, duty cycle = 4 pulses per minute maximum. For Unidirectional only.

#### Description

The SZP6SMB series is designed to protect voltage sensitive components from high voltage, high energy transients. They have excellent clamping capability, high surge capability, low breakdown impedance and fast response time. The SZP6SMB series is supplied in the Littelfuse exclusive, cost-effective, highly reliable package and is ideally suited for use in communication systems, automotive, numerical controls, process controls, medical equipment, business machines, power supplies and many other industrial/consumer applications.

#### Features

- Zener Transient Overvoltage Suppressors
- Working Peak Reverse Voltage Range – 5.8 to 171 V (for Uni-directional), 9.4 to 70.1 V (for Bi-directional)
- Standard Breakdown Voltage Range – 6.45 to 210V for Uni-directional, 10.5 to 86.1V for Bi-directional
- Peak Power – 600 W @ 1 ms
- ESD Rating of Class 3 (> 16 kV) per Human Body Model
- Maximum Clamp Voltage @ Peak Pulse Current
- Low Leakage < 5  $\mu\text{A}$  Above 10 V
- Response Time is Typically < 1 ns
- Pb-free means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)
- SZ Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable

#### Additional Information



Datasheet




Resources




Samples

### Functional Diagram

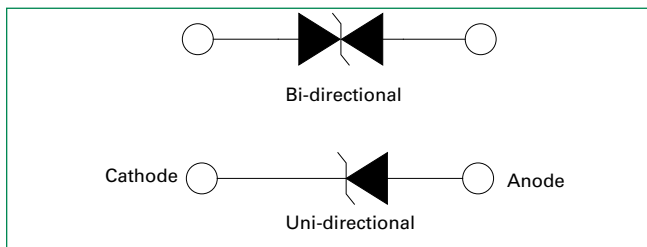


### I-V Curve Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted, $V_F = 3.5\text{ V Max.}$ @ $I_F$ (Note 5) = 30 A) For Uni-directional

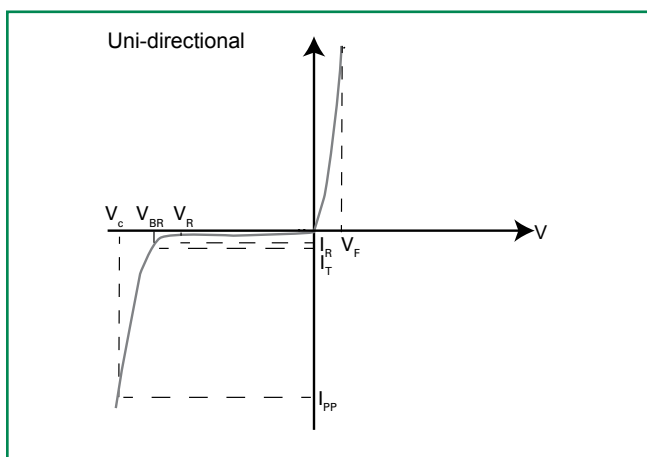

| Symbol    | Parameter                                   |
|-----------|---------------------------------------------|
| $I_{PP}$  | Maximum Reverse Peak Pulse Current          |
| $V_C$     | Clamping Voltage @ $I_{PP}$                 |
| $V_{RWM}$ | Working Peak Reverse Voltage                |
| $I_R$     | Maximum Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$                   |
| $I_T$     | On-State Current                            |
| $V_F$     | Forward Voltage @ $I_F$                     |
| $I_F$     | Forward Current                             |

5. 1/2 sine wave (or equivalent square wave), PW = 8.3 ms, non-repetitive duty cycle.

### I-V Curve Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted) – For Bi-directional

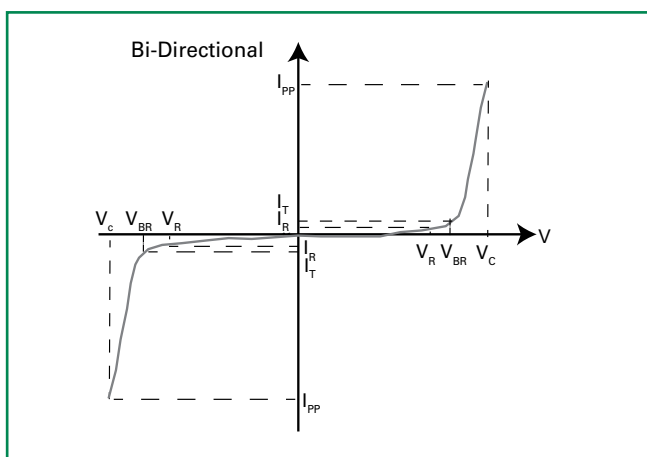

| Symbol    | Parameter                                   |
|-----------|---------------------------------------------|
| $I_{PP}$  | Maximum Reverse Peak Pulse Current          |
| $V_C$     | Clamping Voltage @ $I_{PP}$                 |
| $V_{RWM}$ | Working Peak Reverse Voltage                |
| $I_R$     | Maximum Reverse Leakage Current @ $V_{RWM}$ |
| $V_{BR}$  | Breakdown Voltage @ $I_T$                   |
| $I_T$     | Test Current                                |

### Electrical Characteristics - For Unidirectional

| Component      | Component Marking |                       |                 | Breakdown Voltage           |       |      |         | $V_C @ I_{PP}$<br>(Note 8) |          | $V_{BR}$ | $C_{Typ}$<br>(Note 9) |
|----------------|-------------------|-----------------------|-----------------|-----------------------------|-------|------|---------|----------------------------|----------|----------|-----------------------|
|                |                   | $V_{RWM}$<br>(Note 6) | $I_R @ V_{RWM}$ | $V_{BR} @ I_T$ (V) (Note 7) |       |      | @ $I_T$ | $V_C$                      | $I_{PP}$ |          |                       |
|                |                   | Volts                 | $\mu A$         | MIN                         | NOM   | MAX  | mA      | Volts                      | Amps     |          |                       |
| SZP6SMB6.8AT3G | 6V8A              | 5.8                   | 1000            | 6.45                        | 6.8   | 7.14 | 10      | 10.5                       | 57       | 0.057    | 2380                  |
| SZP6SMB7.5AT3G | 7V5A              | 6.4                   | 500             | 7.13                        | 7.51  | 7.88 | 10      | 11.3                       | 53       | 0.061    | 2180                  |
| SZP6SMB8.2AT3G | 8V2A              | 7.02                  | 200             | 7.79                        | 8.2   | 8.61 | 10      | 12.1                       | 50       | 0.065    | 2015                  |
| SZP6SMB9.1AT3G | 9V1A              | 7.78                  | 50              | 8.65                        | 9.1   | 9.55 | 1       | 13.4                       | 45       | 0.068    | 1835                  |
| SZP6SMB10AT3G  | 10A               | 8.55                  | 10              | 9.5                         | 10    | 10.5 | 1       | 14.5                       | 41       | 0.073    | 1690                  |
| SZP6SMB12AT3G  | 12A               | 10.2                  | 5               | 11.4                        | 12    | 12.6 | 1       | 16.7                       | 36       | 0.078    | 1435                  |
| SZP6SMB13AT3G  | 13A               | 11.1                  | 5               | 12.4                        | 13.05 | 13.7 | 1       | 18.2                       | 33       | 0.081    | 1335                  |
| SZP6SMB15AT3G  | 15A               | 12.8                  | 5               | 14.3                        | 15.05 | 15.8 | 1       | 21.2                       | 28       | 0.084    | 1175                  |
| SZP6SMB16AT3G  | 16A               | 13.6                  | 5               | 15.2                        | 16    | 16.8 | 1       | 22.5                       | 27       | 0.086    | 1110                  |
| SZP6SMB18AT3G  | 18A               | 15.3                  | 5               | 17.1                        | 18    | 18.9 | 1       | 25.2                       | 24       | 0.088    | 1000                  |
| SZP6SMB20AT3G  | 20A               | 17.1                  | 5               | 19                          | 20    | 21   | 1       | 27.7                       | 22       | 0.09     | 910                   |
| SZP6SMB22AT3G  | 22A               | 18.8                  | 5               | 20.9                        | 22    | 23.1 | 1       | 30.6                       | 20       | 0.092    | 835                   |
| SZP6SMB24AT3G  | 24A               | 20.5                  | 5               | 22.8                        | 24    | 25.2 | 1       | 33.2                       | 18       | 0.094    | 775                   |
| SZP6SMB27AT3G  | 27A               | 23.1                  | 5               | 25.7                        | 27.05 | 28.4 | 1       | 37.5                       | 16       | 0.096    | 700                   |
| SZP6SMB30AT3G  | 30A               | 25.6                  | 5               | 28.5                        | 30    | 31.5 | 1       | 41.4                       | 14.4     | 0.097    | 635                   |
| SZP6SMB33AT3G  | 33A               | 28.2                  | 5               | 31.4                        | 33.05 | 34.7 | 1       | 45.7                       | 13.2     | 0.098    | 585                   |
| SZP6SMB36AT3G  | 36A               | 30.8                  | 5               | 34.2                        | 36    | 37.8 | 1       | 49.9                       | 12       | 0.099    | 540                   |
| SZP6SMB39AT3G  | 39A               | 33.3                  | 5               | 37.1                        | 39.05 | 41   | 1       | 53.9                       | 11.2     | 0.1      | 500                   |
| SZP6SMB43AT3G  | 43A               | 36.8                  | 5               | 40.9                        | 43.05 | 45.2 | 1       | 59.3                       | 10.1     | 0.101    | 460                   |
| SZP6SMB47AT3G  | 47A               | 40.2                  | 5               | 44.7                        | 47.05 | 49.4 | 1       | 64.8                       | 9.3      | 0.101    | 425                   |
| SZP6SMB51AT3G  | 51A               | 43.6                  | 5               | 48.5                        | 51.05 | 53.6 | 1       | 70.1                       | 8.6      | 0.102    | 395                   |
| SZP6SMB56AT3G  | 56A               | 47.8                  | 5               | 53.2                        | 56    | 58.8 | 1       | 77                         | 7.8      | 0.103    | 365                   |
| SZP6SMB62AT3G  | 62A               | 53                    | 5               | 58.9                        | 62    | 65.1 | 1       | 85                         | 7.1      | 0.104    | 335                   |
| SZP6SMB68AT3G  | 68A               | 58.1                  | 5               | 64.6                        | 68    | 71.4 | 1       | 92                         | 6.5      | 0.104    | 305                   |
| SZP6SMB75AT3G  | 75A               | 64.1                  | 5               | 71.3                        | 75.05 | 78.8 | 1       | 103                        | 5.8      | 0.105    | 280                   |
| SZP6SMB91AT3G  | 91A               | 77.8                  | 5               | 86.5                        | 91    | 95.5 | 1       | 125                        | 4.8      | 0.106    | 235                   |
| SZP6SMB100AT3G | 100A              | 85.5                  | 5               | 95                          | 100   | 105  | 1       | 137                        | 4.4      | 0.106    | 215                   |
| SZP6SMB120AT3G | 120A              | 102                   | 5               | 114                         | 120   | 126  | 1       | 165                        | 3.6      | 0.107    | 185                   |
| SZP6SMB130AT3G | 130A              | 111                   | 5               | 124                         | 130.5 | 137  | 1       | 179                        | 3.3      | 0.107    | 170                   |
| SZP6SMB150AT3G | 150A              | 128                   | 5               | 143                         | 150.5 | 158  | 1       | 207                        | 2.9      | 0.108    | 150                   |
| SZP6SMB160AT3G | 160A              | 136                   | 5               | 152                         | 160   | 168  | 1       | 219                        | 2.7      | 0.108    | 140                   |
| SZP6SMB180AT3G | 180A              | 154                   | 5               | 171                         | 180   | 189  | 1       | 246                        | 2.4      | 0.108    | 130                   |
| SZP6SMB200AT3G | 200A              | 171                   | 5               | 190                         | 200   | 210  | 1       | 274                        | 2.2      | 0.108    | 115                   |

### Electrical Characteristics - For Bidirectional

| Component      | Component Marking | V <sub>RWM</sub><br>(Note 6) | I <sub>R</sub> @<br>V <sub>RWM</sub> | Breakdown Voltage                             |       |      |                  | V <sub>C</sub> @ I <sub>PP</sub><br>(Note 8) |                 | V <sub>BR</sub> | C <sub>Typ.</sub><br>(Note 9) |
|----------------|-------------------|------------------------------|--------------------------------------|-----------------------------------------------|-------|------|------------------|----------------------------------------------|-----------------|-----------------|-------------------------------|
|                |                   |                              |                                      | V <sub>BR</sub> @ I <sub>T</sub> (V) (Note 7) |       |      | @ I <sub>T</sub> | V <sub>C</sub>                               | I <sub>PP</sub> |                 |                               |
|                |                   | Volts                        | µA                                   | MIN                                           | NOM   | MAX  | mA               | Volts                                        | Amps            | %/°C            | pF                            |
| SZP6SMB11CAT3G | 11C               | 9.4                          | 5                                    | 10.5                                          | 11.05 | 11.6 | 1                | 15.6                                         | 38              | 0.075           | 865                           |
| SZP6SMB12CAT3G | 12C               | 10.2                         | 5                                    | 11.4                                          | 12    | 12.6 | 1                | 16.7                                         | 36              | 0.078           | 800                           |
| SZP6SMB15CAT3G | 15C               | 12.8                         | 5                                    | 14.3                                          | 15.05 | 15.8 | 1                | 21.2                                         | 28              | 0.084           | 645                           |
| SZP6SMB16CAT3G | 16C               | 13.6                         | 5                                    | 15.2                                          | 16    | 16.8 | 1                | 22.5                                         | 27              | 0.086           | 610                           |
| SZP6SMB18CAT3G | 18C               | 15.3                         | 5                                    | 17.1                                          | 18    | 18.9 | 1                | 25.2                                         | 24              | 0.088           | 545                           |
| SZP6SMB20CAT3G | 20C               | 17.1                         | 5                                    | 19                                            | 20    | 21   | 1                | 27.7                                         | 22              | 0.09            | 490                           |
| SZP6SMB22CAT3G | 22C               | 18.8                         | 5                                    | 20.9                                          | 22    | 23.1 | 1                | 30.6                                         | 20              | 0.09            | 450                           |
| SZP6SMB24CAT3G | 24C               | 20.5                         | 5                                    | 22.8                                          | 24    | 25.2 | 1                | 33.2                                         | 18              | 0.094           | 415                           |
| SZP6SMB27CAT3G | 27C               | 23.1                         | 5                                    | 25.7                                          | 27.05 | 28.4 | 1                | 37.5                                         | 16              | 0.096           | 370                           |
| SZP6SMB30CAT3G | 30C               | 25.6                         | 5                                    | 28.5                                          | 30    | 31.5 | 1                | 41.4                                         | 14.4            | 0.097           | 335                           |
| SZP6SMB33CAT3G | 33C               | 28.2                         | 5                                    | 31.4                                          | 33.05 | 34.7 | 1                | 45.7                                         | 13.2            | 0.098           | 305                           |
| SZP6SMB36CAT3G | 36C               | 30.8                         | 5                                    | 34.2                                          | 36    | 37.8 | 1                | 49.9                                         | 12              | 0.099           | 280                           |
| SZP6SMB39CAT3G | 39C               | 33.3                         | 5                                    | 37.1                                          | 39.05 | 41   | 1                | 53.9                                         | 11.2            | 0.1             | 260                           |
| SZP6SMB43CAT3G | 43C               | 36.8                         | 5                                    | 40.9                                          | 43.05 | 45.2 | 1                | 59.3                                         | 10.1            | 0.101           | 240                           |
| SZP6SMB47CAT3G | 47C               | 40.2                         | 5                                    | 44.7                                          | 47.05 | 49.4 | 1                | 64.8                                         | 9.3             | 0.101           | 220                           |
| SZP6SMB51CAT3G | 51C               | 43.6                         | 5                                    | 48.5                                          | 51.05 | 53.6 | 1                | 70.1                                         | 8.6             | 0.102           | 205                           |
| SZP6SMB56CAT3G | 56C               | 47.8                         | 5                                    | 53.2                                          | 56    | 58.8 | 1                | 77                                           | 7.8             | 0.103           | 185                           |
| SZP6SMB62CAT3G | 62C               | 53                           | 5                                    | 58.9                                          | 62    | 65.1 | 1                | 85                                           | 7.1             | 0.104           | 170                           |
| SZP6SMB68CAT3G | 68C               | 58.1                         | 5                                    | 64.6                                          | 68    | 71.4 | 1                | 92                                           | 6.5             | 0.104           | 155                           |
| SZP6SMB82CAT3G | 82C               | 70.1                         | 5                                    | 77.9                                          | 82    | 86.1 | 1                | 113                                          | 5.3             | 0.105           | 130                           |

6. A transient suppressor is normally selected according to the working peak reverse voltage ( $V_{RWM}$ ), which should be equal to or greater than the DC or continuous peak operating voltage level.


7.  $V_{BR}$  measured at pulse test current  $I_T$  at an ambient temperature of 25°C.

8. Surge current waveform per Figure 2 and derate per Figure 3 of the General Data – 600 Watt at the beginning of this group.


9. Bias Voltage = 0 V, F = 1 MHz,  $T_J$  = 25°C

## Ratings and Characteristic Curves - For Unidirectional


**Figure 1. Pulse Rating Curve**

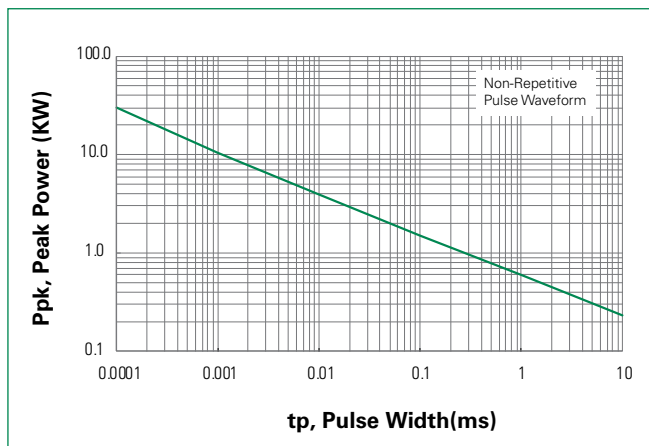


**Figure 2. Pulse Waveform**

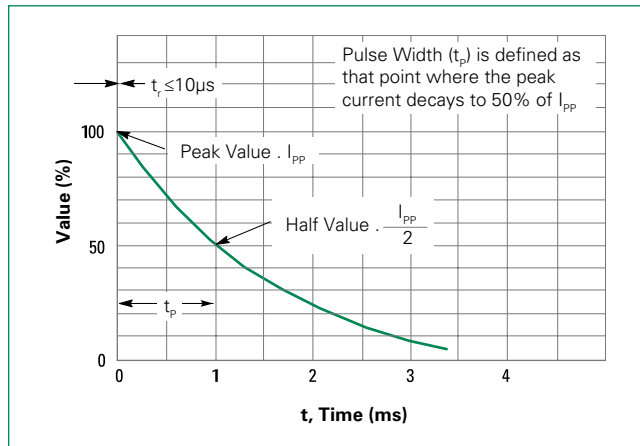


**Figure 3. Surge Derating Curve**

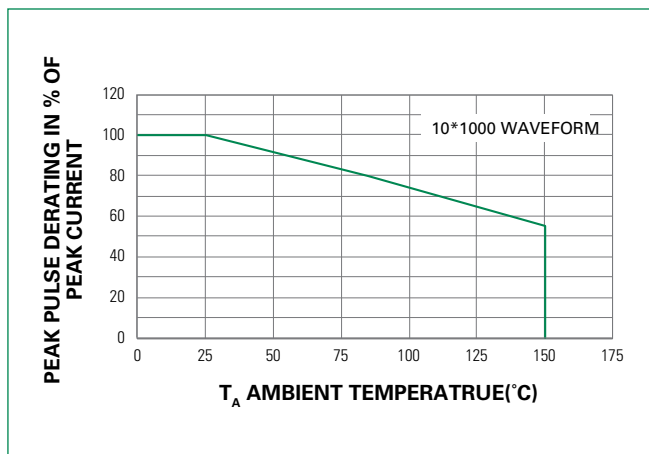


**Figure 4. Typical Junction Capacitance vs. Bias Voltage**

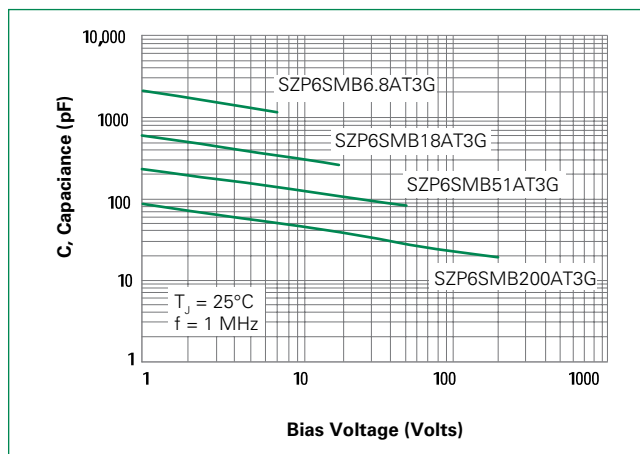

**Figure 5. Typical Junction Capacitance vs. Bias Voltage**

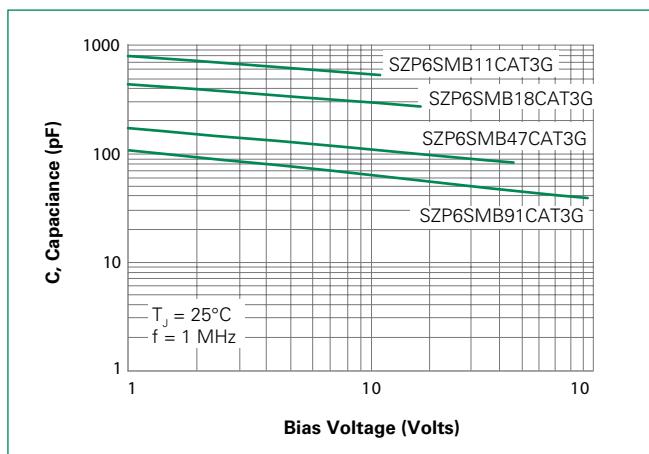


**Figure 6. Typical Protection Circuit**

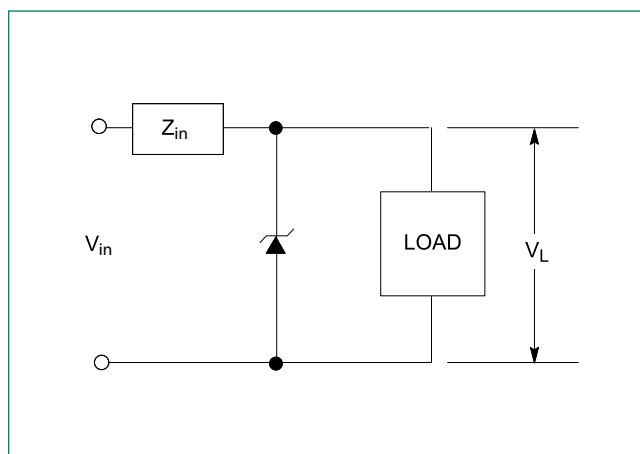

### Soldering Parameters

| Reflow Condition                                      |                                    | Lead-free assembly      |
|-------------------------------------------------------|------------------------------------|-------------------------|
| Pre Heat                                              | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                       | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                       | - Time (min to max) ( $t_p$ )      | 60 – 120 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                  |                                    | 3°C/second max          |
| Reflow                                                | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                       | - Time (min to max) ( $t_L$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                            |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )  |                                    | 30 seconds max          |
| Ramp-down Rate                                        |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )               |                                    | 8 minutes max.          |
| Do not exceed                                         |                                    | 260°C                   |

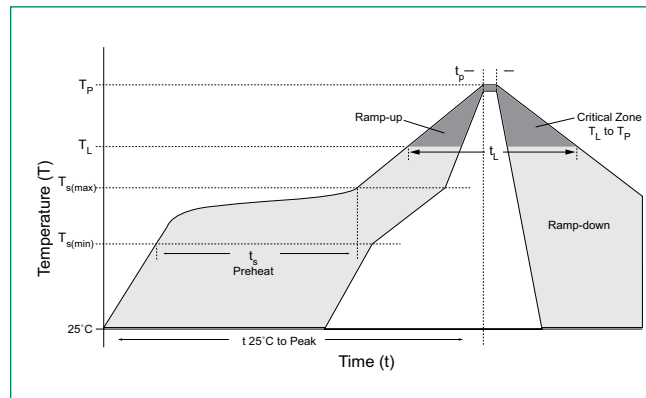


### Physical Specifications

|          |                                                                                       |
|----------|---------------------------------------------------------------------------------------|
| Weight   | 0.00326 ounce, 0.1015 grams                                                           |
| Case     | JEDEC DO214AA. Void-Free, Transfer-Molded, Thermosetting Plastic Epoxy Meets UL 94V-0 |
| Polarity | Color band denotes cathode for unidirectional components.                             |
| Terminal | Matte Tin-plated leads, Solderable per JESD22-B102                                    |

### Environmental Specifications


|                     |                          |
|---------------------|--------------------------|
| High Temp. Storage  | JESD22-A103              |
| HTRB                | JESD22-A108              |
| Temperature Cycling | JESD22-A104              |
| MSL                 | JEDEC-J-STD-020, Level 1 |
| H3TRB               | JESD22-A101              |
| RSH                 | JESD22-A111              |

### Dimensions

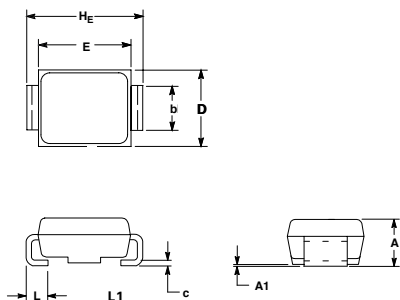

| Dim | Inches   |       |       | Millimeters |      |      |
|-----|----------|-------|-------|-------------|------|------|
|     | Min      | Nom   | Max   | Min         | Nom  | Max  |
| A   | 0.077    | 0.091 | 0.097 | 1.95        | 2.30 | 2.47 |
| A1  | 0.002    | 0.004 | 0.008 | 0.05        | 0.10 | 0.20 |
| b   | 0.077    | 0.080 | 0.087 | 1.96        | 2.03 | 2.20 |
| c   | 0.006    | 0.009 | 0.012 | 0.15        | 0.23 | 0.31 |
| D   | 0.130    | 0.140 | 0.156 | 3.30        | 3.56 | 3.95 |
| E   | 0.160    | 0.170 | 0.181 | 4.06        | 4.32 | 4.60 |
| HE  | 0.205    | 0.214 | 0.220 | 5.21        | 5.44 | 5.60 |
| L   | 0.030    | 0.040 | 0.063 | 0.76        | 1.02 | 1.60 |
| L1  | 0.51 REF |       |       | 0.020 REF   |      |      |


### Soldering Footprint

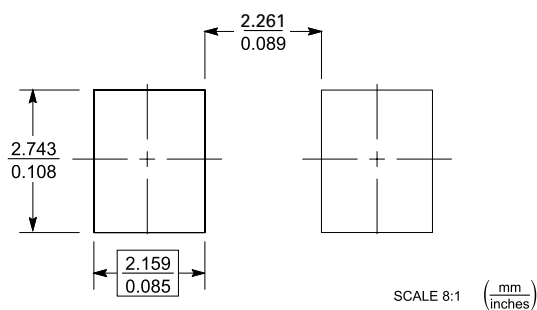

### Ordering Information


| Device          | Package       | Shipping            |
|-----------------|---------------|---------------------|
| SZP6SMBxxxAT3G  | SMB (Pb-Free) | 2,500 / Tape & Reel |
| SZP6SMBxxxCAT3G | SMB (Pb-Free) | 2,500 / Tape & Reel |

### Part Marking System




**XXXX** = Device Code  
**Y** = Year  
**M** = Month  
**A** = Assembly Location  
**WW** = Lot Code

### Part Numbering System

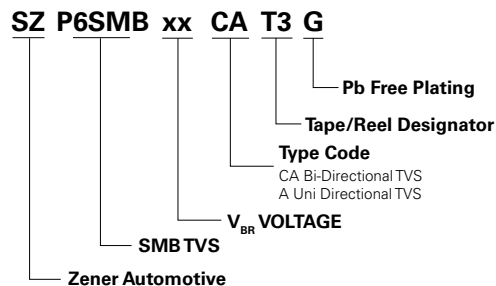

### Tape and Reel Specification

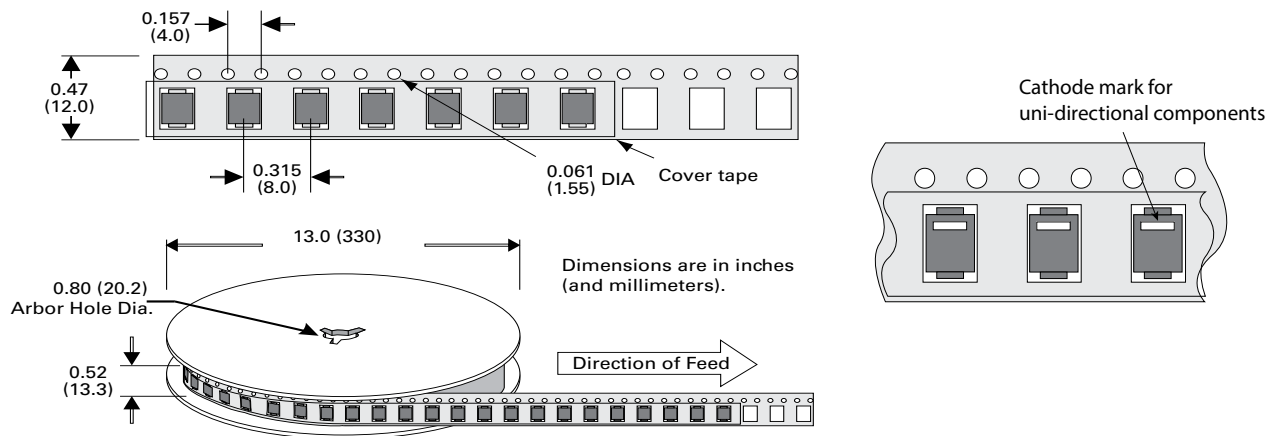

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.