


### Features

- ◆ Ultra wide 4 : 1 input range
- ◆ Input filter to meet EN 55022, Class A and FCC, level A without external components
- ◆ Extended operating temperature range  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$
- ◆ Models with 1'500 VDC and 3'000 VDC I/O isolation (functional insulation)
- ◆ DIP-24 package
- ◆ High reliability, MTBF >1.0 Mio. h
- ◆ 3-year product warranty

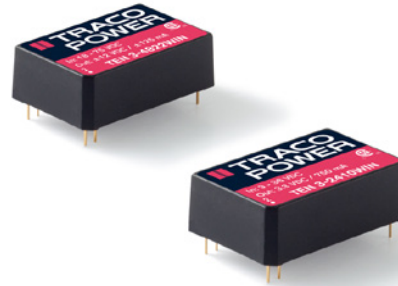

The TEN 3WIN Series is a drop in replacement of the prevalent TEN 3WI Series. The up-to date design enables a cost reduction without any compromise to reliability and function. They come with an internal filter to meet EN55022 class A without external components. Increased EMC immunity and extended operating temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  make these converters an ideal solution for cost critical but demanding applications. With the standard pinning it is a drop in replacement for common 3 Watt converters in DIP24 package.

### Models

Ordercode		Input voltage range	Output voltage	Output current max.	Efficiency max.
1500 VDC isolation	3000 VDC isolation				
TEN 3-2410WIN	-	9.0 – 36 VDC (nominal 24 VDC)	3.3 VDC	750 mA	77 %
TEN 3-2411WIN	TEN 3-2411WIN-HI		5.0 VDC	600 mA	79 %
TEN 3-2412WIN	TEN 3-2412WIN-HI		12 VDC	250 mA	82 %
TEN 3-2413WIN	TEN 3-2413WIN-HI		15 VDC	200 mA	83 %
TEN 3-2415WIN	TEN 3-2415WIN-HI		24 VDC	125 mA	81 %
TEN 3-2421WIN	TEN 3-2421WIN-HI		$\pm 5.0$ VDC	$\pm 250$ mA	80 %
TEN 3-2422WIN	TEN 3-2422WIN-HI		$\pm 12$ VDC	$\pm 125$ mA	82 %
TEN 3-2423WIN	TEN 3-2423WIN-HI		$\pm 15$ VDC	$\pm 100$ mA	82 %
TEN 3-4810WIN	-		18 – 75 VDC (nominal 48 VDC)	3.3 VDC	750 mA
TEN 3-4811WIN	TEN 3-4811WIN-HI	5 VDC		600 mA	80 %
TEN 3-4812WIN	TEN 3-4812WIN-HI	12 VDC		250 mA	83 %
TEN 3-4813WIN	TEN 3-4813WIN-HI	15 VDC		200 mA	84 %
TEN 3-4815WIN	TEN 3-4815WIN-HI	24 VDC		125 mA	82 %
TEN 3-4821WIN	TEN 3-4821WIN-HI	$\pm 5.0$ VDC		$\pm 250$ mA	80 %
TEN 3-4822WIN	TEN 3-4822WIN-HI	$\pm 12$ VDC		$\pm 125$ mA	82 %
TEN 3-4823WIN	TEN 3-4823WIN-HI	$\pm 15$ VDC		$\pm 100$ mA	82 %

### Input Specifications

Input current no load	24 Vin models 48 Vin models	30 mA typ. 20 mA typ.
Start-up voltage	24 Vin models: 48 Vin models:	9.0 VDC (or lower) 18 VDC (or lower)
Under voltage shut down (lock-out circuit)	24 Vin models: 48 Vin models:	8.5 VDC max. 17.5 VDC max.
Surge voltage (1 sec. max.)	24 Vin models 48 Vin models	50 V max. 100 V max.
Reflected ripple current	24 Vin models 48 Vin models	15 mA typ 10 mA typ.
Conducted noise		EN 55022 class A without external components
EMC immunity	<ul style="list-style-type: none"> <li>- ESD (electrostatic discharge)</li> <li>- Radiated immunity</li> <li>- Fast transient / surge</li> <li>- Conducted immunity</li> </ul>	EN 55024 EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±1 kV, perf. criteria A - External input capacitor 200 µF, 100 V, ESR 48 mOhm EN 61000-4-6, 10 Vrms, perf. criteria A
Short circuit input power		2000 mW max.
Internal power dissipation		1200 mW max.

### Output Specifications

Voltage set accuracy		±2 % max.
Regulation	<ul style="list-style-type: none"> <li>- Input variation Vin min. to Vin max.</li> <li>- Load variation 0 – 100 %</li> </ul>	1.0 % max.
	<ul style="list-style-type: none"> <li>single output models</li> <li>dual output models balanced load</li> </ul>	1.0 % max. 2.0 % max.
Minimum load		not required
Ripple and noise (20 MHz bandwidth)		70 mVpk-pk max
Transient response time (25% load step change)		500 µs max.
Transient response deviation (25% load step change)		±5 % max.
Temperature coefficient		±0.02 %/K
Current limitation		>120 % of Iout max., constant current
Short circuit protection		continuous, automatic recovery

**Output Specifications (continued)**

Capacitive load	3.3 VDC models:	680 $\mu$ F max.
	5.0 VDC models:	470 $\mu$ F max.
	12 VDC models:	330 $\mu$ F max.
	15 VDC models:	220 $\mu$ F max.
	24 VDC models:	100 $\mu$ F max.
	$\pm$ 5.0 VDC models:	220 $\mu$ F max. (each output)
	$\pm$ 12 VDC models:	150 $\mu$ F max. (each output)
	$\pm$ 15 VDC models:	100 $\mu$ F max. (each output)

**General Specifications**


Temperature ranges	– Operating (natural convection cooling 20 LFM)	–40°C to +85°C
	– Case temperature	+100°C max.
	– Storage	–55°C to +125°C
Derating		3.3 %/K above 70°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217 F, at +25°C, ground benign)		>1 Mio. h
Isolation voltage (60 sec.)	– Input/Output	1'500 VDC or 3'000 VDC
Isolation capacitance	– Input/Output	300 pF max.
Isolation resistance	– Input/Output (500 VDC)	>1'000 M Ohm
Switching frequency		90 kHz min. (pulse frequency modulation PFM)
Safety standards		cUL/UL 60950-1, IEC/EN 60950-1
Safety approvals	– CSA certificate of compliance	CAN/CSA-C22.2 No 60950-1-07, Am 1:2011
	– CB test certificate	ANSI/UL Std No 60950-1, 2nd Ed, AM 1:2011
	– Certification documents	IEC 60950-1:2005 2nd Ed, Am 1:2009 <a href="http://www.tracopower.com/overview/ten3win">www.tracopower.com/overview/ten3win</a>
Environmental compliance	– Reach	<a href="http://www.tracopower.com/overview/ten3win">www.tracopower.com/overview/ten3win</a>
	– RoHS	RoHS directive 2011/65/EU

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Casing material	non conductive FR4
Potting material	epoxy (UL 94V-0 rated)
Pin material	copper alloy with gold plated subplate
Weight	12.8 g (0.45 oz)
Soldering temperature	max. 260°C / 10 sec.

**Outline Dimensions**

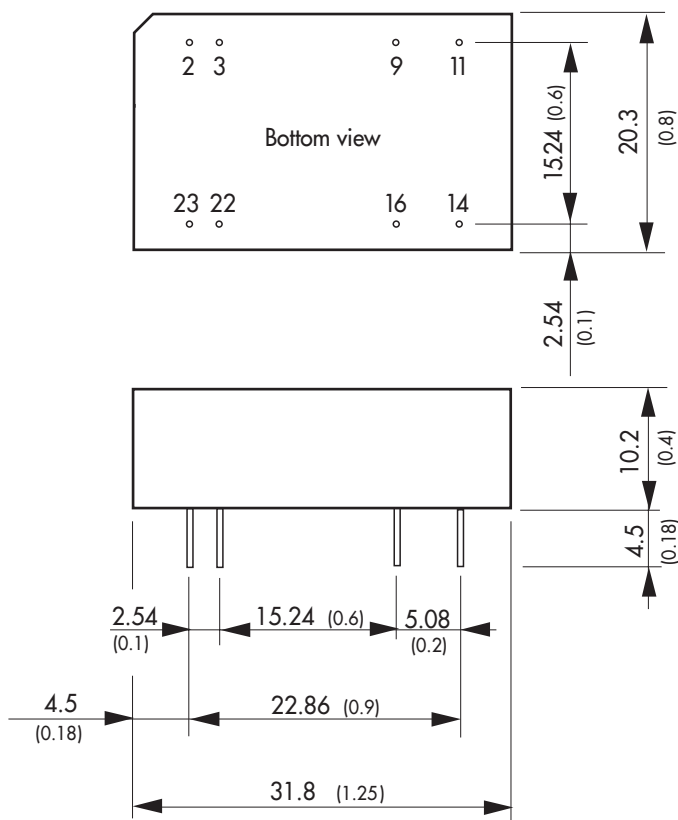

Dimensions in [mm], ( ) = Inch  
 Pin diameter  $\varnothing 0.5 \pm 0.05$  ( $0.02 \pm 0.002$ )  
 Tolerances  $\pm 0.5$  ( $\pm 0.02$ )  
 Pin pitch tolerances  $\pm 0.25$  ( $\pm 0.01$ )

Pin-Out		
Pin	Single	Dual
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No pin	Common
11	ntc	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

ntc = not to connect



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.