

# Features

## Unregulated Converters

- 1W Power in SMD package
- Pin compatible with R1D series
- -40°C to +95°C operating temperature @ full load
- High 3kVDC/1 second or 1kVDC/1 second isolation
- IEC/EN/UL62368-1 certified, CB Report
- 5000m operation

### Description

Low cost, low profile, open-frame 1W SMD isolated DC/DC dual output converters. The R1DX operates from 5V and offers  $\pm 5$ ,  $\pm 9$ ,  $\pm 12$  or  $\pm 15$  dual outputs. There is no minimum load requirement and the quiescent consumption is less than 150mW. Standard isolation is 1kVDC/1s and a /H version with 3kVDC/1s is available. The operating temperature is from -40°C up to +95°C without derating. The pin-out is industry standard and compatible with the R1D series, but at half the height. The converters are fully certified to IEC/EN/UL62368 and IEC/EN/UL60950 and are 10/10 RoHS-conform. Class A EMC conformity requires only an input capacitor and a simple low cost LC filter is all that is needed for Class B EMC.

### Selection Guide


| Part Number | nom. Input Voltage [VDC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ. <sup>(1)</sup> [%] | max. Capacitive Load <sup>(2)</sup> [ $\mu$ F] |
|-------------|--------------------------|----------------------|---------------------|------------------------------------|------------------------------------------------|
| R1DX-0505   | 5                        | $\pm 5$              | $\pm 100$           | 78                                 | $\pm 1000$                                     |
| R1DX-0509   | 5                        | $\pm 9$              | $\pm 56$            | 78                                 | $\pm 470$                                      |
| R1DX-0512   | 5                        | $\pm 12$             | $\pm 42$            | 80                                 | $\pm 220$                                      |
| R1DX-0515   | 5                        | $\pm 15$             | $\pm 33$            | 80                                 | $\pm 220$                                      |

#### Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Note2: Max Cap Load is tested at nominal input and full resistive load

### Model Numbering

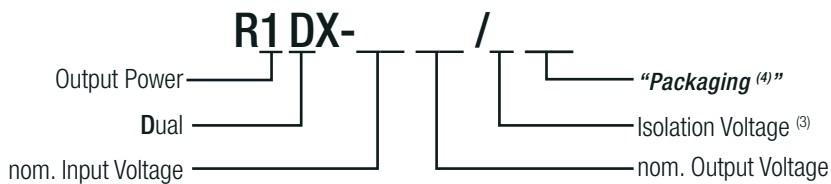

#### Notes:

Note3: without suffix, standard isolation voltage (1kVDC/1 second)  
with suffix „/H“, high isolation voltage (3kVDC/1 second)

Note4: with suffix „-R“, standard packaging Tape and Reel  
with suffix „-Tray“ for optional tray packaging

#### Ordering Examples:

|                  |      |               |                          |                         |
|------------------|------|---------------|--------------------------|-------------------------|
| R1DX-0505-R      | 5Vin | $\pm 5$ Vout  | 1kVDC/1 second isolation | tape and reel packaging |
| R1DX-0515/H-Tray | 5Vin | $\pm 15$ Vout | 3kVDC/1 second isolation | tray packaging          |

**RECOM**  
DC/DC Converter

## R1DX

1 Watt  
SMD  
Dual Output



**CULUS**  
E224736

IEC/EN62368-1 certified  
UL62368-1 certified  
IEC/EN60950-1 certified  
C22.2 No. 62368-1-14 certified  
CB Report  
EN55032 compliant  
EN55024 compliant

**Specifications** (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)


### BASIC CHARACTERISTICS

| Parameter                              | Condition | Min.  | Typ.   | Max.      |
|----------------------------------------|-----------|-------|--------|-----------|
| Internal Input Filter                  |           |       |        | capacitor |
| Input Voltage Range                    |           |       | ±10.0% |           |
| Quiescent Current                      |           |       |        | 40mA      |
| Minimum Load                           |           | 0%    |        |           |
| Internal Operating Frequency           |           | 20kHz | 60kHz  | 100kHz    |
| Output Ripple and Noise <sup>(5)</sup> | 20MHz BW  |       |        | 100mVp-p  |

#### Notes:

Note5: Measurements are made with a 0.1µF MLCC across output (low ESR)



### Efficiency vs. Load

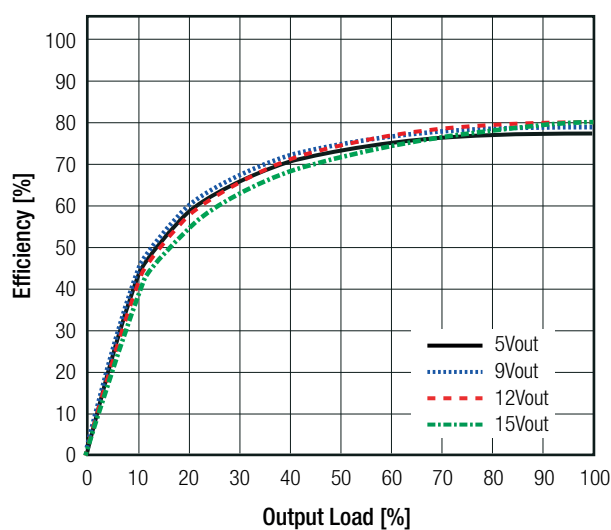

### REGULATIONS

| Parameter        | Condition             |            | Value                           |
|------------------|-----------------------|------------|---------------------------------|
| Output Accuracy  |                       |            | ±5.0% max.                      |
| Line Regulation  | low line to high line |            | ±1.2% typ. at ±1.0% of Vin typ. |
| Load Regulation  | 10% to 100% load      | ±5Vout     | 10.0% typ. / 15.0% max.         |
|                  |                       | all others | 8.0% typ. / 10.0% max.          |
| Cross Regulation |                       |            | ±6.5% max.                      |


### Tolerance Envelope

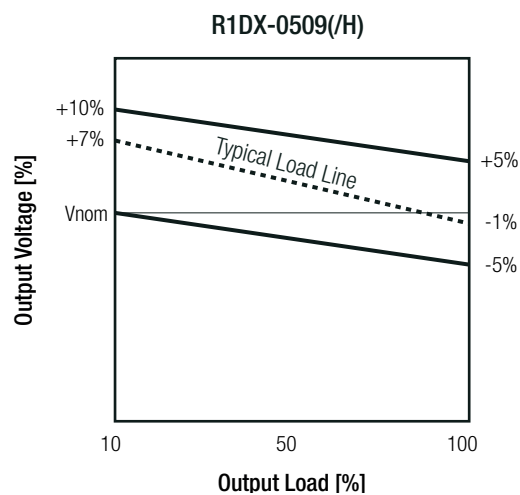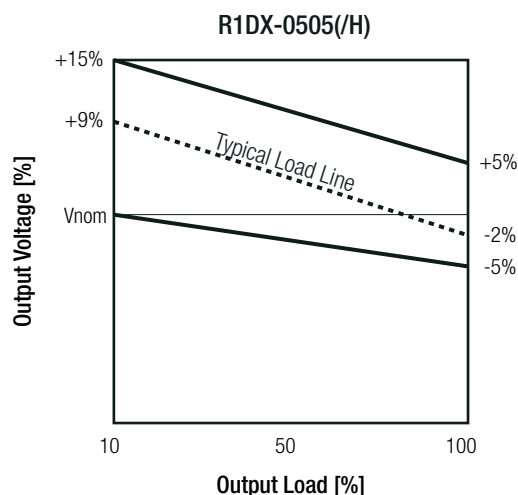

continued on next page

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nominal input voltage, full load unless otherwise specified)

**Tolerance Envelope**

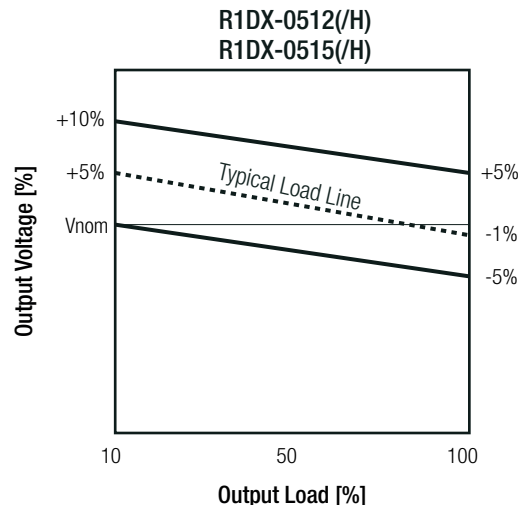

**PROTECTIONS**


| Parameter             | Type             |                                                                              | Value            |
|-----------------------|------------------|------------------------------------------------------------------------------|------------------|
| Isolation Voltage     | I/P to O/P       | standard<br>tested for 1 second<br>rated for 1 minute <sup>(6)</sup>         | 1kVDC<br>500VAC  |
|                       |                  | with suffix "/H"<br>tested for 1 second<br>rated for 1 minute <sup>(6)</sup> | 3kVDC<br>1.5kVAC |
| Isolation Resistance  |                  |                                                                              | 10GΩ min.        |
| Isolation Capacitance |                  |                                                                              | 100pF max.       |
| Leakage Current       | standard         |                                                                              | 1μA max.         |
|                       | with suffix "/H" |                                                                              | 3μA max.         |
| Insulation Grade      |                  |                                                                              | functional       |

**Notes:**

Note6: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note7: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: slow blow type

**Protection Circuit**

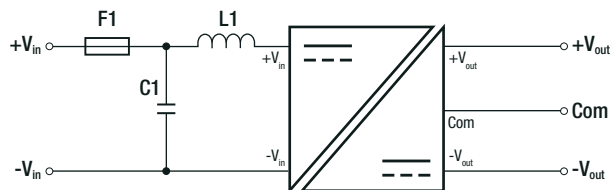

**ENVIRONMENTAL**


| Parameter                   | Condition                                                    |       | Value                         |
|-----------------------------|--------------------------------------------------------------|-------|-------------------------------|
| Operating Temperature Range | @ natural convection and full load (refer to derating graph) |       | -40°C to +95°C                |
| Operating Altitude          |                                                              |       | 5000m                         |
| Operating Humidity          | non-condensing                                               |       | 5% - 95% RH max.              |
| Pollution Degree            |                                                              |       | PD2                           |
| Vibration                   |                                                              |       | according to MIL-STD-202G     |
| MTBF                        | according to MIL-HDBK-217F, G.B.                             | +25°C | 20900 x 10 <sup>3</sup> hours |
|                             |                                                              | +95°C | 7200 x 10 <sup>3</sup> hours  |

continued on next page

**Specifications** (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

**Derating Graph**

(@ Chamber and natural convection 0.1m/s)

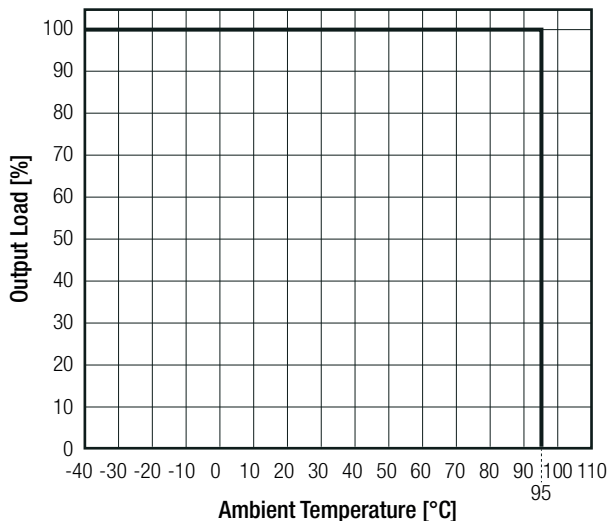

**SAFETY AND CERTIFICATIONS**


| Certificate Type (Safety)                                                                         | Report / File Number | Standard                                                                       |
|---------------------------------------------------------------------------------------------------|----------------------|--------------------------------------------------------------------------------|
| Information Technology Equipment, General Requirements for Safety                                 | E224736              | UL60950-1, 2nd Edition 2014<br>CAN/CSA C22.2 No. 60950-1-07, 2nd Edition 2014  |
| Information Technology Equipment, General Requirements for Safety (CB Scheme)                     | E224736-4788277362-2 | IEC60950-1:2005 2nd Edition + A2:2013                                          |
| Information Technology Equipment, General Requirements for Safety                                 |                      | EN60950-1:2006 + A2:2013                                                       |
| Audio/video, information and communication technology equipment - Safety requirements (LVD)       | E224736              | UL62368, 2nd Edition, 2014<br>CAN/CSA -C22.2 No. 62368-1-14, 2nd Edition, 2014 |
| Audio/video, information and communication technology equipment - Safety requirements             | E224736-4788277362-1 | EN62368-1:2014 + A11:2017                                                      |
| Audio/video, information and communication technology equipment - Safety requirements (CB Scheme) |                      | IEC62368-1:2014 2nd Edition                                                    |
| RoHS2+                                                                                            |                      | RoHS 2011/65/EU + AM2015/863                                                   |

| EMC Compliance                                                                                           | Condition                                       | Standard / Criterion                    |
|----------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement | with external filter<br>(see filter suggestion) | EN55032:2015, Class A and B             |
| Information technology equipment - Immunity characteristics Limits and methods of measurement            |                                                 | EN55024:2010 +A1:2015                   |
| ESD Electrostatic discharge immunity test                                                                | Air: ±2, 4, 6, 8kV<br>Contact: ±2, 4kV          | IEC61000-4-2:2008, Criteria A           |
| Radiated, radio-frequency, electromagnetic field immunity test                                           | 3 V/m                                           | IEC61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity                                                                        | ±0.5kV                                          | IEC61000-4-4:2012, Criteria A           |
| Surge Immunity                                                                                           | ±0.5kV                                          | IEC61000-4-5:2014, Criteria B           |
| Immunity to conducted disturbances, induced by radio-frequency fields                                    | 3V r.m.s.                                       | IEC61000-4-6:2013, Criteria A           |
| Power Magnetic Field Immunity                                                                            | 50Hz / 1A/m                                     | IEC61000-4-8:2009, Criteria A           |

continued on next page

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nominal input voltage, full load unless otherwise specified)

**EMC Filtering Suggestions for EN55032**

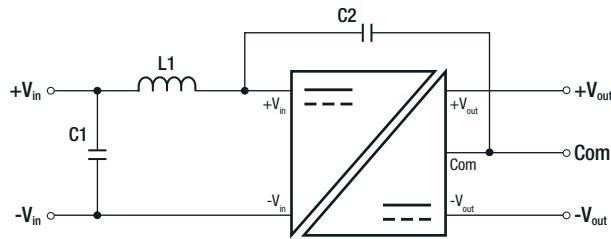



| Component List Class A |             |                               |
|------------------------|-------------|-------------------------------|
| C1                     | C2          | L1                            |
| 4.7 $\mu\text{F}$ MLCC | 470pF/4kVDC | 10 $\mu\text{H}$ SMD Inductor |

| Component List Class B |             |                               |
|------------------------|-------------|-------------------------------|
| C1                     | C2          | L1                            |
| 10 $\mu\text{F}$ MLCC  | 470pF/4kVDC | 10 $\mu\text{H}$ SMD Inductor |



**DIMENSION and PHYSICAL CHARACTERISTICS**

| Parameter         | Type        | Value                                    |
|-------------------|-------------|------------------------------------------|
| Material          | case<br>PCB | black plastic (UL94V-0)<br>FR4 (UL94V-0) |
| Dimension (LxWxH) |             | 15.24 x 11.10 x 8.00mm                   |
| Weight            |             | 1.2g typ.                                |

**Dimension Drawing (mm)**

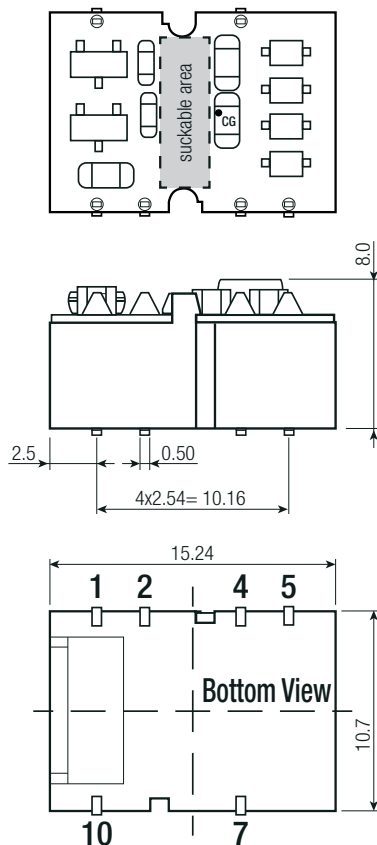

**Recommended Footprint Details**

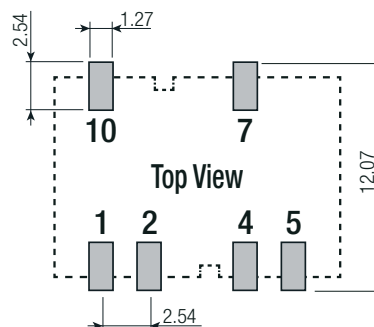

**Pin Connection**

| Pin # | Dual  |
|-------|-------|
| 1     | -Vin  |
| 2     | +Vin  |
| 4     | Com   |
| 5     | -Vout |
| 7     | +Vout |
| 10    | NC    |

CG= center of gravity

NC= no connection

Tolerance: xx.x=  $\pm 0.5\text{mm}$

xx.xx=  $\pm 0.25\text{mm}$

Pin


Thickness:  $\pm 0.05\text{mm}$

Length:  $+0.25/-0.50\text{mm}$

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

## INSTALLATION and APPLICATION

### Isolated DAC (±10VDC)

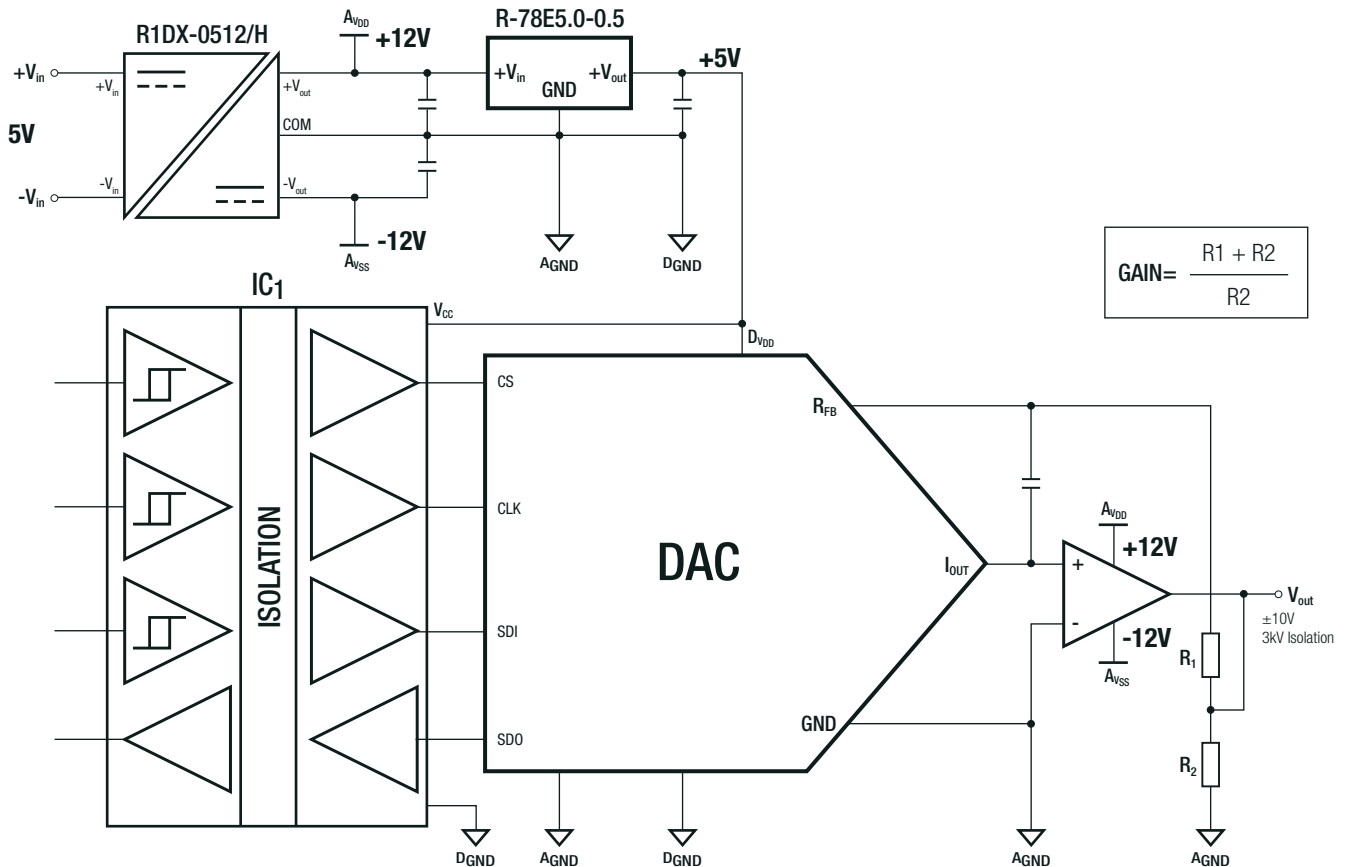

## PACKAGING INFORMATION

|                             |                        |                        |
|-----------------------------|------------------------|------------------------|
| Packaging Dimension (LxWxH) | tape and reel (carton) | 355.0 x 340.0 x 35.0mm |
|                             | reel                   | 330.2 x 330.2 x 30.0mm |
|                             | tray                   | 260.0 x 205.0 x 27.0mm |
| Packaging Quantity          | tape and reel          | 250pcs                 |
|                             | tray                   | 30pcs                  |
| Tape Width                  |                        | 24.0mm                 |
| Storage Temperature Range   | non-condensing         | -55°C to +125°C        |
| Storage Humidity            |                        | 5% - 95% RH max.       |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.