

# 2450 SourceMeter® SMU Instrument

## Datasheet




**KEITHLEY**  
A Tektronix Company

The 2450 is Keithley's next-generation SourceMeter source measure unit (SMU) instrument that truly brings Ohm's law (current, voltage, and resistance) testing right to your fingertips. Its innovative graphical user interface (GUI) and advanced, capacitive touchscreen technology allow intuitive usage and minimize the learning curve to enable engineers and scientists to learn faster, work smarter, and invent easier. The 2450 is the SMU for everyone: a versatile instrument, particularly well-suited for characterizing modern scaled semiconductors, nano-scale devices and materials, organic semiconductors, printed electronics, and other small-geometry and low-power devices. All this combined with Keithley SMU precision and accuracy allows users to Touch, Test, Invent® with the new favorite go-to instrument in the lab for years to come.

## Key Features

- Capabilities of analyzers, curve tracers, and I-V systems at a fraction of their cost
- Five-inch, high resolution capacitive touchscreen GUI
- 0.012% basic measure accuracy with 6½-digit resolution
- Enhanced sensitivity with new 20mV and 10nA source/measure ranges
- Source and sink (four-quadrant) operation
- Four "Quickset" modes for fast setup and measurements
- Built-in, context-sensitive front panel help
- Front panel input banana jacks; rear panel input triaxial connections
- 2450 SCPI and TSP® scripting programming modes
- 2400 SCPI-compatible programming mode
- Front panel USB memory port for storing data, programming, instrument configurations, and to upgrade the unit

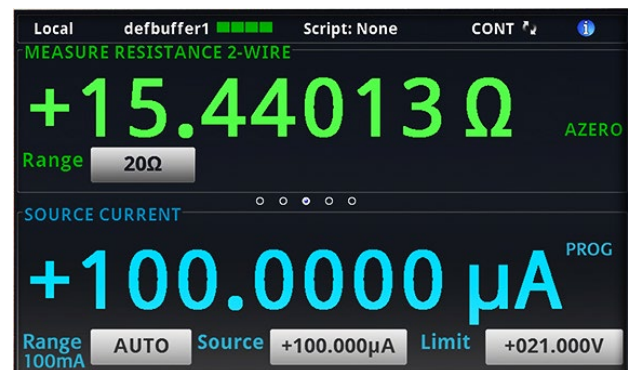

2450 main home screen.

## Learn Faster, Work Smarter, and Invent Easier

Unlike conventional instruments with dedicated push-button technology and small, obscure, limited-character displays, the 2450 features a five-inch, full-color, high-resolution touchscreen that facilitates ease of use, learning, and optimizes overall speed and productivity. A simple icon-based menu structure reduces configuration steps by as much as 50 percent and eliminates the cumbersome multi-layer menu structures typically used on soft-key instruments. Built-in, context-sensitive help enables intuitive operation and minimizes the need to review a separate manual. These capabilities combined with its application versatility make the 2450 the SMU instrument inherently easy to use for basic and advanced measurement applications, regardless of your experience level with SMU instruments.



2450 icon-based menu.

## Fourth-Generation, All-in-One SMU Instrument

The 2450 is the fourth-generation member of Keithley's award-winning SourceMeter family of SMU instruments and leverages the proven capabilities of the 2400 SourceMeter SMU Instrument. It offers a highly flexible, four-quadrant voltage and current source/load coupled with precision voltage and current meters. This all-in-one instrument gives you the capabilities of a:

- Precision power supply with V and I readback
- True current source
- Digital multimeter (DCV, DCI, ohms, and power with 6½-digit resolution)
- Precision electronic load
- Trigger controller



2450 power envelope.

## Comparison Table: 2400 vs 2450


| Model 2400                                      | Model 2450                                                                              |
|-------------------------------------------------|-----------------------------------------------------------------------------------------|
| V-Ranges: 200 mV – 200 V                        | V-Ranges: 20 mV – 200 V                                                                 |
| I-Ranges: 1 $\mu$ A – 1 A                       | I-Ranges: 10 nA – 1 A                                                                   |
| 0.012% Basic Accuracy                           | 0.012% Basic Accuracy                                                                   |
| Wideband Noise: 4 mV <sub>rms</sub> Typ.        | Wideband Noise: 2 mV <sub>rms</sub> Typ.                                                |
| Sweep Types: Linear, Log, Custom, Source-Memory | Sweep Types: Linear, Log, Dual Linear, Dual Log, Custom, Source-Memory (SCPI 2400 Mode) |
| 5000 Point Reading Buffer                       | >250,000 Point Reading Buffer                                                           |
| >2000 Readings/Second                           | >3000 Readings/Second                                                                   |
| SCPI Programming                                | SCPI (2400 + 2450) + TSP Programming                                                    |
| GPIB                                            | GPIB, USB, Ethernet (LXI)                                                               |
| Front/Rear Banana Jacks                         | Front: Banana Jacks, Rear: Triax                                                        |

### Ease of Use Beyond the Touchscreen

In addition to its five-inch, color touchscreen, the 2450 front panel has many features that supplement its speed, user-friendliness, and learnability, including a USB 2.0 memory I/O port, a HELP key, a rotary navigation/control knob, a front/rear input selector button, and banana jacks for basic bench applications. The USB 2.0 memory port supports easy data storing, saving instrument configurations, loading test scripts, and system upgrades. Plus, all front panel buttons are backlit to enhance visibility in low-light environments.



2450 front panel with high-resolution, capacitive touchscreen.

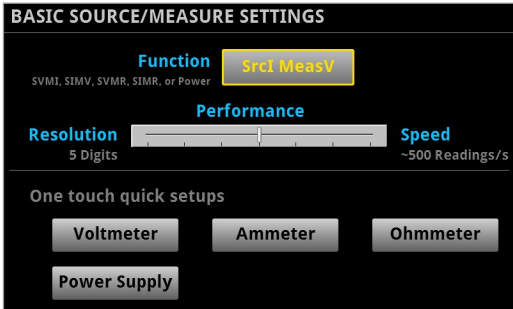


Four “Quickset” modes simplify user setup. With one touch, the instrument can be quickly configured for various operating modes without the need to configure the instrument indirectly for this operation.

Quickset modes enable fast setup and time to measurements.

### Comprehensive Built-in Connectivity


Rear panel access to rear-input triax connectors, remote control interfaces (GPIB, USB 2.0, and LXI/Ethernet), D-sub 9-pin digital I/O port (for internal/external trigger signals and handler control), instrument interlock control, and TSP-Link® jacks enables easy configuration of multiple instrument test solutions and eliminates the need to invest in additional adapter accessories.

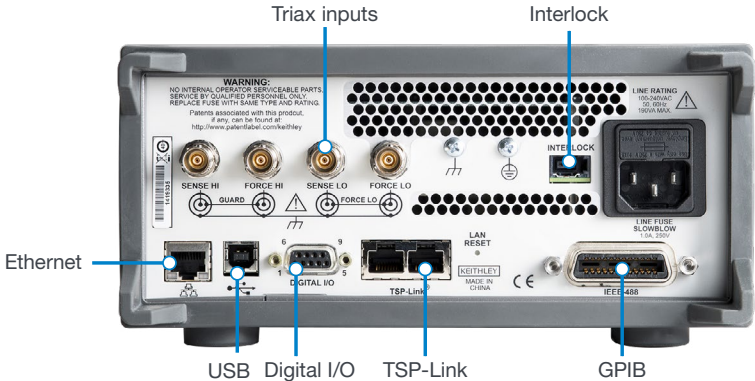

Rear panel connections are optimized for signal integrity.

## Convert Raw Data to Information

The 2450 provides a full plotting and sheet view to display sweeps, measurement data, and charting right on the screen. It also supports exporting to a spreadsheet for further analysis, dramatically improving productivity for research, bench-top testing, device qualification, and debugging.

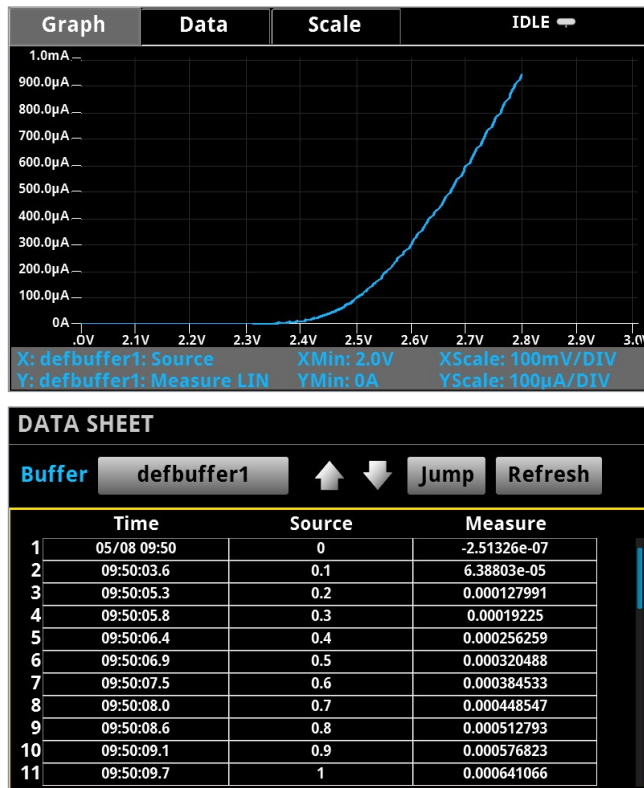


Full data display, charting, and export to a spreadsheet lets you convert raw data to useful information.

## TriggerFlow® Building Blocks for Instrument Control and Execution

The 2450 incorporates Keithley's new TriggerFlow triggering system that allows user control of instrument execution. Similar to developing a flow chart, TriggerFlow diagrams are created using four fundamental building blocks:

- Wait – Waits for an event to occur before the flow continues
- Branch – Branches when a condition has been satisfied
- Action – Initiates an action in the instrument, for example, measure, source, delay, set digital I/O, etc.
- Notify – Notifies other equipment that an event has occurred

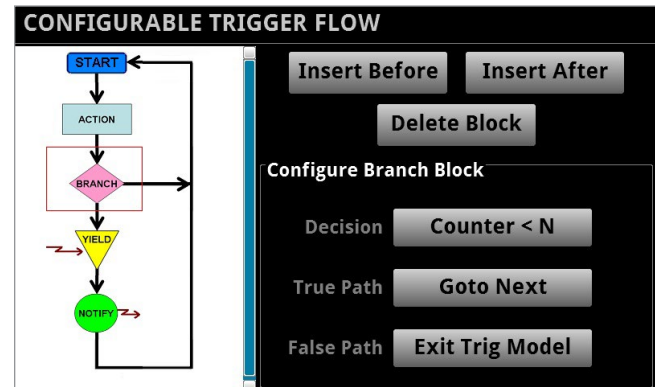

TriggerFlow building blocks let users create very simple to very complex triggering models.

A TriggerFlow model using a combination of these building blocks can be created from the front panel or by sending remote commands. With the TriggerFlow system, users can build triggering models from very simple to complex with up to 255 block levels. The 2450 also includes basic triggering functions, including immediate, timer, and manual triggering.

## Unmatched System Integration and Programming Flexibility

When the 2450 is integrated as part of a multi-channel I-V test system, the Test Script Processor (TSP®) embedded scripting capability allows test scripts to be run by the instrument, enabling the user to create powerful measurement applications with significantly reduced development times. TSP technology also offers channel expansion without a mainframe. Keithley's TSP-Link® channel expansion bus, which uses a 100 Base T Ethernet cable, connects multiple 2450 instruments and other TSP instruments such as Keithley's Series 2600B SourceMeter SMU instruments and Series 3700A Switch/Multimeter systems in a master-slave configuration that behaves as one integrated system. The TSP-Link expansion bus supports up to 32 units per GPIB or IP address, making it easy to scale a system to fit an application's particular requirements.

The 2450 also includes a SCPI programming mode that optimizes the instrument's new features, as well as a SCPI 2400 mode that provides backwards compatibility with the existing 2400 SourceMeter instrument. Not only does this preserve your 2400 investment but it also eliminates re-work normally associated with upgrading to a new instrument with new capabilities.





## Parallel Test Capability

With the TSP technology in the 2450, multiple devices can be tested in parallel to meet the needs of device research, advanced semiconductor lab applications, and even high throughput production test. This parallel testing capability enables each instrument in the system to run its own complete test sequence, creating a fully multi-threaded test environment. The number of tests that can be run in parallel on a 2450 can be as high as the number of instruments in the system.

## Typical Applications

Ideal for current/voltage characterization and functional test of a wide range of today's modern electronics and devices, including:

- Nanomaterials and Devices
  - Graphene
  - Carbon nanotubes
  - Nanowires
  - Low power nanostructures
- Semiconductor Structures
  - Wafers
  - Thin films
- Organic Materials and Devices
  - E-inks
  - Printable electronics
- Energy Efficiency and Lighting
  - LEDs/AMOLEDs
  - Photovoltaics/Solar cells
  - Batteries
- Discrete and Passive Components
  - Two-leaded: Resistors, diodes, zener diodes, LEDs, disk drive heads, sensors
  - Three-leaded: Small signal bipolar junction transistors (BJTs), field effect transistors (FETs), and more
- Material Characterization
  - Resistivity
  - Hall Effect
  - High ohmic resistance (using triax connectors)
- Electrochemistry
  - Cyclic voltammetry
  - Battery charge/discharge cycling
  - Electro-deposition




## Free Instrument Control Start-up Software and Web Interface

KickStart, Keithley's new instrument control non-programming start-up software, lets users start taking measurements in minutes. In most cases, users merely need to make quick measurements, graph the data, and store the data to disk to perform analysis in software environments such as Excel.

## Simplified Programming with Ready-to-Use Instrument Drivers

For users who want to create their own customized application software, native National Instruments LabVIEW® drivers, IVI-C, and IVI-COM drivers are available at [www.keithley.com](http://www.keithley.com).

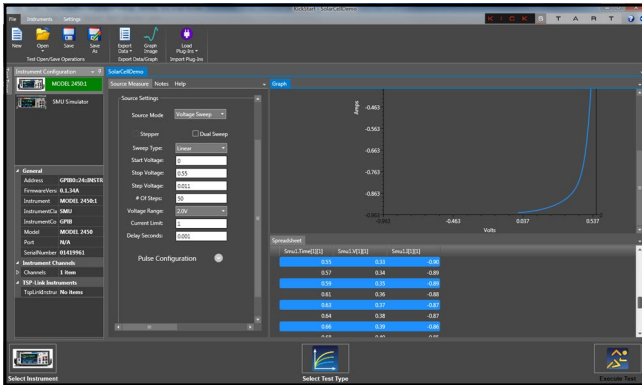

With KickStart start-up software, users are ready to take measurements in minutes.

### KickStart offers the following functionality:

- Instrument configuration control to perform I-V characterization
- Native X-Y graphing, panning, and zooming
- Spreadsheet/tabular viewing of data
- Saving and exporting data for further analysis
- Saving of test setups
- Screenshot capturing of graph
- Annotation of tests
- Command line dialog for sending and receiving data
- HTML help
- GPIB, USB 2.0, Ethernet compliant

## Specifications

### Voltage Specifications <sup>1, 2</sup>

| Range       | Source     |                                                        |                         | Measure <sup>3</sup> |                     |                                                     |
|-------------|------------|--------------------------------------------------------|-------------------------|----------------------|---------------------|-----------------------------------------------------|
|             | Resolution | Accuracy (23° ± 5°C)<br>1 Year<br>±(% setting + volts) | Noise (RMS)<br>(<10 Hz) | Resolution           | Input<br>Resistance | Accuracy (23° ± 5°C)<br>1 Year<br>±(% rdg. + volts) |
| 20.00000 mV | 500 nV     | 0.100% + 200 µV                                        | 1 µV                    | 10 nV                | >10 GΩ              | 0.100% + 150 µV                                     |
| 200.0000 mV | 5 µV       | 0.015% + 200 µV                                        | 1 µV                    | 100 nV               | >10 GΩ              | 0.012% + 200 µV                                     |
| 2.000000 V  | 50 µV      | 0.020% + 300 µV                                        | 10 µV                   | 1 µV                 | >10 GΩ              | 0.012% + 300 µV                                     |
| 20.00000 V  | 500 µV     | 0.015% + 2.4 mV                                        | 100 µV                  | 10 µV                | >10 GΩ              | 0.015% + 1 mV                                       |
| 200.0000 V  | 5 mV       | 0.015% + 24 mV                                         | 1 mV                    | 100 µV               | >10 GΩ              | 0.015% + 10 mV                                      |

### Current Specifications <sup>1, 2</sup>

| Range                    | Source     |                                                                    |                         | Measure <sup>3</sup> |                   |                                                    |
|--------------------------|------------|--------------------------------------------------------------------|-------------------------|----------------------|-------------------|----------------------------------------------------|
|                          | Resolution | Accuracy (23° ± 5°C) <sup>4</sup><br>1 Year<br>±(% setting + amps) | Noise (RMS)<br>(<10 Hz) | Resolution           | Voltage<br>Burden | Accuracy (23° ± 5°C)<br>1 Year<br>±(% rdg. + amps) |
| 10.00000 nA <sup>5</sup> | 500 fA     | 0.100% + 100 pA                                                    | 500 fA                  | 10 fA                | <100 µV           | 0.100% + 50 pA                                     |
| 100.0000 nA <sup>5</sup> | 5 pA       | 0.060% + 150 pA                                                    | 500 fA                  | 100 fA               | <100 µV           | 0.060% + 100 pA                                    |
| 1.000000 µA              | 50 pA      | 0.025% + 400 pA                                                    | 5 pA                    | 1 pA                 | <100 µV           | 0.025% + 300 pA                                    |
| 10.00000 µA              | 500 pA     | 0.025% + 1.5 nA                                                    | 40 pA                   | 10 pA                | <100 µV           | 0.025% + 700 pA                                    |
| 100.0000 µA              | 5 nA       | 0.020% + 15 nA                                                     | 400 pA                  | 100 pA               | <100 µV           | 0.020% + 6 nA                                      |
| 1.000000 mA              | 50 nA      | 0.020% + 150 nA                                                    | 5 nA                    | 1 nA                 | <100 µV           | 0.020% + 60 nA                                     |
| 10.00000 mA              | 500 nA     | 0.020% + 1.5 µA                                                    | 40 nA                   | 10 nA                | <100 µV           | 0.020% + 600 nA                                    |
| 100.0000 mA              | 5 µA       | 0.025% + 15 µA                                                     | 100 nA                  | 100 nA               | <100 µV           | 0.025% + 6 µA                                      |
| 1.000000 A               | 50 µA      | 0.067% + 900 µA                                                    | 3 µA                    | 1 µA                 | <100 µV           | 0.030% + 500 µA                                    |

#### Temperature Coefficient (0°–18°C and 28°–50°C)

±(0.15 × accuracy specification)/°C.

#### Notes

- Speed = 1 PLC.
- All specifications are guaranteed with output ON.
- Accuracies apply to 2- and 4-wire mode when properly zeroed.
- For sink mode, 1 µA to 100 mA range accuracy is ±(0.15% + offset × 4). For 1A range, accuracy is ±(1.5% + offset × 8).
- Rear panel triax connections only.

## Resistance Measurement Accuracy (Local or Remote Sense) <sup>1, 2</sup>

| Range                     | Default Resolution <sup>3</sup> | Default Test Current | Normal Accuracy<br>(23°C ±5°C)<br>1 Year, ±(% rdg. + ohms) | Enhanced Accuracy <sup>4</sup><br>(23°C ±5°C)<br>1 Year, ±(% rdg. + ohms) |
|---------------------------|---------------------------------|----------------------|------------------------------------------------------------|---------------------------------------------------------------------------|
| <2.000000 Ω <sup>5</sup>  | 1 μΩ                            | User defined         | Source I <sub>ACC</sub> + Meas. V <sub>ACC</sub>           | Meas. I <sub>ACC</sub> + Meas. V <sub>ACC</sub>                           |
| 20.00000 Ω                | 10 μΩ                           | 100 mA               | 0.098% + 0.003 Ω                                           | 0.073% + 0.001 Ω                                                          |
| 200.0000 Ω                | 100 μΩ                          | 10 mA                | 0.077% + 0.03 Ω                                            | 0.053% + 0.01 Ω                                                           |
| 2.000000 kΩ               | 1 mΩ                            | 1 mA                 | 0.066% + 0.3 Ω                                             | 0.045% + 0.1 Ω                                                            |
| 20.00000 kΩ               | 10 mΩ                           | 100 μA               | 0.063% + 3 Ω                                               | 0.043% + 1 Ω                                                              |
| 200.0000 kΩ               | 100 mΩ                          | 10 μA                | 0.065% + 30 Ω                                              | 0.046% + 10 Ω                                                             |
| 2.000000 MΩ               | 1 Ω                             | 1 μA                 | 0.110% + 300 Ω                                             | 0.049% + 100 Ω                                                            |
| 20.00000 MΩ               | 10 Ω                            | 1 μA                 | 0.110% + 1 kΩ                                              | 0.052% + 500 Ω                                                            |
| 200.0000 MΩ               | 100 Ω                           | 100 nA               | 0.655% + 10 kΩ                                             | 0.349% + 5k Ω                                                             |
| >200.0000 MΩ <sup>5</sup> | —                               | User defined         | Source I <sub>ACC</sub> + Meas. V <sub>ACC</sub>           | Meas. I <sub>ACC</sub> + Meas. V <sub>ACC</sub>                           |

**Temperature Coefficient**  
(0°–18°C and 28°–50°C) ±(0.15 × accuracy specification)/°C.

**Source Current, Measure Resistance Mode** Total uncertainty = I<sub>source</sub> accuracy + V<sub>measure</sub> accuracy (4-wire remote sense).

**Source Voltage, Measure Resistance Mode** Total uncertainty = V<sub>source</sub> accuracy + I<sub>measure</sub> accuracy (4-wire remote sense).

**Guard Output Impedance** 0.5 Ω (DC) in ohms mode.

### Notes

1. All specifications are guaranteed with output ON.
2. Accuracies apply to 2- and 4-wire mode when properly zeroed.
3. 6.5 digit measure resolution
4. Source readback enabled. Offset compensation ON.
5. Source Current, Measure Resistance or Source Voltage, Measure Resistance only. For best measurements, use rear panel triax connectors.

## Operating Characteristics

**Max. Output Power** 20 W, four-quadrant source or sink operation.

**Source Limits**  
**Vsource:** ±21 V (≤ 1 A range), ±210 V (≤ 100 mA range)  
**Isource:** ±1.05 A (≤ 20 V range), ±105 mA (≤ 200 V range).

**Overrange** 105% of range, source and measure.

**Regulation**  
**Voltage:** Line: 0.01% of range. **Load:** 0.01% of range + 100 μV.  
**Current:** Line: 0.01% of range. **Load:** 0.01% of range + 100 pA.

**Source Limits**  
**Voltage Source Current Limit:** Bipolar current limit set with single value. Min. 10% of range.  
**Current Source Voltage Limit:** Bipolar voltage limit set with single value. Min. 10% of range.

**V-Limit / I-Limit Accuracy** Add 0.3% of setting and ±0.02% of reading to base specification.

**Overshoot**  
**Voltage Source:** <0.1% typical (full scale step, resistive load, 20 V range, 10 mA I-Limit).  
**Current Source:** <0.1% typical (1 mA step, R<sub>Load</sub> = 10 kΩ, 20 V range).

**Range Change Overshoot** Overshoot into a fully resistive 100 kΩ load, 10 Hz to 20 MHz BW, adjacent ranges: 250 mV typical

**Output Settling Time** Time required to reach 0.1% of final value, 20 V range, 100 mA I-Limit: <200 μs typical.

**Maximum Slew Rate** 0.2 V/μs, 200 V range, 100 mA limit into a 2 kΩ load (typical).

**Over Voltage Protection** User selectable values, 5% tolerance. Factory default = none.

**Voltage Source Noise** 10 Hz–1 MHz (RMS): 2 mV typical into a resistive load.

**Common Mode Voltage** 250 V DC.



**Common Mode Isolation** >1 G $\Omega$ , <1000 pF.

**Noise Rejection (typical)**

| NPLC | NMRR  | CMRR    |
|------|-------|---------|
| 0.01 | —     | 60 dB   |
| 0.1  | —     | 60 dB   |
| 1    | 60 dB | 100 dB* |

\* Except lowest two current ranges -90dB.

**Load Impedance** 20 nF typical (standard). Stable into 50  $\mu$ F typical (High-C mode).  
High-C mode valid for  $\geq 100$   $\mu$ A ranges,  $\geq 200$  mV ranges.

**Max. Voltage Drop Between Force and Sense Terminals** 5 V.

**Max. Sense Lead Resistance** 1 M $\Omega$  for rated accuracy.

**Sense Input Impedance** >10 G $\Omega$ .

**Guard Offset Voltage** <300  $\mu$ V, typical

## System Measurement Speeds <sup>1</sup>

**Reading Rates (readings/second) typical for 60 Hz (50 Hz):**

**Script (TSP) Programmed**

| NPLC/Trigger Origin | Measure     |             |             |             | Source-Measure Sweep |             |             |             |
|---------------------|-------------|-------------|-------------|-------------|----------------------|-------------|-------------|-------------|
|                     | To Mem.     | To GPIB     | To USB      | To LAN      | To Mem.              | To GPIB     | To USB      | To LAN      |
| 0.01 / Internal     | 3130 (2800) | 2830 (2570) | 2825 (2600) | 2790 (2530) | 1710 (1620)          | 1620 (1540) | 1630 (1540) | 1620 (1540) |
| 0.01 / External     | 2170 (2050) | 2150 (2030) | 2170 (2040) | 2160 (1990) | 1670 (1590)          | 1580 (1500) | 1590 (1510) | 1580 (1510) |
| 0.1 / Internal      | 540 (460)   | 530 (450)   | 530 (450)   | 530 (450)   | 470 (410)            | 460 (400)   | 470 (400)   | 470 (400)   |
| 0.1 / External      | 500 (430)   | 490 (420)   | 500 (430)   | 500 (420)   | 470 (400)            | 460 (390)   | 460 (400)   | 460 (400)   |
| 1.00 / Internal     | 59 (49)     | 58 (49)     | 59 (49)     | 59 (49)     | 58 (48)              | 58 (48)     | 58 (48)     | 58 (48)     |
| 1.00 / External     | 58 (48)     | 57 (48)     | 58 (48)     | 58 (48)     | 57 (48)              | 57 (47)     | 57 (48)     | 57 (48)     |

**SCPI Programmed <sup>2</sup>**

| NPLC/Trigger Origin | Measure     |             |             |             | Source-Measure Sweep |             |             |             |
|---------------------|-------------|-------------|-------------|-------------|----------------------|-------------|-------------|-------------|
|                     | To Mem.     | To GPIB     | To USB      | To LAN      | To Mem.              | To GPIB     | To USB      | To LAN      |
| 0.01 / Internal     | 3130 (2800) | 3060 (2760) | 3000 (2790) | 3010 (2710) | 1710 (1630)          | 1610 (1600) | 1440 (1380) | 1690 (1590) |
| 0.01 / External     | 2350 (2200) | 2320 (2170) | 2340 (2190) | 2320 (2130) | 1680 (1590)          | 1560 (1570) | 1410 (1360) | 1660 (1560) |
| 0.1 / Internal      | 540 (460)   | 540 (450)   | 540 (460)   | 540 (450)   | 470 (410)            | 470 (410)   | 450 (390)   | 470 (410)   |
| 0.1 / External      | 510 (440)   | 510 (430)   | 510 (440)   | 510 (430)   | 470 (400)            | 470 (400)   | 450 (390)   | 470 (400)   |
| 1.00 / Internal     | 59 (49)     | 59 (49)     | 59 (49)     | 59 (49)     | 58 (48)              | 58 (48)     | 57 (48)     | 58 (48)     |
| 1.00 / External     | 58 (49)     | 58 (49)     | 58 (49)     | 58 (49)     | 58 (48)              | 58 (48)     | 57 (47)     | 58 (48)     |

**Notes**

1. Reading rates applicable for voltage or current measurements, autozero off, autorange off, filter off, binary reading format, and source readback off.
2. SCPI programming mode. Speeds do not apply to SCPI 2400 mode.

## Supplied Accessories

|           |                                                                                             |
|-----------|---------------------------------------------------------------------------------------------|
| 8608      | High Performance Test Leads                                                                 |
| USB-B-1   | USB Cable, Type A to Type B, 1m (3.3 ft)                                                    |
| CS-1616-3 | Safety Interlock Mating Connector                                                           |
| CA-180-3A | TSP-Link/Ethernet Cable                                                                     |
|           | Documentation CD                                                                            |
|           | 2450 QuickStart Guide                                                                       |
|           | Test Script Builder Software (supplied on CD)                                               |
|           | KickStart Startup Software (supplied on CD)                                                 |
|           | LabVIEW and IVI Drivers available at <a href="http://www.keithley.com">www.keithley.com</a> |

## Available Accessories

### Test Leads and Probes

|      |                                                  |
|------|--------------------------------------------------|
| 1754 | 2-wire Universal 10-Piece Test Lead Kit          |
| 5804 | Kelvin (4-Wire) Universal 10-Piece Test Lead Kit |
| 5805 | Kelvin (4-Wire) Spring-Loaded Probes             |
| 5806 | Kelvin Clip Lead Set                             |
| 5808 | Low Cost Single-pin Kelvin Probe Set             |
| 5809 | Low Cost Kelvin Clip Lead Set                    |
| 8605 | High Performance Modular Test Leads              |
| 8606 | High Performance Modular Probe Kit               |
| 8608 | High Performance Clip Lead Set                   |

### Cables, Connectors, Adapters

|              |                                                                                            |
|--------------|--------------------------------------------------------------------------------------------|
| 237-ALG-2    | 3-slot Male Triax Connector to 3 Alligator Clips                                           |
| 237-BAN-3A   | Triax to Banana Plug                                                                       |
| 2450-TRX-BAN | Triax to Banana Adapter. Converts the 4 Triax adapters on the rear panel to 5 banana jacks |
| 7078-TRX-*   | 3-slot, Low Noise Triax Cable                                                              |
| 7078-TRX-GND | 3-slot Male Triax To BNC Adapter (guard removed)                                           |
| 8607         | 2-wire, 1000V Banana Cables, 1 m (3.3 ft)                                                  |
| CA-18-1      | Shielded Dual Banana Cable, 1.2 m (4 ft)                                                   |
| CAP-31       | Protective Shield/Cap for 3-lug Triax Connectors                                           |
| CS-1546      | Triax 3-lug Special Shorting Plug. Shorts center pin to outer shield                       |
| CS-1616-3    | Safety Interlock Mating Connector                                                          |

---

## Communication Interfaces and Cables

|             |                                            |
|-------------|--------------------------------------------|
| 7007-1      | Shielded GPIB Cable, 1 m (3.3 ft)          |
| 7007-2      | Shielded GPIB Cable, 1 m (6.6 ft)          |
| CA-180-3A   | CAT5 Crossover Cable for TSP-Link/Ethernet |
| KPCI-488LPA | IEEE-488 Interface for PCI Bus             |
| KUSB-488B   | IEEE-488 USB-to-GPIB Interface Adapter     |
| USB-B-1     | USB Cable, Type A to Type B, 1 m (3.3 ft)  |

---

## Triggering and Control

|            |                                              |
|------------|----------------------------------------------|
| 2450-TLINK | DB-9 to Trigger Link Connector Adapter.      |
| 8501-1     | Trigger Link Cable, DIN-to-DIN, 1 m (3.3 ft) |
| 8501-2     | Trigger Link Cable, DIN-to-DIN, 2 m (6.6 ft) |

---

## Rack Mount Kits

|               |                                                                                  |
|---------------|----------------------------------------------------------------------------------|
| 2450-BenchKit | Ears and Handle for 2450-NFP-RACK and 2450-RACK models                           |
| 4299-8        | Single Fixed Rack Mount Kit                                                      |
| 4299-9        | Dual Fixed Rack Mount Kit                                                        |
| 4299-10       | Dual Fixed Rack Mount Kit. Mount one 2450 and one Series 26xxB                   |
| 4299-11       | Dual Fixed Rack Mount Kit. Mount one 2450 and one Series 2400, Series 2000, etc. |

---

## Test Fixtures

|          |                 |
|----------|-----------------|
| 8101-PIV | DC Test Fixture |
|----------|-----------------|

---

## Software Options

|            |                                                        |
|------------|--------------------------------------------------------|
| 2450-ECHEM | Electrochemical Test Suite (must be ordered with 2450) |
|------------|--------------------------------------------------------|

## Available Services

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| 2450-3Y-EW      | 1 Year Factory Warranty extended to 3 years from date of shipment |
| 2450-5Y-EW      | 1 Year Factory Warranty extended to 5 years from date of shipment |
| C/2450-3Y-17025 | KeithleyCare® 3 Year ISO 17025 Calibration Plan                   |
| C/2450-3Y-DATA  | KeithleyCare 3 Year Calibration w/Data Plan                       |
| C/2450-3Y-STD   | KeithleyCare 3 Year Std. Calibration Plan                         |
| C/2450-5Y-17025 | KeithleyCare 5 Year ISO 17025 Calibration Plan                    |
| C/2450-5Y-DATA  | KeithleyCare 5 Year Calibration w/Data Plan                       |
| C/2450-5Y-STD   | KeithleyCare 5 Year Std. Calibration Plan                         |

## General Characteristics (default mode unless specified)

|                                          |                                                                                                             |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <b>Factory Default Standard Power-Up</b> | SCPI Mode.                                                                                                  |
| <b>Source Output Modes</b>               | Fixed DC Level, Memory/Configuration List (mixed function), Stair (linear and log).                         |
| <b>Source Memory List</b>                | 100 points max. (SCPI 2400 Mode only).                                                                      |
| <b>Memory Buffer</b>                     | >250,000 readings. Includes selected measured value(s) and time stamp.                                      |
| <b>Real-Time Clock</b>                   | Lithium battery backup (3 yr. + battery life).                                                              |
| <b>Remote Interfaces</b>                 |                                                                                                             |
| <b> GPIB</b>                             | IEEE-488.1 compliant. Supports IEEE-488.2 common commands and status model topology.                        |
| <b> USB Device (rear panel, type B)</b>  | 2.0 Full Speed USBTMC.                                                                                      |
| <b> USB Host (front panel, type A)</b>   | USB 2.0, support for flash drives, FAT32.                                                                   |
| <b> Ethernet</b>                         | RJ-45 (10/100BT).                                                                                           |
| <b>Digital I/O Interface:</b>            |                                                                                                             |
| <b> Lines</b>                            | 6 Input/Output user defined for digital I/O or triggering.                                                  |
| <b> Connector</b>                        | 9-pin female D.                                                                                             |
| <b> Input Signal Levels</b>              | 0.7 V (maximum logic low), 3.7 V (minimum logic high).                                                      |
| <b> Input Voltage Limits</b>             | -0.25 V (Abs. minimum), +5.25 V (Abs. maximum).                                                             |
| <b> Maximum Source Current</b>           | +2.0 mA @ >2.7 V (per pin).                                                                                 |
| <b> Maximum Sink Current</b>             | -50 mA @ 0.7 V (per pin, solid-state fuse protected).                                                       |
| <b> 5V Power Supply Pin</b>              | Limited to 500 mA @ >4 V (solid-state fuse protected).                                                      |
| <b> Handler</b>                          | User definable Start of Test, End of Test, 4 category bits.                                                 |
| <b>Programmability</b>                   | SCPI or TSP command sets.                                                                                   |
| <b>TSP Mode</b>                          | Embedded Test Script Processor (TSP) accessible from any host interface.                                    |
| <b>IP Configuration</b>                  | Static or DHCP.                                                                                             |
| <b>Expansion Interface</b>               | The TSP-Link expansion interface allows TSP enabled instruments to trigger and communicate with each other. |
| <b>LXI Compliance</b>                    | 1.4 LXI Core 2011.                                                                                          |
| <b>Display</b>                           | 5 inch capacitive touch, color TFT WVGA (800×480) with LED backlight.                                       |
| <b>Input Signal Connections</b>          | <b>Front:</b> Banana. <b>Rear:</b> Triaxial (3-lug).                                                        |
| <b>Interlock</b>                         | Active High Input.                                                                                          |
| <b>Cooling</b>                           | Forced air, variable speed.                                                                                 |
| <b>Over Temperature Protection</b>       | Internally sensed temperature overload puts unit in standby mode.                                           |
| <b>Power Supply</b>                      | 100 V to 240 V RMS, 50–60 Hz (automatically detected at power up).                                          |
| <b>VA Rating</b>                         | 190 volt-amps max.                                                                                          |
| <b>Altitude</b>                          | Maximum 2000 meters above sea level.                                                                        |
| <b>EMC</b>                               | Conforms to European Union EMC Directive.                                                                   |
| <b>Safety</b>                            | NRTL listed to UL61010-1 and UL61010-2-30. Conforms with European Union Low Voltage Directive.              |
| <b>Vibration</b>                         | MIL-PRF-28800F Class 3 Random.                                                                              |

|                             |                                                                                                                                                                                                                       |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Warm-Up</b>              | 1 hour to rated accuracies.                                                                                                                                                                                           |
| <b>Dimensions</b>           | <b>With bumpers and handle:</b> 106 mm high × 255 mm wide × 425 mm deep (4.18 in × 10.05 in × 16.75 in).<br><b>Without bumpers and handle:</b> 88 mm high × 213 mm wide × 403 mm deep (3.46 in × 8.39 in × 15.87 in.) |
| <b>Weight</b>               | <b>With bumpers and handle:</b> 4.04 kg (8.9 lbs.).<br><b>Without bumpers and handle:</b> 3.58 kg (7.9 lbs.).                                                                                                         |
| <b>Environment</b>          | <b>Operating:</b> 0°–50°C, 70% R.H. up to 35°C. Derate 3% R.H./°C, 35°–50°C.<br><b>Storage:</b> –25°C to 65°C.                                                                                                        |
| <b>Accessories Supplied</b> | Test Leads, USB Cable, Ethernet/TSP Cable, Interlock Adapter, Power Cord, Quick Start Guide, CD User's Manual.                                                                                                        |

## Ordering Information

|                      |                                                                            |
|----------------------|----------------------------------------------------------------------------|
| <b>2450</b>          | 200 V, 1 A, 20 W SourceMeter Instrument                                    |
| <b>2450-NFP</b>      | 200 V, 1 A, 20 W SourceMeter Instrument, with No Front Panel               |
| <b>2450-RACK</b>     | 200 V, 1 A, 20 W SourceMeter Instrument, without Handle                    |
| <b>2450-NFP-RACK</b> | 200 V, 1 A, 20 W SourceMeter Instrument, with No Front Panel and No Handle |

## Warranty Information

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Warranty Summary</b>  | This section summarizes the warranties of the 2450. For complete warranty information, refer to the 2450 Reference Manual. Any portion of the product that is not manufactured by Keithley is not covered by this warranty and Keithley will have no duty to enforce any other manufacturer's warranties.                                                                                                                                                                                                                                                                          |
| <b>Hardware Warranty</b> | Keithley Instruments, Inc. warrants the Keithley manufactured portion of the hardware for a period of one year from defects in materials or workmanship; provided that such defect has not been caused by use of the Keithley hardware which is not in accordance with the hardware instructions. The warranty does not apply upon any modification of Keithley hardware made by the customer or operation of the hardware outside the environmental specifications.                                                                                                               |
| <b>Software Warranty</b> | Keithley warrants for the Keithley produced portion of the software or firmware will conform in all material respects with the published specifications for a period of ninety (90) days; provided the software is used on the product for which it is intended in accordance with the software instructions. Keithley does not warrant that operation of the software will be uninterrupted or error-free, or that the software will be adequate for the customer's intended application. The warranty does not apply upon any modification of the software made by the customer. |

**Contact Information:**

**Australia\*** 1 800 709 465  
**Austria** 00800 2255 4835  
**Balkans, Israel, South Africa and other ISE Countries** +41 52 675 3777  
**Belgium\*** 00800 2255 4835  
**Brazil** +55 (11) 3759 7627  
**Canada** 1 800 833 9200  
**Central East Europe / Baltics** +41 52 675 3777  
**Central Europe / Greece** +41 52 675 3777  
**Denmark** +45 80 88 1401  
**Finland** +41 52 675 3777  
**France\*** 00800 2255 4835  
**Germany\*** 00800 2255 4835  
**Hong Kong** 400 820 5835  
**India** 000 800 650 1835  
**Indonesia** 007 803 601 5249  
**Italy** 00800 2255 4835  
**Japan** 81 (3) 6714 3010  
**Luxembourg** +41 52 675 3777  
**Malaysia** 1 800 22 55835  
**Mexico, Central/South America and Caribbean** 52 (55) 56 04 50 90  
**Middle East, Asia, and North Africa** +41 52 675 3777  
**The Netherlands\*** 00800 2255 4835  
**New Zealand** 0800 800 238  
**Norway** 800 16098  
**People's Republic of China** 400 820 5835  
**Philippines** 1 800 1601 0077  
**Poland** +41 52 675 3777  
**Portugal** 80 08 12370  
**Republic of Korea** +82 2 6917 5000  
**Russia / CIS** +7 (495) 6647564  
**Singapore** 800 6011 473  
**South Africa** +41 52 675 3777  
**Spain\*** 00800 2255 4835  
**Sweden\*** 00800 2255 4835  
**Switzerland\*** 00800 2255 4835  
**Taiwan** 886 (2) 2656 6688  
**Thailand** 1 800 011 931  
**United Kingdom / Ireland\*** 00800 2255 4835  
**USA** 1 800 833 9200  
**Vietnam** 12060128

\* European toll-free number. If not accessible, call: +41 52 675 3777



Find more valuable resources at [TEK.COM](http://TEK.COM)

Copyright © Tektronix. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.  
012717.SBG 1KW-60904-0





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.