


## Sxx55x Series

RoHS

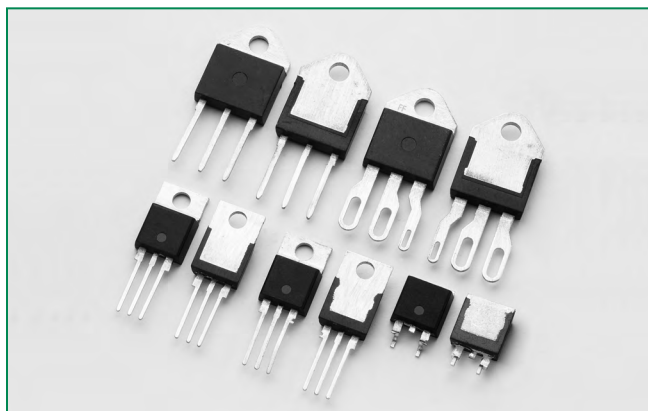

### Main Features

| Symbol            | Value       | Unit |
|-------------------|-------------|------|
| $I_{T(RMS)}$      | 55          | A    |
| $V_{DRM}/V_{RRM}$ | 400 to 1000 | V    |
| $I_{GT}$          | 40          | mA   |

### Additional Information



Datasheet



Resources



Samples

### Description

Excellent unidirectional switches for phase control applications such as heating and motor speed controls.

Standard phase control SCRs are triggered with few milliamperes of current at less than 1.5V potential.


### Features & Benefits

- RoHS compliant
- Glass – passivated junctions
- Voltage capability up to 1000 V
- Surge capability up to 650 A

### Applications

Typical applications are AC solid-state switches, industrial power tools, exercise equipment, white goods and commercial appliances.

### Schematic Symbol

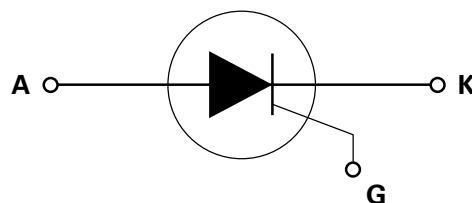

### Absolute Maximum Ratings

| Symbol       | Parameter                                 | Test Conditions                                                                    | Value      | Unit                   |
|--------------|-------------------------------------------|------------------------------------------------------------------------------------|------------|------------------------|
| $I_{T(RMS)}$ | RMS on-state current                      | $T_c = 90^\circ\text{C}$                                                           | 55         | A                      |
| $I_{T(AV)}$  | Average on-state current                  | $T_c = 90^\circ\text{C}$                                                           | 35.0       | A                      |
| $I_{TSM}$    | Peak non-repetitive surge current         | single half cycle; $f = 50\text{Hz}$ ;<br>$T_j(\text{initial}) = 25^\circ\text{C}$ | 550        | A                      |
|              |                                           | single half cycle; $f = 60\text{Hz}$ ;<br>$T_j(\text{initial}) = 25^\circ\text{C}$ | 650        |                        |
| $I^2t$       | $I^2t$ Value for fusing                   | $t_p = 8.3 \text{ ms}$                                                             | 1750       | $\text{A}^2\text{s}$   |
| $di/dt$      | Critical rate of rise of on-state current | $f = 60\text{Hz}$ ; $T_j = 125^\circ\text{C}$                                      | 175        | $\text{A}/\mu\text{s}$ |
| $I_{GM}$     | Peak gate current                         | $T_j = 125^\circ\text{C}$<br>$P_w = 10\mu\text{S}$                                 | 4.0        | A                      |
| $P_{G(AV)}$  | Average gate power dissipation            | $T_j = 125^\circ\text{C}$                                                          | 0.8        | W                      |
| $T_{stg}$    | Storage temperature range                 |                                                                                    | -40 to 150 | $^\circ\text{C}$       |
| $T_j$        | Operating junction temperature range      |                                                                                    | -40 to 125 | $^\circ\text{C}$       |

**Electrical Characteristics ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)**

| Symbol          | Test Conditions                                                                     |       |      | Value | Unit |
|-----------------|-------------------------------------------------------------------------------------|-------|------|-------|------|
| I <sub>GT</sub> | V <sub>D</sub> = 12V; R <sub>L</sub> = 30 Ω                                         |       | MAX. | 40    | mA   |
|                 |                                                                                     |       | MIN. | 5     |      |
| V <sub>GT</sub> | V <sub>D</sub> = 12V; R <sub>L</sub> = 30 Ω                                         |       | MAX. | 1.5   | V    |
| dv/dt           | V <sub>D</sub> = V <sub>DRM</sub> ; gate open; T <sub>J</sub> = 100°C               | 400V  | MIN. | 650   | V/μs |
|                 |                                                                                     | 600V  |      | 600   |      |
|                 |                                                                                     | 800V  |      | 500   |      |
|                 |                                                                                     | 1000V |      | 250   |      |
|                 | V <sub>D</sub> = V <sub>DRM</sub> ; gate open; T <sub>J</sub> = 125°C               | 400V  |      | 550   |      |
|                 |                                                                                     | 600V  |      | 500   |      |
|                 |                                                                                     | 800V  |      | 475   |      |
|                 |                                                                                     |       |      |       |      |
| V <sub>GD</sub> | V <sub>D</sub> = V <sub>DRM</sub> ; R <sub>L</sub> = 3.3 kΩ; T <sub>J</sub> = 125°C |       | MIN. | 0.2   | V    |
| I <sub>H</sub>  | I <sub>T</sub> = 400mA (initial)                                                    |       | MAX. | 60    | mA   |
| t <sub>q</sub>  | (1)                                                                                 |       | MAX. | 35    | μs   |
| t <sub>gt</sub> | I <sub>G</sub> = 2 × I <sub>GT</sub> ; PW = 15μs; I <sub>T</sub> = 110A             |       | TYP. | 2.5   | μs   |

Note :

 (1)  $I_T = 2\text{A}; t_p = 50\mu\text{s}; dv/dt = 5\text{V}/\mu\text{s}; di/dt = -30\text{A}/\mu\text{s}$ 
**Static Characteristics**


| Symbol                              | Test Conditions                               |                        |            |      | Value | Unit |
|-------------------------------------|-----------------------------------------------|------------------------|------------|------|-------|------|
| V <sub>TM</sub>                     | I <sub>T</sub> = 110A; t <sub>p</sub> = 380μs |                        |            | MAX. | 1.8   | V    |
| I <sub>DRM</sub> / I <sub>RRM</sub> | V <sub>DRM</sub> / V <sub>RRM</sub>           | T <sub>J</sub> = 25°C  | 400 – 600V | MAX. | 10    | μA   |
|                                     |                                               |                        | 800 V      |      | 20    |      |
|                                     |                                               |                        | 1000 V     |      | 30    |      |
|                                     |                                               | T <sub>J</sub> = 100°C | 400 – 600V |      | 1000  |      |
|                                     |                                               |                        | 800V       |      | 1500  |      |
|                                     |                                               |                        | 1000V      |      | 5000  |      |
|                                     |                                               | T <sub>J</sub> = 125°C | 400 – 600V |      | 2000  |      |
|                                     |                                               |                        | 800V       |      | 3000  |      |

**Thermal Resistances**


| Symbol            | Parameter             |                  | Value | Unit                      |
|-------------------|-----------------------|------------------|-------|---------------------------|
| $R_{\theta(J-C)}$ | Junction to case (AC) | Sxx55R<br>Sxx55N | 0.5   | $^\circ\text{C}/\text{W}$ |
|                   |                       | Sxx55W<br>Sxx55M | 0.53  |                           |
|                   |                       |                  |       |                           |
| $R_{\theta(J-A)}$ | Junction to ambient   | Sxx55R           | 40    | $^\circ\text{C}/\text{W}$ |

Note: xx = voltage


**Figure 1: Normalized DC Gate Trigger Current vs. Junction Temperature**

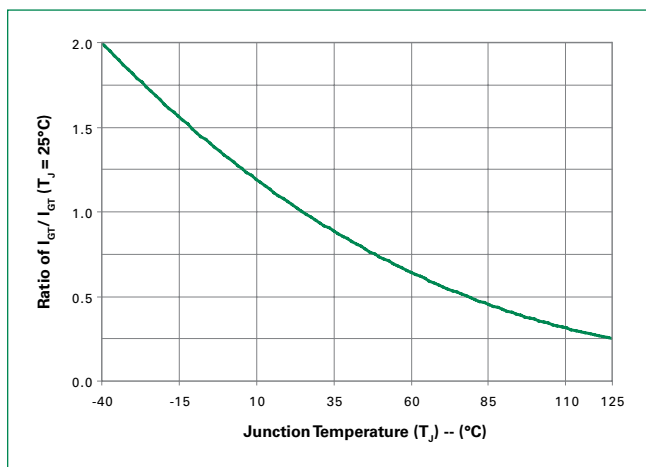


**Figure 2: Normalized DC Gate Trigger Voltage vs. Junction Temperature**

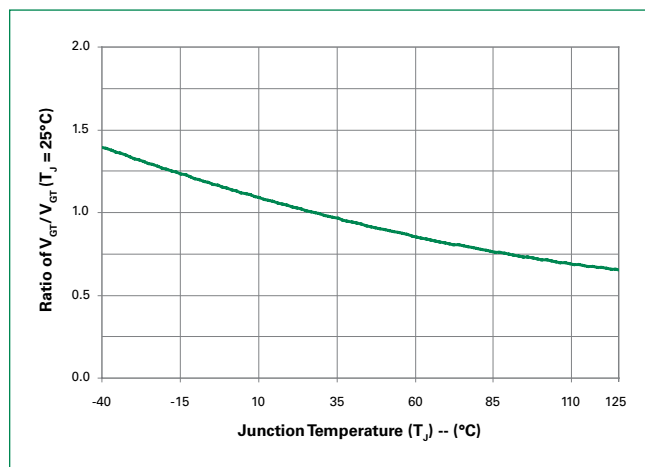


**Figure 3: Normalized DC Holding Current vs. Junction Temperature**

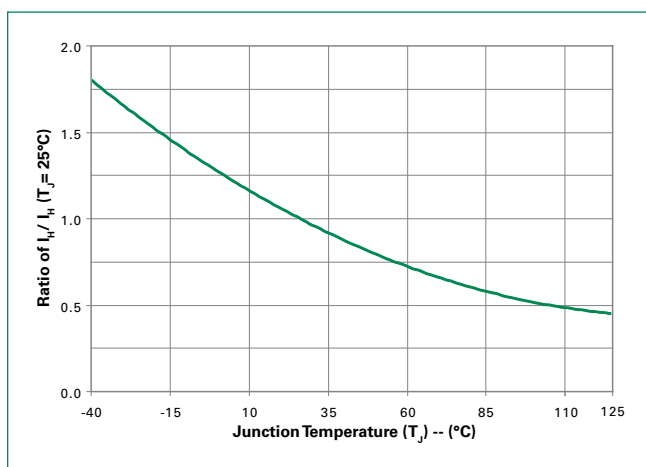


**Figure 4: On-State Current vs. On-State Voltage (Typical)**

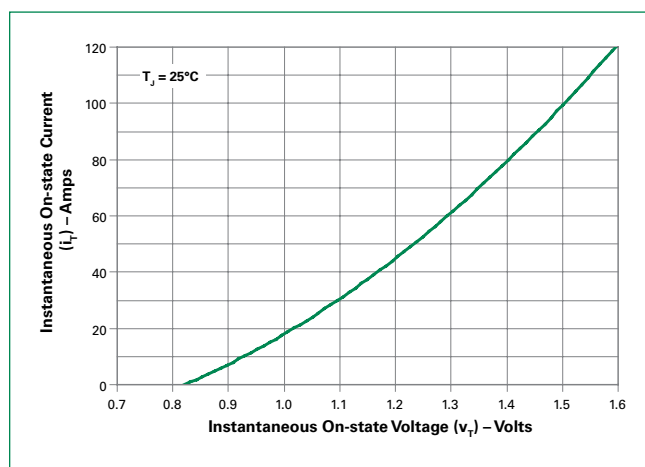

**Figure 5: Power Dissipation (Typical) vs. RMS On-State Current**

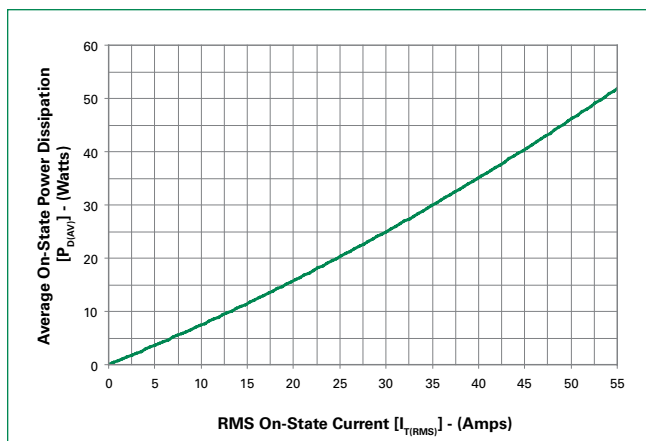


**Figure 6: Maximum Allowable Case Temperature vs. RMS On-State Current**

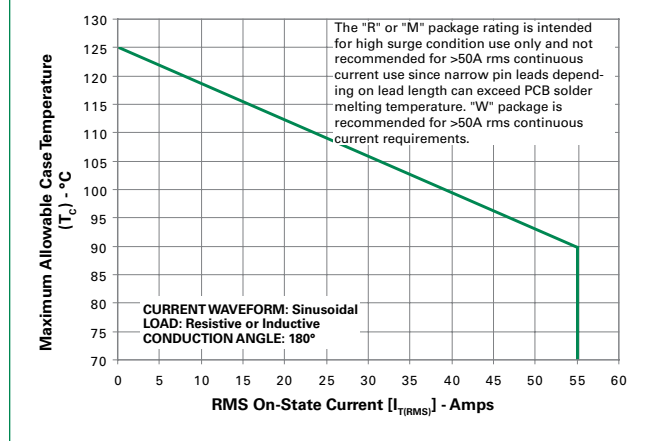

Note: xx = voltage


**Figure 7: Maximum Allowable Case Temperature vs. Average On-State Current**

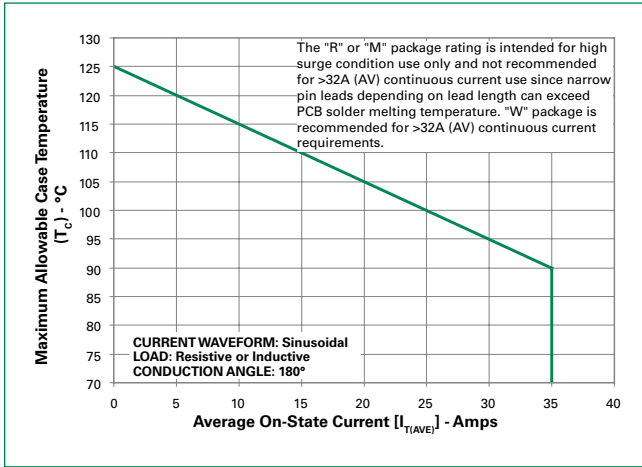


**Figure 8: Maximum Allowable Ambient Temperature vs. RMS On-State Current**




**Figure 9: Maximum Allowable Ambient Temperature vs. Average On-State Current**

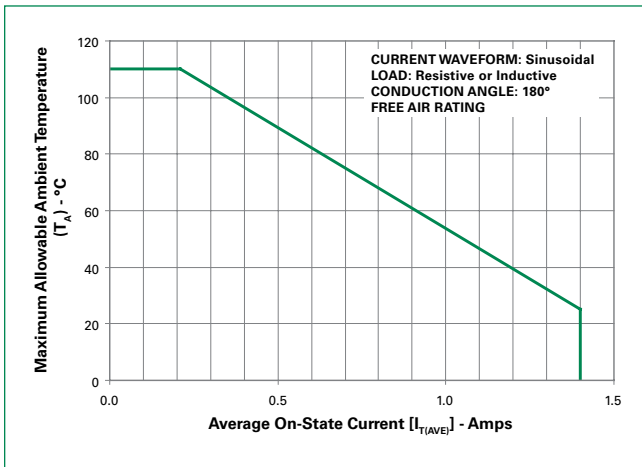

**Figure 10: Peak Capacitor Discharge Current**

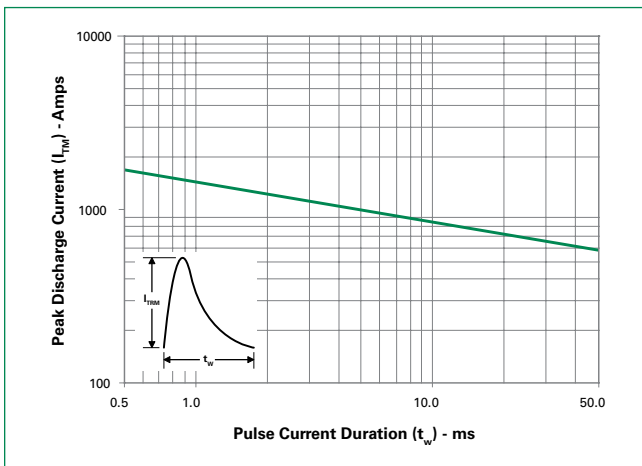


**Figure 11: Peak Capacitor Discharge Current Derating**

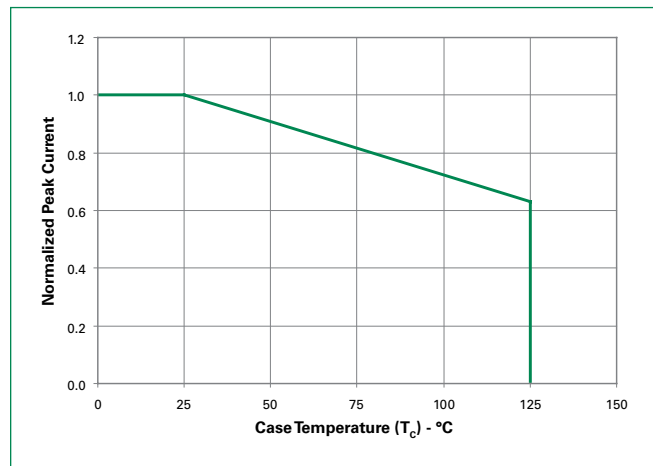


Note: xx = voltage

**Figure 12: Surge Peak On-State Current vs. Number of Cycles**

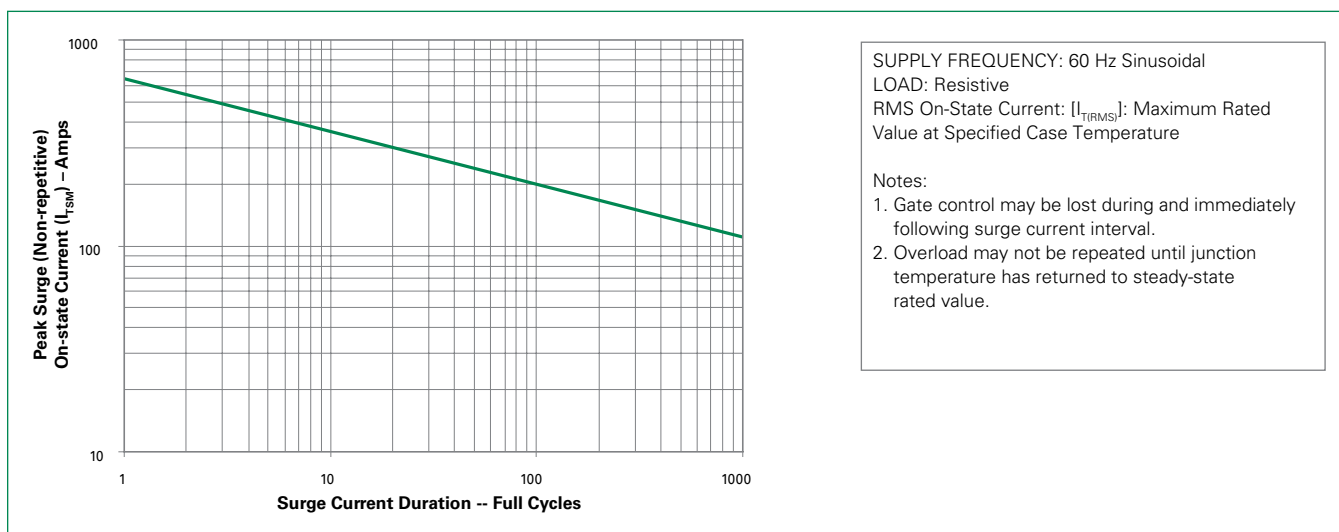

### Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp) ( $T_L$ ) to peak |                                    | 5°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max          |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate                                         |                                    | 5°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed                                          |                                    | 280°C                   |

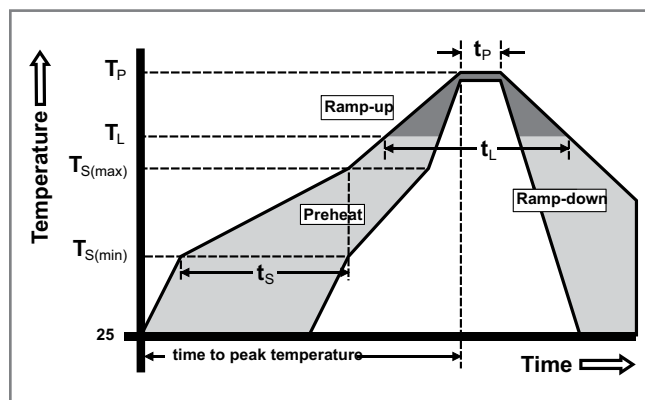

## Physical Specifications

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| <b>Terminal Finish</b> | 100% Matte Tin-plated                                         |
| <b>Body Material</b>   | UL recognized epoxy meeting flammability classification 94V-0 |
| <b>Lead Material</b>   | Copper Alloy                                                  |


## Design Considerations

Careful selection of the correct device for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Good design practice should limit the maximum continuous current through the main terminals to 75% of the device rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including  $dv/dt$ ), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

## Environmental Specifications


| Test                         | Specifications and Conditions                                                 |
|------------------------------|-------------------------------------------------------------------------------|
| AC Blocking                  | MIL-STD-750, M-1040, Cond A Applied<br>Peak AC voltage @ 125°C for 1008 hours |
| Temperature Cycling          | MIL-STD-750, M-1051,<br>100 cycles; -40°C to +150°C;<br>15-min dwell-time     |
| Temperature/<br>Humidity     | EIA / JEDEC, JESD22-A101<br>1008 hours; 320V - DC: 85°C;<br>85% rel humidity  |
| High Temp Storage            | MIL-STD-750, M-1031,<br>1008 hours; 150°C                                     |
| Low-Temp Storage             | 1008 hours; -40°C                                                             |
| Resistance to<br>Solder Heat | MIL-STD-750 Method 2031                                                       |
| Solderability                | ANSI/J-STD-002, category 3, Test A                                            |
| Lead Bend                    | MIL-STD-750, M-2036 Cond E                                                    |

### Dimensions — TO-220AB (R-Package) — Non-Isolated Mounting Tab Common with Center Lead

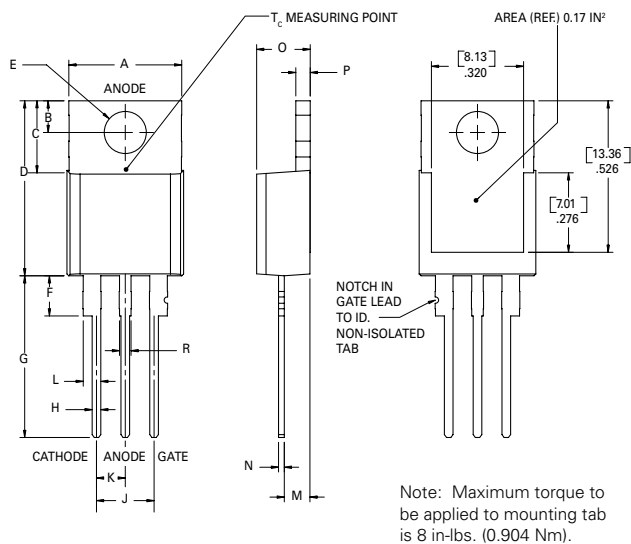


| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.380  | 0.420 | 9.65        | 10.67 |
| B         | 0.105  | 0.115 | 2.67        | 2.92  |
| C         | 0.230  | 0.250 | 5.84        | 6.35  |
| D         | 0.590  | 0.620 | 14.99       | 15.75 |
| E         | 0.142  | 0.147 | 3.61        | 3.73  |
| F         | 0.110  | 0.130 | 2.79        | 3.30  |
| G         | 0.540  | 0.575 | 13.72       | 14.61 |
| H         | 0.025  | 0.035 | 0.64        | 0.89  |
| J         | 0.195  | 0.205 | 4.95        | 5.21  |
| K         | 0.095  | 0.105 | 2.41        | 2.67  |
| L         | 0.060  | 0.075 | 1.52        | 1.91  |
| M         | 0.085  | 0.095 | 2.16        | 2.41  |
| N         | 0.018  | 0.024 | 0.46        | 0.61  |
| O         | 0.178  | 0.188 | 4.52        | 4.78  |
| P         | 0.045  | 0.060 | 1.14        | 1.52  |
| R         | 0.038  | 0.048 | 0.97        | 1.22  |

**Dimensions – TO-263AB (N-package) – D<sup>2</sup>-Pak Surface Mount**

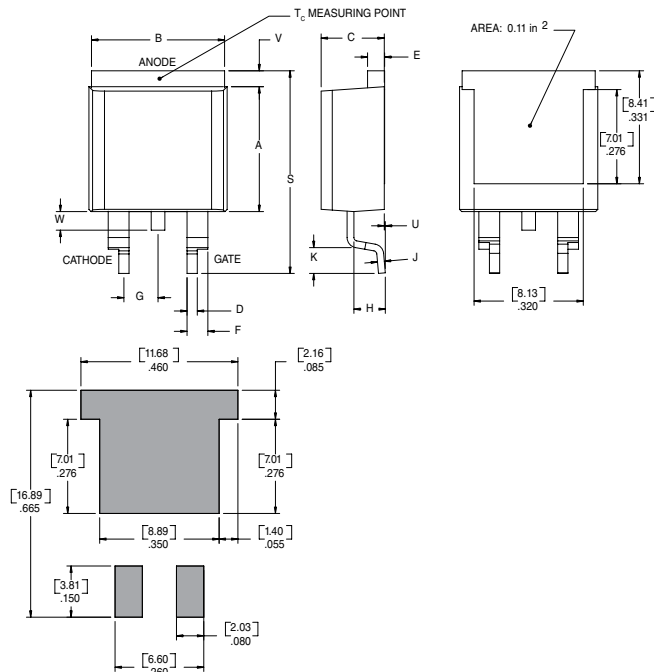


| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.360  | 0.370 | 9.14        | 9.40  |
| B         | 0.380  | 0.420 | 9.65        | 10.67 |
| C         | 0.178  | 0.188 | 4.52        | 4.78  |
| D         | 0.025  | 0.035 | 0.63        | 0.89  |
| E         | 0.048  | 0.055 | 1.22        | 1.40  |
| F         | 0.060  | 0.075 | 1.52        | 1.91  |
| G         | 0.095  | 0.105 | 2.41        | 2.67  |
| H         | 0.083  | 0.093 | 2.11        | 2.36  |
| J         | 0.018  | 0.024 | 0.46        | 0.61  |
| K         | 0.090  | 0.110 | 2.29        | 2.79  |
| S         | 0.590  | 0.625 | 14.99       | 15.87 |
| V         | 0.035  | 0.045 | 0.89        | 1.14  |
| U         | 0.002  | 0.010 | 0.05        | 0.25  |
| W         | 0.040  | 0.070 | 1.02        | 1.78  |

**Dimensions – TO-218X (W Package) – Non-Isolated Mounting Tab Common with Center Lead**

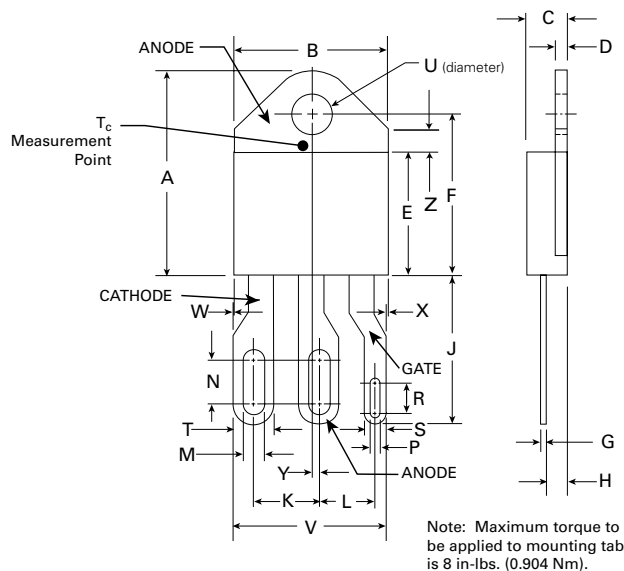

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.810  | 0.835 | 20.57       | 21.21 |
| B         | 0.610  | 0.630 | 15.49       | 16.00 |
| C         | 0.178  | 0.188 | 4.52        | 4.78  |
| D         | 0.055  | 0.070 | 1.40        | 1.78  |
| E         | 0.487  | 0.497 | 12.37       | 12.62 |
| F         | 0.635  | 0.655 | 16.13       | 16.64 |
| G         | 0.022  | 0.029 | 0.56        | 0.74  |
| H         | 0.075  | 0.095 | 1.91        | 2.41  |
| J         | 0.575  | 0.625 | 14.61       | 15.88 |
| K         | 0.256  | 0.264 | 6.50        | 6.71  |
| L         | 0.220  | 0.228 | 5.58        | 5.79  |
| M         | 0.080  | 0.088 | 2.03        | 2.24  |
| N         | 0.169  | 0.177 | 4.29        | 4.49  |
| P         | 0.034  | 0.042 | 0.86        | 1.07  |
| R         | 0.113  | 0.121 | 2.87        | 3.07  |
| S         | 0.086  | 0.096 | 2.18        | 2.44  |
| T         | 0.156  | 0.166 | 3.96        | 4.22  |
| U         | 0.164  | 0.165 | 4.10        | 4.20  |
| V         | 0.603  | 0.618 | 15.31       | 15.70 |
| W         | 0.000  | 0.005 | 0.00        | 0.13  |
| X         | 0.003  | 0.012 | 0.07        | 0.30  |
| Y         | 0.028  | 0.032 | 0.71        | 0.81  |
| Z         | 0.085  | 0.095 | 2.17        | 2.42  |

**Dimensions – TO-218AC (M Package) – Non-isolated Mounting Tab Common with Center Lead**

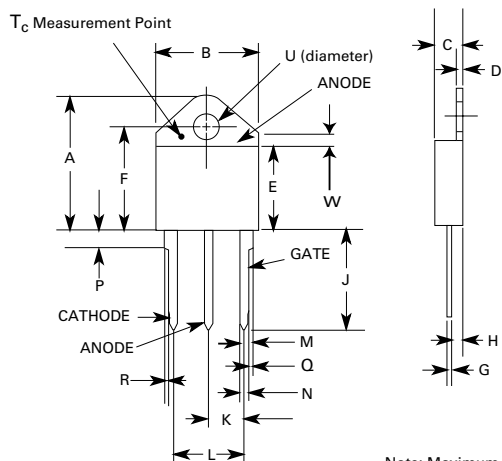

Note: Maximum torque to be applied to mounting tab is 8 in-lbs. (0.904 Nm).

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.810  | 0.835 | 20.57       | 21.21 |
| B         | 0.610  | 0.630 | 15.49       | 16.00 |
| C         | 0.178  | 0.188 | 4.52        | 4.78  |
| D         | 0.055  | 0.070 | 1.40        | 1.78  |
| E         | 0.487  | 0.497 | 12.37       | 12.62 |
| F         | 0.635  | 0.655 | 16.13       | 16.64 |
| G         | 0.022  | 0.029 | 0.56        | 0.74  |
| H         | 0.075  | 0.095 | 1.91        | 2.41  |
| J         | 0.575  | 0.625 | 14.61       | 15.88 |
| K         | 0.211  | 0.219 | 5.36        | 5.56  |
| L         | 0.422  | 0.437 | 10.72       | 11.10 |
| M         | 0.058  | 0.068 | 1.47        | 1.73  |
| N         | 0.045  | 0.055 | 1.14        | 1.40  |
| P         | 0.095  | 0.115 | 2.41        | 2.92  |
| Q         | 0.008  | 0.016 | 0.20        | 0.41  |
| R         | 0.008  | 0.016 | 0.20        | 0.41  |
| U         | 0.164  | 0.165 | 4.10        | 4.20  |
| W         | 0.085  | 0.095 | 2.17        | 2.42  |

**Product Selector**

| Part Number | Voltage |      |      |       | Gate Sensitivity | Type         | Package  |
|-------------|---------|------|------|-------|------------------|--------------|----------|
|             | 400V    | 600V | 800V | 1000V |                  |              |          |
| Sxx55R      | X       | X    | X    | X     | 40mA             | Standard SCR | TO-220R  |
| Sxx55N      | X       | X    | X    | X     | 40mA             | Standard SCR | TO-263   |
| Sxx55W      | X       | X    | X    |       | 40mA             | Standard SCR | TO-218X  |
| Sxx55M      | X       | X    | X    | X     | 40mA             | Standard SCR | TO-218AC |

Note: xx = Voltage


**Packing Options**

| Part Number | Marking | Weight | Packing Mode     | Base Quantity     |
|-------------|---------|--------|------------------|-------------------|
| Sxx55RTP    | Sxx55R  | 2.2g   | Tube             | 500 (50 per tube) |
| Sxx55NTP    | Sxx55N  | 1.6g   | Tube             | 500 (50 per tube) |
| Sxx55NRP    | Sxx55N  | 1.6g   | Embossed Carrier | 500               |
| Sxx55WTP    | Sxx55W  | 5.23g  | Tube             | 250 (25 per tube) |
| Sxx55MTP    | Sxx55M  | 4.40g  | Tube             | 250 (25 per tube) |


Note: xx = Voltage

## TO-263 Embossed Carrier Reel Pack (RP) Specification

## Meets all EIA-481-2 Standards

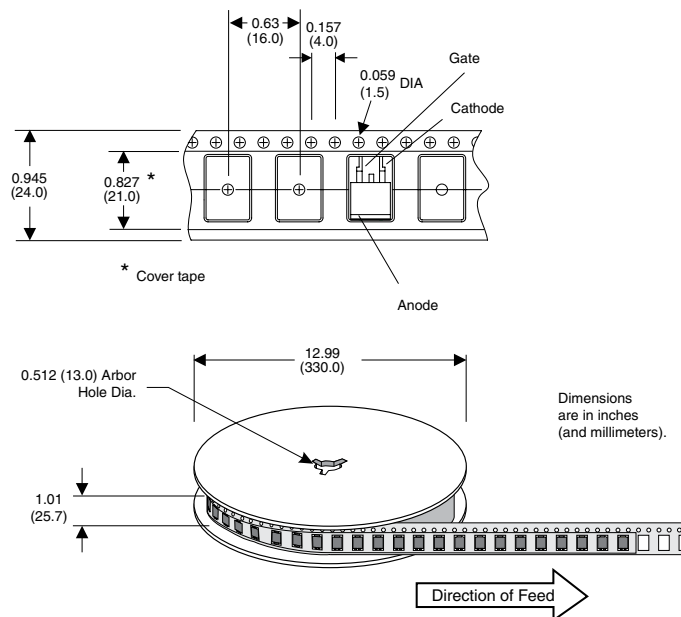



## Part Numbering System

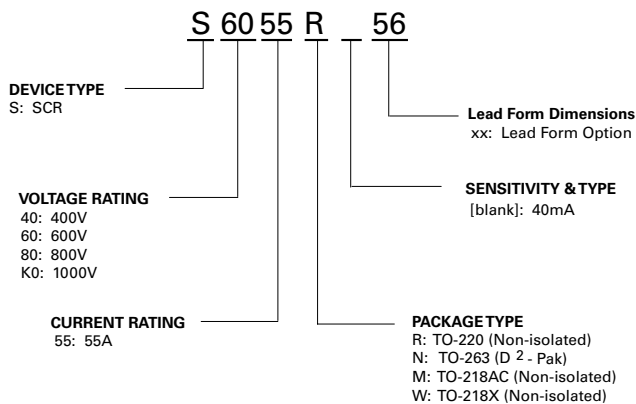

## Part Marking System

TO-218AC - (M Package)  
TO-218X - (W Package)

TO-220 AB - (R Package)  
TO-263 AB - (N Package)

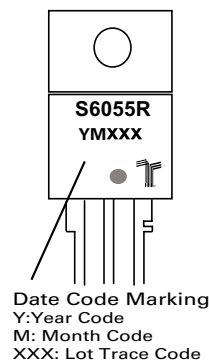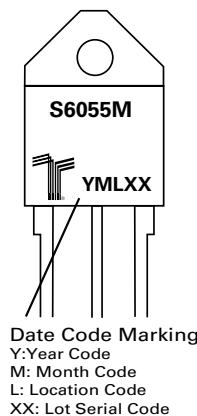



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.