

DESC APPROVED LOW DROPOUT NEGATIVE



Three Terminal, Fixed Voltage,
Low Dropout Negative Voltage Regulator
In Hermetic Packages

FEATURES

- Approved To DESC Standardized Military Drawings
- Low Dropout Voltage, 0.6 V @ $I_o = 1$ A
- Output Current in Excess of 1 A [LCC 20 (N2) package limited to 0.3A]
- Reverse Battery Protection
- Internal Short Circuit Protection
- Isolated and Non-Isolated Hermetic Package Types
- Output Voltages: - 5V, -5.2V, -12V, & -15V

13

DESCRIPTION

The OM2990 series of fixed voltage regulators are designed to provide up to 1.5A with high efficiency. It has the ability to source 1A of output current with a typical dropout voltage of 0.6V and a maximum of 1V over the entire operating temperature range. It is supplied in hermetic packages and is ideally suited for all applications where small size and high reliability are required.

ABSOLUTE MAXIMUM RATINGS, $T_c = 25^\circ\text{C}$

| | |
|---|------------------------------|
| Input Voltage | -26 V to +0.3V |
| Output Voltage | -5V, -5.2 V, -12 V, -15 V dc |
| Operating Junction Temperature Range | - 55°C to + 125°C |
| Storage Temperature Range | - 65°C to + 150°C |
| Lead Temperature (Soldering 10 seconds) | 300°C |
| Thermal Resistance: Junction to Case | |
| Case 2, LCC20 | 15.5°C/W |
| Case U&M, TO-257 (isolated) & SMD-3 | 3.8°C/W |
| Case T&N, TO-257 (non-isolated) & SMD-1 | 3.0°C/W |
| Case Y, TO-3 | 2.7°C/W |
| Maximum Output Current | |
| Case 2 | 0.3A |
| Case U&M | 1.2A |
| Case T, N & Y | 1.5A |

| APPROVED DESC DRAWING | OMNIREL P/N |
|-----------------------|------------------|
| 5962-9571101MUA | OM2990 - 5 STM |
| 5962-9571002MUA | OM2990 - 5.2 STM |
| 5962-9571001MUA | OM2990 - 12 STM |

ELECTRICAL CHARACTERISTICS, OM2990-5NK, NM, NT (-5 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -10V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|-------|--|-------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 | -5.10 | -4.90 | V |
| | | | 2 | -5.25 | -4.75 | |
| Quiescent Current | I _Q | I _O ≤ 1.0 A | 1 | | 5 | mA |
| | | | 2 | | 12 | |
| | | | 1,2 | I _I = 1.0 A, V _{IN} = -5 V | 50 | |
| Line Regulation | V _{RLN} | -6 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 | | ±40 | mV |
| | | | 2 | | ±50 | |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 | | ±50 | mV |
| | | | 2 | | ±100 | |
| Dropout Voltage | V _{DO} | I _O = 0.1 A DV _O 100 mV | 1 | | 3 | V |
| | | | 2 | | | |
| | | | 1 | I _O = 1.0 A DV _O 100 mV | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 750 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 | 1.5 | | A |
| | | | 2 | 1.3 | | |
| Maximum Output Current | I _{MAX} | | 1 | 1.5 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 50 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-12NK, NM, NT (-12 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -17V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|-------|--|--------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 | -12.24 | -11.76 | V |
| | | | 2 | -12.60 | -11.40 | |
| Quiescent Current | I _Q | I _O ≤ 1.0 A | 1 | | 5 | mA |
| | | | 2 | | 12 | |
| | | | 1,2 | I _I = 1 A, V _{IN} = -12 V | 50 | |
| Line Regulation | V _{RLN} | -13 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 | | ±65 | mV |
| | | | 2 | | ±80 | |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 | | ±80 | mV |
| | | | 2 | | ±120 | |
| Dropout Voltage | V _{DO} | I _O = 0.1 A DV _O 100 mV | 1 | | 3 | V |
| | | | 2 | | | |
| | | | 1 | I _O = 1 A DV _O 100 mV | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1500 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 | .90 | | A |
| | | | 2 | .75 | | |
| Maximum Output Current | I _{MAX} | | 1 | 1.4 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short

ELECTRICAL CHARACTERISTICS, OM2990-15NK, NM, NT (-15 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -20V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|-------|--|--------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 | -15.30 | -14.70 | V |
| | | | 2 | -15.75 | -14.25 | |
| Quiescent Current | I _Q | I _O ≤ 1.0 A | 1 | | 15 | mA |
| | | | 2 | | 20 | |
| | | | 1,2 | I _I = 1.0 A, V _{IN} = -15 V | 50 | |
| Line Regulation | V _{RLN} | -16 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 | | ±75 | mV |
| | | | 2 | | ±120 | |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 | | ±120 | mV |
| | | | 2 | | ±190 | |
| Dropout Voltage | V _{DO} | I _O = 0.1 A DV _O 100 mV | 1 | | 3 | V |
| | | | 2 | | | |
| | | | 1 | I _O = 1.0 A DV _O 100 mV | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1800 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 | .75 | | A |
| | | | 2 | .62 | | |
| Maximum Output Current | I _{MAX} | | 1 | 1.4 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-5SM, ST (-5 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -10V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|--------|----------------|----------------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 2 | -5.10 -5.25 | -4.90 -4.75 | V |
| Quiescent Current | I _Q | I _O ≤ 1.0A | 1 2 | | 5 12 | mA |
| | | I _O = 1.0A, V _{IN} = -5 V | 1,2 | | 50 | |
| Line Regulation | V _{RLN} | -6 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 2 | | ±45 ±55 | mV |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 2 | | ±70 ±110 | mV |
| Dropout Voltage | V _{DO} | I _O = 0.1 A | 1 | | 3 | V |
| | | DV _O 100 mV | 2 | | | |
| | | I _O = 1.0 A | 1 | | 1 | |
| | | DV _O 100 mV | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 750 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1,2 | 1.27 | | A |
| Maximum Output Current | I _{MAX} | | 1 | 1.27 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 50 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-12SM, ST (-12 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -17V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|--------|------------------|------------------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0A | 1 2 | -12.24 -12.60 | -11.76 -11.40 | V |
| Quiescent Current | I _Q | I _O ≤ 1.0A | 1 2 | | 5 12 | mA |
| | | I _O = 1A, V _{IN} = -12 V | 1,2 | | 50 | |
| Line Regulation | V _{RLN} | -13 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 2 | | ±65 ±80 | mV |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 2 | | ±80 ±120 | mV |
| Dropout Voltage | V _{DO} | I _O = 0.1 A | 1 | | 3 | V |
| | | DV _O 100 mV | 2 | | | |
| | | I _O = 1 A | 1 | | 1 | |
| | | DV _O 100 mV | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1500 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1,2 | .75 | | A |
| Maximum Output Current | I _{MAX} | | 1 4 | 1.18 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-15SM, ST (-15 VOLTS)

Test Conditions are -55°C, T_a 125°C, V_{IN} = -20V, C_{OUT} = 47 μF (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|------------------|--|--------|------------------|------------------|------|
| Output Voltage | V _{OUT} | 5 mA ≤ I _O ≤ 1.0 A | 1 2 | -15.30 -15.75 | -14.70 -14.25 | V |
| Quiescent Current | I _Q | I _O ≤ 1.0A | 1 2 | | 15 20 | mA |
| | | I _O = 1.0A, V _{IN} = -15 V | 1,2 | | 50 | |
| Line Regulation | V _{RLN} | -16 V V _{IN} -26 V, I _{OUT} = 5 mA | 1 2 | | ±75 ±120 | mV |
| Load Regulation | V _{RLD} | 50 mA I _{OUT} 1.0 A | 1 2 | | ±120 ±190 | mV |
| Dropout Voltage | V _{DO} | I _O = 0.1 A | 1 | | 3 | V |
| | | DV _O 100 mV | 2 | | | |
| | | I _O = 1.0 A | 1 | | 1 | |
| | | DV _O 100 mV | 2 | | | |
| Output Noise Voltage | V _{ON} | I _O = 5 mA, 10 Hz - 100 kHz | 3 | | 1800 | μV |
| Short Circuit Current | I _{SC} | R _L = 1 | 1 2 | .60 .50 | | A |
| Maximum Output Current | I _{MAX} | | 1 4 | 1.4 | | A |
| Ripple Rejection | R _R | V _{ripple} = 1 V _{rms} I _{OUT} = 5 mA, f = 1 kHz | 1 | 42 | | dB |

Notes: 1. T_a = 25°C.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -5V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-5N2 (-5 VOLTS)

Test Conditions are -55°C T_A , 125°C, $V_{IN} = -10V$, $C_{OUT} = 47 \mu F$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|----------|---------|
| Output Voltage | V_{OUT} | $5 \text{ mA} \leq I_L \leq 300 \text{ mA}$ | 1 | -5.10 | -4.90 | V |
| | | | 2 | -5.25 | -4.75 | |
| Quiescent Current | I_Q | $I_L \leq 300 \text{ mA}$ | 1 | | 7 | m A |
| | | | 2 | | 14 | |
| Line Regulation | V_{RLN} | $I_L = 300 \text{ mA}$, $V_{IN} = -5 \text{ V}$ $-6 \text{ V} \leq V_{IN} \leq -26 \text{ V}$, $I_{OUT} = 5 \text{ mA}$ | 1,2 | | 55 | m V |
| | | | 1 | | ± 45 | |
| Load Regulation | V_{RLD} | $50 \text{ mA} \leq I_{OUT} \leq 300 \text{ mA}$ | 2 | | ± 60 | m V |
| | | | 1 | | ± 80 | |
| Dropout Voltage | V_{DO} | $I_L = 100 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 3 | V |
| | | | 2 | | | |
| Dropout Voltage | V_{DO} | $I_L = 300 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V_{ON} | $I_L = 5 \text{ mA}$, 10 Hz - 100 kHz | 3 | | 800 | μV |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 300 | | m A |
| | | | 2 | 250 | | |
| Maximum Output Current | I_{MAX} | | 1 | 300 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1 \text{ V}_{rms}$ $I_{OUT} = 5 \text{ mA}$, $f = 1 \text{ kHz}$ | 1 | 50 | | dB |

Notes: 1. $T_A = 25^\circ C$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

13

ELECTRICAL CHARACTERISTICS, OM2990-12N2 (-12 VOLTS)

Test Conditions are -55°C T_A , 125°C, $V_{IN} = -17V$, $C_{OUT} = 47 \mu F$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|--------|-----------|---------|
| Output Voltage | V_{OUT} | $5 \text{ mA} \leq I_L \leq 300 \text{ mA}$ | 1 | -12.24 | -11.76 | V |
| | | | 2 | -12.60 | -11.40 | |
| Quiescent Current | I_Q | $I_L \leq 300 \text{ mA}$ | 1 | | 7 | m A |
| | | | 2 | | 14 | |
| Line Regulation | V_{RLN} | $I_L = 300 \text{ mA}$, $V_{IN} = -12 \text{ V}$ $-13 \text{ V} \leq V_{IN} \leq -26 \text{ V}$, $I_{OUT} = 5 \text{ mA}$ | 1,2 | | 60 | m V |
| | | | 1 | | ± 75 | |
| Load Regulation | V_{RLD} | $50 \text{ mA} \leq I_{OUT} \leq 300 \text{ mA}$ | 2 | | ± 110 | m V |
| | | | 1 | | ± 120 | |
| Dropout Voltage | V_{DO} | $I_L = 100 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 3 | V |
| | | | 2 | | | |
| Dropout Voltage | V_{DO} | $I_L = 300 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V_{ON} | $I_L = 5 \text{ mA}$, 10 Hz - 100 kHz | 3 | | 1650 | μV |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 200 | | m A |
| | | | 2 | 175 | | |
| Maximum Output Current | I_{MAX} | | 1 | 280 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1 \text{ V}_{rms}$ $I_{OUT} = 5 \text{ mA}$, $f = 1 \text{ kHz}$ | 4 | | | |
| | | | 1 | 42 | | dB |

Notes: 1. $T_A = 25^\circ C$.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -9V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-15 N2 (-15 VOLTS)

Test Conditions are -55°C T_A , 125°C, $V_{IN} = -20V$, $C_{OUT} = 47 \mu F$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|--------|-----------|---------|
| Output Voltage | V_{OUT} | $5 \text{ mA} \leq I_L \leq 300 \text{ mA}$ | 1 | -15.30 | -14.70 | V |
| | | | 2 | -15.75 | -14.25 | |
| Quiescent Current | I_Q | $I_L \leq 300 \text{ mA}$ | 1 | | 20 | m A |
| | | | 2 | | 25 | |
| Line Regulation | V_{RLN} | $I_L = 300 \text{ mA}$, $V_{IN} = -15 \text{ V}$ $-16 \text{ V} \leq V_{IN} \leq -26 \text{ V}$, $I_{OUT} = 5 \text{ mA}$ | 1,2 | | 60 | m V |
| | | | 1 | | ± 85 | |
| Load Regulation | V_{RLD} | $50 \text{ mA} \leq I_{OUT} \leq 300 \text{ mA}$ | 2 | | ± 130 | m V |
| | | | 1 | | ± 135 | |
| Dropout Voltage | V_{DO} | $I_L = 100 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 3 | V |
| | | | 2 | | | |
| Dropout Voltage | V_{DO} | $I_L = 300 \text{ mA}$ $DV_{IN} = 100 \text{ mV}$ | 1 | | 1 | |
| | | | 2 | | | |
| Output Noise Voltage | V_{ON} | $I_L = 5 \text{ mA}$, 10 Hz - 100 kHz | 3 | | 1900 | μV |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 150 | | m A |
| | | | 2 | 140 | | |
| Maximum Output Current | I_{MAX} | | 1 | 280 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1 \text{ V}_{rms}$ $I_{OUT} = 5 \text{ mA}$, $f = 1 \text{ kHz}$ | 4 | | | |
| | | | 1 | 42 | | dB |

Notes: 1. $T_A = 25^\circ C$.
2. Over full operating temperature range.
3. Guaranteed, not tested.
4. The short circuit current is less than the maximum output current due to internal foldback current limiting. The -9V and -5.2V versions do not reach the foldback current limit and therefore conducts a higher short circuit level.

ELECTRICAL CHARACTERISTICS, OM2990-5.2NK, NM, NT (-5.2 VOLTS)

Test Conditions are -55°C , T_A , 125°C , $V_{IN} = -10.2\text{V}$, $C_{OUT} = 47\mu\text{F}$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|-----------|---------------|
| Output Voltage | V_{OUT} | $5\text{ mA} \leq I_Q \leq 1.0\text{ A}$ | 1 | -5.30 | -5.10 | V |
| | | | 2 | -5.46 | -4.94 | |
| Quiescent Current | I_Q | $I_Q \leq 1.0\text{ A}$ | 1 | | 5 | m A |
| | | | 2 | | 12 | |
| | | | 1,2 | | 50 | |
| Line Regulation | V_{RLN} | $-6.2\text{ V} \leq V_{IN} \leq -26\text{ V}$, $I_{OUT} = 5\text{ mA}$ | 1 | | ± 40 | m V |
| | | | 2 | | ± 50 | |
| Load Regulation | V_{RLD} | $50\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 1 | | ± 50 | m V |
| | | | 2 | | ± 100 | |
| Dropout Voltage | V_{DO} | $I_Q = 0.1\text{ A}$ | 1 | | | V |
| | | | 2 | | 3 | |
| | | | 1 | | | |
| | | | 2 | | 1 | |
| Output Noise Voltage | V_{ON} | $I_Q = 5\text{ mA}$, 10 Hz - 100 kHz | 3 | | 750 | μV |
| | | | | | | |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 1.5 | | A |
| | | | 2 | 1.3 | | |
| Maximum Output Current | I_{MAX} | | 1 | 1.5 | | A |
| Ripple Rejection | R_R | $V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$ | 1 | 50 | | dB |

Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-5.2SM, ST (-5.2 VOLTS)

Test Conditions are -55°C , T_A , 125°C , $V_{IN} = -10.2\text{V}$, $C_{OUT} = 47\mu\text{F}$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|-----------|---------------|
| Output Voltage | V_{OUT} | $5\text{ mA} \leq I_Q \leq 1.0\text{ A}$ | 1 | -5.30 | -5.10 | V |
| | | | 2 | -5.46 | -4.94 | |
| Quiescent Current | I_Q | $I_Q \leq 1.0\text{ A}$ | 1 | | 5 | m A |
| | | | 2 | | 12 | |
| | | | 1,2 | | 50 | |
| Line Regulation | V_{RLN} | $-6.2\text{ V} \leq V_{IN} \leq -26\text{ V}$, $I_{OUT} = 5\text{ mA}$ | 1 | | ± 45 | m V |
| | | | 2 | | ± 55 | |
| Load Regulation | V_{RLD} | $50\text{ mA} \leq I_{OUT} \leq 1.0\text{ A}$ | 1 | | ± 70 | m V |
| | | | 2 | | ± 110 | |
| Dropout Voltage | V_{DO} | $I_Q = 0.1\text{ A}$ | 1 | | | V |
| | | | 2 | | 3 | |
| | | | 1 | | | |
| | | | 2 | | 1 | |
| Output Noise Voltage | V_{ON} | $I_Q = 5\text{ mA}$, 10 Hz - 100 kHz | 3 | | 750 | μV |
| | | | | | | |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1,2 | 1.27 | | A |
| | | | | | | |
| Maximum Output Current | I_{MAX} | | 1 | 1.27 | | A |
| Ripple Rejection | R_R | $V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$ | 1 | 50 | | dB |


Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

ELECTRICAL CHARACTERISTICS, OM2990-5.2N2 (-5.2 VOLTS)

Test Conditions are -55°C , T_A , 125°C , $V_{IN} = -10.2\text{V}$, $C_{OUT} = 47\mu\text{F}$ (unless otherwise specified).

| Parameter | Symbol | Test Conditions | Notes | Min. | Max. | Unit |
|------------------------|-----------|---|-------|-------|-----------|---------------|
| Output Voltage | V_{OUT} | $5\text{ mA} \leq I_Q \leq 300\text{ mA}$ | 1 | -5.30 | -5.10 | V |
| | | | 2 | -5.46 | -4.94 | |
| Quiescent Current | I_Q | $I_Q \leq 300\text{ mA}$ | 1 | | 7 | m A |
| | | | 2 | | 14 | |
| | | | 1,2 | | 55 | |
| Line Regulation | V_{RLN} | $-6.2\text{ V} \leq V_{IN} \leq -26\text{ V}$, $I_{OUT} = 5\text{ mA}$ | 1 | | ± 45 | m V |
| | | | 2 | | ± 60 | |
| Load Regulation | V_{RLD} | $50\text{ mA} \leq I_{OUT} \leq 300\text{ mA}$ | 1 | | ± 80 | m V |
| | | | 2 | | ± 120 | |
| Dropout Voltage | V_{DO} | $I_Q = 100\text{ mA}$ | 1 | | | V |
| | | | 2 | | 3 | |
| | | | 1 | | | |
| | | | 2 | | 1 | |
| Output Noise Voltage | V_{ON} | $I_Q = 5\text{ mA}$, 10 Hz - 100 kHz | 3 | | 800 | μV |
| | | | | | | |
| Short Circuit Current | I_{SC} | $R_L = 1$ | 1 | 300 | | m A |
| | | | 2 | 250 | | |
| Maximum Output Current | I_{MAX} | | 1 | 300 | | m A |
| Ripple Rejection | R_R | $V_{ripple} = 1\text{ V}_{rms}$ $I_{OUT} = 5\text{ mA}$, $f = 1\text{ kHz}$ | 1 | 50 | | dB |


Notes: 1. $T_A = 25^{\circ}\text{C}$.
2. Over full operating temperature range.
3. Guaranteed, not tested.

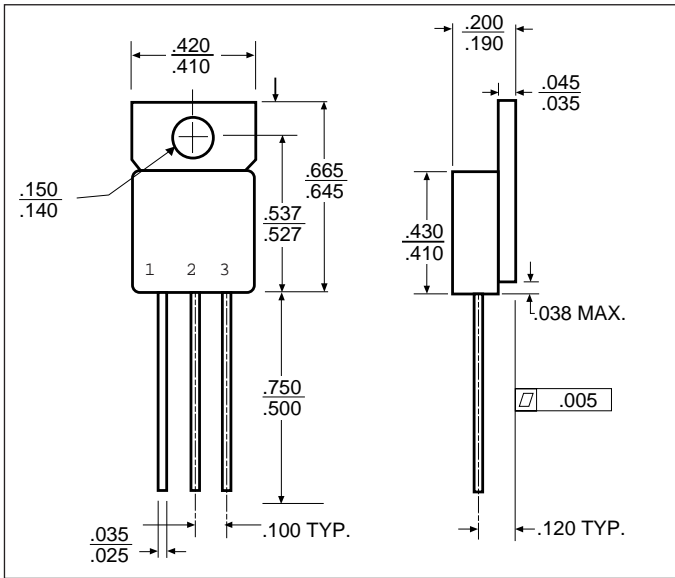


TO-257AA

OM2990STM
Isolated
Front View
Pin 1 - Ground
Pin 2 - Input
Pin 3 - Output
Tab - Isolated


OM2990NTM
Non-Isolated
Front View
Pin 1 - Ground
Pin 2 - Input
Pin 3 - Output
Tab - Input

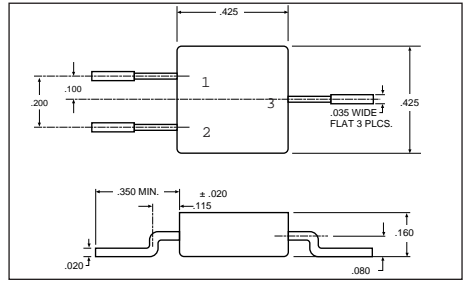

SMD-3 OM2990SMM
Front View
Pin 1 - Ground
Pin 2 - Output
Pin 3 - Input
Case - Isolated

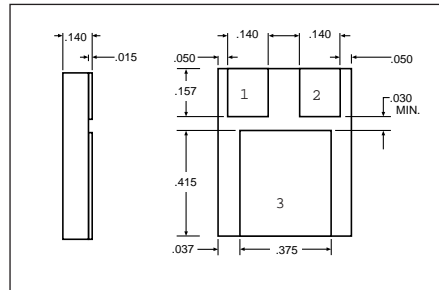


SMD 1 OM2990NMM
"N" PACKAGE
Pin 1 - Ground
Pin 2 - Output
Pin 3 - Input

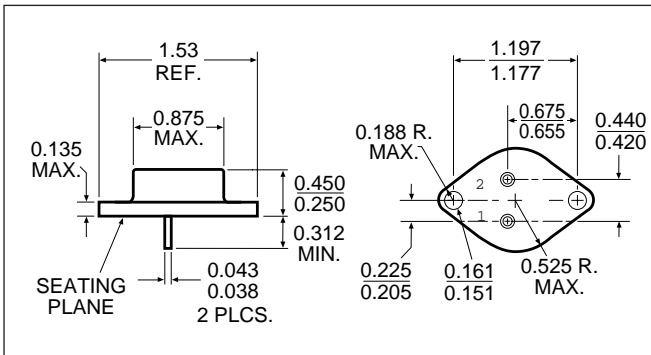

TO-204AA (TO-3)

OM2990NKM
Pin 1 - Ground
Pin 2 - Output

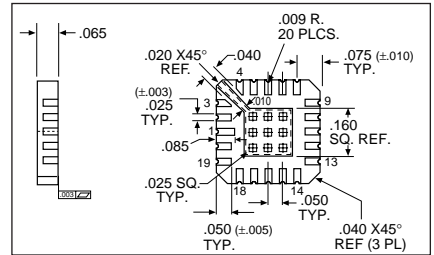

LCC 20 OM2990N2M

| | |
|--------------------------------|-------------------------|
| Pin 1 NC | Pin 11 V _{OUT} |
| Pin 2 NC | Pin 12 V _{OUT} |
| Pin 3 NC | Pin 13 NC |
| Pin 4 NC | Pin 14 NC |
| Pin 5 NC | Pin 15 V _{IN} |
| Pin 6 Ground | Pin 16 V _{IN} |
| Pin 7 NC | Pin 17 V _{IN} |
| Pin 8 NC | Pin 18 NC |
| Pin 9 V _{OUT} (Sense) | Pin 19 NC |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.