


Features:

- Frequency: 1558-1616/2400-2500MHz
- Omni directional radiation
- Low profile
- Size W x L x H (10 x 3.2 x 1.5mm)
- Lead free materials
- Fully SMD compatible
- MSL Level 3
- RoHS Compliant

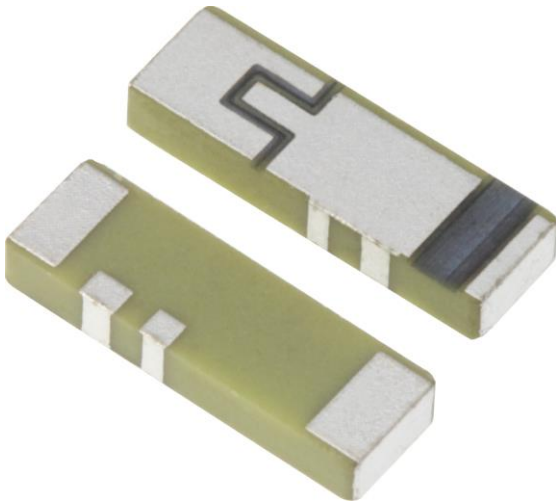

Applications:

- Combo 2-in-1 Antenna
- Single feed point
- GNSS L1 band
- Bluetooth, WLAN, WiFi (2.4 – 2.5GHz)

All dimensions are in mm / inches

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



ELECTRICAL SPECIFICATIONS

| | |
|--|----------------------------|
| Antenna Type | Ceramic Chip |
| Frequency | 1558-1616MHz/2.4-2.5GHz |
| Nominal Impedance | 50 Ω |
| Return Loss / Max (BD / GPS / GLONASS / BT) | -4 / -5 / -3 / -7 (dB) |
| Radiation Pattern – XY Plane & ZY Plane | Omni |
| Radiation Pattern – ZX Plane | Directional |
| Gain / Min (BD / GPS / GLONASS / BT) | -0.5 / 0.5 / 0 / 2 (dBi) |
| Efficiency / Min (BD / GPS / GLONASS / BT) | 35% / 45% / 45% / 65% |
| Polarization | Linear-Vertical |
| Power Withstanding | 1W |


MECHANICAL SPECIFICATIONS

| | |
|----------------|-------|
| Overall Length | 10mm |
| Weight | 0.24g |
| Antenna Color | White |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-----------------------|--------------|
| Operating Temperature | -40 ~ +85° C |
| Storage Temperature | -40 ~ +85° C |
| RoHS Compliant | Yes |


MECHANICAL DRAWING

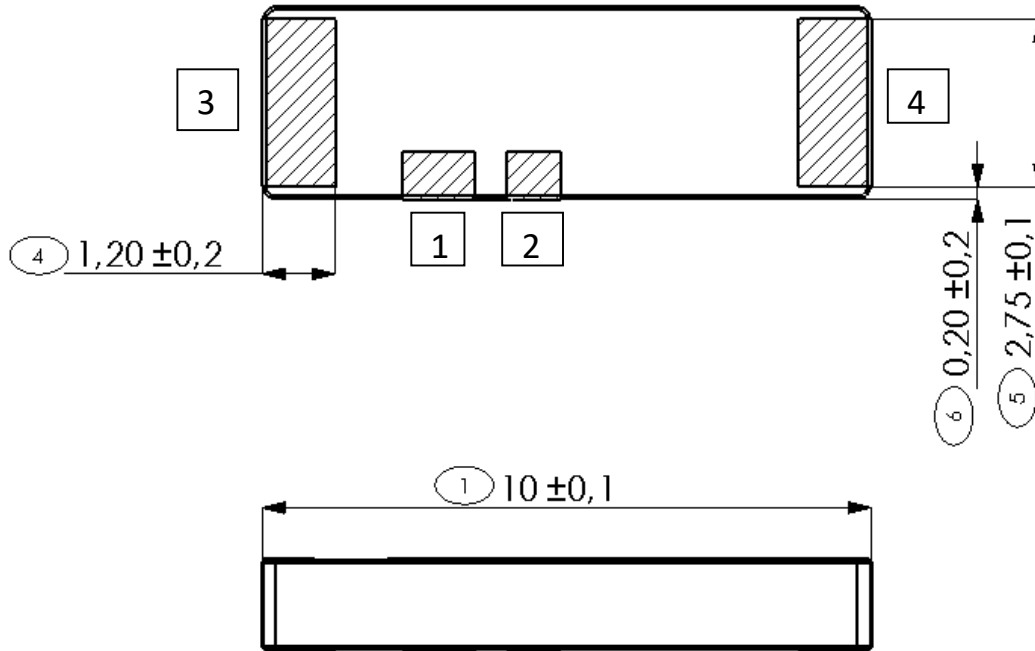

| No. | Terminal Name | Terminal Dimensions |
|-----|---------------|---------------------|
| 1 | Feed | 1.34 x 0.80 mm |
| 2 | GND | 1.00 x 0.80 mm |
| 3 | GND | 2.75 x 1.20 mm |
| 4 | GND | 2.75 x 1.20 mm |

TEST SETUP

Test board information

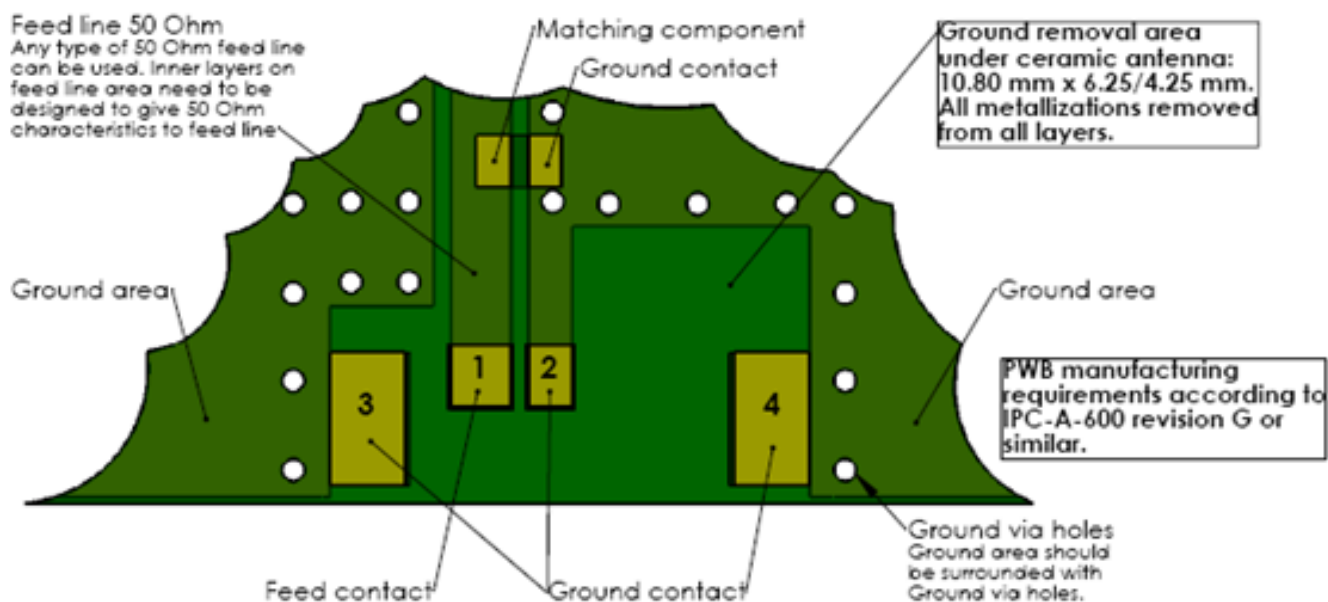

Note: Electrical characteristics are measured on test pwb with matching circuit (2.2 nH shunt matching inductor on feed).

Recommended Antenna Pad Dimensions on PWB Layout (top surface)

| PWB features | | |
|--------------|---------------|---------------------|
| No. | Terminal Name | Terminal Dimensions |
| 1 | Feed | 1.45 x 1.34 mm |
| 2 | GND | 1.45 x 1.00 mm |
| 3 | GND | 3.00 x 1.70 mm |
| 4 | GND | 3.00 x 1.70 mm |


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT Antenna


PART NUMBER: W3056

TEST SETUP

Recommended ground clearance area under antenna on PWB (top surface)

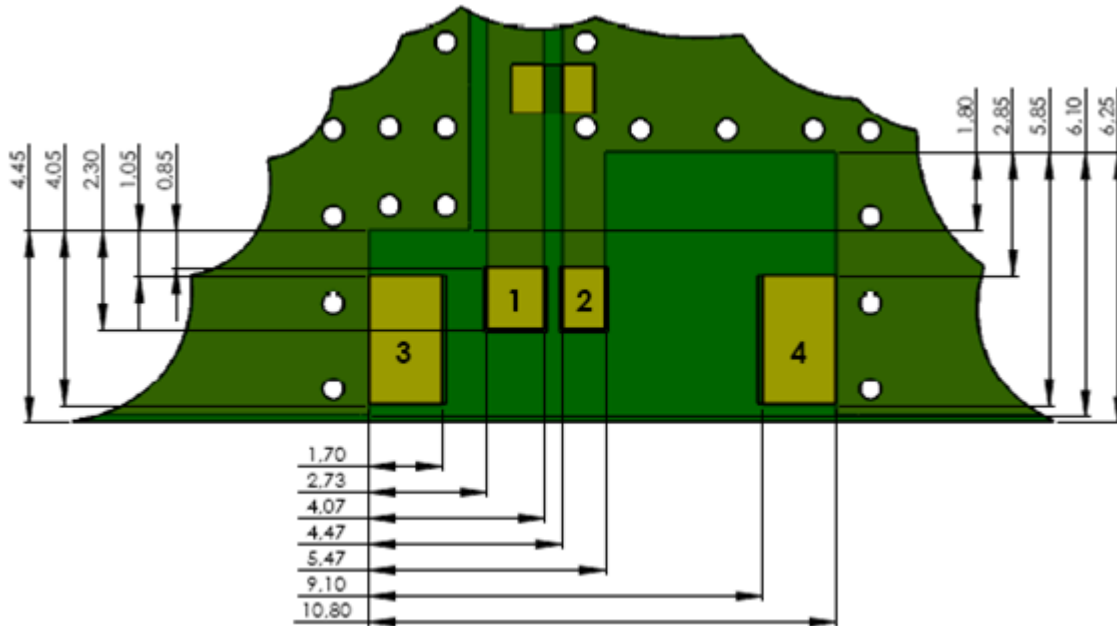

Recommended ground clearance area under antenna on PWB (bottom surface)

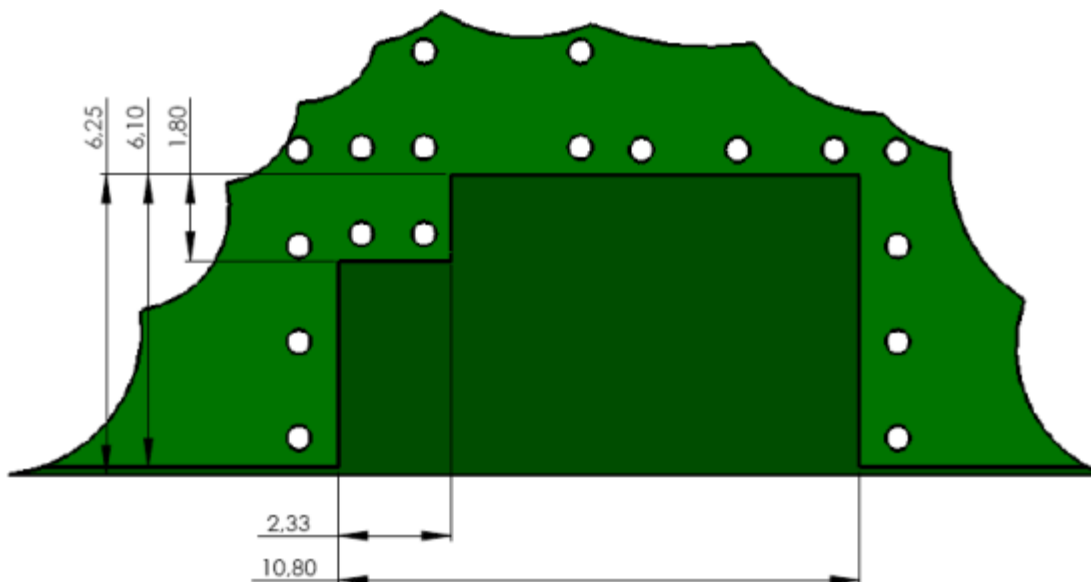

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT
Antenna


PART NUMBER: W3056

CHARTS

Return Loss/GNSS

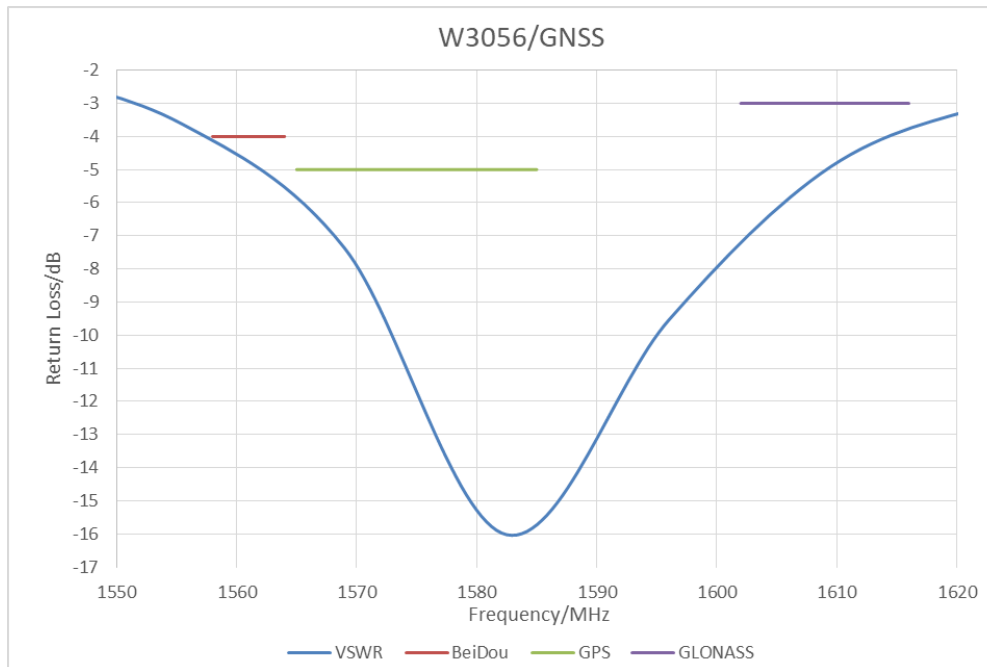

Return Loss/ BT

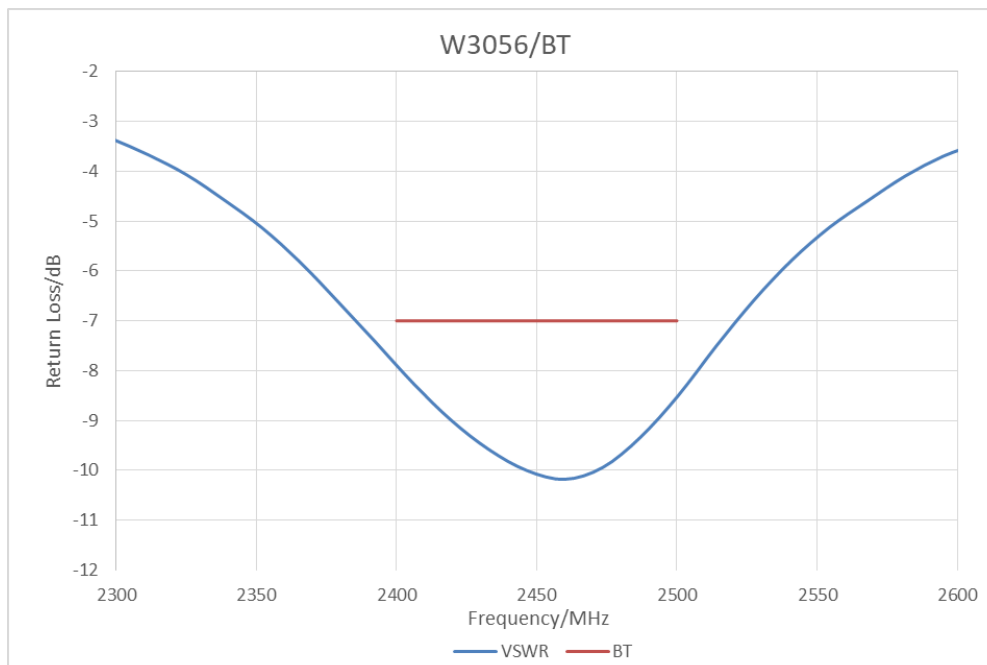

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT Antenna


PART NUMBER: W3056

CHARTS

Peaking Gain/ GNSS

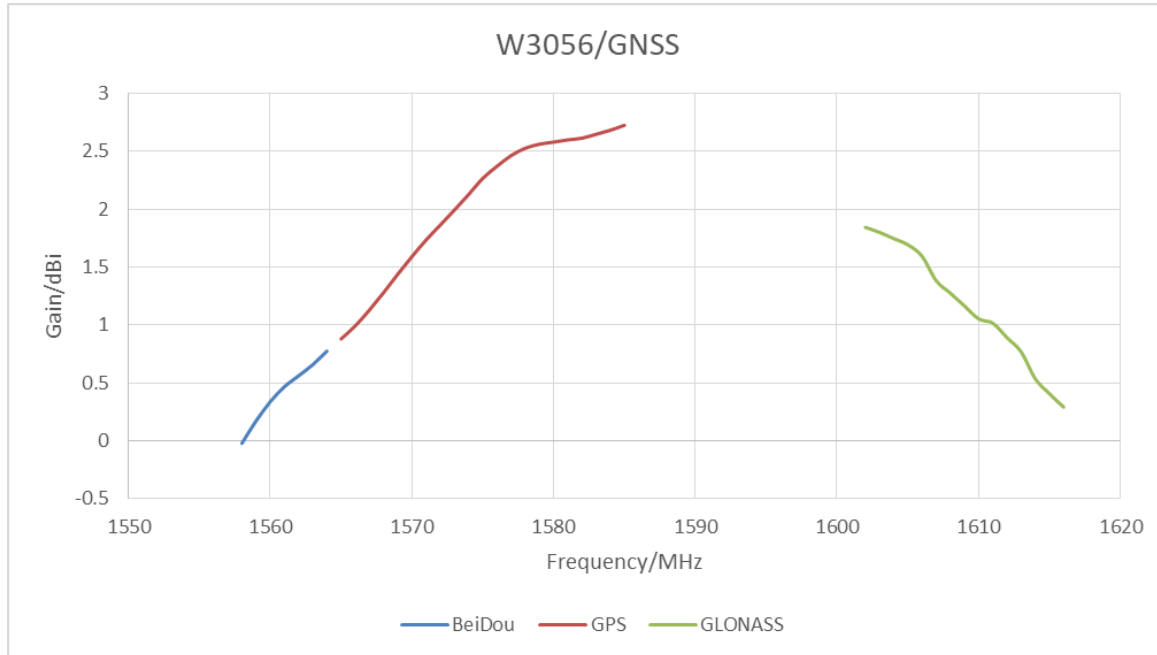

Rad Efficiency/ GNSS

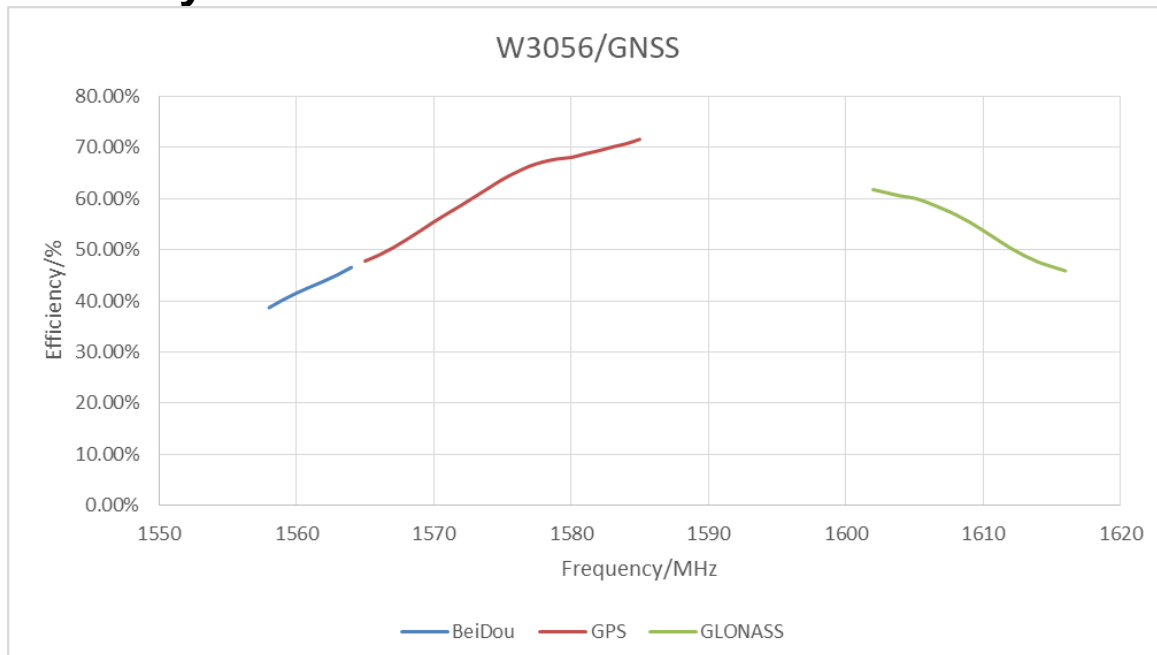

Issue: 1837


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

CHARTS

Typical Free Space Radiation Patterns / BeiDou

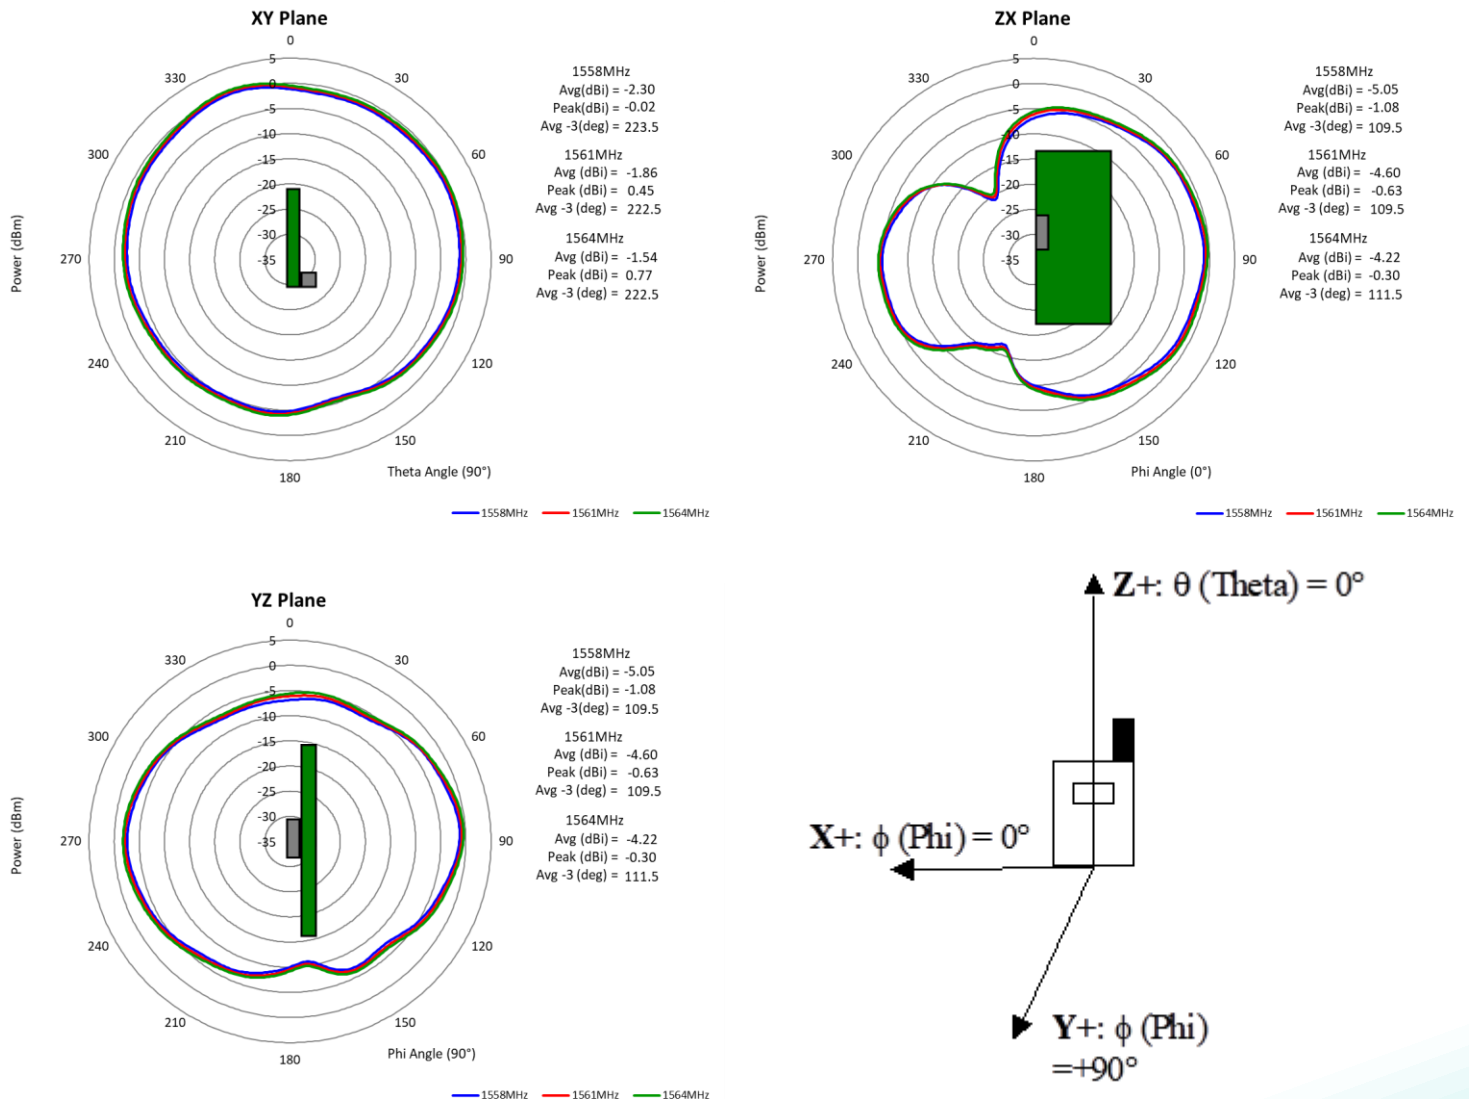

Issue: 1837


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

CHARTS

Typical Free Space Radiation Patterns / GPS

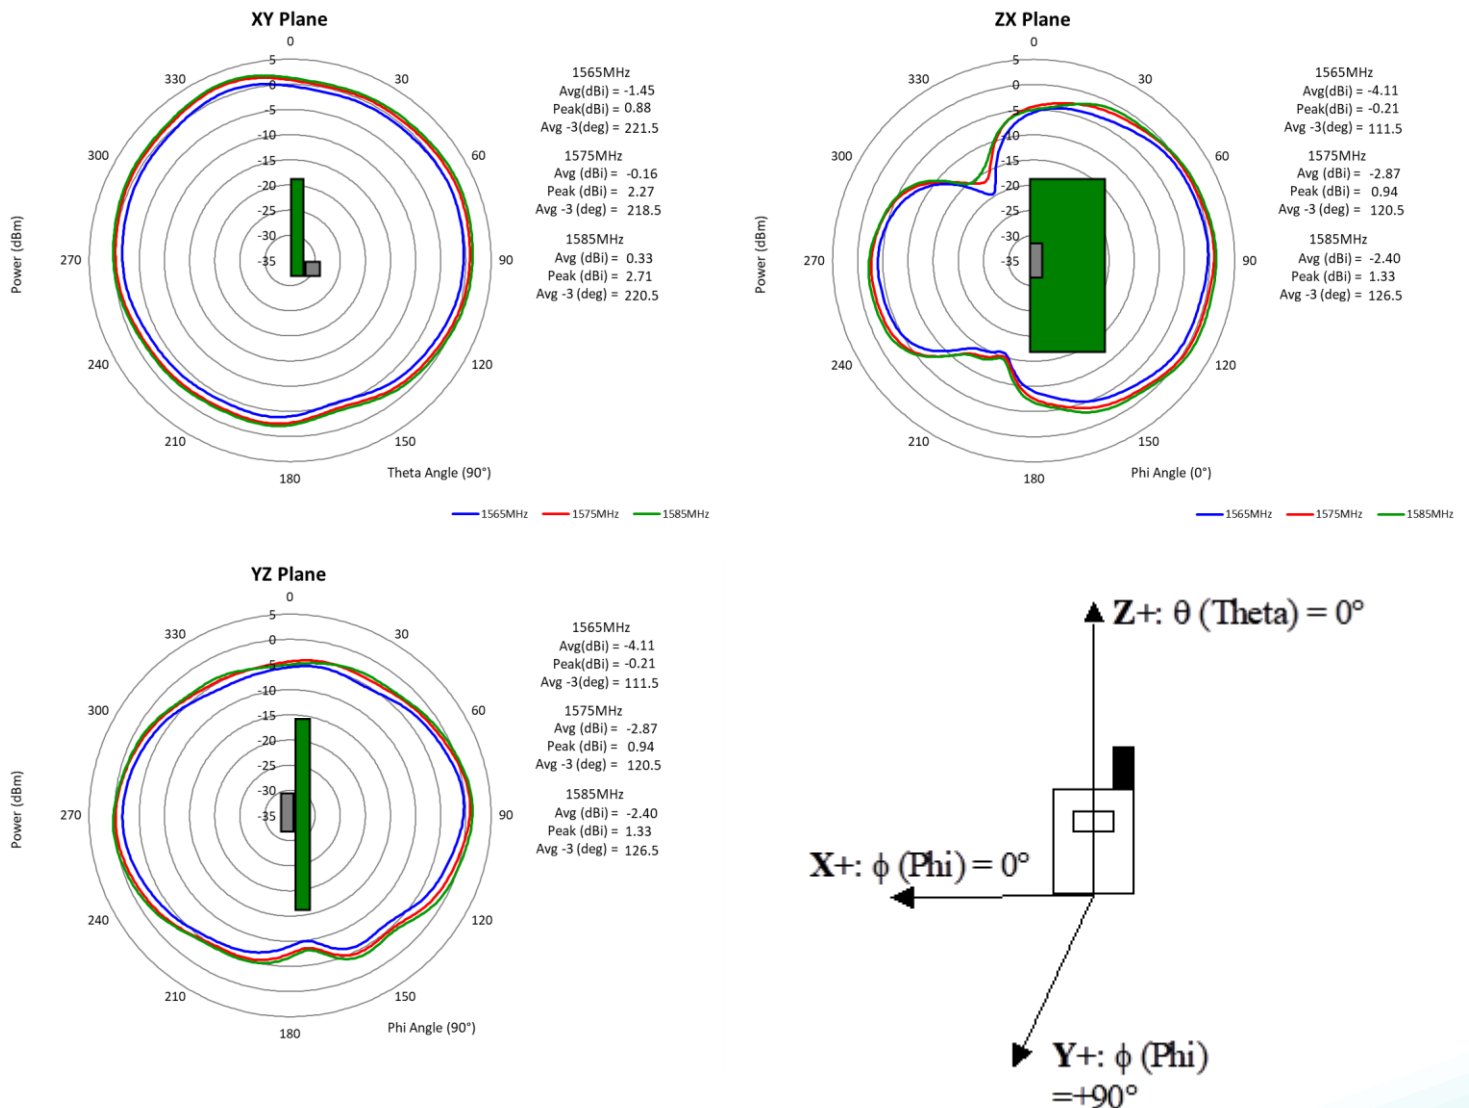

Issue: 1837


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

CHARTS

Typical Free Space Radiation Patterns / GLONASS

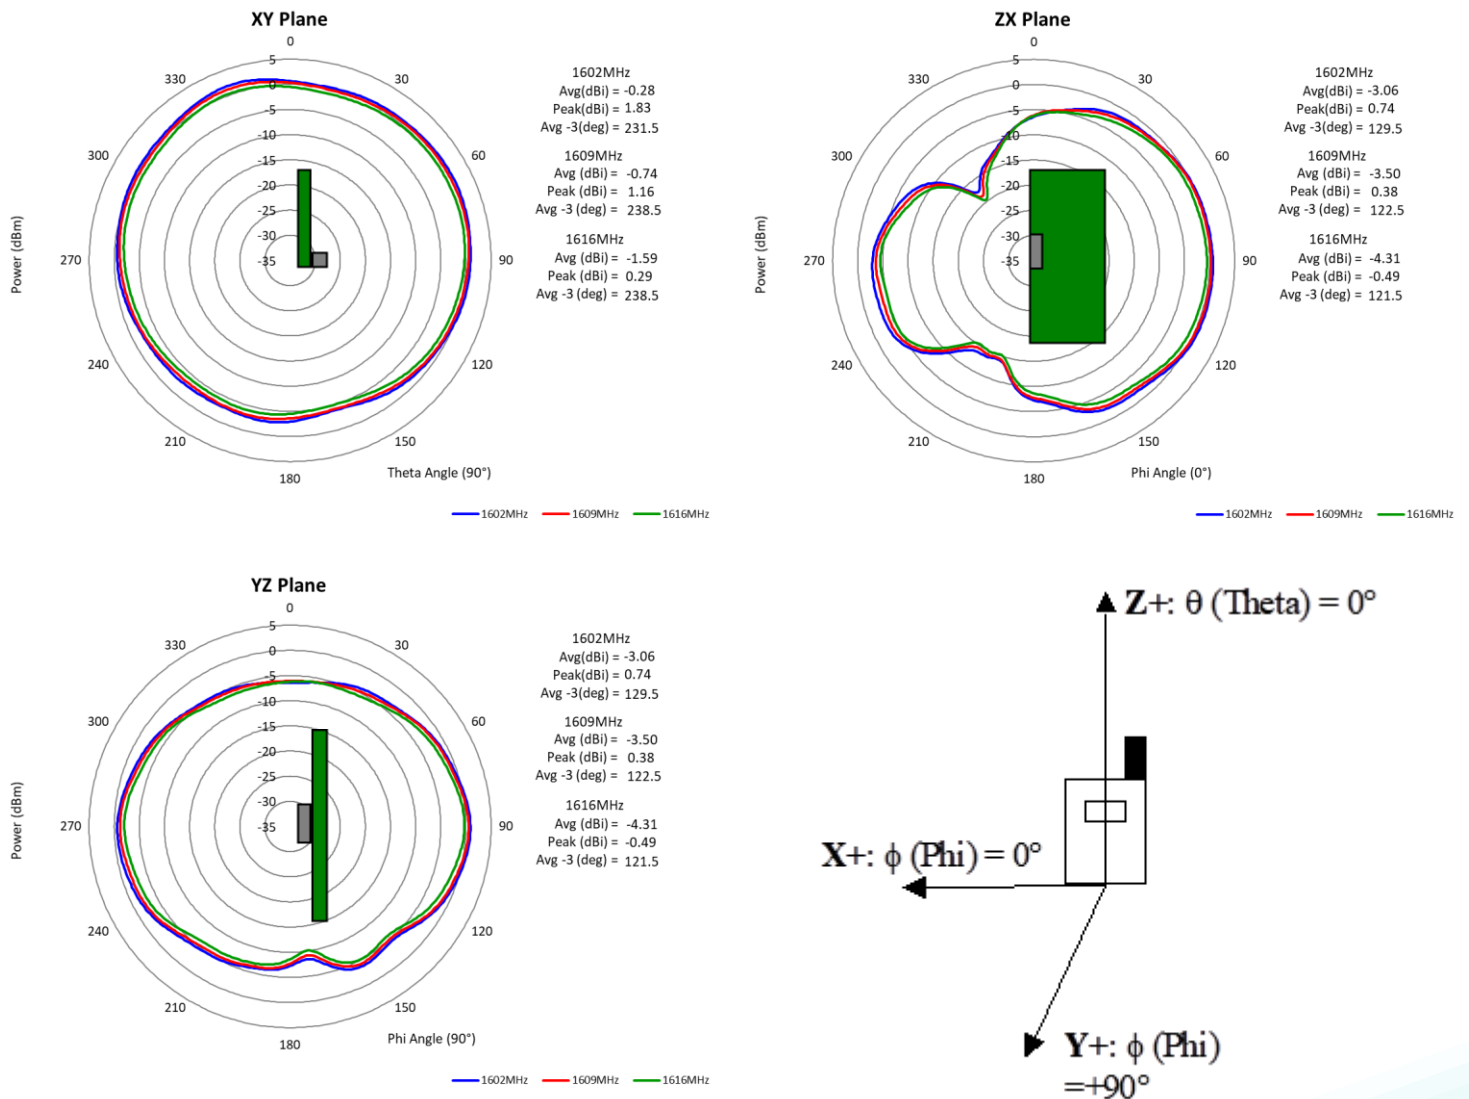

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT
Antenna


PART NUMBER: W3056

CHARTS

Peaking Gain/ BT(2.4G-2.5G)

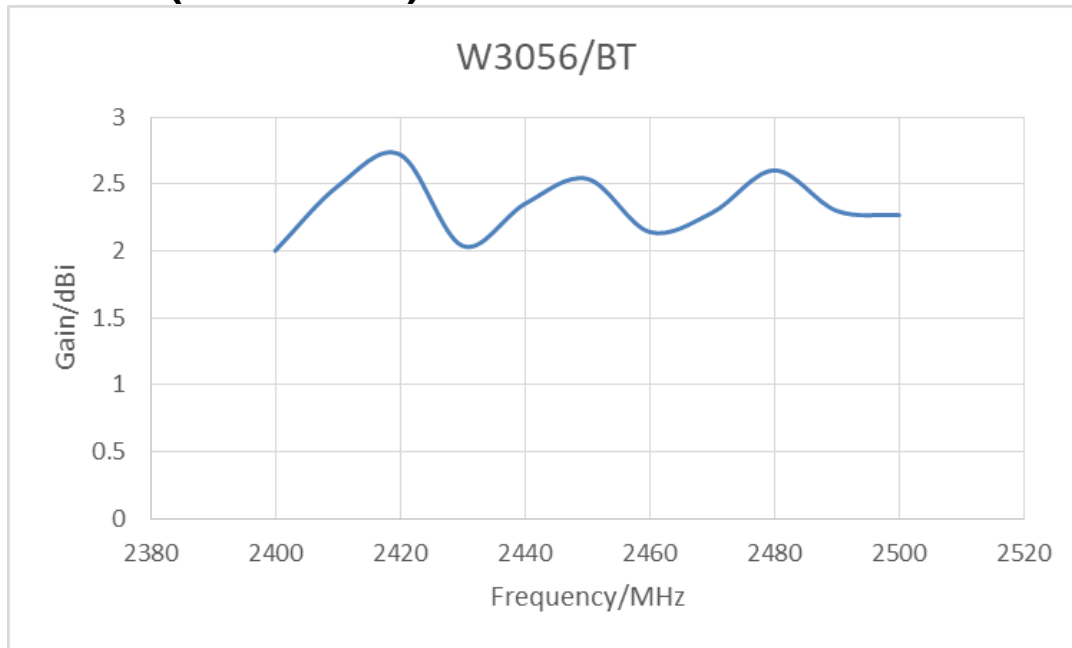

Rad Efficiency/ BT(2.4G-2.5G)

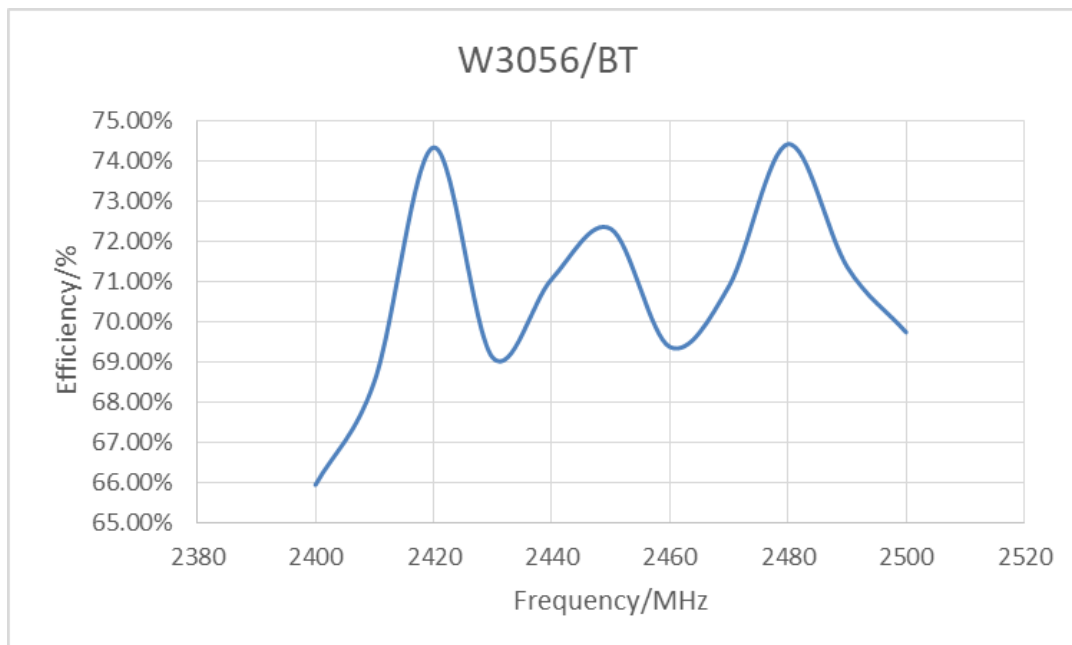

Issue: 1837


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

CHARTS

Typical Free Space Radiation Patterns / BT(2.4G-2.5G)

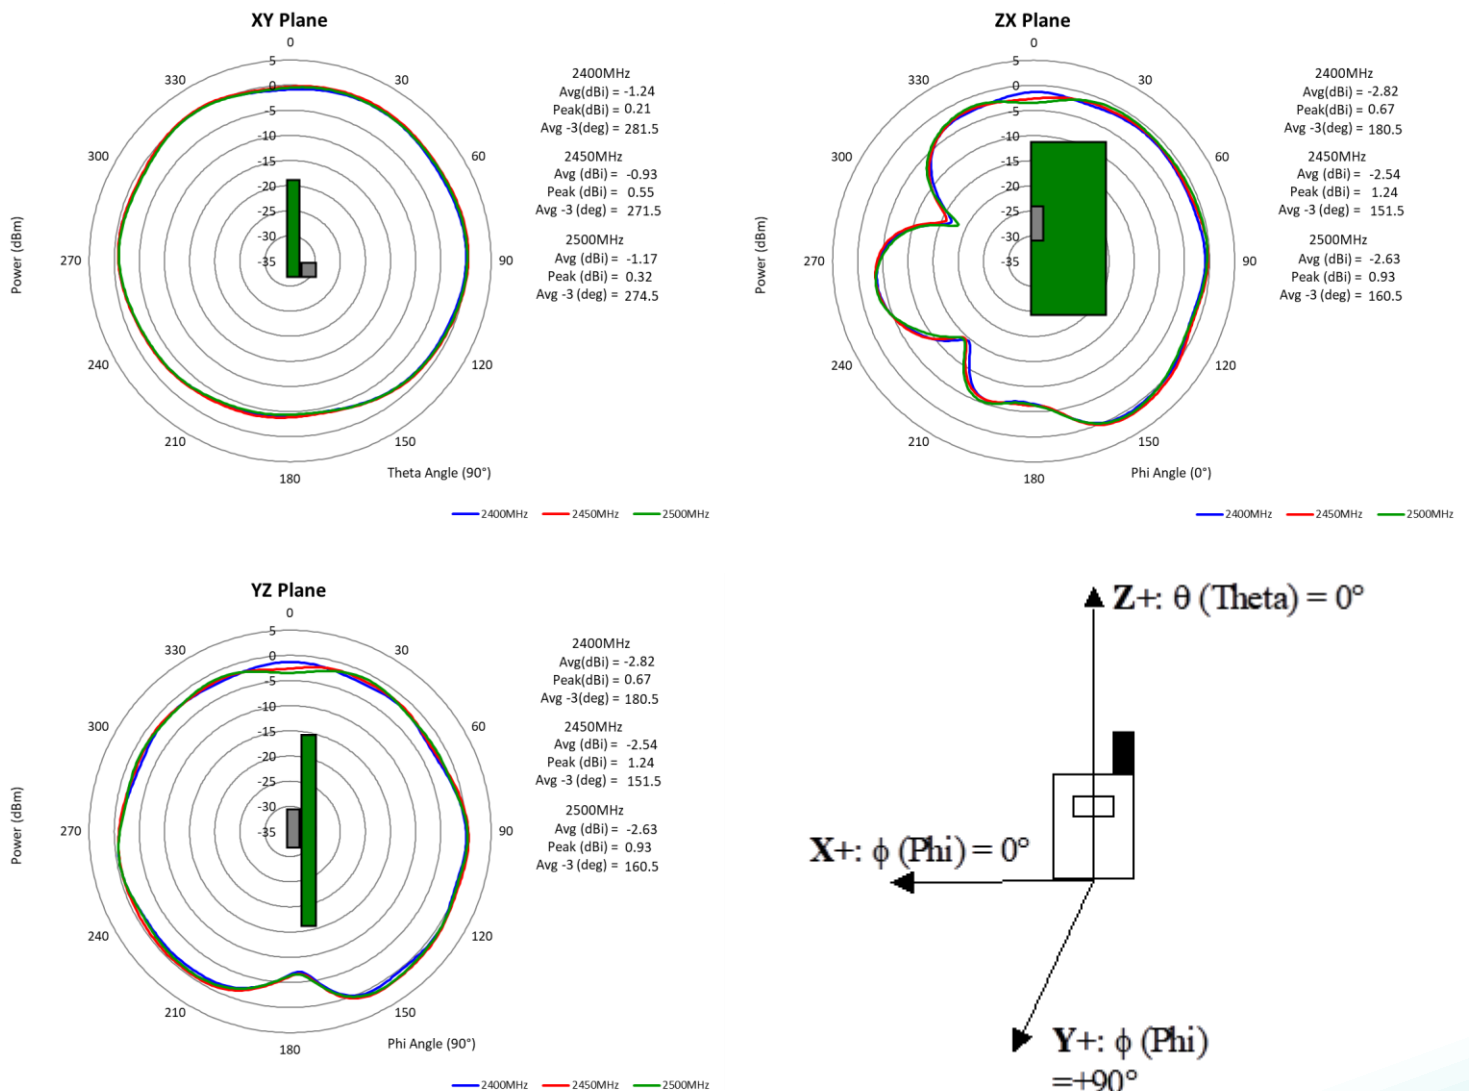

Issue: 1837



In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

PACKAGING

1. Tape and reel packing with plastic vacuum bag.
1000 PCS/ REEL, 4 Reels/ BOX

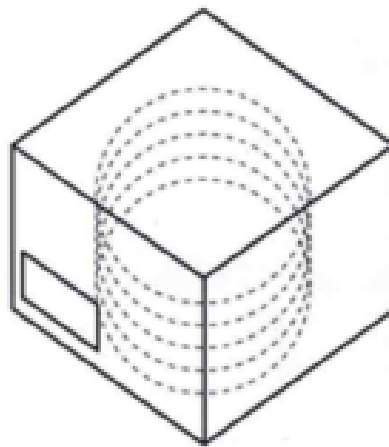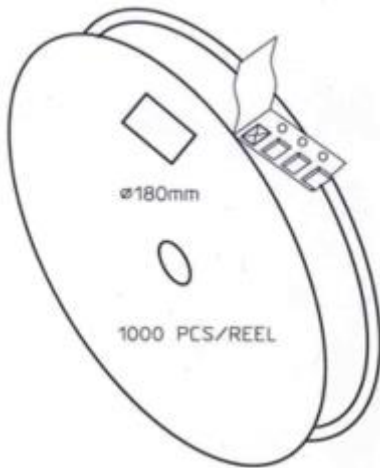

2. MSL: Level 3

2.1 Calculated shelf life in sealed bag: 12 months at $< 30^{\circ}\text{C}$ and 60% relative humidity (RH)

2.2 Peak temperature in reflow: 260°C

2.3 After bag is opened, devices that will be subjected to reflow solder or other temperature process must:

- a) Mount within: 168 hours of factory conditions $\leq 30^{\circ}\text{C}/60\%$
- b) stored at $< 20\%$ RH

2.4 Devices require bake, before mounting, if:

- a) Humidity Indicator Card is $> 20\%$ when read at $23 \pm 5^{\circ}\text{C}$
- b) 3a or 3b not met

2.5 If baking is required, devices may be baked for 24 hours at $125\sim 130^{\circ}\text{C}$



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.