

FASTON Housings

Product Facts

- Straight, right-angle, multiple position and special application housings available
- Various materials and temperature ratings available
- Accept FASTON receptacles
- Special application housings include microswitch, gas valve, wax motor and water valve housings
- Available in .312, .250, .205, .187 and .110 Series
- Translucent plastic insulating sleeves in both straight and flag configurations




FASTON housings are designed to be used with the FASTON terminal line. They come in sizes ranging from .312, .250, .205, .187 and .110 and are available in multiple positions and configurations. Included in this line are special connectors, including water valve connectors,

microswitch connectors, gas valve connectors, and various other special application connectors. Many of these housings are available in both V-2 and V-0 rated materials. Translucent plastic insulating sleeves are available for use with FASTON receptacles and flags.

FASTON Housings (Continued)

AMPIP Post-Insulation Pods

Flag Style Receptacle Housings

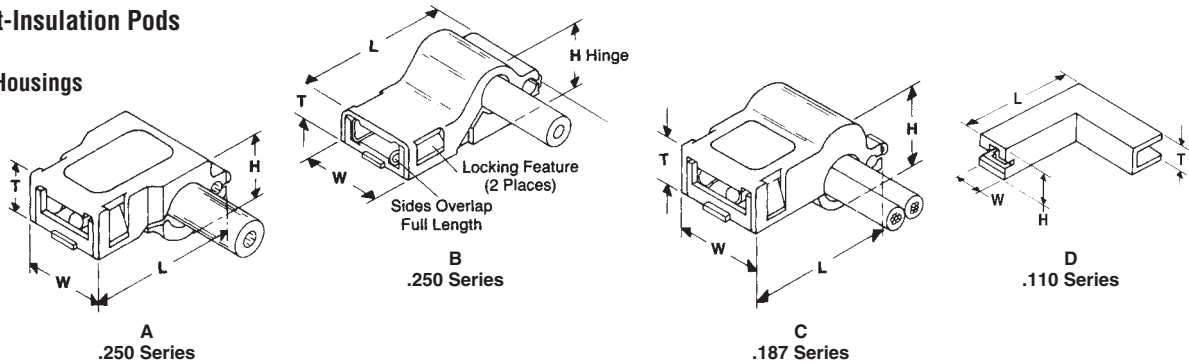


Style	Material	UL 94 ¹	Color	Insulation Dia. Max.	Dimensions				Part Number	Type	Accepts Terminal		
					L	T	W	H					
A	Nylon	V2	Natural	.210 5.33	.787 19.99	.266 6.76	.448 11.38	.360 9.14	1-480298-0	Continuous Strip	"250" Series Flag FASTON Tab-Lok Receptacles 41531, 41532, 42511, 61156, 63445	X	X
		1-480307-1											
		V0	Natural						1-480307-7	Loose Piece			
		V2	Nat. 150°						1-480307-6				
		V2	Natural						1-480307-8 ³				
B	Nylon	V2	Natural	.140 3.56 or (2) .110 2.79	.732 18.59	.180 4.57	.460 11.68	.315 8.00	1-480296-0	Continuous Strip	"250" Series Flag FASTON Commercial Receptacle 60290, 60736, 62418	X	X
									1-480306-1				
									C	Nylon			
V	Natural	1-480487-4 ³	—	—									
D	Nylon	V2	Natural	—	.550 13.97	.205 5.21	.225 5.72	.200 5.08	360040-1	Loose Piece	"110" Series FASTON 61070, 61481, 62336	X	X

¹ Flammability rating of plastic material.

² Does not accept commercial series.

³ Material according to IEC 60335-1.

Straight Style Receptacle Housing

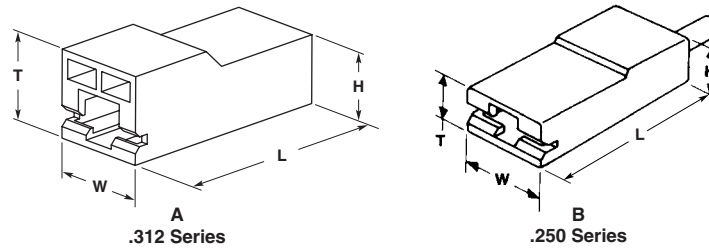


Style	Type	Material	UL 94 ¹	Color	Insulation Dia. Max.	Dimensions				Part Number	Accepts Terminal				
						L	T	W	H						
A	Loose Piece	Nylon	V0	Black	.200	1.035	.400	.440	.310	1969186-1	"312" Series FASTON Receptacles	X	X		
			V2	Natural	5.08	26.29	10.16	11.18	7.87	1969186-2					
B	Loose Piece	Nylon	V2	Natural	.260 6.60	.961 24.40	.181 4.60	.358 9.10	.314 8.00	171706-1	"250" Series FASTON Receptacles ³	X	X		
			V2	Natural	.224 5.69	1.03 26.20	.225 6.70	.490 12.40	.285 7.20	521053-1		—	—		
			V2	Natural						1-480416-0		X	X		
			V0	Natural						1-480416-7					
			V2	Natural 150°	.200 5.08	.920 23.37	.280 6.60	.390 9.91	.298 7.57	1-480416-8		—	—		
			V2	Black						1-480416-1					
			V2	Natural						2-480416-2 ²					
			V2	Natural	.187 4.75	.995 25.30	.193 4.90	.354 9.00	.252 6.40	280232		—	—		
			V0	Natural	.187 4.75	.995 25.30	.193 4.90	.354 9.00	.252 6.40	280232-6		—	—		
			V2	Natural	.169 4.30	.960 24.40	.181 4.60	.366 9.30	.209 5.30	336369-1		X	—		
				Polypropylene	HB	Clear	.161 4.10	.960 24.40	.181 4.60	.362 9.20		.209 5.30	735075	X	—

FASTON Housings (Continued)


AMPIP Post-Insulation Pods (Continued)

Straight Style


Receptacle Housing (Continued)



C
.**250** Series



D
.**205/.187** Series



E
.**110** Series



Style	Type	Material	UL 94 ¹	Color	Insulation Dia. Max.	Dimensions					Part Number	Accepts Terminal	UL	CS
						L	T	W	H					
C	Loose Piece	Nylon	V2	Natural	.125 3.18	.955 24.26	—	.570 14.48	.190 4.83		1-480458-0	"250" Series FASTON Economy Receptacles 42660, 42743, 42845, 61202	X	X
				Natural	.180 4.57	.775 19.69	.225 5.72	.338 8.59	.245 6.22		1-480418-0	"205" Series FASTON Receptacles 42197, 42198, 42710, 42712, 42713, 60904	X	X
D	Loose Piece	Nylon	V2	Natural	.170 4.32	.775 19.69	.215 5.46	.308 7.82	.235 5.97		1-480435-0	"187" Series FASTON Receptacles 42373, 42374, 42452, 42453, 42617, 60487, 60573, 62137, 62138, 62187, 63475, 63477	X	X
											1-480435-5 ²		—	—
E	Loose Piece	Nylon	V2	Natural	.150 3.81	.790 20.07	—	.235 5.97	.240 6.10		1-480417-0	"110" Series FASTON Receptacles 42067, 42068, 42236, 42398, 42399, 42415, 60118, 60197, 60577, 60601, 60729, 61158, 61400, 61457, 61818, 62050, 62094, 62191, 62345	X	X
				Black	.150 3.81	.790 20.07	—	.235 5.97	.240 6.10		1-480417-1			

¹ Flammability rating of plastic material.

² Material according to IEC 60335-1.

Insulation Sleeves For FASTON Receptacle

Material — Soft Vinyl Chloride Cloudy




Style	FASTON Series	Dimensions					Part Number
		D	E	L	W	H	
		.079 2.00					170823-3
		.098 2.50	.748 19.00	.945 24.00	.315 8.00	.138 3.50	170823-2
		.126 3.20	.866 22.00	1.06 27.00	.315 8.00	.138 3.50	1-170823-8
			.787 20.00	.984 25.00			1-170823-5
		.138 3.50	1.18 30.00	1.38 35.00	.315 8.00	.138 3.50	1-170823-9
			1.38 35.00	1.57 40.00			2-170823-0
A		.189 4.80	.787 20.00	.984 25.00	.315 8.00	.138 3.50	170823-6
	205	.098 2.50	.709 18.00	.906 23.00	.256 6.50	.118 3.00	4-170823-1
		.087 2.20	.709 18.00	.906 23.00	.228 5.80		1-170823-3
	187	.098 2.50	.591 15.00	.787 20.00	.228 5.80	.087 2.20	1-170823-4
		.071 1.80	.300 16.00	.827 21.00	.157 4.00	.083 2.10	170823-9
		.098 2.50					170823-1
		.126 3.20	.571 14.50	.728 18.50	.335 8.50	.177 4.50	170891-1
	250	.189 4.80					170891-2
B		.126 3.20	.488 12.40	.587 14.90	.256 6.50	.118 3.00	3-170823-8

Note: All part numbers are RoHS compliant.

FASTON Housings (Continued)

Multi-Position Housings

.250 [6.35] Series

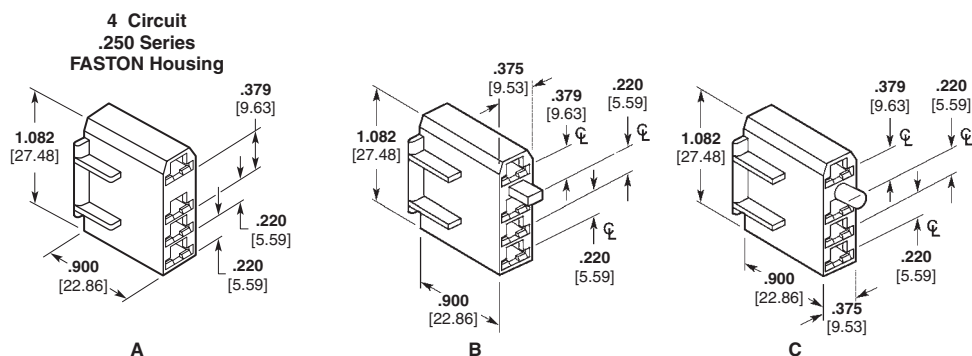


Style	Material	UL 94 ¹	Color	Part Number	Accepts Terminals		
A	Nylon	V2	Black	520987-1	.250 Low Insertion Terminals	X	X
			Natural	520987-2		—	—
				520987-6 ²		—	—
		V0	Black	520987-4		X	X
			Natural	520987-5		—	—
B	Nylon	V2	Black	521065-1	.250 Low Insertion Terminals	X	X
C	Nylon	V2	Black	521066-1	.250 Low Insertion Terminals	X	X

¹ Flammability rating of plastic material.

² Material according to IEC 60335-1.

Multi-Position Housings

.110 [2.79] Series Ignition Connectors

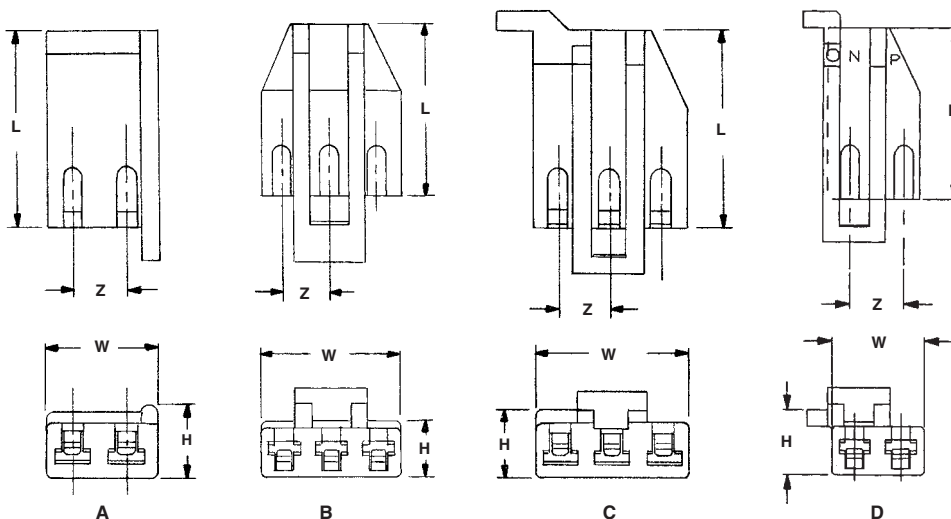

Style	Material	UL 94 ¹	Color	Dimensions				Part Number	Accepts Terminal ²		
				Z	W	H	L				
A	Nylon	V2	Black	<u>.224</u> 5.69	<u>.470</u> 11.94	<u>.305</u> 7.75	<u>.825</u> 20.96	520206-2	62942, 63021, 63093	X	X
D	Nylon	V2	<u>Black</u> Yellow	<u>.224</u> 5.69	<u>.444</u> 11.28	<u>.315</u> 8.00	<u>.827</u> 21.01	<u>520217-2</u> <u>520217-3</u>	62942, 63021, 63093	X	X
	Polyester	HB	Natural					<u>520217-4</u>			
B	Nylon	V2	<u>Natural</u> Black	<u>.224</u> 5.69	<u>.668</u> 16.97	<u>.235</u> 5.97	<u>.825</u> 20.96	<u>520219-1</u> <u>520219-2</u>	62942, 63021, 63093	X	X
	Polyester	HB	Black	<u>.224</u> 5.69	<u>.668</u> 16.97	<u>.235</u> 5.97	<u>.825</u> 20.96	520219-4			
C	Nylon	V2	Black	<u>.224</u> 5.69	<u>.444</u> 11.28	<u>.315</u> 8.00	<u>.866</u> 22.00	520220-2	63093	X	X

¹ Flammability rating of plastic material.


² For dimensions see TE customer drawing.

Note: All part numbers are RoHS compliant.


FASTON Housings (Continued)

Housings for Special Applications







Appliance Connectors Door Interlock Switch

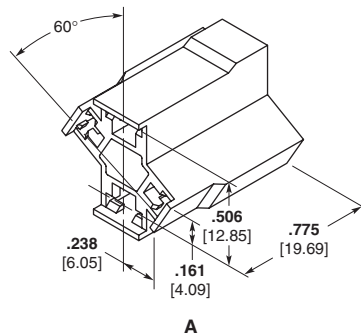

A

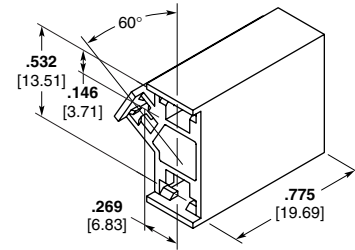

B

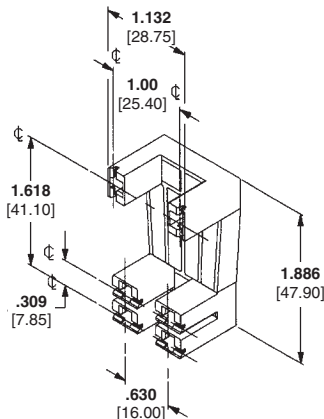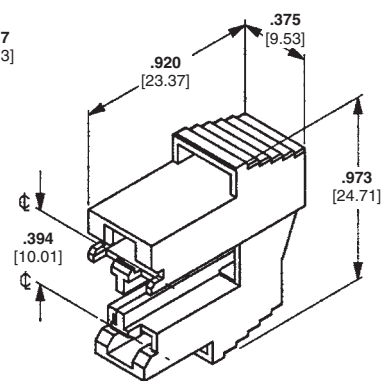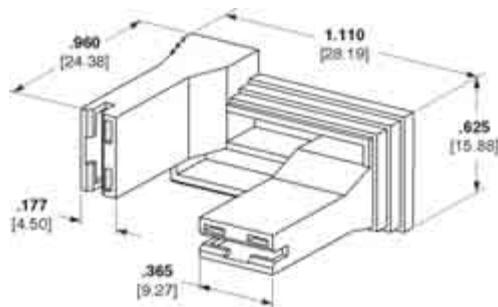
C
T-Motor Connector

E
Potter & Brumfield Relay Connector

D
T-Motor Connector

F
Pressure Switch

G
T9A Relay Connector

H
RF Relay Connector

Style	Material	UL 94 ¹	Color	Part Number	Accepts Terminals		
A	Nylon	V2	Natural 150°C	521251-1	110/187	X	—
			Natural 150°C	520978-1	110/187	X	X
B	Nylon	V2	Natural 150°C	521069-1	250 LIF	X	X
			Black	521070-1	250 LIF	X	X
C	Nylon	V2	Black	521140-1	63981-1	X	X
D	Nylon	V2	Black	521148-1	187 LIF/ 250 LIF	X	X
E	Nylon	V0	Natural	521785-1	250 LIF	X	X
F	Nylon	V0	Natural	521771-1	250 LIF	X	X
G	Nylon	V0	Natural				
H	Nylon	V0	Natural				


¹ Flammability rating of plastic material.

Note: All part numbers are RoHS compliant.

FASTON Housings (Continued)

Housings for Special Applications (Continued)

Microswitch Connectors

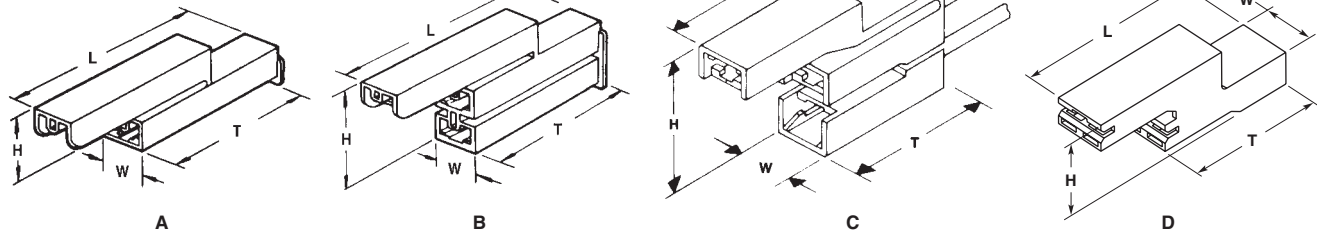


Style	Type	Material	UL 94 ¹	Color	Insulation Dia. Max.	Dimensions				Part Number	Accepts Terminal		
						L	T	W	H				
A	Loose Piece	Nylon	V2	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.520 13.20	174712-1	187 Series MK II Positive Lock Receptacles 170324, 170325, 170326	X	X
			V0	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.520 13.20	1-174712-1			
B	Loose Piece	Nylon	V2	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.770 19.50	172075-1	187 Series MK II Positive Lock Receptacles 170324, 170325, 170326	X	X
			V0	Natural	.157 4.00	1.720 43.70	1.035 26.30	.307 7.80	.770 19.50	1-172075-1			
C	Loose Piece	Nylon	V2	Natural	.170 4.32	1.655 42.04	.845 21.46	.317 8.05	.875 22.23	520212-1	187 Series FASTON Receptacles 42373, 42374, 42452, 42453, 42617, 60487, 60573, 62137, 62187	X	X
				Red						520212-2			
			V0	Natural	520212-3								
			V2	Natural	360010-1								
			V0	Natural	360010-5 ²								
									360010-2		—	—	
											X	X	
D	Loose Piece	Nylon	V0	Natural	.195 4.95	1.500 38.10	.981 24.92	.370 9.40	.536 13.61	521955-1	250 Series MK III Positive Lock Receptacles 63993, 63854, 1217092	X	X

¹ Flammability rating of plastic material.


² Material according to IEC 60335-1.

Gas Valve Connectors

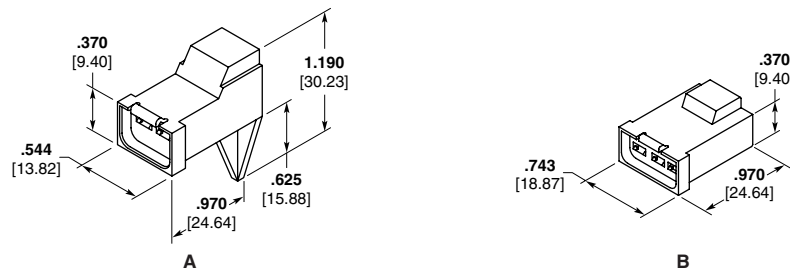

Style	Material	UL 94	Color	Part Number	Accepts Terminal	UL	SP
A	Nylon	V2	Natural	521306-1	1217345-1	X	X
B	Nylon	V2	Natural	521307-1	1217345-1	X	X

Wax Motor Connector




Style	Material	UL 94	Color	Part Number	Accepts Terminal	UL	SP
A	Nylon	V0	Natural	521766-1	250 Series FASTON and Positive Lock Mark III Terminals. Examples include 63306 and 63854.	X	X

Note: All part numbers are RoHS compliant.

FASTON Housings (Continued)

250 Series Water Valve Coil Connector

This connector is designed to mate with the appliance industry's standard water valve coil. The connector is suitable for such applications as washing machine mixing valves, dishwasher fill valves, and refrigerators with automatic ice makers. The housing has a unique internal cavity design to accommodate either two Positive Lock or two budget and LIF FASTON receptacles.

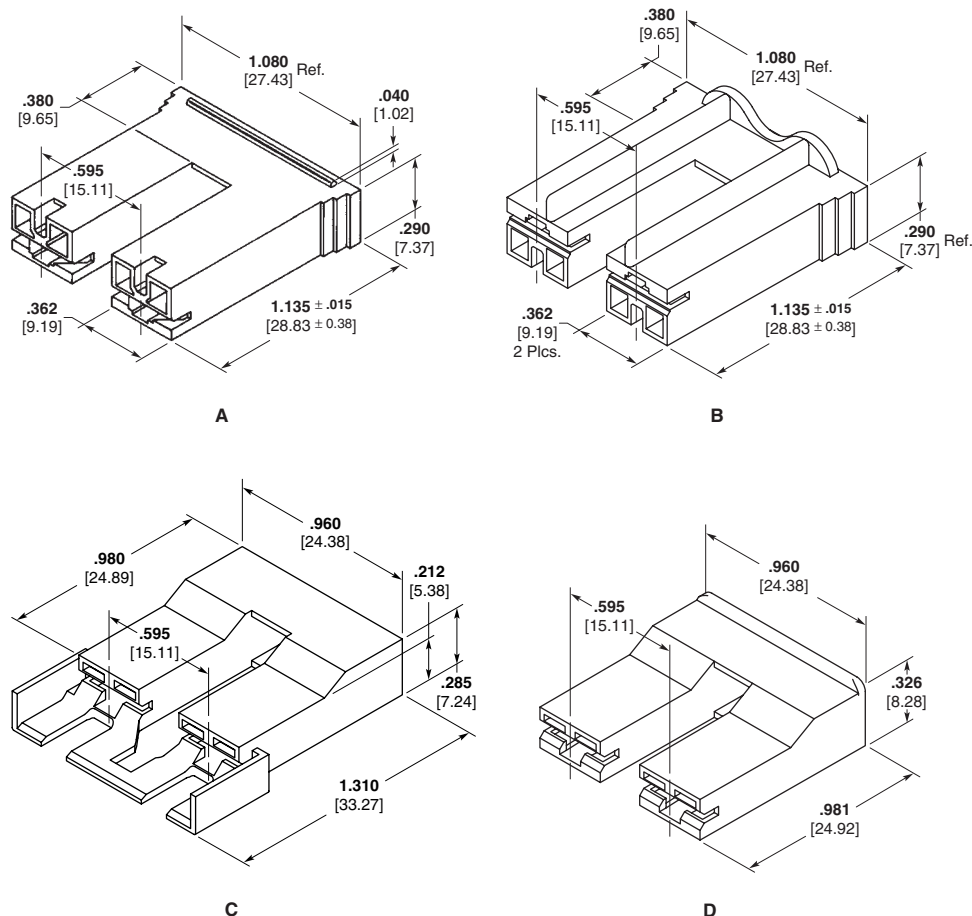

Product Facts

- Helps prevent terminal back-out of housing through plastic retention feature
- Higher disengagement forces possible with Positive Lock or Low Insertion Force (LIF) FASTON receptacles (hole required in mating tab)
- Recognized under the Component Program of Underwriters Laboratories, Inc., File Nos. E28476 and E13288.



Style	Material	UL 94 ²	Color ⁴	Part Number	Accepts		
A	Nylon	V2	Natural	520935-1	250 Series FASTON and Positive Lock Mark II Terminals. Examples Include 42400, 42510, 63306, 63097 ¹ , 63119 ¹ , 63239 ¹ , and 170328 ¹	X	X
			Red	520935-2			
			Black	520935-3 ³			
			Green	520935-4			
			Blue	520935-5			
			Yellow	520935-6			
			Brown	520935-7			
		V0	Natural	1-520935-1		X	X
			Red	1-520935-2			
			Blue	1-520935-5			
B	Nylon	V0	Natural	521229-1	250 Series FASTON and Positive Lock Mark III Terminals. Examples Include 63306 and 63854	X	—
			Red	521229-2			
C	Nylon	V2	Natural	521253-1		X	X
			Red	521253-2		X	X
		V0	Red	1-521253-2		X	X
			Green	1-521253-3		X	X
			Blue	1-521253-7		X	X
			Natural	521119-1		X	X
D	Nylon	V2	Putty	521119-2			
			Blue	521119-4			

¹ For Positive Lock mark II receptacles, refer to pages 78-83.

² Flammability rating of plastic material.




³ Weather resistant material.

⁴ Additional colors available.

Note: All part numbers are RoHS compliant.

FASTON Housings (Continued)

187 Series Connector

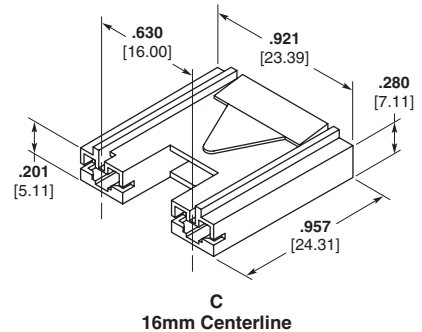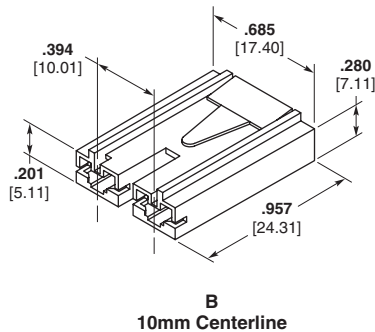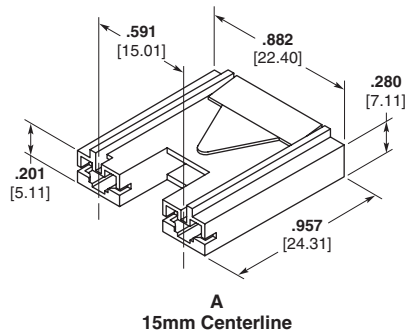

Style	Material	UL 94	Color	Part Number	Accepts Terminals
A	Nylon	V0	Natural	176498-1	170324, 170325, 170326
			Black	176498-2	
			Yellow	176498-4	
			Blue	176498-6	
B	Nylon	V0	Natural	179720-1	170324, 170325, 170326
			Black	179720-2	
			Yellow	179720-4	
			Blue	179720-6	
C	Nylon	V0	Red	179720-7	170324, 170325, 170326
			Natural	353148-1	
			Yellow	353148-4	
			Green	353148-5	
			Blue	353148-6	

Note: All part numbers are RoHS compliant.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.