

## Description

The 74LVC1G04 is a single inverter gate with a standard push-pull output. The device is designed for operation with a power supply range of 1.65V to 5.5V. The inputs are tolerant to 5.5V allowing this device to be used in a mixed voltage environment. The device is fully specified for partial power down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output preventing damaging current backflow when the device is powered down.


The gate performs the positive Boolean function:

$$Y = \overline{A}$$

## Features

- Wide Supply Voltage Range from 1.65 to 5.5V
- $\pm 24\text{mA}$  Output Drive at 3.3V
- CMOS Low Power Consumption
- $I_{OFF}$  Supports Partial-Power-Down Mode Operation
- Inputs Accept Up to 5.5V
- ESD Protection Tested per JESD 22
  - Exceeds 200-V Machine Model (A115)
  - Exceeds 2000-V Human Body Model (A114)
  - Exceeds 1000-V Charged Device Model (C101)
- Latch-Up Exceeds 100mA per JESD 78, Class I
- Range of Package Options
- Direct Interface with TTL Levels
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

## Pin Assignments

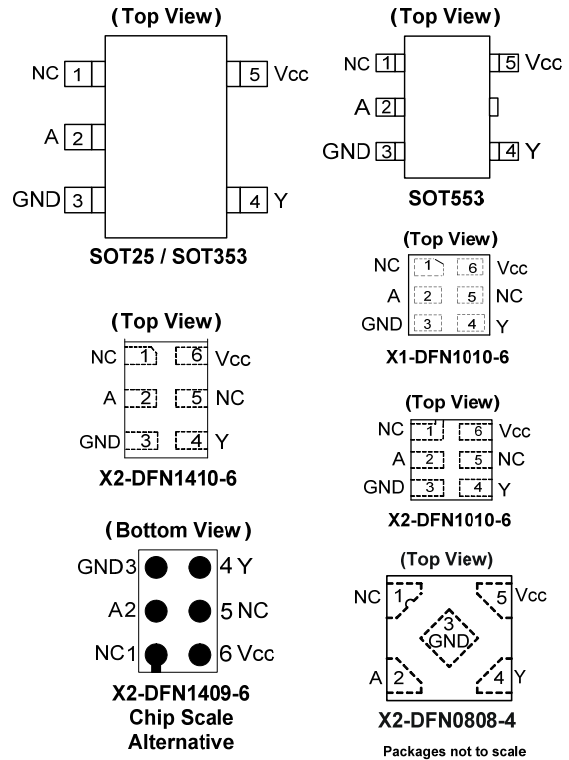

## Applications

- Voltage Level Shifting
- General Purpose Logic
- Power Down Signal Isolation
- Wide Array of Products Such as.
  - PCs, Networking, Notebooks, Netbooks, PDAs
  - Tablet Computers, E-readers
  - Computer Peripherals, Hard Drives, CD/DVD ROM
  - TV, DVD, DVR, set top box
  - Cell Phones, Personal Navigation / GPS
  - MP3 players, Cameras, Video Recorders

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
  2. See [http://www.diodes.com/quality/lead\\_free.html](http://www.diodes.com/quality/lead_free.html) for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

## Ordering Information

74 LVC1G 04 XXX -7

| Logic Device                                                              | Function                          | Package                                                                                                                                                 | Packing             |
|---------------------------------------------------------------------------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 74 : Logic Prefix<br>LVC : 1.65 to 5.5 V<br>Logic Family<br>1G : One Gate | 04 : 1-Input<br>Inverter / Buffer | W5 : SOT25<br>SE : SOT353<br>Z : SOT553<br>FS3 : X2-DFN0808-4<br>FW5 : X1-DFN1010-6<br>FW4 : X2-DFN1010-6<br>FX4 : X2- DFN1409-6<br>FZ4 : X2- DFN1410-6 | -7 : 7" Tape & Reel |


| Part Number    | Package Code | Package<br>(Notes 4 & 5)               | Package<br>Size                                       | 7" Tape and Reel |                    |
|----------------|--------------|----------------------------------------|-------------------------------------------------------|------------------|--------------------|
|                |              |                                        |                                                       | Quantity         | Part Number Suffix |
| 74LVC1G04W5-7  | W5           | SOT25                                  | 3.0mm X 2.8mm X 1.2mm<br>0.95 mm lead pitch           | 3000/Tape & Reel | -7                 |
| 74LVC1G04SE-7  | SE           | SOT353                                 | 2.0mm X 2.0mm X 1.1mm<br>0.65 mm lead pitch           | 3000/Tape & Reel | -7                 |
| 74LVC1G04Z-7   | Z            | SOT553                                 | 1.6mm X 1.6 mm X 0.62mm<br>0.5 mm lead pitch          | 4000/Tape & Reel | -7                 |
| 74LVC1G04FS3-7 | FS3          | X2-DFN0808-4                           | 0.9mm X 0.9 mm X 0.35mm<br>0.5 mm pad pitch (diamond) | 5000/Tape & Reel | -7                 |
| 74LVC1G04FW5-7 | FW5          | X1-DFN1010-6                           | 1.0mm X 1.0mm X 0.5mm<br>0.35 mm pad pitch            | 5000/Tape & Reel | -7                 |
| 74LVC1G04FW4-7 | FW4          | X2-DFN1010-6                           | 1.0mm X 1.0mm X 0.4mm<br>0.35 mm pad pitch            | 5000/Tape & Reel | -7                 |
| 74LVC1G04FX4-7 | FX4          | X2-DFN1409-6<br>Chip scale alternative | 1.4mm X 0.9mm X 0.4mm<br>0.5 mm pad pitch             | 5000/Tape & Reel | -7                 |
| 74LVC1G04FZ4-7 | FZ4          | X2-DFN1410-6                           | 1.4mm X 1.0mm X 0.4mm<br>0.5 mm pad pitch             | 5000/Tape & Reel | -7                 |

Notes: 4. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.  
5. The taping orientation is located on our website at <http://www.diodes.com/datasheets/ap02007.pdf>

## Pin Descriptions

| Pin Name        | Description    |
|-----------------|----------------|
| NC              | No Connection  |
| A               | Data Input     |
| GND             | Ground         |
| Y               | Data Output    |
| V <sub>CC</sub> | Supply Voltage |

## Logic Diagram

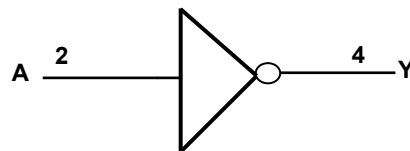

## Function Table

| Inputs | Output |
|--------|--------|
| A      | Y      |
| H      | L      |
| L      | H      |

**Absolute Maximum Ratings** (Notes 6, 7) (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Symbol                            | Description                                                           | Rating                       | Unit |
|-----------------------------------|-----------------------------------------------------------------------|------------------------------|------|
| ESD HBM                           | Human Body Model ESD Protection                                       | 2                            | kV   |
| ESD CDM                           | Charged Device Model ESD Protection                                   | 1                            | kV   |
| ESD MM                            | Machine Model ESD Protection                                          | 200                          | V    |
| V <sub>CC</sub>                   | Supply Voltage Range                                                  | -0.5 to 6.5                  | V    |
| V <sub>I</sub>                    | Input Voltage Range                                                   | -0.5 to 6.5                  | V    |
| V <sub>O</sub>                    | Voltage Applied to Output in High Impedance or I <sub>OFF</sub> State | -0.5 to 6.5                  | V    |
| V <sub>O</sub>                    | Voltage Applied to Output in High or Low State.                       | -0.5 to V <sub>CC</sub> +0.5 | V    |
| I <sub>IK</sub>                   | Input Clamp Current V <sub>I</sub> < 0                                | -50                          | mA   |
| I <sub>OK</sub>                   | Output Clamp Current                                                  | -50                          | mA   |
| I <sub>O</sub>                    | Continuous Output Current                                             | ±50                          | mA   |
| I <sub>CC</sub> , I <sub>GN</sub> | Continuous Current Through V <sub>CC</sub> or GND                     | ±100                         | mA   |
| T <sub>J</sub>                    | Operating Junction Temperature                                        | -40 to +150                  | °C   |
| T <sub>STG</sub>                  | Storage Temperature                                                   | -65 to +150                  | °C   |

- Notes:
- Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.
  - Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum voltage. The ratings of both current and voltage must be maintained within the controlled range..

**Recommended Operating Conditions** (Note 8) (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Symbol          | Parameter                          |                                             | Min                    | Max                    | Unit |
|-----------------|------------------------------------|---------------------------------------------|------------------------|------------------------|------|
| V <sub>CC</sub> | Operating Voltage                  | Operating                                   | 1.65                   | 5.5                    | V    |
|                 |                                    | Data retention only                         | 1.5                    | —                      | V    |
| V <sub>IH</sub> | High-Level Input Voltage           | V <sub>CC</sub> = 1.65V to 1.95V            | 0.65 X V <sub>CC</sub> | —                      | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V              | 1.7                    | —                      |      |
|                 |                                    | V <sub>CC</sub> = 3V to 3.6V                | 2                      | —                      |      |
|                 |                                    | V <sub>CC</sub> = 4.5V to 5.5V              | 0.7 X V <sub>CC</sub>  | —                      |      |
| V <sub>IL</sub> | Low-Level Input voltage            | V <sub>CC</sub> = 1.65V to 1.95V            | —                      | 0.35 X V <sub>CC</sub> | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V              | —                      | 0.7                    |      |
|                 |                                    | V <sub>CC</sub> = 3V to 3.6V                | —                      | 0.8                    |      |
|                 |                                    | V <sub>CC</sub> = 4.5V to 5.5V              | —                      | 0.3 X V <sub>CC</sub>  |      |
| V <sub>I</sub>  | Input Voltage                      |                                             | 0                      | 5.5                    | V    |
| V <sub>O</sub>  | Output Voltage                     |                                             | 0                      | V <sub>CC</sub>        | V    |
| I <sub>OH</sub> | High-Level Output Current          | V <sub>CC</sub> = 1.65V                     | —                      | -4                     | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V                      | —                      | -8                     |      |
|                 |                                    | V <sub>CC</sub> = 2.7V                      | —                      | -12                    |      |
|                 |                                    | V <sub>CC</sub> = 3V                        | —                      | -16                    |      |
|                 |                                    |                                             | —                      | -24                    |      |
|                 |                                    | V <sub>CC</sub> = 4.5V                      | —                      | -32                    |      |
| I <sub>OL</sub> | Low-Level Output Current           | V <sub>CC</sub> = 1.65V                     | —                      | 4                      | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V                      | —                      | 8                      |      |
|                 |                                    | V <sub>CC</sub> = 2.7V                      | —                      | 12                     |      |
|                 |                                    | V <sub>CC</sub> = 3V                        | —                      | 16                     |      |
|                 |                                    |                                             | —                      | 24                     |      |
|                 |                                    | V <sub>CC</sub> = 4.5V                      | —                      | 32                     |      |
| Δt/ΔV           | Input Transition Rise or Fall Rate | V <sub>CC</sub> = 1.8V ± 0.15V, 2.5V ± 0.2V | —                      | 20                     | ns/V |
|                 |                                    | V <sub>CC</sub> = 3.3V ± 0.3V               | —                      | 10                     |      |
|                 |                                    | V <sub>CC</sub> = 5V ± 0.5V                 | —                      | 5                      |      |
| T <sub>A</sub>  | Operating Free-Air Temperature     | —                                           | -40                    | +125                   | °C   |

Note: 8. Unused inputs should be held at V<sub>CC</sub> or Ground.

**Electrical Characteristics** (All typical values are at  $V_{CC} = 3.3V$ ,  $T_A = +25^\circ C$ )

| Symbol          | Parameter                  | Test Conditions                  | $V_{CC}$      | -40°C to +85°C |           |          | -40°C to +125°C |           | Unit    |
|-----------------|----------------------------|----------------------------------|---------------|----------------|-----------|----------|-----------------|-----------|---------|
|                 |                            |                                  |               | Min            | Typ.      | Max      | Min             | Max       |         |
| $V_{OH}$        | High-Level Output Voltage  | $I_{OH} = -100\mu A$             | 1.65V to 5.5V | $V_{CC} - 0.1$ | —         | —        | $V_{CC} - 0.1$  | —         | V       |
|                 |                            | $I_{OH} = -4mA$                  | 1.65V         | 1.2            | —         | —        | 0.95            | —         |         |
|                 |                            | $I_{OH} = -8mA$                  | 2.3V          | 1.9            | —         | —        | 1.7             | —         |         |
|                 |                            | $I_{OH} = -12mA$                 | 2.7V          | 2.2            | —         | —        | 1.9             | —         |         |
|                 |                            | $I_{OH} = -16mA$                 | 3V            | 2.4            | —         | —        | 2.2             | —         |         |
|                 |                            | $I_{OH} = -24mA$                 |               | 2.3            | —         | —        | 2.0             | —         |         |
|                 |                            | $I_{OH} = -32mA$                 | 4.5V          | 3.8            | —         | —        | 3.4             | —         |         |
| $V_{OL}$        | Low-Level Output Voltage   | $I_{OL} = 100\mu A$              | 1.65V to 5.5V | —              | —         | 0.1      | —               | 0.1       | V       |
|                 |                            | $I_{OL} = 4mA$                   | 1.65V         | —              | —         | 0.45     | —               | 0.7       |         |
|                 |                            | $I_{OL} = 8mA$                   | 2.3V          | —              | —         | 0.3      | —               | 0.45      |         |
|                 |                            | $I_{OL} = 12mA$                  | 2.7V          | —              | —         | 0.4      | —               | 0.6       |         |
|                 |                            | $I_{OL} = 16mA$                  | 3V            | —              | —         | 0.4      | —               | 0.6       |         |
|                 |                            | $I_{OL} = 24mA$                  |               | —              | —         | 0.55     | —               | 0.8       |         |
|                 |                            | $I_{OL} = 32mA$                  | 4.5V          | —              | —         | 0.55     | —               | .8        |         |
| $I_I$           | Input Current              | $V_I = 5.5V$ or GND              | 0 to 5.5V     | —              | $\pm 0.1$ | $\pm 5$  | —               | $\pm 100$ | $\mu A$ |
| $I_{OFF}$       | Power Down Leakage Current | $V_I$ or $V_O = 5.5V$            | 0V            | —              | —         | $\pm 10$ | —               | $\pm 200$ | $\mu A$ |
| $I_{CC}$        | Supply Current             | $V_I = 5.5V$ or GND<br>$I_O = 0$ | 5.5V          | —              | 0.1       | 10       | —               | 200       | $\mu A$ |
| $\Delta I_{CC}$ | Additional Supply Current  | Input at $V_{CC} - 0.6V$         | 3V to 5.5V    | —              | —         | 500      | —               | 5000      | $\mu A$ |
| $C_i$           | Input Capacitance          | $V_i = V_{CC} -$ or GND          | 3.3V          | —              | 5         | —        | —               | —         | pF      |

**Package Characteristics** (All typical values are at  $V_{CC} = 3.3V$ ,  $T_A = +25^\circ C$ )

| Symbol        | Parameter                              | Test Conditions | $V_{CC}$ | Min | Typ | Max | Unit         |
|---------------|----------------------------------------|-----------------|----------|-----|-----|-----|--------------|
| $\theta_{JA}$ | Thermal Resistance Junction-to-Ambient | SOT25           | (Note 9) | —   | 204 | —   | $^\circ C/W$ |
|               |                                        | SOT353          |          | —   | 371 | —   |              |
|               |                                        | SOT553          |          | —   | 231 | —   |              |
|               |                                        | X2-DFN0808-4    |          | —   | 400 | —   |              |
|               |                                        | X1-DFN1010-6    |          | —   | 435 | —   |              |
|               |                                        | X2-DFN1010-6    |          | —   | 445 | —   |              |
|               |                                        | X2-DFN1409-6    |          | —   | 470 | —   |              |
|               |                                        | X2-DFN1410-6    |          | —   | 460 | —   |              |
| $\theta_{JC}$ | Thermal Resistance Junction-to-Case    | SOT25           | (Note 9) | —   | 52  | —   | $^\circ C/W$ |
|               |                                        | SOT353          |          | —   | 143 | —   |              |
|               |                                        | SOT553          |          | —   | 105 | —   |              |
|               |                                        | X2-DFN0808-4    |          | —   | 225 | —   |              |
|               |                                        | X1-DFN1010-6    |          | —   | 250 | —   |              |
|               |                                        | X2-DFN1010-6    |          | —   | 250 | —   |              |
|               |                                        | X2-DFN1409-6    |          | —   | 275 | —   |              |
|               |                                        | X2-DFN1410-6    |          | —   | 265 | —   |              |

Note: 9. Test condition for each of the 8 package types: Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.

## Switching Characteristics

Figure 1 Typical Values at  $T_A = +25^\circ\text{C}$  and nominal voltages 1.8V, 2.5V, 2.7V, 3.3V, and 5.0V.

| Parameter | From Input | To Output | $V_{CC}$                       | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ |     |     | $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ |     | Unit |
|-----------|------------|-----------|--------------------------------|-------------------------------------------------|-----|-----|--------------------------------------------------|-----|------|
|           |            |           |                                | Min                                             | Typ | Max | Min                                              | Max |      |
| $t_{pd}$  | A or B     | Y         | $1.8\text{V} \pm 0.15\text{V}$ | 1.0                                             | 3.0 | 7.5 | 1.0                                              | 9.5 | ns   |
|           |            |           | $2.5\text{V} \pm 0.2\text{V}$  | 0.5                                             | 2.0 | 5.0 | 0.5                                              | 6.5 |      |
|           |            |           | 2.7V                           | 0.5                                             | 2.3 | 5.2 | 0.5                                              | 7.0 |      |
|           |            |           | $3.3\text{V} \pm 0.3\text{V}$  | 0.5                                             | 2.0 | 4.2 | 0.5                                              | 5.5 |      |
|           |            |           | $5.0\text{V} \pm 0.5\text{V}$  | 0.5                                             | 1.6 | 3.7 | 0.5                                              | 5.0 |      |


## Operating Characteristics

$T_A = +25^\circ\text{C}$



| Parameter |                               | Test Conditions    | $V_{CC} = 1.8\text{V}$ | $V_{CC} = 2.5\text{V}$ | $V_{CC} = 3.3\text{V}$ | $V_{CC} = 5\text{V}$ | Unit |
|-----------|-------------------------------|--------------------|------------------------|------------------------|------------------------|----------------------|------|
|           |                               |                    | Typ                    | Typ                    | Typ                    | Typ                  |      |
| $C_{pd}$  | Power Dissipation Capacitance | $f = 10\text{MHz}$ | 16                     | 16                     | 16                     | 16                   | pF   |

## Parameter Measurement Information

From Output  
Under Test



| $V_{CC}$         | Inputs   |              | $V_M$      | $C_L$ | $R_L$        |
|------------------|----------|--------------|------------|-------|--------------|
|                  | $V_I$    | $t_r/t_f$    |            |       |              |
| $1.8V \pm 0.15V$ | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | 30pF  | 1k $\Omega$  |
| $2.5V \pm 0.2V$  | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | 30pF  | 500 $\Omega$ |
| 2.7V             | $V_{CC}$ | $\leq 2.5ns$ | 1.5V       | 50pF  | 500 $\Omega$ |
| $3.3V \pm 0.3V$  | 3.0V     | $\leq 2.5ns$ | 1.5V       | 50pF  | 500 $\Omega$ |
| $5.0V \pm 0.5V$  | $V_{CC}$ | $\leq 2.5ns$ | $V_{CC}/2$ | 50pF  | 500 $\Omega$ |

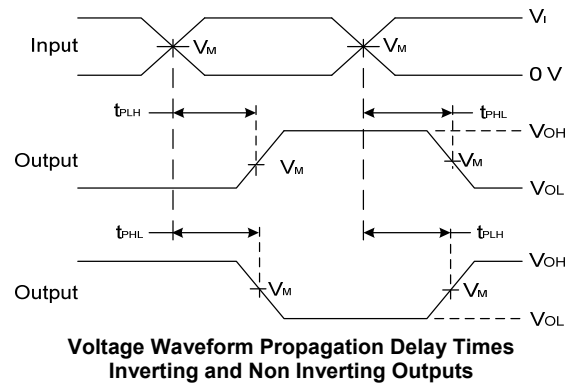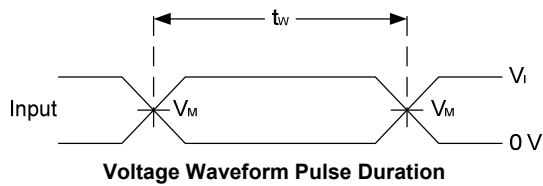


**Figure 1 Load Circuit and Voltage Waveforms**

- Notes:
- A. Includes test lead and test apparatus capacitance.
  - B. All pulses are supplied at pulse repetition rate  $\leq 10MHz$ .
  - C.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .


## Marking Information

### (1) SOT25, SOT353 and SOT553

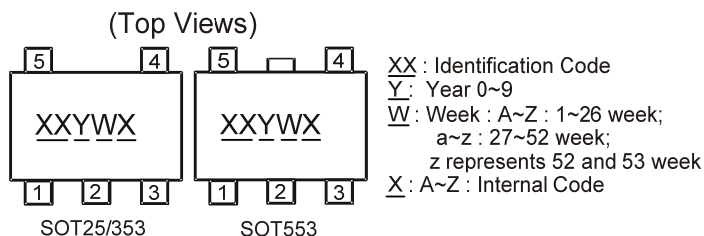

| Part Number   | Package | Identification Code |
|---------------|---------|---------------------|
| 74LVC1G04W5-7 | SOT25   | UU                  |
| 74LVC1G04SE-7 | SOT353  | UU                  |
| 74LVC1G04Z-7  | SOT553  | UU                  |

### (2) DFN Packages

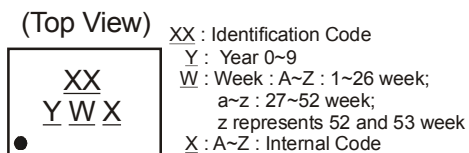


| Part Number    | Package      | Identification Code |
|----------------|--------------|---------------------|
| 74LVC1G04FS3-7 | X2-DFN0808-4 | WU                  |
| 74LVC1G04FW5-7 | X1-DFN1010-6 | V4                  |
| 74LVC1G04FW4-7 | X2-DFN1010-6 | UU                  |
| 74LVC1G04FX4-7 | X2-DFN1409-6 | MC                  |
| 74LVC1G04FZ4-7 | X2-DFN1410-6 | UU                  |

## Package Outline Dimensions (All dimensions in mm.)


Please see AP02002 at <http://www.diodes.com/datasheets/ap02002.pdf> for latest version.

### (1) SOT25

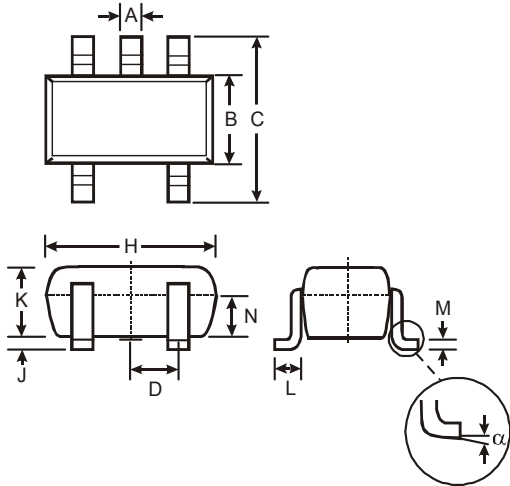


| SOT25                |       |      |      |
|----------------------|-------|------|------|
| Dim                  | Min   | Max  | Typ  |
| A                    | 0.35  | 0.50 | 0.38 |
| B                    | 1.50  | 1.70 | 1.60 |
| C                    | 2.70  | 3.00 | 2.80 |
| D                    | —     | —    | 0.95 |
| H                    | 2.90  | 3.10 | 3.00 |
| J                    | 0.013 | 0.10 | 0.05 |
| K                    | 1.00  | 1.30 | 1.10 |
| L                    | 0.35  | 0.55 | 0.40 |
| M                    | 0.10  | 0.20 | 0.15 |
| N                    | 0.70  | 0.80 | 0.75 |
| $\alpha$             | 0°    | 8°   | —    |
| All Dimensions in mm |       |      |      |

### (2) SOT353

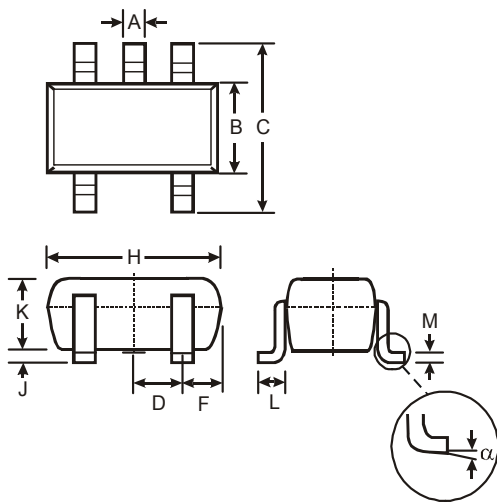

| SOT353               |          |      |
|----------------------|----------|------|
| Dim                  | Min      | Max  |
| A                    | 0.10     | 0.30 |
| B                    | 1.15     | 1.35 |
| C                    | 2.00     | 2.20 |
| D                    | 0.65 Typ |      |
| F                    | 0.40     | 0.45 |
| H                    | 1.80     | 2.20 |
| J                    | 0        | 0.10 |
| K                    | 0.90     | 1.00 |
| L                    | 0.25     | 0.40 |
| M                    | 0.10     | 0.22 |
| $\alpha$             | 0°       | 8°   |
| All Dimensions in mm |          |      |

### (3) SOT553

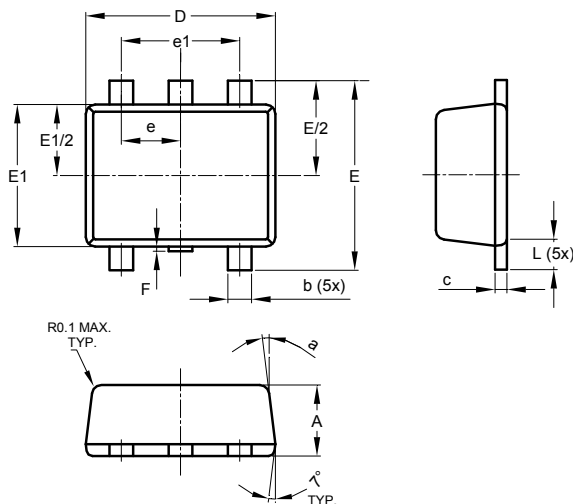


| SOT553               |          |      |      |
|----------------------|----------|------|------|
| Dim                  | Min      | Max  | Typ  |
| A                    | 0.55     | 0.62 | 0.60 |
| b                    | 0.15     | 0.30 | 0.20 |
| c                    | 0.10     | 0.18 | 0.15 |
| D                    | 1.50     | 1.70 | 1.60 |
| E                    | 1.55     | 1.70 | 1.60 |
| E1                   | 1.10     | 1.25 | 1.20 |
| e                    | 0.50 BSC |      |      |
| e1                   | 1.00 BSC |      |      |
| F                    | 0.00     | 0.10 | —    |
| L                    | 0.10     | 0.30 | 0.20 |
| $\alpha$             | 6°       | 8°   | 7°   |
| All Dimensions in mm |          |      |      |



## Package Outline Dimensions (cont.) (All dimensions in mm.)


Please see AP02002 at <http://www.diodes.com/datasheets/ap02002.pdf> for latest version.

### (4) X2-DFN0808-4

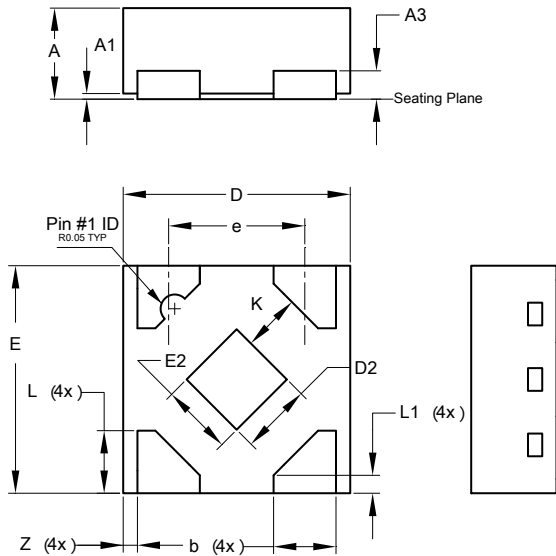

| X2-DFN0808-4         |      |      |      |
|----------------------|------|------|------|
| Dim                  | Min  | Max  | Typ  |
| A                    | 0.25 | 0.35 | 0.30 |
| A1                   | 0    | 0.04 | 0.02 |
| A3                   | -    | -    | 0.13 |
| b                    | 0.17 | 0.27 | 0.22 |
| D                    | 0.75 | 0.85 | 0.80 |
| D2                   | 0.15 | 0.35 | 0.25 |
| E                    | 0.75 | 0.85 | 0.80 |
| E2                   | 0.15 | 0.35 | 0.25 |
| e                    | -    | -    | 0.48 |
| K                    | 0.20 | -    | -    |
| L                    | 0.17 | 0.27 | 0.22 |
| L1                   | 0.02 | 0.12 | 0.07 |
| Z                    | -    | -    | 0.05 |
| All Dimensions in mm |      |      |      |

### (5) X1-DFN1010-6

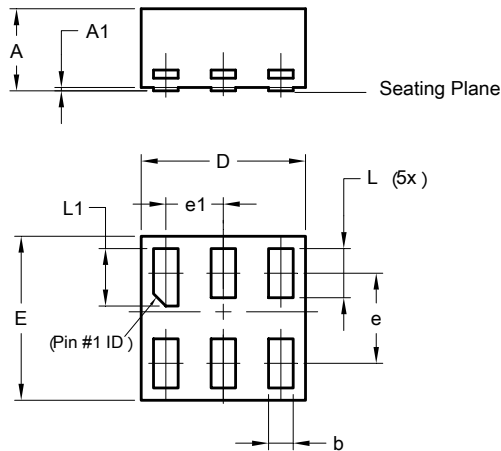


| X1-DFN1010-6         |          |       |      |
|----------------------|----------|-------|------|
| Dim                  | Min      | Max   | Typ  |
| A                    | -        | 0.50  | 0.39 |
| A1                   | -        | 0.04  | -    |
| b                    | 0.12     | 0.20  | 0.15 |
| D                    | 0.95     | 1.050 | 1.00 |
| E                    | 0.95     | 1.050 | 1.00 |
| e                    | 0.55 BSC |       |      |
| e1                   | 0.35 BSC |       |      |
| L                    | 0.27     | 0.35  | 0.30 |
| L1                   | 0.32     | 0.40  | 0.35 |
| All Dimensions in mm |          |       |      |

## Package Outline Dimensions (cont.) (All dimensions in mm.)


Please see AP02002 at <http://www.diodes.com/datasheets/ap02002.pdf> for latest version.

### (6) X2-DFN1010-6

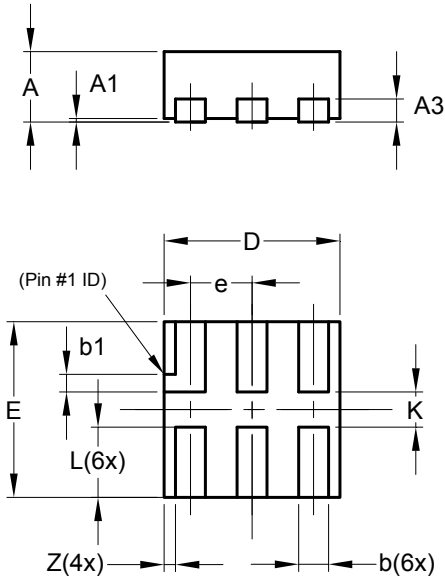


| X2-DFN1010-6         |      |      |       |
|----------------------|------|------|-------|
| Dim                  | Min  | Max  | Typ   |
| A                    | —    | 0.40 | 0.39  |
| A1                   | 0.00 | 0.05 | 0.02  |
| A3                   | —    | —    | 0.13  |
| b                    | 0.14 | 0.20 | 0.17  |
| b1                   | 0.05 | 0.15 | 0.10  |
| D                    | 0.95 | 1.05 | 1.00  |
| E                    | 0.95 | 1.05 | 1.00  |
| e                    | —    | —    | 0.35  |
| L                    | 0.35 | 0.45 | 0.40  |
| K                    | 0.15 | —    | —     |
| Z                    | —    | —    | 0.065 |
| All Dimensions in mm |      |      |       |

### (7) X2-DFN1409-6 CHIP SCALE ALTERNATIVE

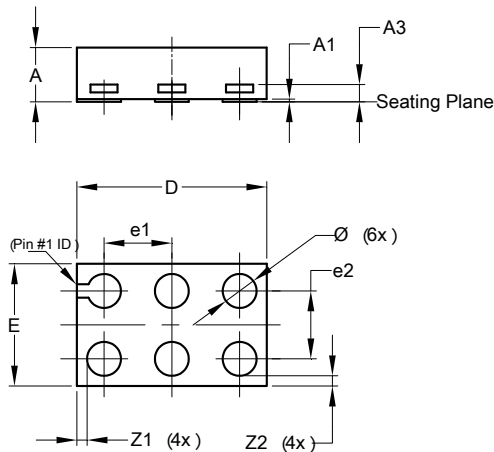

| X2-DFN1409-6         |      |      |       |
|----------------------|------|------|-------|
| Dim                  | Min  | Max  | Typ   |
| A                    | -    | 0.40 | 0.39  |
| A1                   | 0    | 0.05 | 0.02  |
| A3                   | -    | -    | 0.13  |
| Ø                    | 0.20 | 0.30 | 0.25  |
| D                    | 1.35 | 1.45 | 1.40  |
| E                    | 0.85 | 0.95 | 0.90  |
| e1                   | -    | -    | 0.50  |
| e2                   | -    | -    | 0.50  |
| Z1                   | -    | -    | 0.075 |
| Z2                   | -    | -    | 0.075 |
| All Dimensions in mm |      |      |       |

### (8) X2-DFN1410-6

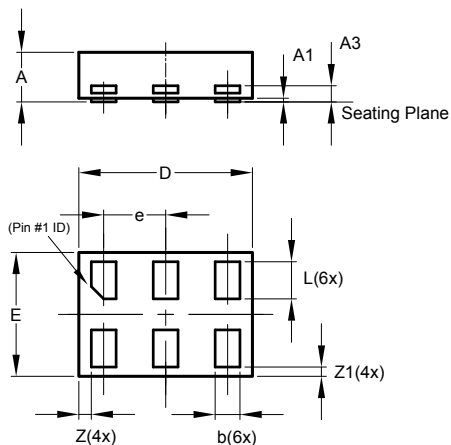


| X2-DFN1410-6         |       |       |       |
|----------------------|-------|-------|-------|
| Dim                  | Min   | Max   | Typ   |
| A                    | —     | 0.40  | 0.39  |
| A1                   | 0.00  | 0.05  | 0.02  |
| A3                   | —     | —     | 0.13  |
| b                    | 0.15  | 0.25  | 0.20  |
| D                    | 1.35  | 1.45  | 1.40  |
| E                    | 0.95  | 1.05  | 1.00  |
| e                    | —     | —     | 0.50  |
| L                    | 0.25  | 0.35  | 0.30  |
| Z                    | —     | —     | 0.10  |
| Z1                   | 0.045 | 0.105 | 0.075 |
| All Dimensions in mm |       |       |       |

## Suggested Pad Layout


Please see AP02001 at <http://www.diodes.com/datasheets/ap02001.pdf> for the latest version.

### (1) SOT25

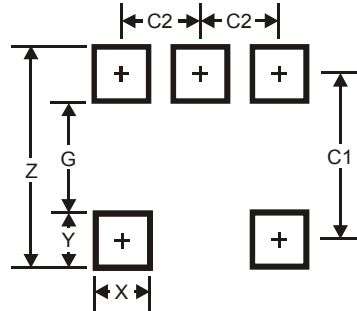


| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 3.20          |
| G          | 1.60          |
| X          | 0.55          |
| Y          | 0.80          |
| C1         | 2.40          |
| C2         | 0.95          |

### (2) SOT353

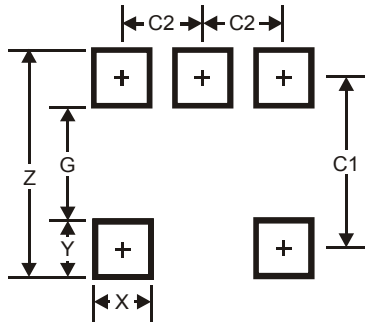

| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 2.5           |
| G          | 1.3           |
| X          | 0.42          |
| Y          | 0.6           |
| C1         | 1.9           |
| C2         | 0.65          |

### (3) SOT553

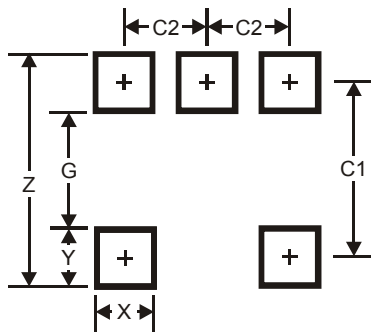


| Dimensions | Value (in mm) |
|------------|---------------|
| Z          | 2.2           |
| G          | 1.2           |
| X          | 0.375         |
| Y          | 0.5           |
| C1         | 1.7           |
| C2         | 0.5           |

## Suggested Pad Layout (cont.)


Please see AP02001 at <http://www.diodes.com/datasheets/ap02001.pdf> for the latest version.

### (4) X2-DFN0808-4

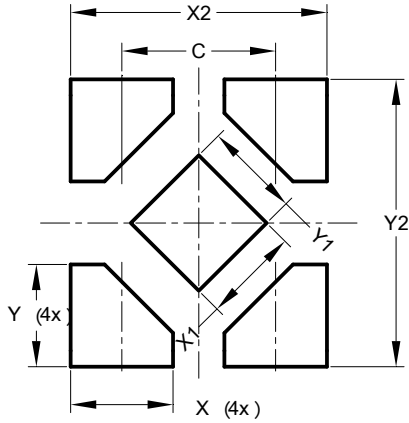

| Dimensions | Value<br>(in mm) |
|------------|------------------|
| C          | 0.480            |
| X          | 0.320            |
| X1         | 0.300            |
| X2         | 0.800            |
| Y          | 0.320            |
| Y1         | 0.300            |
| Y2         | 0.900            |

### (5) X1-DFN1010-6

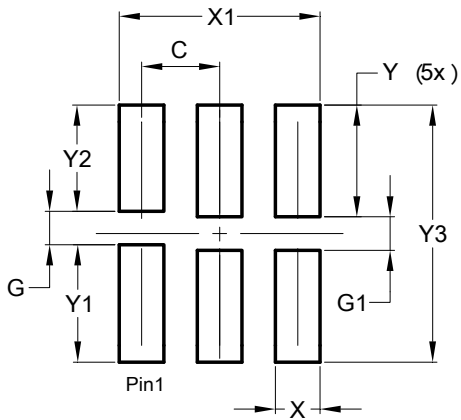


| Dimensions | Value<br>(in mm) |
|------------|------------------|
| C          | 0.350            |
| G          | 0.150            |
| G1         | 0.150            |
| X          | 0.200            |
| X1         | 0.900            |
| Y          | 0.500            |
| Y1         | 0.525            |
| Y2         | 0.475            |
| Y3         | 1.150            |

## Suggested Pad Layout (cont.)


Please see AP02001 at <http://www.diodes.com/datasheets/ap02001.pdf> for the latest version.

### (6) X2-DFN1010-6

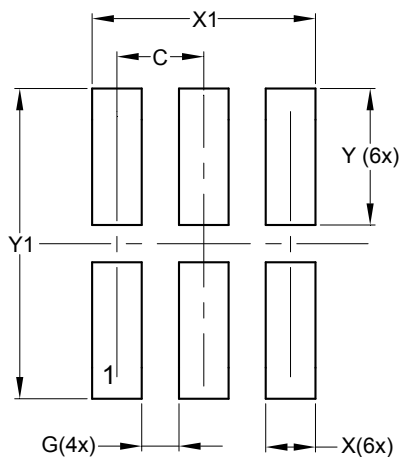


| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 0.350         |
| G          | 0.150         |
| X          | 0.200         |
| X1         | 0.900         |
| Y          | 0.550         |
| Y1         | 1.250         |

### (7) X2-DFN1409-6

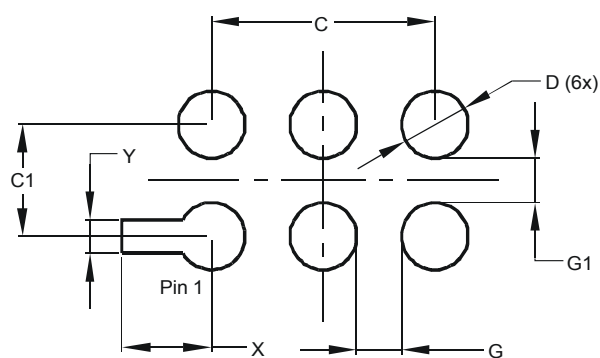

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 1.000         |
| C1         | 0.500         |
| D          | 0.300         |
| G          | 0.200         |
| G1         | 0.200         |
| X          | 0.400         |
| Y          | 0.150         |

### (8) X2-DFN1410-6

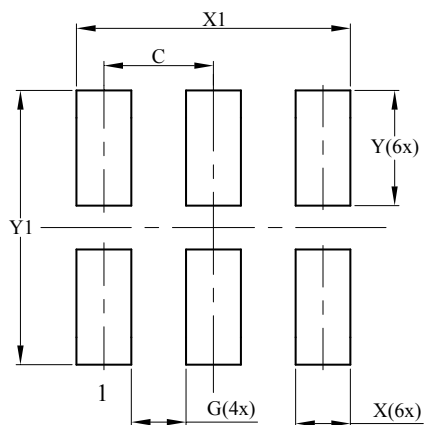

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 0.500         |
| G          | 0.250         |
| X          | 0.250         |
| X1         | 1.250         |
| Y          | 0.525         |
| Y1         | 1.250         |

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2012, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.