

RJ45 10/100 Base-T Jack with Magnetic Module



16.26 x 13.84 x 21.59mm

ARJ11D

RoHS
Compliant

FEATURES:

- Available with or without LED
- Suitable CAT 5 & 6 cable and UTP
- Comply IEEE 802.3ab
- LAN Magnetic with RJ4
- Suitable for RoHS compliant reflow

APPLICATIONS:

- 10/100 Base-T LAN
- NIC, LoM and PC

STANDARD SPECIFICATIONS at 25°C

Operating temperature range: 0°C to +70°C Storage temperature range: -40°C to +85°C

| Part Number | Turns Ratio | | EMI Fingers | LEDs L/R | Insertion Loss (dB TYP) 1-65 MHz | Return Loss (dB TYP @100Ω±15Ω) | | | |
|-----------------------|-------------|---------|-------------|----------|----------------------------------|--------------------------------|-----------|-----------|-------------|
| | TX | RX | | | | 1- 10 MHz | 10-30 MHz | 30-60 MHz | 60 – 80 MHz |
| ARJ11D-MCSA-LU2 | 1CT:1 | 1CT:1CT | Yes | NONE | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MASB-B-A-□MU2 | 1CT:1CT | 1CT:1CT | Yes | Y/G | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MCSC-LU2 | 1CT:1 | 1CT:1CT | Yes | NONE | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MDSD-A-B-□LT2 | 1CT:1 | 1CT:1 | No | G/Y | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MCSD-LT2 | 1CT:1 | 1CT:1 | Yes | NONE | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MDSE-A-B-□MU2 | 1CT:1CT | 1CT:1CT | No | G/Y | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MASE-A-B-□MU2 | 1CT:1CT | 1CT:1CT | Yes | G/Y | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MDSG-B-A-□MU2 | 1CT:1CT | 1CT:1CT | No | Y/G | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MASG-B-A-□MU2 | 1CT:1CT | 1CT:1CT | Yes | Y/G | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MASG-A-A-□MU2 | 1CT:1CT | 1CT:1CT | Yes | G/G | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MESH-LU2 | 1CT:1 | 1CT:1CT | Yes | NONE | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MDSH-A-B-□LU2 | 1CT:1 | 1CT:1CT | No | G/Y | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MASH-B-A-□LU2 | 1CT:1 | 1CT:1CT | Yes | Y/G | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MBSJ-A-DA-HLT2 | 1CT:1 | 1CT:1 | Yes | G/O G | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MBSK-A-DA-HMU2 | 1CT:1CT | 1CT:1CT | Yes | G/O G | -1 | -20 | -16 | -12 | -10 |
| ARJ11D-MBSL-A-DA-HLU2 | 1CT:1 | 1CT:1CT | Yes | G/O G | -1 | -20 | -16 | -12 | -10 |

| Part Number | Crosstalk (dB TYP) | | | Common Mode Rejection (dB TYP) | | Hipot (Vrms) @60Hz |
|-----------------------|--------------------|-----------|------------|--------------------------------|------------|--------------------|
| | 1-30 MHz | 30-60 MHz | 60-100 MHz | 1-50 MHz | 50-150 MHz | |
| ARJ11D-MCSA-LU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MASB-B-A-□MU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MCSC-LU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MDSD-A-B-□LT2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MCSD-LT2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MDSE-A-B-□MU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MASE-A-B-□MU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MDSG-B-A-□MU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MASG-B-A-□MU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MASG-A-A-□MU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MESH-LU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MDSH-A-B-□LU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MASH-B-A-□LU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MBSJ-A-DA-HLT2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MBSK-A-DA-HMU2 | -40 | -35 | -30 | -30 | -20 | 1500 |
| ARJ11D-MBSL-A-DA-HLU2 | -40 | -35 | -30 | -30 | -20 | 1500 |

□: LED Polarity Option

ARJ11D-MA: E, F or G
ARJ11D-MD: E, F or G

Contact Abracon for more custom configurations. See options to build a custom configuration.

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.03.11

RJ45 10/100 Base-T Jack with Magnetic Module



16.26 x 13.84 x 21.59mm

ARJ11D


RoHS
Compliant

OPTIONS AND PART IDENTIFICATION

ARJ11D - - - - - - -

| Mechanical | Schematic | Left LED color (e.g. B for Yellow, AB for Green-Yellow) | Right LED color (e.g. B for Yellow, AB for Green-Yellow) | LED polarity | Turns Ratio (Tx) | Turns Ratio (Rx) | Gold plating |
|---|---|---|---|---|--|--|--|
| MA, MB (Please see mechanical section) | SA ~ SR (Please see schematic section) | Blank: No LED A: Green B: Yellow C: Amber D: Orange | Blank: No LED A: Green B: Yellow C: Amber D: Orange | Blank: No LED E ~ I (Please see 7.0 LED polarity section) | K: 1CT:1.41 L: 1CT:1 M: 1CT:1CT N: 1.414:1CT O: 1CT:1.41CT P: 1:2CT Q: 1:1.414CT R: 1CT:2.5 | S: 1CT:1.41 T: 1CT:1 U: 1CT:1CT V: 1.414:1CT W: 1CT:1.41CT X: 1:2CT Y: 1:1.414CT Z: 1CT:2.5 | 1: 3u " 2: 6u " 3: 15u " 4: 30u " 5: 50u " |

MECHANICAL DIMENSIONS

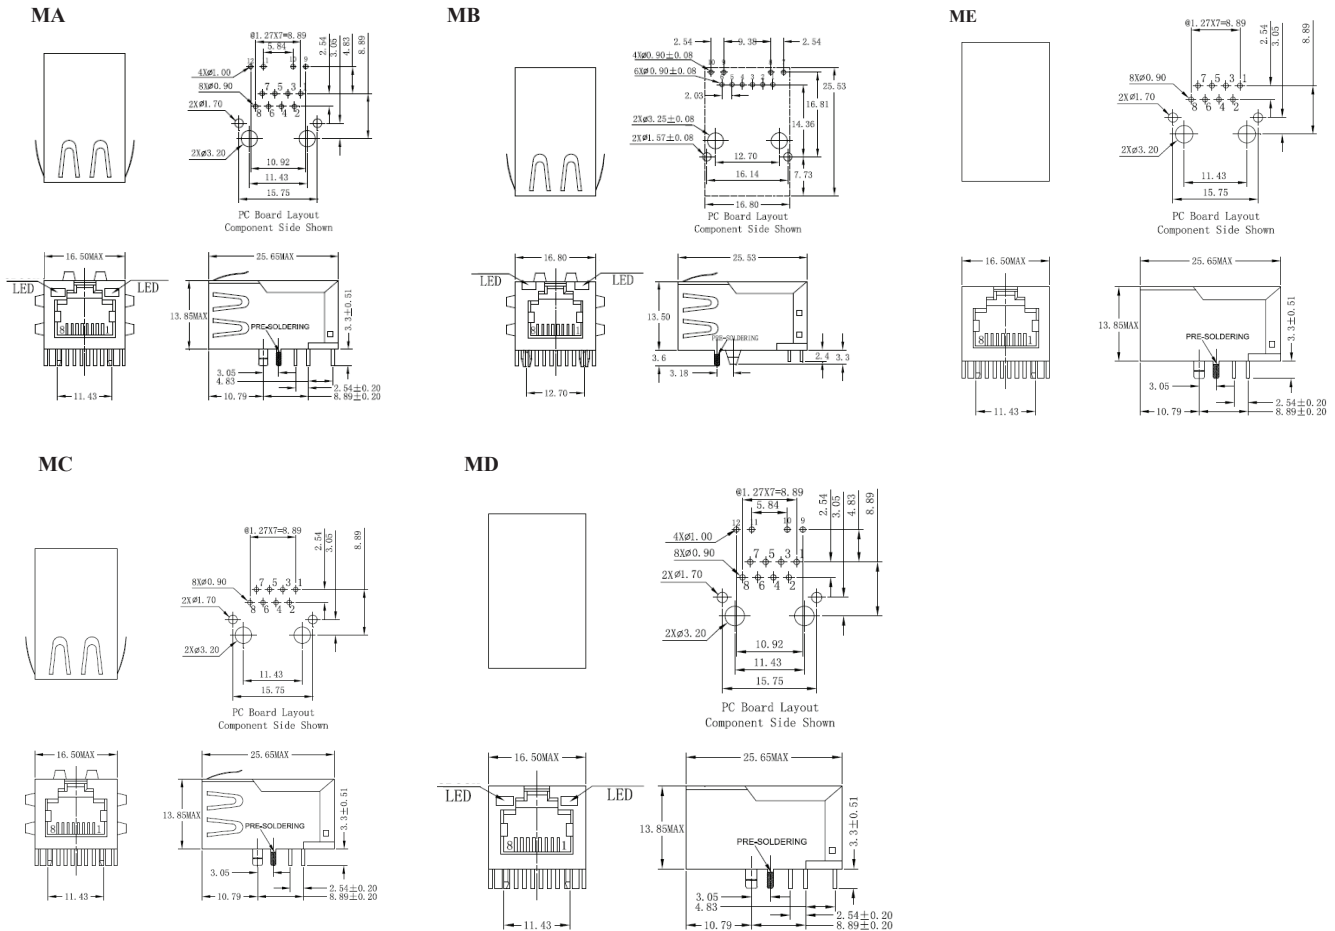

Dimension: mm. All tolerances are ±0.25

ABRACON IS
ISO 9001:2008
CERTIFIED



**ABRACON
CORPORATION**

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.03.11

RJ45 10/100 Base-T Jack with Magnetic Module




16.26 x 13.84 x 21.59mm

ARJ11D

RoHS
Compliant

SCHEMATICS

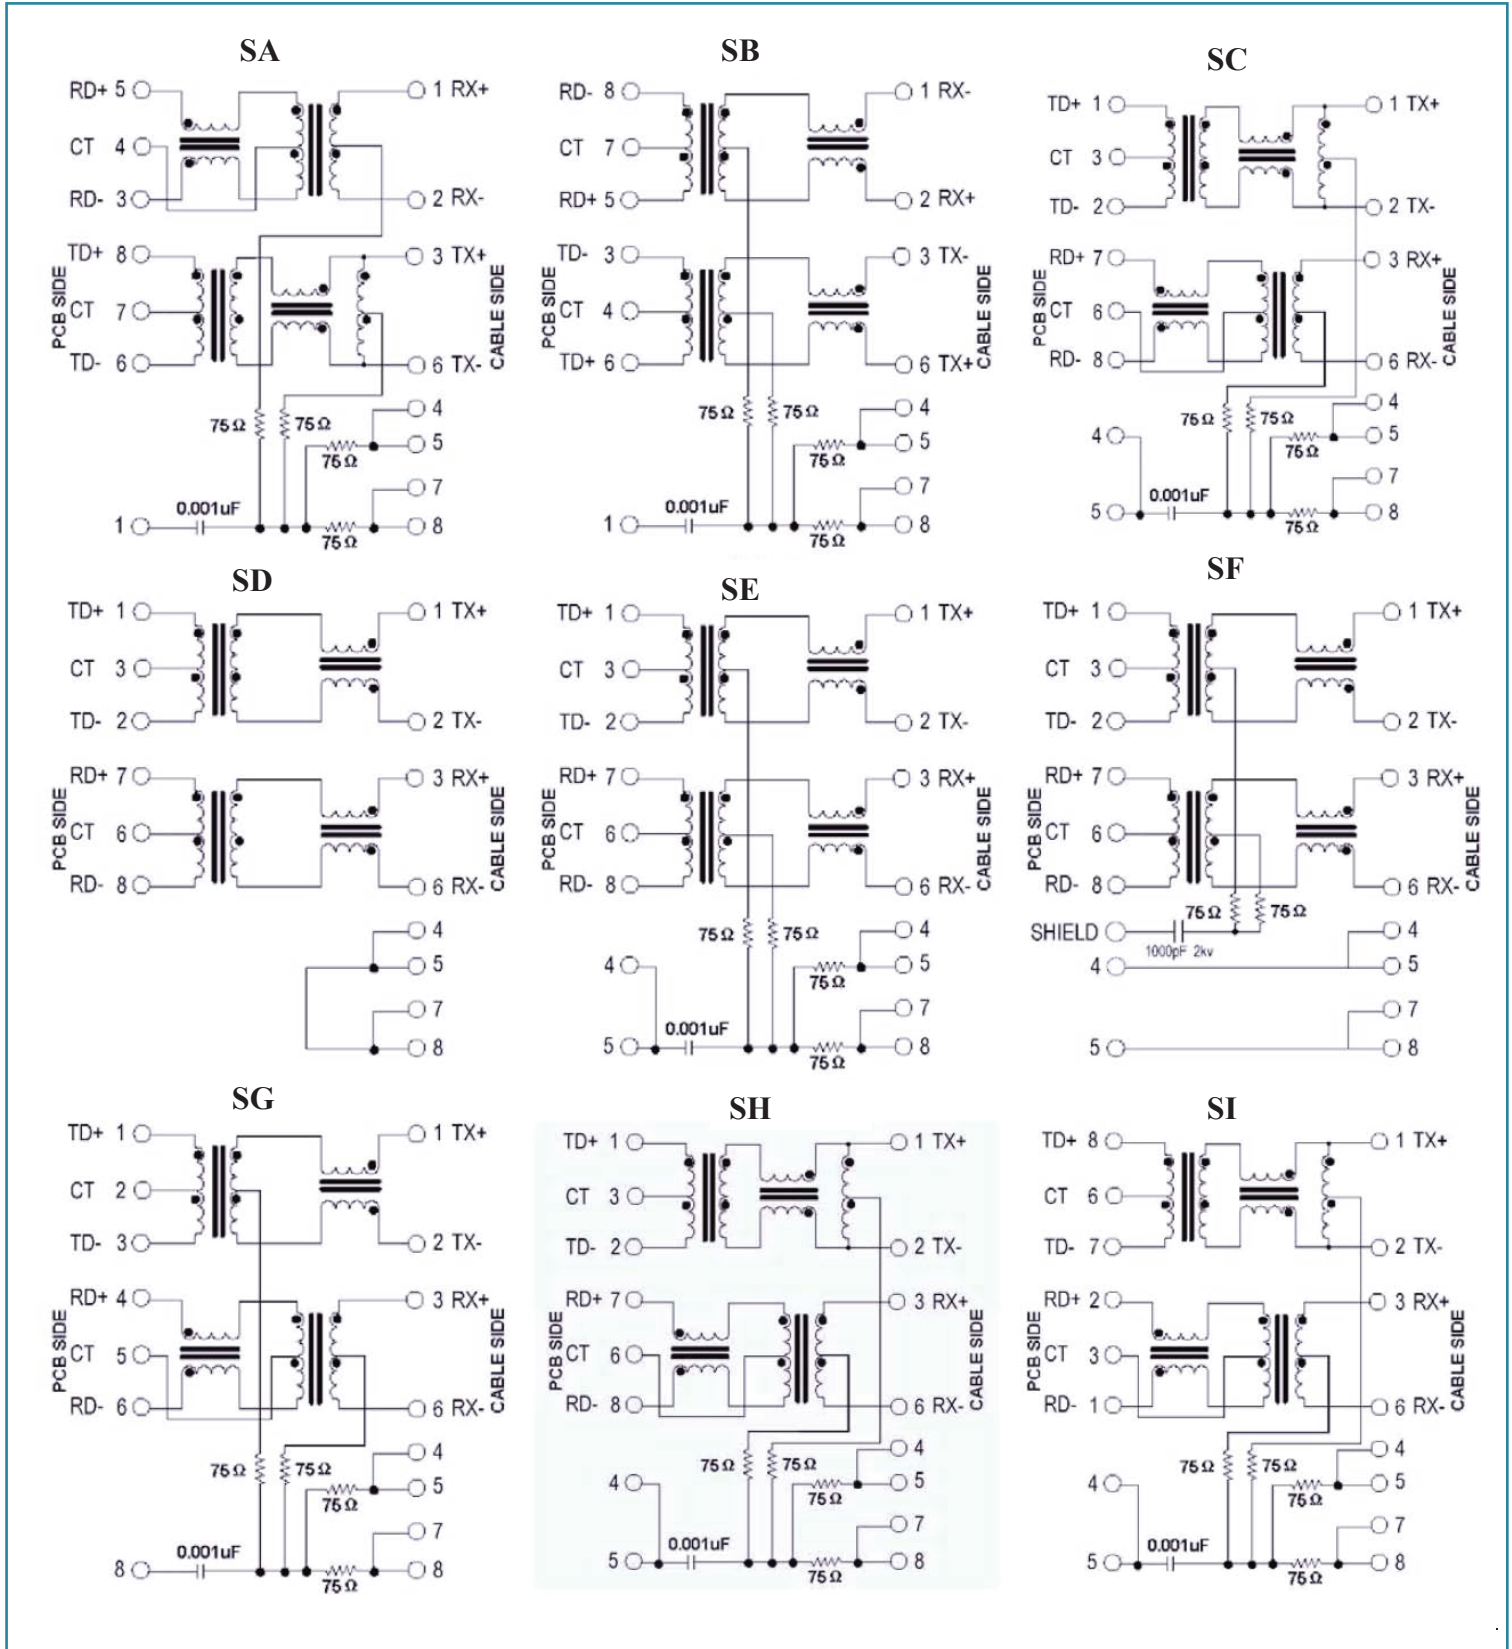

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.03.11

RJ45 10/100 Base-T Jack with Magnetic Module




16.26 x 13.84 x 21.59mm


ARJ11D

RoHS
Compliant

SCHEMATICS - continued

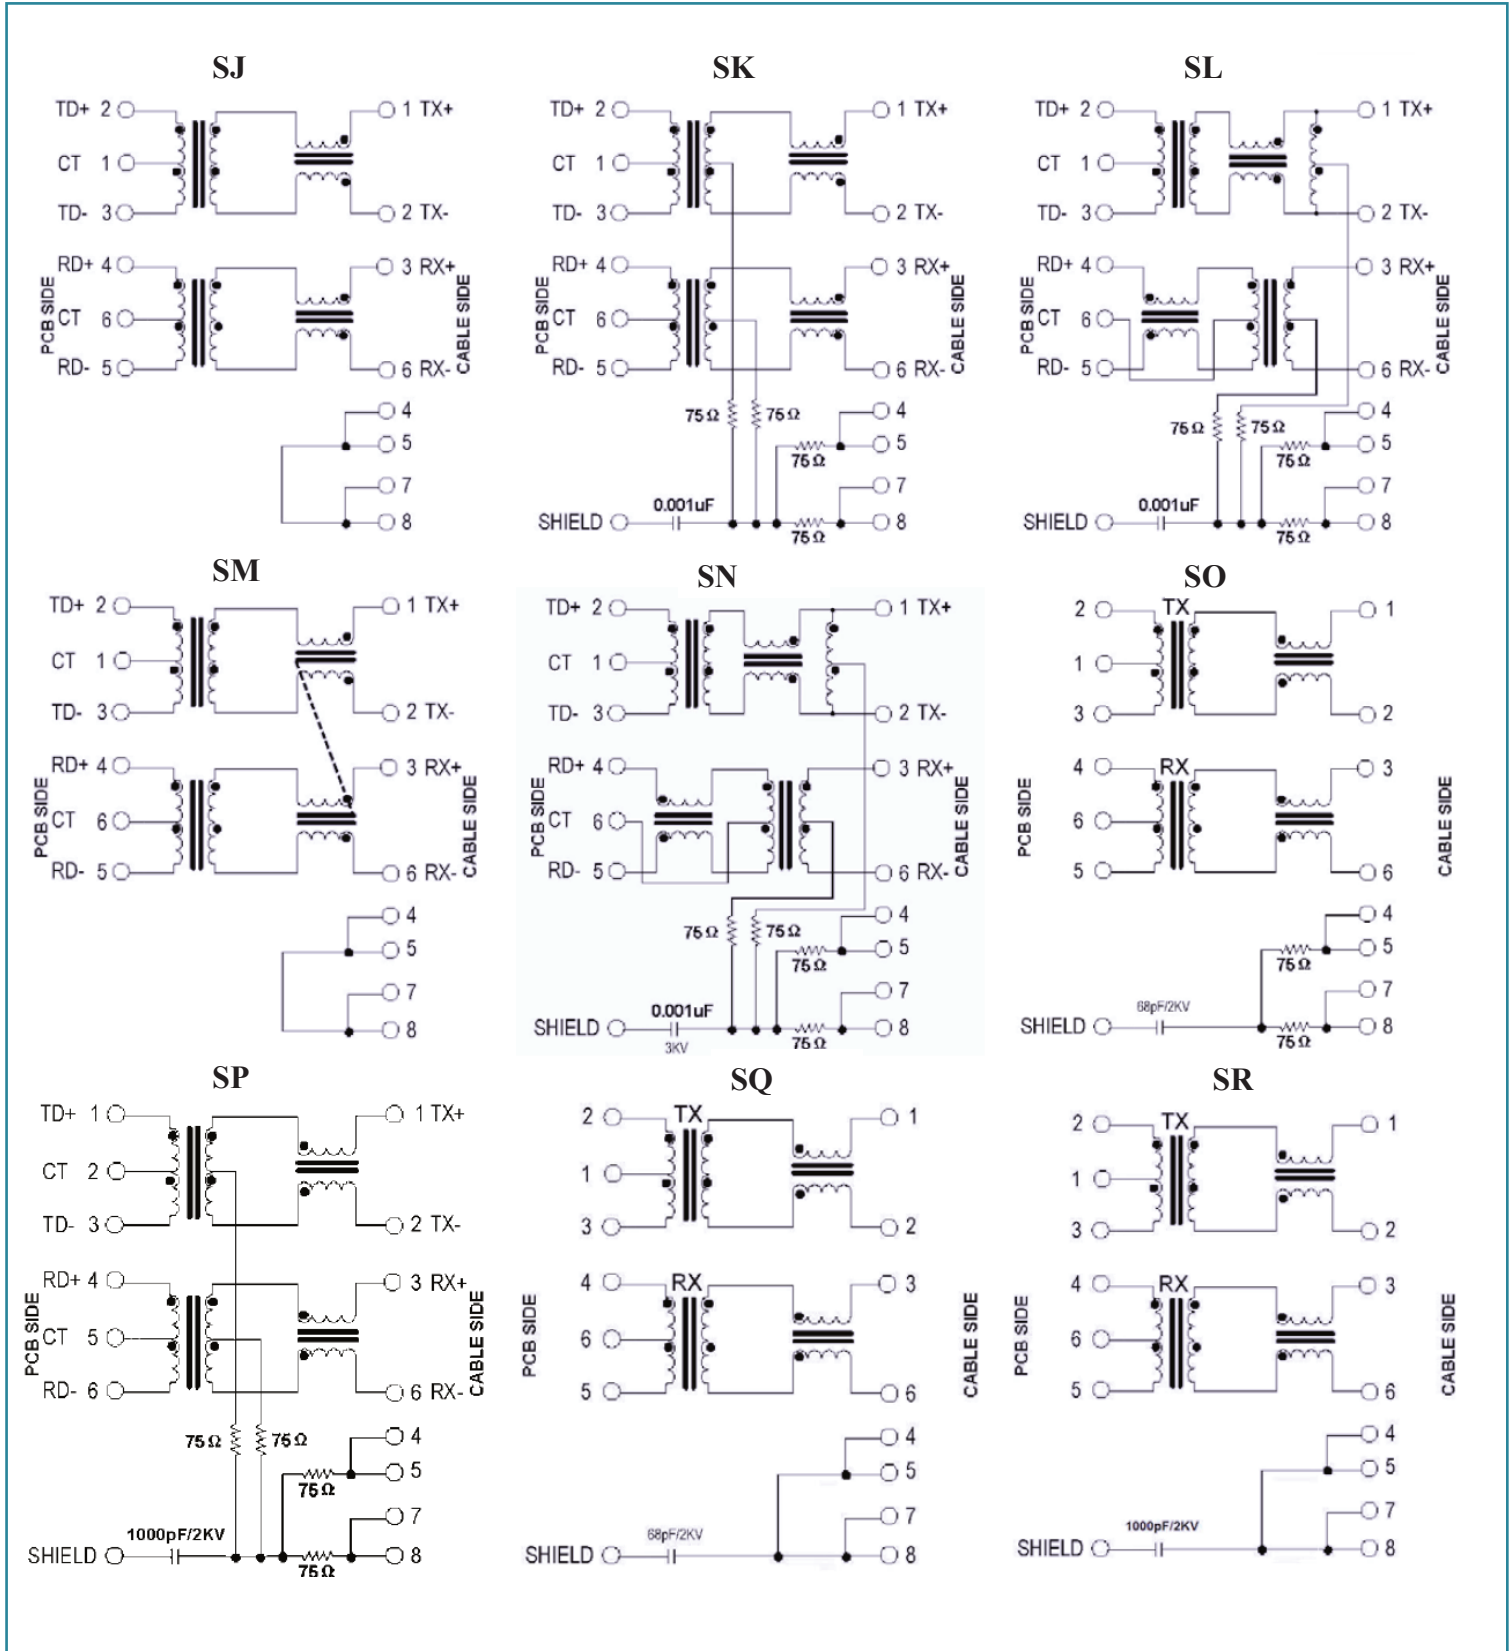

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.03.11

RJ45 10/100 Base-T Jack with Magnetic Module


ARJ11D

RoHS
Compliant



16.26 x 13.84 x 21.59mm



LED POLARITY

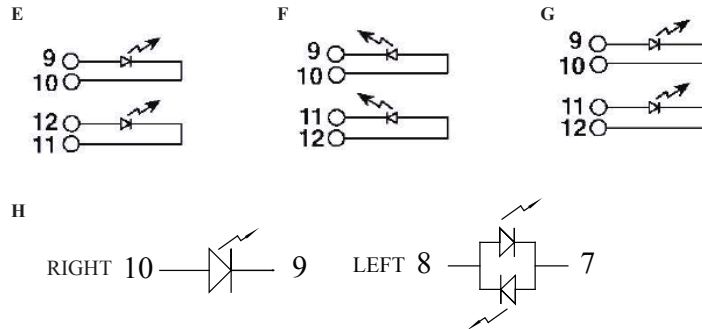


PACKING: 60pcs/tray

Packing 60pcs/tray
Packaging material: PET

Outer carton unit 1320 pcs/ 22 Trays/box

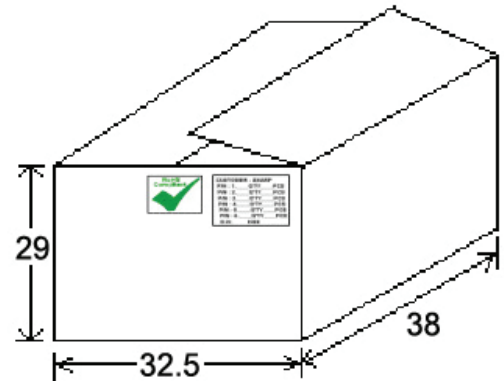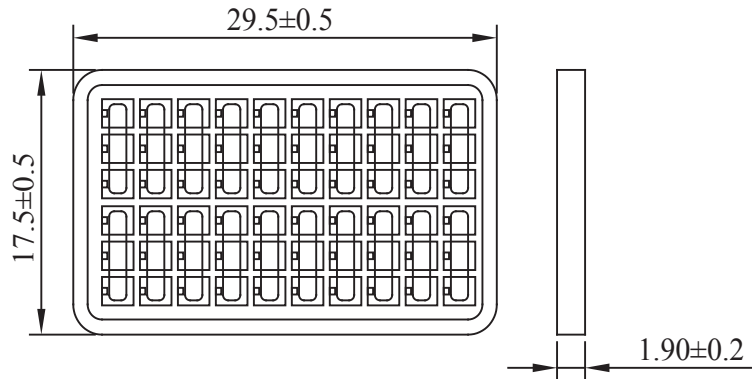

REFLOW PROFILE:

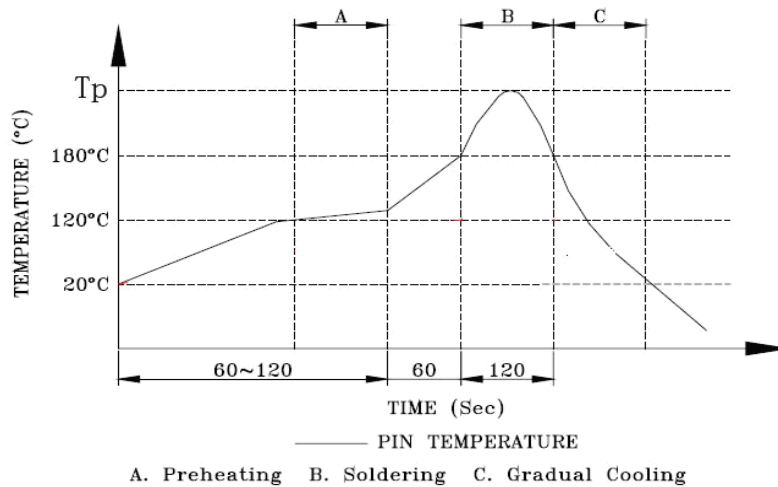

Peak temperature(Tp) : 250 ± 10°C
Peak temperature(Tp) time : 5sec max

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 05.03.11



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.