

### FEATURES

- Maximum output current: 150 mA**
- Input voltage range: 2.5 V to 5.5 V**
- Light load efficient**
  - $I_{GND} = 35 \mu A$  with zero load
  - $I_{GND} = 40 \mu A$  with 100  $\mu A$  load
- Low shutdown current: <1  $\mu A$**
- Low dropout voltage: 150 mV @ 150 mA load**
- Initial accuracy:  $\pm 1\%$**
- Accuracy over line, load, and temperature:  $\pm 2\%$**
- Stable with small 1  $\mu F$  ceramic output capacitor**
- 16 fixed output voltage options: 0.75 V to 3.3 V (ADP1710)**
- Adjustable output voltage option: 0.8 V to 5.0 V (ADP1710 Adjustable)**
- 16 fixed output voltage options with reference bypass: 0.75 V to 3.3 V (ADP1711)**
- High PSRR: 69 dB @ 1 kHz**
- Low noise: 40  $\mu V_{RMS}$**
- Excellent load/line transient response**
- Current limit and thermal overload protection**
- Logic controlled enable**
- 5-lead TSOT package**

### APPLICATIONS

- Mobile phones**
- Digital camera and audio devices**
- Portable and battery-powered equipment**
- Post dc-dc regulation**

### GENERAL DESCRIPTION

The ADP1710/ADP1711 are low dropout linear regulators that operate from 2.5 V to 5.5 V and provide up to 150 mA of output current. Utilizing a novel scaling architecture, ground current drawn is a very low 40  $\mu A$ , when driving a 100  $\mu A$  load, making the ADP1710/ADP1711 ideal for battery-operated portable equipment.

The ADP1710 and the ADP1711 are each available in sixteen fixed output voltage options. The ADP1710 is also available in an adjustable version, which allows output voltages that range from 0.8 V to 5 V via an external divider. The ADP1711 allows for a reference bypass capacitor to be connected, which reduces output voltage noise and improves power supply rejection.

### TYPICAL APPLICATION CIRCUITS

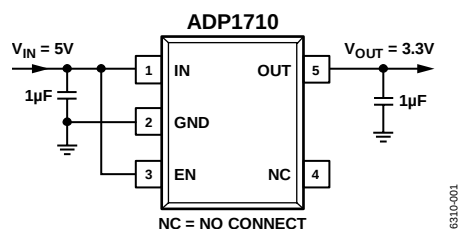


Figure 1. ADP1710 with Fixed Output Voltage, 3.3 V

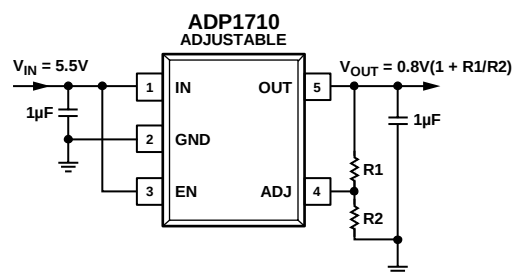


Figure 2. ADP1710 with Adjustable Output Voltage, 0.8 V to 5.0 V

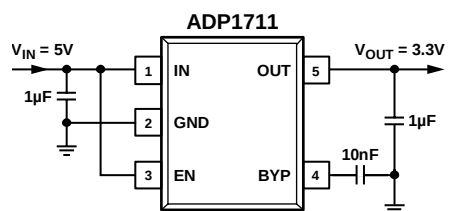


Figure 3. ADP1711 with Fixed Output Voltage and Bypass Capacitor, 3.3 V

The ADP1710/ADP1711 are optimized for stable operation with small 1  $\mu F$  ceramic output capacitors, allowing for good transient performance while occupying minimal board space. An enable pin controls the output voltage on both devices. There is also an under-voltage lockout circuit on both devices, which disables the regulator if IN drops below a minimum threshold.

An internal soft start gives a typical start-up time of 80  $\mu s$ . Short-circuit protection and thermal overload protection circuits prevent damage to the devices in adverse conditions. Both the ADP1710 and the ADP1711 are available in tiny 5-lead TSOT packages, for the smallest footprint solution to all your power needs.

#### Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

|                                                      |   |                                                     |    |
|------------------------------------------------------|---|-----------------------------------------------------|----|
| Features .....                                       | 1 | Enable Feature .....                                | 8  |
| Applications .....                                   | 1 | Undervoltage Lockout (UVLO) .....                   | 9  |
| Typical Application Circuits.....                    | 1 | Application Information.....                        | 10 |
| General Description .....                            | 1 | Capacitor Selection .....                           | 10 |
| Revision History .....                               | 2 | Current Limit and Thermal Overload Protection ..... | 10 |
| Specifications.....                                  | 3 | Thermal Considerations.....                         | 11 |
| Absolute Maximum Ratings.....                        | 4 | Printed Circuit Board Layout Considerations .....   | 12 |
| Thermal Resistance .....                             | 4 | Outline Dimensions .....                            | 13 |
| ESD Caution.....                                     | 4 | Ordering Guide .....                                | 14 |
| Pin Configurations and Function Descriptions .....   | 5 |                                                     |    |
| Typical Performance Characteristics .....            | 6 |                                                     |    |
| Theory of Operation .....                            | 8 |                                                     |    |
| Adjustable Output Voltage (ADP1710 Adjustable) ..... | 8 |                                                     |    |
| Bypass Capacitor (ADP1711) .....                     | 8 |                                                     |    |

REVISION HISTORY

10/06—Revision 0: Initial Version

## SPECIFICATIONS

$V_{IN} = (V_{OUT} + 0.5 \text{ V})$  or 2.5 V (whichever is greater),  $I_{OUT} = 1 \text{ mA}$ ,  $C_{IN} = C_{OUT} = 1 \text{ }\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 1.

| Parameter                                                            | Symbol                          | Conditions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Min            | Typ                      | Max                      | Unit                                                                                                            |
|----------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------|
| INPUT VOLTAGE RANGE                                                  | $V_{IN}$                        | $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2.5            |                          | 5.5                      | V                                                                                                               |
| OPERATING SUPPLY CURRENT                                             | $I_{GND}$                       | $I_{OUT} = 0 \text{ }\mu\text{A}$<br>$I_{OUT} = 0 \text{ }\mu\text{A}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$<br>$I_{OUT} = 100 \text{ }\mu\text{A}$<br>$I_{OUT} = 100 \text{ }\mu\text{A}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$<br>$I_{OUT} = 100 \text{ mA}$<br>$I_{OUT} = 100 \text{ mA}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$<br>$I_{OUT} = 150 \text{ mA}$<br>$I_{OUT} = 150 \text{ mA}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                                                                                                                                                                                                                         |                | 35<br>40<br>665<br>1     | 50<br>80<br>860<br>1.3   | $\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$<br>$\mu\text{A}$<br>$\text{mA}$<br>$\text{mA}$ |
| SHUTDOWN CURRENT                                                     | $I_{GND-SD}$                    | $EN = \text{GND}$<br>$EN = \text{GND}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                | 0.1                      | 1.0                      | $\mu\text{A}$<br>$\mu\text{A}$                                                                                  |
| FIXED OUTPUT VOLTAGE ACCURACY (ADP1710 AND ADP1711)                  | $V_{OUT}$                       | $I_{OUT} = 1 \text{ mA}$<br>$100 \text{ }\mu\text{A} < I_{OUT} < 150 \text{ mA}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -1<br>-2       |                          | +1<br>+2                 | %<br>%                                                                                                          |
| ADJUSTABLE OUTPUT VOLTAGE ACCURACY (ADP1710 ADJUSTABLE) <sup>1</sup> | $V_{OUT}$                       | $I_{OUT} = 1 \text{ mA}$<br>$100 \text{ }\mu\text{A} < I_{OUT} < 150 \text{ mA}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0.792<br>0.784 | 0.8                      | 0.808<br>0.816           | V<br>V                                                                                                          |
| LINE REGULATION                                                      | $\Delta V_{OUT}/\Delta V_{IN}$  | $V_{IN} = (V_{OUT} + 0.5 \text{ V})$ to 5.5 V, $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | -0.1           |                          | +0.1                     | %/V                                                                                                             |
| LOAD REGULATION <sup>2</sup>                                         | $\Delta V_{OUT}/\Delta I_{OUT}$ | $I_{OUT} = 10 \text{ mA}$ to 150 mA<br>$I_{OUT} = 10 \text{ mA}$ to 150 mA, $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                | 0.002                    | 0.004                    | %/mA<br>%/mA                                                                                                    |
| DROPOUT VOLTAGE <sup>3</sup>                                         | $V_{DROPOUT}$                   | $I_{OUT} = 100 \text{ mA}$ , $V_{OUT} \geq 3.0 \text{ V}$<br>$I_{OUT} = 100 \text{ mA}$ , $V_{OUT} \geq 3.0 \text{ V}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$<br>$I_{OUT} = 150 \text{ mA}$ , $V_{OUT} \geq 3.0 \text{ V}$<br>$I_{OUT} = 150 \text{ mA}$ , $V_{OUT} \geq 3.0 \text{ V}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$<br>$I_{OUT} = 100 \text{ mA}$ , $2.5 \text{ V} \leq V_{OUT} < 3.0 \text{ V}$<br>$I_{OUT} = 100 \text{ mA}$ , $2.5 \text{ V} \leq V_{OUT} < 3.0 \text{ V}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$<br>$I_{OUT} = 150 \text{ mA}$ , $2.5 \text{ V} \leq V_{OUT} < 3.0 \text{ V}$<br>$I_{OUT} = 150 \text{ mA}$ , $2.5 \text{ V} \leq V_{OUT} < 3.0 \text{ V}$ , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$ |                | 100<br>150<br>120<br>180 | 175<br>250<br>200<br>300 | mV<br>mV<br>mV<br>mV<br>mV<br>mV<br>mV                                                                          |
| START-UP TIME <sup>4</sup><br>ADP1710<br>ADP1711                     | $T_{START-UP}$                  | With 10 nF bypass capacitor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                | 80<br>100                |                          | $\mu\text{s}$<br>$\mu\text{s}$                                                                                  |
| CURRENT LIMIT THRESHOLD <sup>5</sup>                                 | $I_{LIMIT}$                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 180            | 270                      | 360                      | mA                                                                                                              |
| THERMAL SHUTDOWN THRESHOLD                                           | $T_{SD}$                        | $T_J$ rising                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                | 150                      |                          | $^\circ\text{C}$                                                                                                |
| THERMAL SHUTDOWN HYSTERESIS                                          | $T_{SD-HYS}$                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                | 15                       |                          | $^\circ\text{C}$                                                                                                |
| UVLO ACTIVE THRESHOLD                                                | $UVLO_{ACTIVE}$                 | $V_{IN}$ falling                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1.95           |                          |                          | V                                                                                                               |
| UVLO INACTIVE THRESHOLD                                              | $UVLO_{INACTIVE}$               | $V_{IN}$ rising                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                          | 2.45                     | V                                                                                                               |
| UVLO HYSTERESIS                                                      | $UVLO_{HYS}$                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                | 250                      |                          | mV                                                                                                              |
| EN INPUT LOGIC HIGH                                                  | $V_{IH}$                        | $2.5 \text{ V} \leq V_{IN} \leq 5.5 \text{ V}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1.8            |                          |                          | V                                                                                                               |
| EN INPUT LOGIC LOW                                                   | $V_{IL}$                        | $2.5 \text{ V} \leq V_{IN} \leq 5.5 \text{ V}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                          | 0.4                      | V                                                                                                               |
| EN INPUT LEAKAGE CURRENT                                             | $I_{I-LEAKAGE}$                 | $EN = \text{IN}$ or $\text{GND}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                | 0.1                      | 1                        | $\mu\text{A}$                                                                                                   |
| ADJ INPUT BIAS CURRENT (ADP1710 ADJUSTABLE)                          | $ADJ_{I-BIAS}$                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                | 30                       | 100                      | nA                                                                                                              |
| OUTPUT NOISE<br>ADP1710<br>ADP1711                                   | $OUT_{NOISE}$                   | 10 Hz to 100 kHz, $V_{OUT} = 3.3 \text{ V}$<br>10 Hz to 100 kHz, $V_{OUT} = 0.75 \text{ V}$ , with 10 nF bypass capacitor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                | 330<br>40                |                          | $\mu\text{V}_{rms}$<br>$\mu\text{V}_{rms}$                                                                      |
| POWER SUPPLY REJECTION RATIO<br>ADP1710<br>ADP1711                   | PSRR                            | 1 kHz, $V_{OUT} = 3.3 \text{ V}$<br>1 kHz, $V_{OUT} = 0.75 \text{ V}$ , with 10 nF bypass capacitor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                | 58<br>69                 |                          | dB<br>dB                                                                                                        |

<sup>1</sup> Accuracy when OUT is connected directly to ADJ. When OUT voltage is set by external feedback resistors, absolute accuracy in adjust mode depends on the tolerances of resistors used.

<sup>2</sup> Based on an end-point calculation using 10 mA and 150 mA loads. See Figure 8 for typical load regulation performance for loads less than 10 mA.

<sup>3</sup> Dropout voltage is defined as the input-to-output voltage differential when the input voltage is set to the nominal output voltage. This applies only for output voltages above 2.5 V.

<sup>4</sup> Start-up time is defined as the time between the rising edge of EN to OUT being at 90% of its nominal value.

<sup>5</sup> Current limit threshold is defined as the current at which the output voltage drops to 90% of the specified typical value. For example, the current limit for a 1.0 V output voltage is defined as the current that causes the output voltage to drop to 90% of 1.0 V, or 0.9 V.

## ABSOLUTE MAXIMUM RATINGS

Table 2.

| Parameter                            | Rating          |
|--------------------------------------|-----------------|
| IN to GND                            | –0.3 V to +6 V  |
| OUT to GND                           | –0.3 V to IN    |
| EN to GND                            | –0.3 V to +6 V  |
| ADJ/BYP to GND                       | –0.3 V to +6 V  |
| Storage Temperature Range            | –65°C to +150°C |
| Operating Junction Temperature Range | –40°C to +125°C |
| Soldering Conditions                 | JEDEC J-STD-020 |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 3. Thermal Resistance

| Package Type | $\theta_{JA}$ | Unit |
|--------------|---------------|------|
| 5-Lead TSOT  | 170           | °C/W |

## ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS




Figure 4. 5-Lead TSOT (UJ-Suffix)




Figure 5. 5-Lead TSOT (UJ-Suffix)




Figure 6. 5-Lead TSOT (UJ-Suffix)

Table 4. Pin Function Descriptions

| ADP1710<br>Fixed<br>Pin No. | ADP1710<br>Adjustable<br>Pin No. | ADP1711<br>Pin No. | Mnemonic | Description                                                                                                                                       |
|-----------------------------|----------------------------------|--------------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                           | 1                                | 1                  | IN       | Regulator Input Supply. Bypass IN to GND with a 1 $\mu$ F or greater capacitor.                                                                   |
| 2                           | 2                                | 2                  | GND      | Ground.                                                                                                                                           |
| 3                           | 3                                | 3                  | EN       | Enable Input. Drive EN high to turn on the regulator; drive it low to turn off the regulator. For automatic startup, connect EN to IN.            |
| 4                           | 4                                | 4                  | NC       | No Connect.                                                                                                                                       |
|                             |                                  |                    | ADJ      | Adjust. A resistor divider from OUT to ADJ sets the output voltage.                                                                               |
|                             |                                  |                    | BYP      | Connect a 1 nF or greater capacitor (10 nF is recommended) between BYP and GND to reduce the internal reference noise for low noise applications. |
| 5                           | 5                                | 5                  | OUT      | Regulated Output Voltage. Bypass OUT to GND with a 1 $\mu$ F or greater capacitor.                                                                |

## TYPICAL PERFORMANCE CHARACTERISTICS

$V_{IN} = 3.8\text{ V}$ ,  $I_{OUT} = 1\text{ mA}$ ,  $C_{IN} = C_{OUT} = 1\text{ }\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

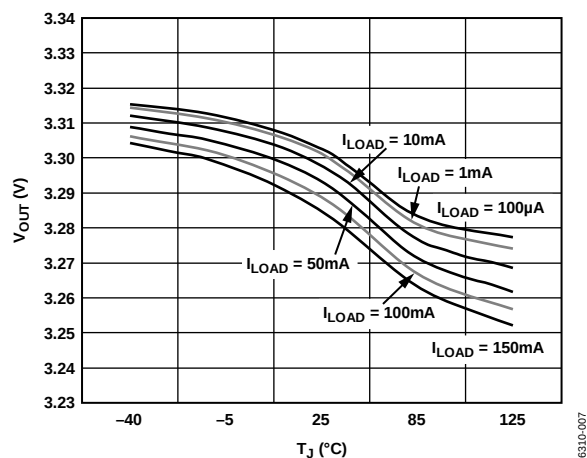


Figure 7. Output Voltage vs. Junction Temperature

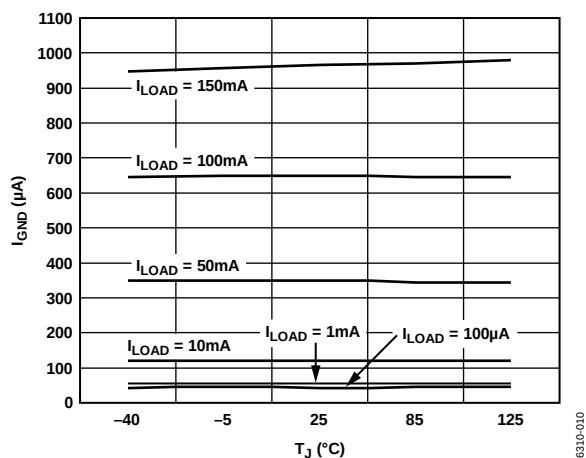


Figure 10. Ground Current vs. Junction Temperature

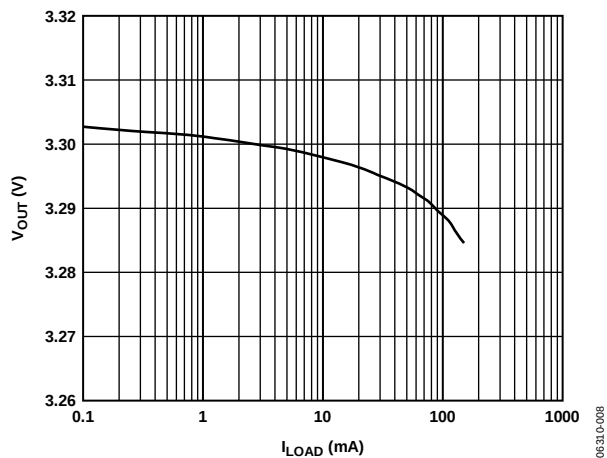


Figure 8. Output Voltage vs. Load Current

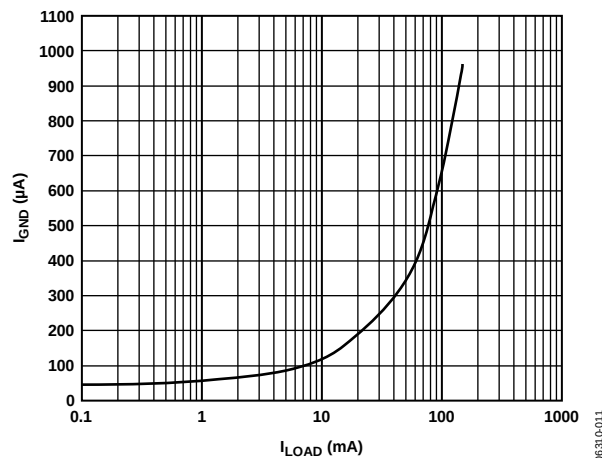


Figure 11. Ground Current vs. Load Current

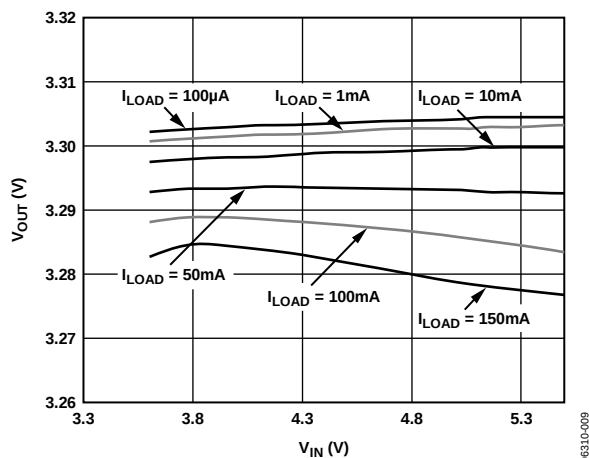


Figure 9. Output Voltage vs. Input Voltage

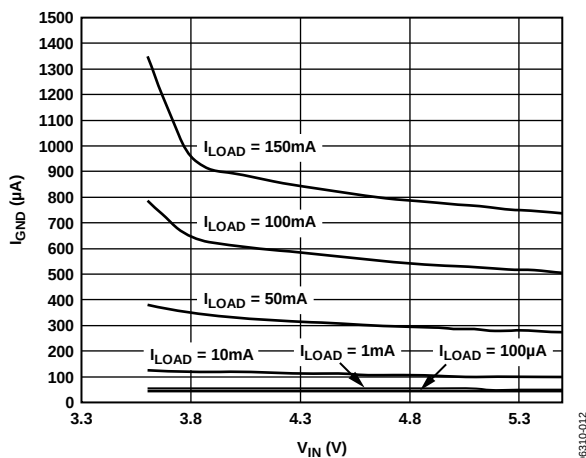


Figure 12. Ground Current vs. Input Voltage

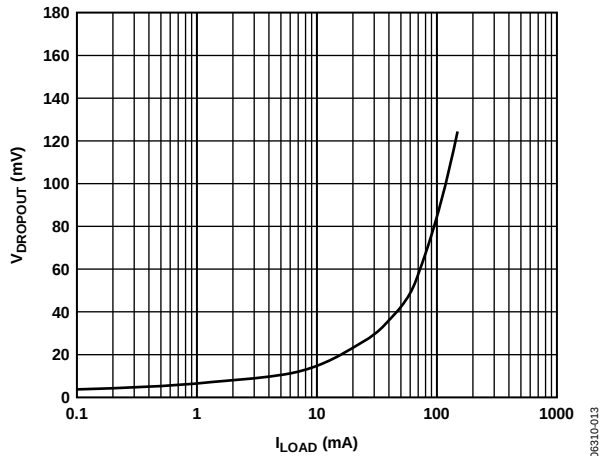


Figure 13. Dropout Voltage vs. Load Current

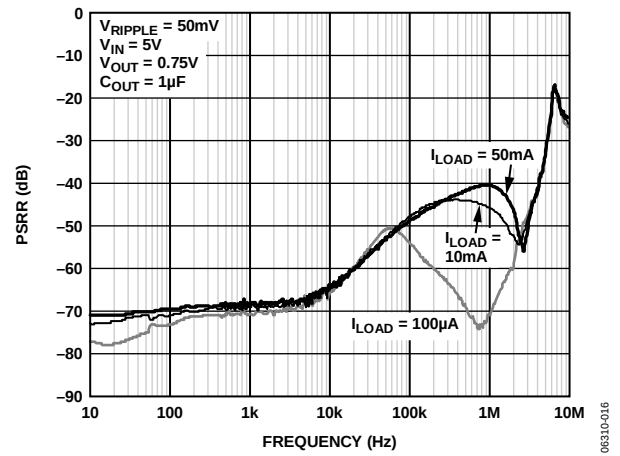


Figure 16. ADP1711 Power Supply Rejection Ratio vs. Frequency (10 nF Bypass Capacitor)

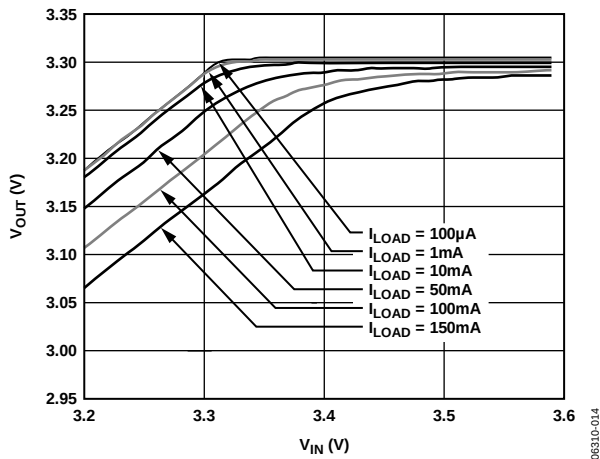


Figure 14. Output Voltage vs. Input Voltage (in Dropout)

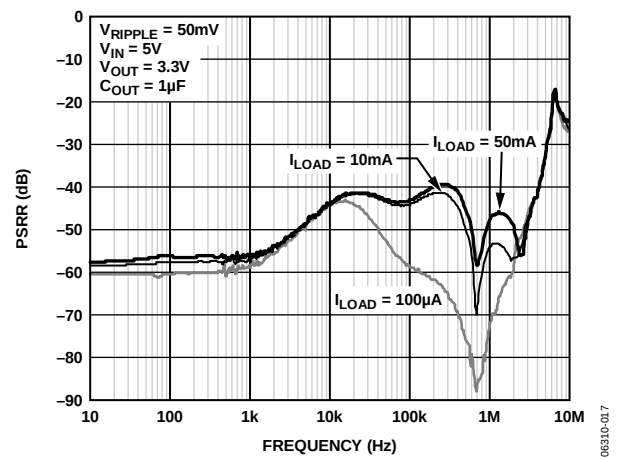


Figure 17. ADP1710 Power Supply Rejection Ratio vs. Frequency

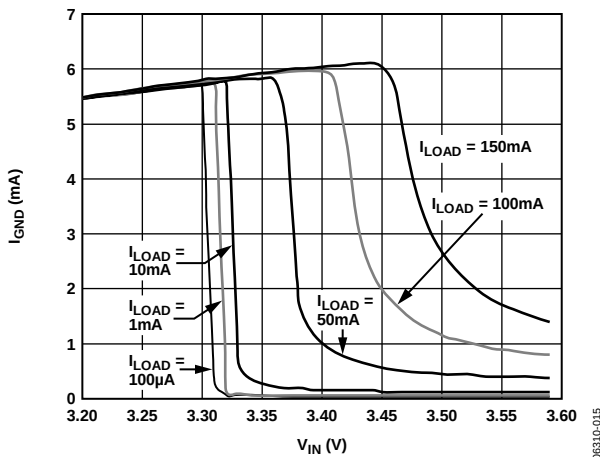


Figure 15. Ground Current vs. Input Voltage (In Dropout)

## THEORY OF OPERATION

The ADP1710/ADP1711 are low dropout, CMOS linear regulators that use an advanced, proprietary architecture to provide high power supply rejection ratio (PSRR) and excellent line and load transient response with just a small 1  $\mu$ F ceramic output capacitor. Both devices operate from a 2.5 V to 5.5 V input rail and provide up to 150 mA of output current. Incorporating a novel scaling architecture, ground current is very low when driving light loads. Ground current in shutdown mode is typically 100 nA.

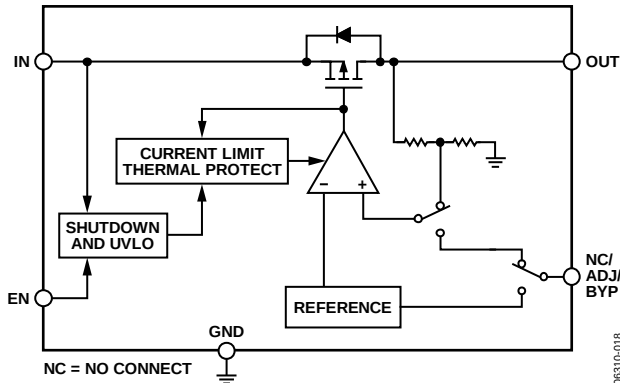


Figure 18. Internal Block Diagram

Internally, the ADP1710/ADP1711 each consist of a reference, an error amplifier, a feedback voltage divider, and a PMOS pass transistor. Output current is delivered via the PMOS pass device, which is controlled by the error amplifier. The error amplifier compares the reference voltage with the feedback voltage from the output and amplifies the difference. If the feedback voltage is lower than the reference voltage, the gate of the PMOS device is pulled lower, allowing more current to pass and increasing the output voltage. If the feedback voltage is higher than the reference voltage, the gate of the PMOS device is pulled higher, allowing less current to pass and decreasing the output voltage.

The ADP1710 is available in two versions, one with fixed output voltage options and one with an adjustable output voltage. The fixed output voltage option is set internally to one of sixteen values between 0.75 V and 3.3 V, using an internal feedback network. The adjustable output voltage can be set to between 0.8 V and 5.0 V by an external voltage divider connected from OUT to ADJ. The ADP1711 is available with fixed output voltage options and features a bypass pin, which allows an external capacitor to be connected, which reduces internal reference noise. All devices are controlled by an enable pin (EN).

## ADJUSTABLE OUTPUT VOLTAGE (ADP1710 ADJUSTABLE)

The ADP1710 adjustable version can have its output voltage set over a 0.8 V to 5.0 V range. The output voltage is set by connecting a resistive voltage divider from OUT to ADJ. The output voltage is calculated using the equation

$$V_{OUT} = 0.8 \text{ V} (1 + R1/R2) \quad (1)$$

where:

$R1$  is the resistor from OUT to ADJ.

$R2$  is the resistor from ADJ to GND.

The maximum bias current into ADJ is 100 nA, so for less than 0.5% error due to the bias current, use values less than 60 k $\Omega$  for  $R2$ .

## BYPASS CAPACITOR (ADP1711)

The ADP1711 allows for an external bypass capacitor to be connected to the internal reference, which reduces output voltage noise and improves power supply rejection. A low leakage capacitor of 1 nF or greater (10 nF is recommended) must be connected between the BYP and GND pins.

## ENABLE FEATURE

The ADP1710/ADP1711 use the EN pin to enable and disable the OUT pin under normal operating conditions. As shown in Figure 19, when a rising voltage on EN crosses the active threshold, OUT turns on. When a falling voltage on EN crosses the inactive threshold, OUT turns off.

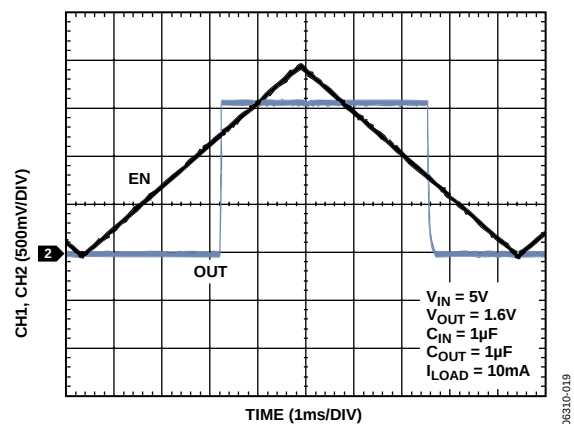


Figure 19. ADP1710 Adjustable Typical EN Pin Operation

As can be seen, the EN pin has hysteresis built in. This prevents on/off oscillations that can occur due to noise on the EN pin as it passes through the threshold points.

The EN pin active/inactive thresholds are derived from the IN voltage. Therefore, these thresholds vary with changing input voltage. Figure 20 shows typical EN active/inactive thresholds when the input voltage varies from 2.5 V to 5.5 V.

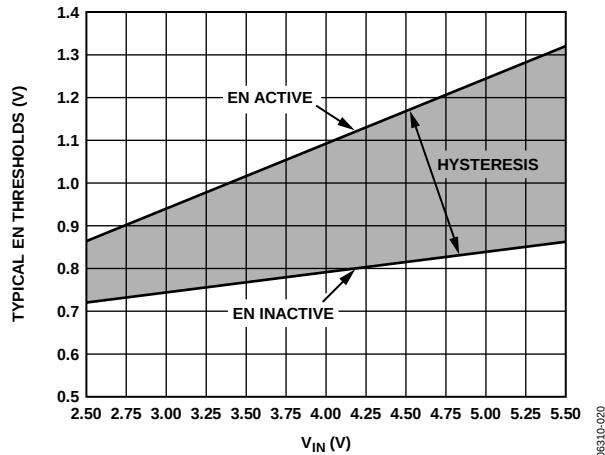


Figure 20. Typical EN Pin Thresholds vs. Input Voltage

### UNDERVOLTAGE LOCKOUT (UVLO)

The ADP1710/ADP1711 have an undervoltage lockout circuit, which monitors the voltage on the IN pin. When the voltage on IN drops below 1.95 V (minimum), the circuit activates, disabling the OUT pin.

## APPLICATION INFORMATION

### CAPACITOR SELECTION

#### Output Capacitor

The ADP1710/ADP1711 are designed for operation with small, space-saving ceramic capacitors, but they will function with most commonly used capacitors as long as care is taken about the effective series resistance (ESR) value. The ESR of the output capacitor affects stability of the LDO control loop. A minimum of 1  $\mu\text{F}$  capacitance with an ESR of 500 m $\Omega$  or less is recommended to ensure stability of the ADP1710/ADP1711. Transient response to changes in load current is also affected by output capacitance. Using a larger value of output capacitance improves the transient response of the ADP1710/ADP1711 to large changes in load current. Figure 21 and Figure 22 show the transient responses for output capacitance values of 1  $\mu\text{F}$  and 22  $\mu\text{F}$ , respectively.

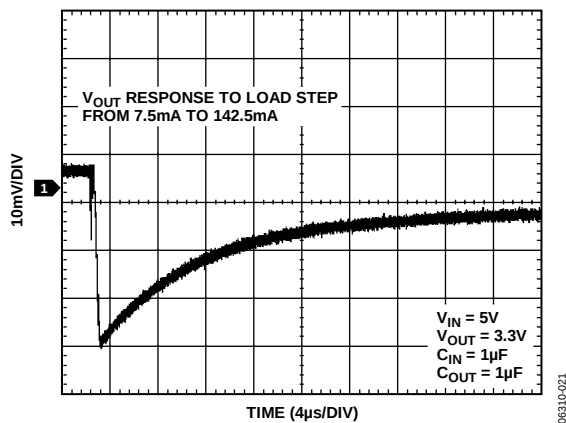


Figure 21. Output Transient Response,  $C_{OUT} = 1 \mu\text{F}$

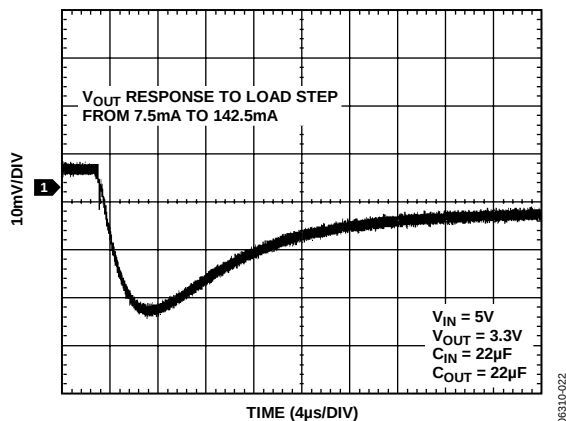


Figure 22. Output Transient Response,  $C_{OUT} = 22 \mu\text{F}$

#### Input Bypass Capacitor

Connecting a 1  $\mu\text{F}$  capacitor from IN to GND reduces the circuit sensitivity to printed circuit board (PCB) layout, especially when long input traces or high source impedance are encountered. If greater than 1  $\mu\text{F}$  of output capacitance is required, the input capacitor should be increased to match it.

#### Input and Output Capacitor Properties

Any good quality ceramic capacitors can be used with the ADP1710/ADP1711, as long as they meet the minimum capacitance and maximum ESR requirements. Ceramic capacitors are manufactured with a variety of dielectrics, each with different behavior over temperature and applied voltage. Capacitors must have a dielectric adequate to ensure the minimum capacitance over the necessary temperature range and dc bias conditions. X5R or X7R dielectrics with a voltage rating of 6.3 V or 10 V are recommended. Y5V and Z5U dielectrics are not recommended, due to their poor temperature and dc bias characteristics.

### CURRENT LIMIT AND THERMAL OVERLOAD PROTECTION

The ADP1710/ADP1711 are protected against damage due to excessive power dissipation by current and thermal overload protection circuits. The ADP1710/ADP1711 are designed to current limit when the output load reaches 270 mA (typical). When the output load exceeds 270 mA, the output voltage is reduced to maintain a constant current limit.

Thermal overload protection is included, which limits the junction temperature to a maximum of 150°C (typical). Under extreme conditions (that is, high ambient temperature and power dissipation) when the junction temperature starts to rise above 150°C, the output is turned off, reducing the output current to zero. When the junction temperature drops below 135°C, the output is turned on again and output current is restored to its nominal value.

Consider the case where a hard short from OUT to ground occurs. At first the ADP1710/ADP1711 current limits, so that only 270 mA is conducted into the short. If self heating of the junction is great enough to cause its temperature to rise above 150°C, thermal shutdown activates, turning off the output and reducing the output current to zero. As the junction temperature cools and drops below 135°C, the output turns on and conducts 270 mA into the short, again causing the junction temperature to rise above 150°C. This thermal oscillation between 135°C and 150°C causes a current oscillation between 270 mA and 0 mA, which continues as long as the short remains at the output.

Current and thermal limit protections are intended to protect the device against accidental overload conditions. For reliable operation, device power dissipation must be externally limited so junction temperatures do not exceed 125°C.

### THERMAL CONSIDERATIONS

To guarantee reliable operation, the junction temperature of the ADP1710/ADP1711 must not exceed 125°C. To ensure the junction temperature stays below this maximum value, the user needs to be aware of the parameters that contribute to junction temperature changes. These parameters include ambient temperature, power dissipation in the power device, and thermal resistances between the junction and ambient air ( $\theta_{JA}$ ). The  $\theta_{JA}$  number is dependent on the package assembly compounds used and the amount of copper to which the GND pins of the package are soldered on the PCB. Table 5 shows typical  $\theta_{JA}$  values of the 5-lead TSOT package for various PCB copper sizes.

Table 5.

| Copper Size (mm <sup>2</sup> ) | $\theta_{JA}$ (°C/W) |
|--------------------------------|----------------------|
| 0 <sup>1</sup>                 | 170                  |
| 50                             | 152                  |
| 100                            | 146                  |
| 300                            | 134                  |
| 500                            | 131                  |

<sup>1</sup> Device soldered to minimum size pin traces.

The junction temperature of the ADP1710/ADP1711 can be calculated from the following equation:

$$T_J = T_A + (P_D \times \theta_{JA}) \quad (2)$$

where:

$T_A$  is the ambient temperature.

$P_D$  is the power dissipation in the die, given by

$$P_D = [(V_{IN} - V_{OUT}) \times I_{LOAD}] + (V_{IN} \times I_{GND}) \quad (3)$$

where:

$I_{LOAD}$  is the load current.

$I_{GND}$  is the ground current.

$V_{IN}$  and  $V_{OUT}$  are the input voltage and output voltage, respectively.

Power dissipation due to ground current is quite small and can be ignored. Therefore, the junction temperature equation simplifies to the following:

$$T_J = T_A + \{[(V_{IN} - V_{OUT}) \times I_{LOAD}] \times \theta_{JA}\} \quad (4)$$

As shown in Equation 4, for a given ambient temperature, input to output voltage differential, and continuous load current, there exists a minimum copper size requirement for the PCB to ensure the junction temperature does not rise above 125°C. The following figures show junction temperature calculations for different ambient temperatures, load currents,  $V_{IN}$  to  $V_{OUT}$  differentials, and areas of PCB copper.

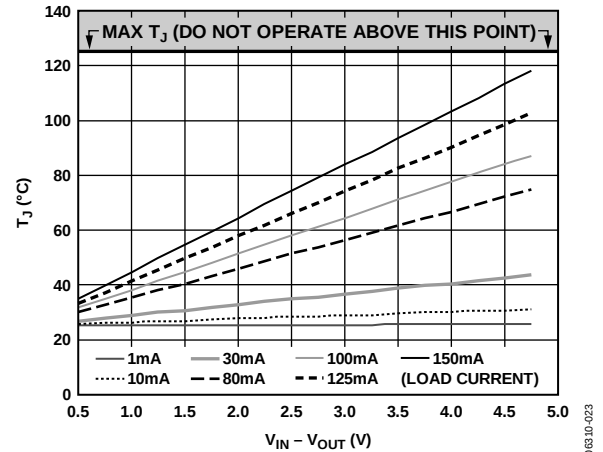


Figure 23. 500 mm<sup>2</sup> of PCB Copper,  $T_A = 25^\circ\text{C}$

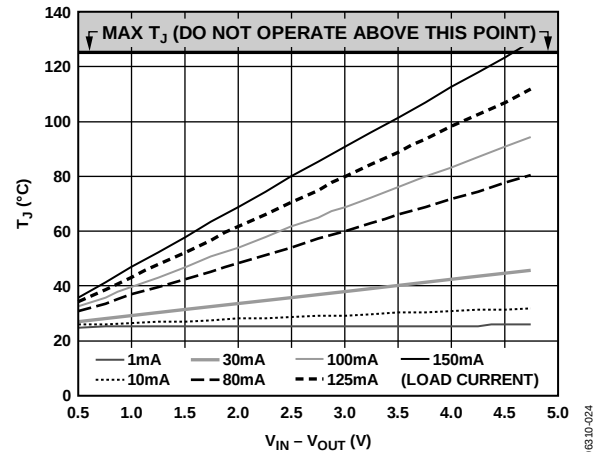


Figure 24. 100 mm<sup>2</sup> of PCB Copper,  $T_A = 25^\circ\text{C}$

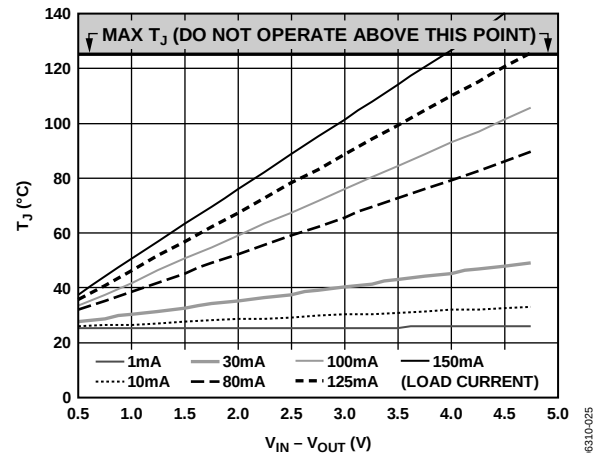


Figure 25. 0 mm<sup>2</sup> of PCB Copper,  $T_A = 25^\circ\text{C}$

# ADP1710/ADP1711

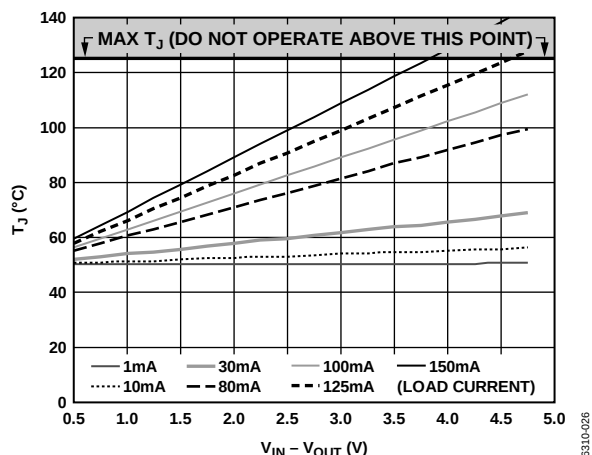


Figure 26. 500 mm<sup>2</sup> of PCB Copper,  $T_A = 50^\circ\text{C}$

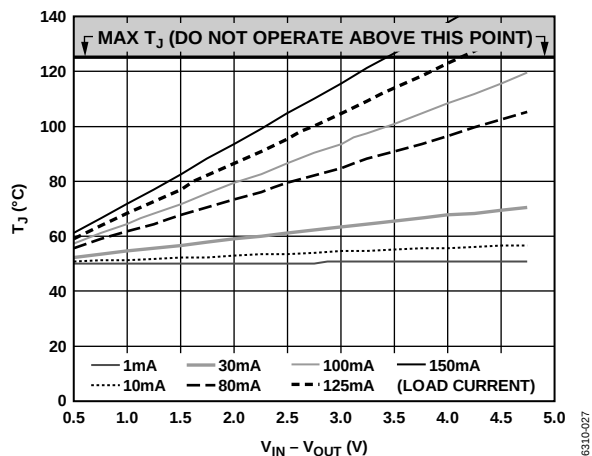


Figure 27. 100 mm<sup>2</sup> of PCB Copper,  $T_A = 50^\circ\text{C}$

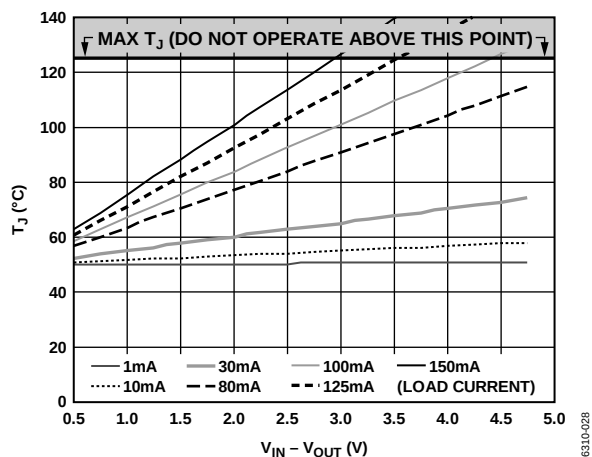


Figure 28. 0 mm<sup>2</sup> of PCB Copper,  $T_A = 50^\circ\text{C}$

## PRINTED CIRCUIT BOARD LAYOUT CONSIDERATIONS

Heat dissipation from the package can be improved by increasing the amount of copper attached to the pins of the ADP1710/ADP1711. However, as can be seen from Table 5, a point of diminishing returns eventually is reached, beyond which an increase in the copper size does not yield significant heat dissipation benefits.

Place the input capacitor as close as possible to the IN and GND pins. Place the output capacitor as close as possible to the OUT and GND pins. For ADP1711, place the internal reference bypass capacitor as close as possible to the BYP pin. Use of 0402 or 0603 size capacitors and resistors achieves the smallest possible footprint solution on boards where area is limited.


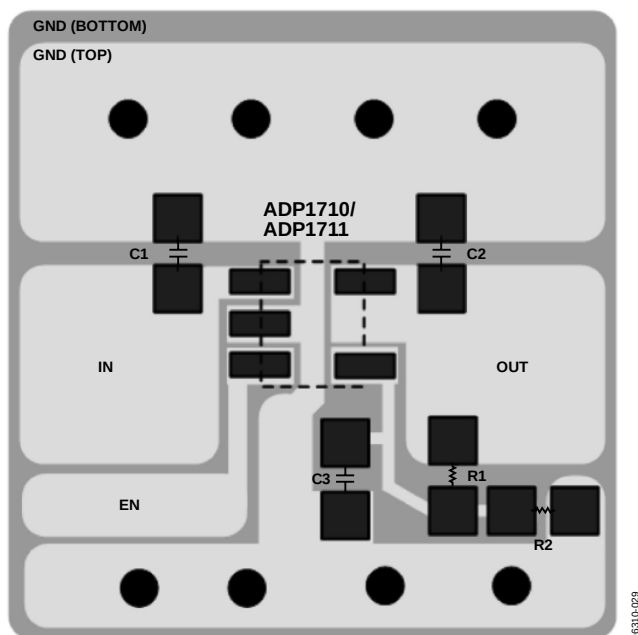


Figure 29. Example PCB Layout

OUTLINE DIMENSIONS

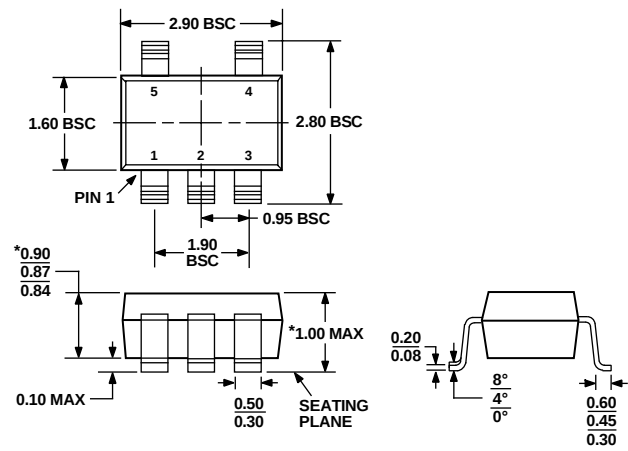

\*COMPLIANT TO JEDEC STANDARDS MO-193-AB WITH THE EXCEPTION OF PACKAGE HEIGHT AND THICKNESS.

Figure 30. 5-Lead Thin Small Outline Transistor Package [TSOT] (UJ-5)  
Dimensions show in millimeters

# ADP1710/ADP1711

## ORDERING GUIDE

| Model                           | Temperature Range | Output Voltage (V) | Package Description | Package Option | Branding |
|---------------------------------|-------------------|--------------------|---------------------|----------------|----------|
| ADP1710AUJZ-0.75R7 <sup>1</sup> | –40°C to +125°C   | 0.75               | 5-Lead TSOT         | UJ-5           | L4S      |
| ADP1710AUJZ-0.8-R7 <sup>1</sup> | –40°C to +125°C   | 0.80               | 5-Lead TSOT         | UJ-5           | L0D      |
| ADP1710AUJZ-0.85R7 <sup>1</sup> | –40°C to +125°C   | 0.85               | 5-Lead TSOT         | UJ-5           | L40      |
| ADP1710AUJZ-0.9-R7 <sup>1</sup> | –40°C to +125°C   | 0.90               | 5-Lead TSOT         | UJ-5           | L41      |
| ADP1710AUJZ-0.95R7 <sup>1</sup> | –40°C to +125°C   | 0.95               | 5-Lead TSOT         | UJ-5           | L42      |
| ADP1710AUJZ-1.0-R7 <sup>1</sup> | –40°C to +125°C   | 1.00               | 5-Lead TSOT         | UJ-5           | L0E      |
| ADP1710AUJZ-1.05R7 <sup>1</sup> | –40°C to +125°C   | 1.05               | 5-Lead TSOT         | UJ-5           | L43      |
| ADP1710AUJZ-1.10R7 <sup>1</sup> | –40°C to +125°C   | 1.10               | 5-Lead TSOT         | UJ-5           | L47      |
| ADP1710AUJZ-1.15R7 <sup>1</sup> | –40°C to +125°C   | 1.15               | 5-Lead TSOT         | UJ-5           | L44      |
| ADP1710AUJZ-1.2-R7 <sup>1</sup> | –40°C to +125°C   | 1.20               | 5-Lead TSOT         | UJ-5           | L45      |
| ADP1710AUJZ-1.3-R7 <sup>1</sup> | –40°C to +125°C   | 1.30               | 5-Lead TSOT         | UJ-5           | L46      |
| ADP1710AUJZ-1.5-R7 <sup>1</sup> | –40°C to +125°C   | 1.50               | 5-Lead TSOT         | UJ-5           | L0F      |
| ADP1710AUJZ-1.8-R7 <sup>1</sup> | –40°C to +125°C   | 1.80               | 5-Lead TSOT         | UJ-5           | L0G      |
| ADP1710AUJZ-2.5-R7 <sup>1</sup> | –40°C to +125°C   | 2.50               | 5-Lead TSOT         | UJ-5           | L0H      |
| ADP1710AUJZ-3.0-R7 <sup>1</sup> | –40°C to +125°C   | 3.00               | 5-Lead TSOT         | UJ-5           | L0J      |
| ADP1710AUJZ-3.3-R7 <sup>1</sup> | –40°C to +125°C   | 3.30               | 5-Lead TSOT         | UJ-5           | L0K      |
| ADP1710AUJZ-R7 <sup>1</sup>     | –40°C to +125°C   | 0.8 to 5.0         | 5-Lead TSOT         | UJ-5           | L0L      |
| ADP1711AUJZ-0.75R7 <sup>1</sup> | –40°C to +125°C   | 0.75               | 5-Lead TSOT         | UJ-5           | L4T      |
| ADP1711AUJZ-0.8-R7 <sup>1</sup> | –40°C to +125°C   | 0.80               | 5-Lead TSOT         | UJ-5           | L0M      |
| ADP1711AUJZ-0.85R7 <sup>1</sup> | –40°C to +125°C   | 0.85               | 5-Lead TSOT         | UJ-5           | L48      |
| ADP1711AUJZ-0.9-R7 <sup>1</sup> | –40°C to +125°C   | 0.90               | 5-Lead TSOT         | UJ-5           | L49      |
| ADP1711AUJZ-0.95R7 <sup>1</sup> | –40°C to +125°C   | 0.95               | 5-Lead TSOT         | UJ-5           | L4A      |
| ADP1711AUJZ-1.0-R7 <sup>1</sup> | –40°C to +125°C   | 1.00               | 5-Lead TSOT         | UJ-5           | L0N      |
| ADP1711AUJZ-1.05R7 <sup>1</sup> | –40°C to +125°C   | 1.05               | 5-Lead TSOT         | UJ-5           | L4C      |
| ADP1711AUJZ-1.10R7 <sup>1</sup> | –40°C to +125°C   | 1.10               | 5-Lead TSOT         | UJ-5           | L4G      |
| ADP1711AUJZ-1.15R7 <sup>1</sup> | –40°C to +125°C   | 1.15               | 5-Lead TSOT         | UJ-5           | L4D      |
| ADP1711AUJZ-1.2-R7 <sup>1</sup> | –40°C to +125°C   | 1.20               | 5-Lead TSOT         | UJ-5           | L4E      |
| ADP1711AUJZ-1.3-R7 <sup>1</sup> | –40°C to +125°C   | 1.30               | 5-Lead TSOT         | UJ-5           | L4F      |
| ADP1711AUJZ-1.5-R7 <sup>1</sup> | –40°C to +125°C   | 1.50               | 5-Lead TSOT         | UJ-5           | L0P      |
| ADP1711AUJZ-1.8-R7 <sup>1</sup> | –40°C to +125°C   | 1.80               | 5-Lead TSOT         | UJ-5           | L0Q      |
| ADP1711AUJZ-2.5-R7 <sup>1</sup> | –40°C to +125°C   | 2.50               | 5-Lead TSOT         | UJ-5           | L0R      |
| ADP1711AUJZ-3.0-R7 <sup>1</sup> | –40°C to +125°C   | 3.00               | 5-Lead TSOT         | UJ-5           | L0S      |
| ADP1711AUJZ-3.3-R7 <sup>1</sup> | –40°C to +125°C   | 3.30               | 5-Lead TSOT         | UJ-5           | L0U      |

<sup>1</sup> Z = Pb-free part.

NOTES

## **NOTES**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.