

NTK3043N

Power MOSFET

20 V, 285 mA, N-Channel with ESD Protection, SOT-723

Features

- Enables High Density PCB Manufacturing
- 44% Smaller Footprint than SC-89 and 38% Thinner than SC-89
- Low Voltage Drive Makes this Device Ideal for Portable Equipment
- Low Threshold Levels, $V_{GS(TH)} < 1.3$ V
- Low Profile (< 0.5 mm) Allows It to Fit Easily into Extremely Thin Environments such as Portable Electronics
- Operated at Standard Logic Level Gate Drive, Facilitating Future Migration to Lower Levels Using the Same Basic Topology
- These are Pb-Free and Halogen Free Devices

Applications

- Interfacing, Switching
- High Speed Switching
- Cellular Phones, PDAs

MAXIMUM RATINGS ($T_J = 25^\circ\text{C}$ unless otherwise stated)

Parameter			Symbol	Value	Unit
Drain-to-Source Voltage			V_{DSS}	20	V
Gate-to-Source Voltage			V_{GS}	± 10	V
Continuous Drain Current (Note 1)	Steady State	$T_A = 25^{\circ}\text{C}$	I_D	255	mA
		$T_A = 85^{\circ}\text{C}$		185	
	$t \leq 5\text{ s}$	$T_A = 25^{\circ}\text{C}$		285	
Power Dissipation (Note 1)	Steady State	$T_A = 25^{\circ}\text{C}$	P_D	440	mW
	$t \leq 5\text{ s}$			545	
Continuous Drain Current (Note 2)	Steady State	$T_A = 25^{\circ}\text{C}$	I_D	210	mA
		$T_A = 85^{\circ}\text{C}$		155	
Power Dissipation (Note 2)			$T_A = 25^{\circ}\text{C}$	P_D	310
Pulsed Drain Current	$t_p = 10\text{ }\mu\text{s}$		I_{DM}	400	mA
Operating Junction and Storage Temperature			T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$
Source Current (Body Diode) (Note 2)			I_S	286	mA
Lead Temperature for Soldering Purposes (1/8" from case for 10 seconds)			T_L	260	$^{\circ}\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Surface-mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces)
2. Surface-mounted on FR4 board using the minimum recommended pad size.




ON Semiconductor®

<http://onsemi.com>


$V_{(BR)DSS}$	$R_{DS(on)}$ TYP	I_D Max
20 V	1.5 Ω @ 4.5 V	285 mA
	2.4 Ω @ 2.5 V	
	5.1 Ω @ 1.8 V	
	6.8 Ω @ 1.65 V	

Top View

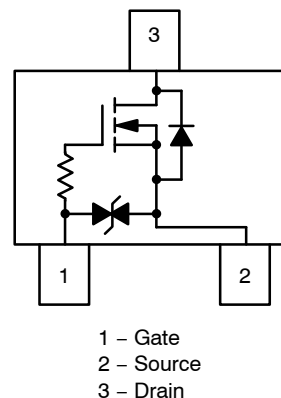

MARKING DIAGRAM

SOT-723
CASE 631AA
STYLE 5



KA = Device Code
M = Date Code

ORDERING INFORMATION

Device	Package	Shipping†
NTK3043NT1G	SOT-723*	4000 / Tape & Reel
NTK3043NT5G	SOT-723*	8000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

*These packages are inherently Pb-Free.

THERMAL RESISTANCE RATINGS

Parameter	Symbol	Max	Unit
Junction-to-Ambient – Steady State (Note 3)	$R_{\theta JA}$	280	°C/W
Junction-to-Ambient – $t = 5$ s (Note 3)	$R_{\theta JA}$	228	
Junction-to-Ambient – Steady State Minimum Pad (Note 4)	$R_{\theta JA}$	400	

3. Surface-mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces)
4. Surface-mounted on FR4 board using the minimum recommended pad size.

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Test Condition	Symbol	Min	Typ	Max	Unit
-----------	----------------	--------	-----	-----	-----	------

OFF CHARACTERISTICS

Drain-to-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 100\text{ }\mu\text{A}$	$V_{(BR)DSS}$	20			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	$I_D = 100\text{ }\mu\text{A}$, Reference to 25°C	$V_{(BR)DSS}/T_J$		27		mV/°C
Zero Gate Voltage Drain Current	$V_{GS} = 0\text{ V}, V_{DS} = 16\text{ V}$	I_{DSS}			1	μA
					10	
Gate-to-Source Leakage Current	$V_{DS} = 0\text{ V}, V_{GS} = \pm 5\text{ V}$	I_{GSS}			1	μA

ON CHARACTERISTICS (Note 3)

Gate Threshold Voltage	$V_{GS} = V_{DS}, I_D = 250\text{ }\mu\text{A}$	$V_{GS(TH)}$	0.4		1.3	V
Gate Threshold Temperature Coefficient		$V_{GS(TH)}/T_J$		-2.4		mV/°C
Drain-to-Source On Resistance	$V_{GS} = 4.5\text{ V}, I_D = 10\text{ mA}$	$R_{DS(ON)}$		1.5	3.4	Ω
	$V_{GS} = 4.5\text{ V}, I_D = 255\text{ mA}$			1.6	3.8	
	$V_{GS} = 2.5\text{ V}, I_D = 1\text{ mA}$			2.4	4.5	
	$V_{GS} = 1.8\text{ V}, I_D = 1\text{ mA}$			5.1	10	
	$V_{GS} = 1.65\text{ V}, I_D = 1\text{ mA}$			6.8	15	
Forward Transconductance	$V_{DS} = 5\text{ V}, I_D = 100\text{ mA}$	g_{FS}		0.275		S

CHARGES, CAPACITANCES AND GATE RESISTANCE

Input Capacitance	$V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = 10\text{ V}$	C_{ISS}		11		pF
Output Capacitance		C_{OSS}		8.3		
Reverse Transfer Capacitance		C_{RSS}		2.7		

SWITCHING CHARACTERISTICS, $V_{GS} = 4.5\text{ V}$ (Note 4)

Turn-On Delay Time	$V_{GS} = 4.5\text{ V}, V_{DD} = 5\text{ V}, I_D = 10\text{ mA}, R_G = 6\text{ }\Omega$	$t_{d(ON)}$		13		ns
Rise Time		t_r		15		
Turn-Off Delay Time		$t_{d(OFF)}$		94		
Fall Time		t_f		55		

DRAIN-SOURCE DIODE CHARACTERISTICS

Forward Diode Voltage	$V_{GS} = 0\text{ V}, I_S = 286\text{ mA}$	$T_J = 25^{\circ}\text{C}$	V_{SD}		0.83	1.2	V
		$T_J = 125^{\circ}\text{C}$			0.69		
Reverse Recovery Time	$V_{GS} = 0\text{ V}, V_{DD} = 20\text{ V}, dI_{SD}/dt = 100\text{ A}/\mu\text{s}, I_S = 286\text{ mA}$	t_{RR}		9.1		ns	
Charge Time		t_a		7.1			
Discharge Time		t_b		2.0			
Reverse Recovery Charge		Q_{RR}		3.7		nC	

5. Pulse Test: pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$
6. Switching characteristics are independent of operating junction temperatures

TYPICAL PERFORMANCE CURVES

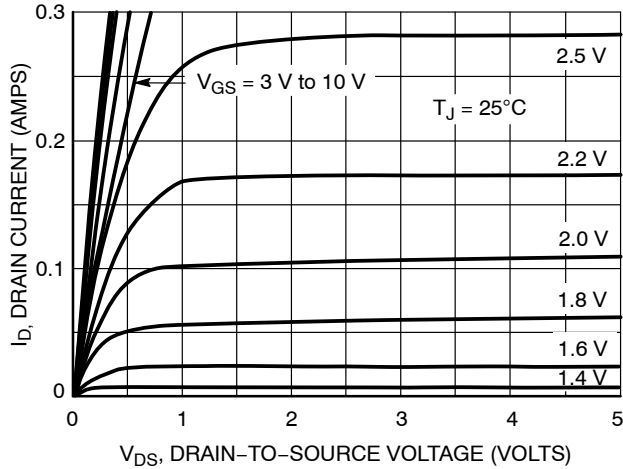


Figure 1. On-Region Characteristics

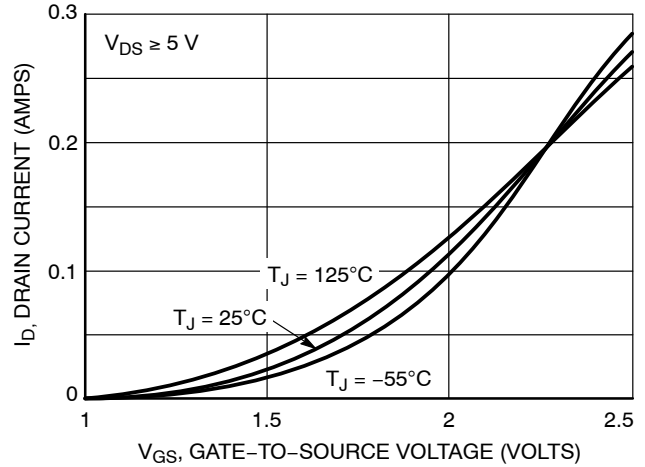


Figure 2. Transfer Characteristics

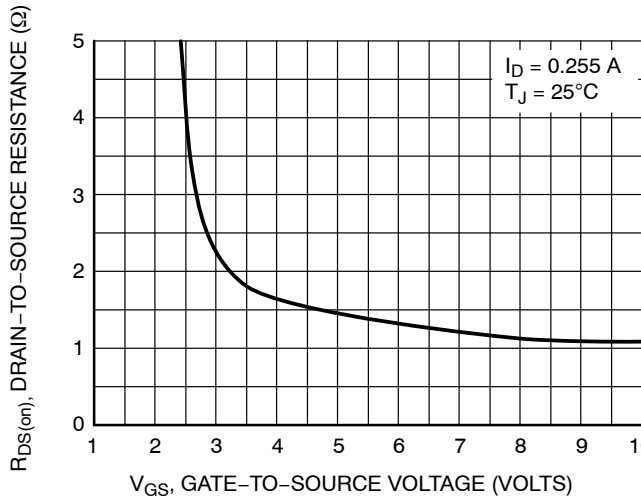


Figure 3. On-Resistance vs. Gate-to-Source Voltage

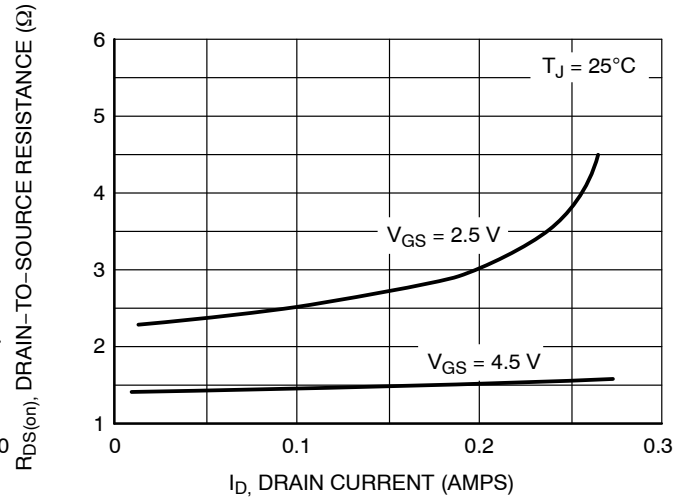


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

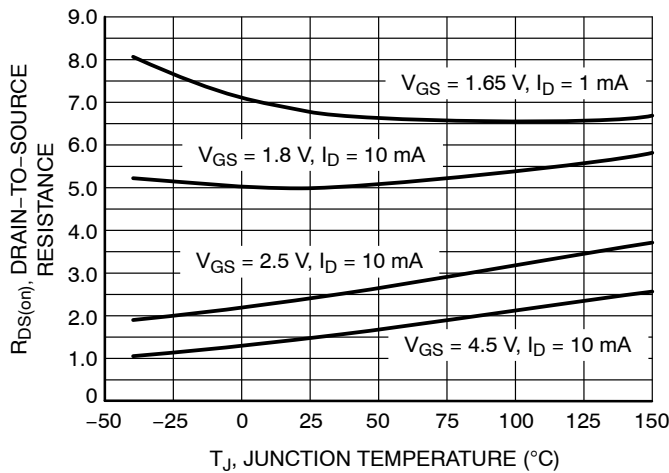


Figure 5. On-Resistance Variation with Temperature

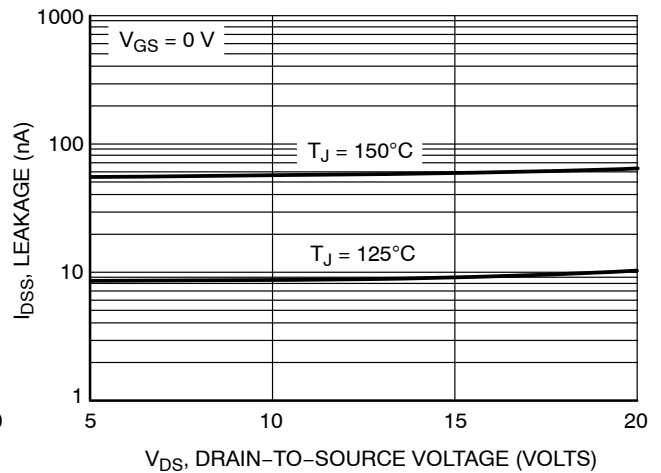


Figure 6. Drain-to-Source Leakage Current vs. Voltage

TYPICAL PERFORMANCE CURVES

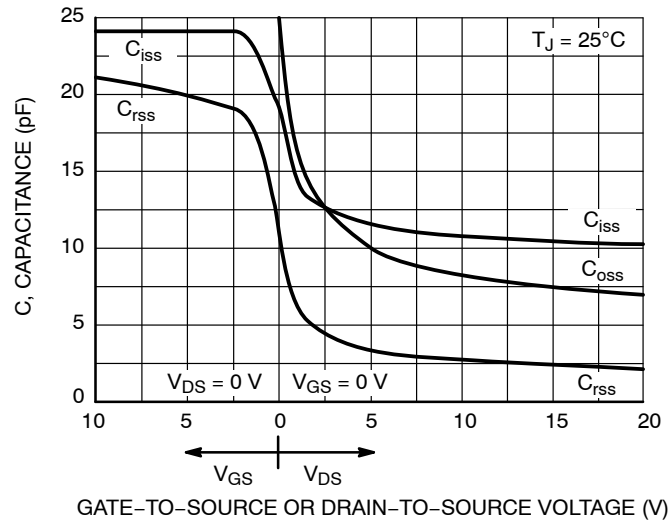


Figure 7. Capacitance Variation

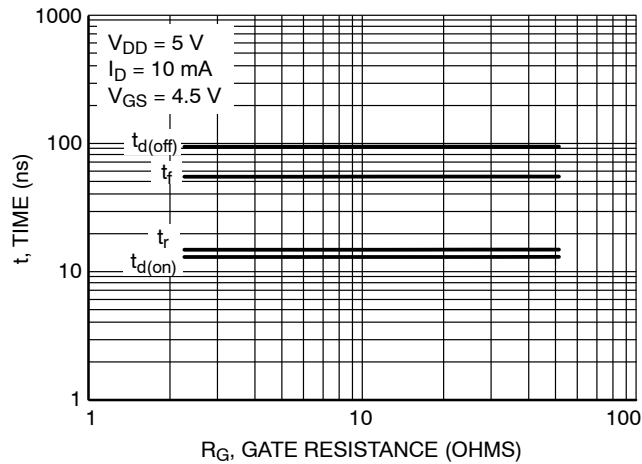


Figure 8. Resistive Switching Time Variation vs. Gate Resistance


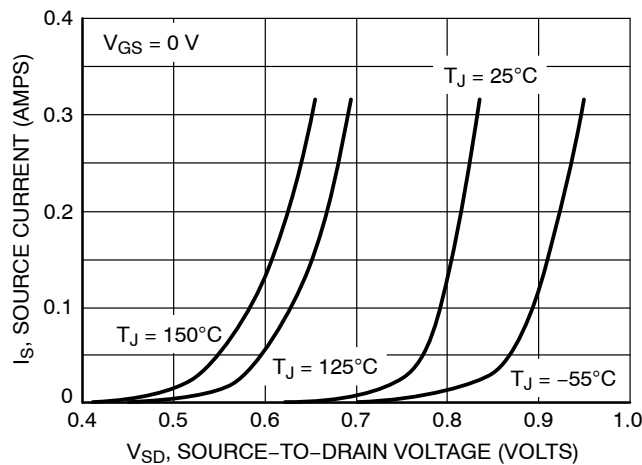


Figure 9. Diode Forward Voltage vs. Current

NTK3043N

PACKAGE DIMENSIONS

SOT-723
CASE 631AA
ISSUE D

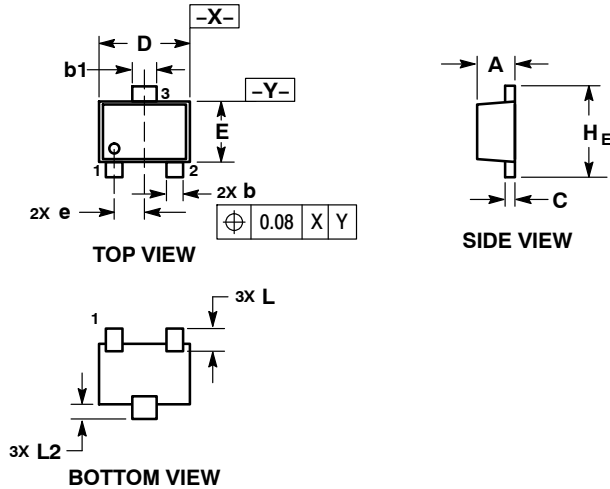

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	0.45	0.50	0.55
b	0.15	0.21	0.27
b1	0.25	0.31	0.37
C	0.07	0.12	0.17
D	1.15	1.20	1.25
E	0.75	0.80	0.85
e	0.40 BSC		
H E	1.15	1.20	1.25
L	0.29 REF		
L2	0.15	0.20	0.25

STYLE 5:

1. GATE
2. SOURCE
3. DRAIN

RECOMMENDED SOLDERING FOOTPRINT*

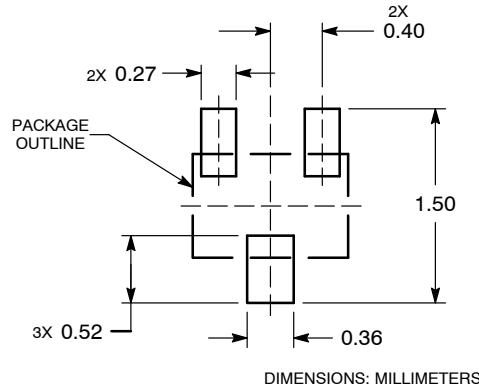

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.