




MICROPROCESSOR
CORE MODULE

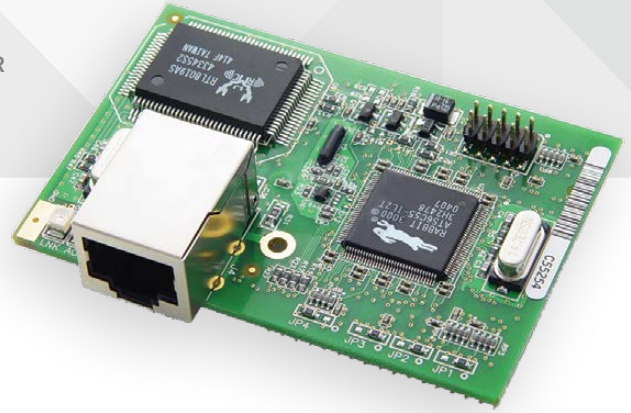

RABBITCORE® RCM3000 SERIES

Ideal for engineers who want to rapidly develop and implement embedded systems with fully integrated Ethernet connectivity

The RabbitCore RCM3000 series, featuring the Rabbit® 3000 microprocessor, boasts powerful features and integrated 10Base-T Ethernet to simplify integration. When paired with Dynamic C®, the RCM3000 series allows engineers to add device intelligence and I/O control for many of today's embedded designs. Its small form factor and low-power modes make the RCM3000 series perfect for remote device applications. The RCM3000 series is pin-compatible with the RCM3100 series, facilitating cost-effective implementation of both Ethernet and non-Ethernet systems.

Rabbit hardware and Dynamic C are designed in a complementary fashion for maximum performance and ease of use in embedded systems. The additional software components in Dynamic C allow you to add functionality for embedded application customization.

BENEFITS

- Rabbit 3000 microprocessor at 30 MHz
- Up to 512K Flash/512K SRAM
- 52 digital I/O and 6 serial ports (IrDA, HDLC, asynch, SPI)
- 3.3V operation, low power “sleepy” modes (< 2mA)
- Small form factor
- Royalty-free TCP/IP stack in source code
- Low-cost embedded microprocessor module
- Security software add-on modules available

RELATED PRODUCTS



RabbitCore®
RCM3209
Series



RabbitCore®
RCM3700
Series



Rabbit MiniCore®
RCM6700
Series




ConnectCard®
for i.MX28




Dynamic C®

APPLICATION EXAMPLE

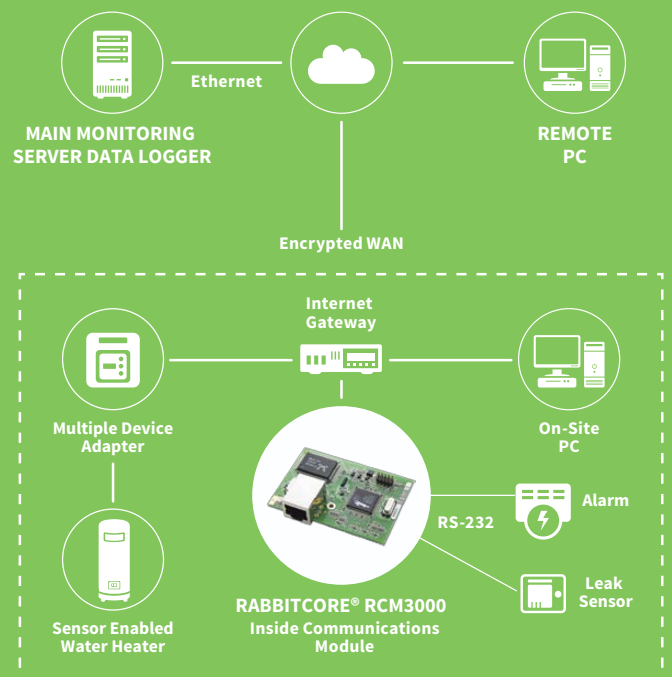

SPECIFICATIONS		RCM3000	RCM3010
FEATURE			
MICROPROCESSOR	Rabbit® 3000 at 30 MHz		
EMI REDUCTION	Spectrum spreader for reduced EMI (radiated emissions)		
ETHERNET PORT	10Base-T interface, RJ-45, 2 LEDs		
FLASH MEMORY	512K (2 × 256K)		256K
SRAM	512K		128K
BACKUP BATTERY	Connection for user-supplied backup battery (to support RTC and SRAM)		
GENERAL-PURPOSE I/O	52 parallel digital I/O lines: • 44 configurable I/O • 4 fixed inputs • 4 fixed outputs		
ADDITIONAL DIGITAL INPUTS	2 startup mode, reset in		
ADDITIONAL DIGITAL OUTPUTS	Status, reset out		
AUXILIARY I/O BUS	8 data lines and 6 address lines (shared with I/O) plus I/O read/write		
SERIAL PORTS	6 shared high-speed, CMOS-compatible ports: • 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC (with IrDA) • 1 asynchronous serial port dedicated for programming • Support for MIR/SIR IrDA transceiver		
SERIAL RATE	Max. asynchronous baud rate = CLK/8		
SLAVE INTERFACE	A slave port allows the RCM3000 to be used as a master or as an intelligent peripheral device with Rabbit-based or any other type of processor		
REAL-TIME CLOCK	Yes		
TIMERS	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers		
WATCHDOG/SUPERVISOR	Yes		
PULSE-WIDTH MODULATORS	10-bit free-running counter and 4 pulse-width registers		
INPUT CAPTURE	2-channel input capture can be used to time input signals from various port pins		
QUADRATURE DECODER	2-channel quadrature decoder accepts inputs from external incremental encoder modules		
POWER	3.15V to 3.45 VDC 150 mA @ 3.3V		
OPERATING TEMPERATURE	-40° C to +70° C		
HUMIDITY	5% to 95%, non-condensing		
CONNECTORS	Two 2 × 17, 2 mm pitch (for connection to headers J4 and J5)		
BOARD SIZE	1.850" × 2.725" × 0.86" (47 mm × 69 mm × 22 mm)		

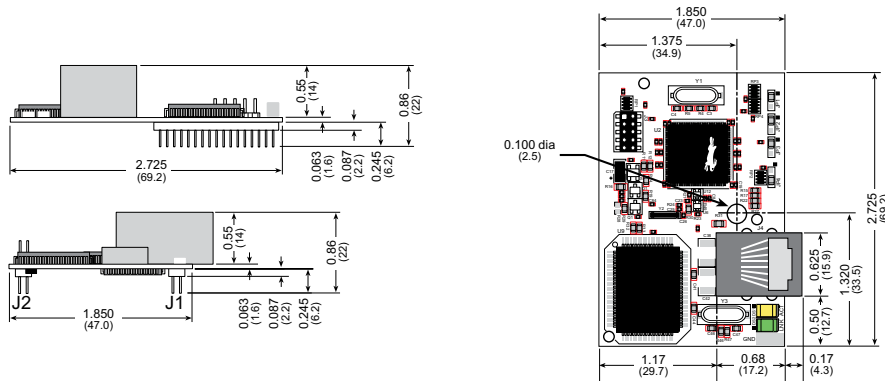

PART NUMBERS	DESCRIPTION
20-101-0507	RCM3000. 512K Flash/512K SRAM
20-101-0508	RCM3010. 256K Flash/128K SRAM
101-0523	RCM3000 RabbitCore Development Kit

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001602
C1/915

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.