

CMXESD70-4**SURFACE MOUNT SILICON
LOW CAPACITANCE
ESD PROTECTION
4-LINE DIODE ARRAY****SOT-26 CASE**www.centralsemi.com**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMXESD70-4 is a 4-line silicon diode array packaged in the SOT-26 surface mount case. This device, with its low capacitance, is designed to protect four high speed data or transmission lines from over-voltage transients and ESD damage.

MARKING CODE: CTV70**APPLICATIONS:**

- USB 2.0 power and data line protection
- HDMI
- DVI
- Ethernet ports

FEATURES:

- Low capacitance
- Protects four I/O lines
- Protects supply voltage rail

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Peak Repetitive Reverse Voltage
Continuous Reverse Voltage
Continuous Forward Current
Peak Repetitive Forward Current
Peak Forward Surge Current, $t_p=1.0\mu\text{s}$
Peak Forward Surge Current, $t_p=1.0\text{s}$
ESD Voltage (IEC 61000-4-2, Air)
ESD Voltage (IEC 61000-4-2, Contact)
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL

V_{RRM}	70
V_R	70
I_F	200
I_{FRM}	450
I_{FSM}	2.0
I_{FSM}	0.5
V_{ESD}	15
V_{ESD}	8.0
T_J, T_{stg}	-55 to +150
θ_{JA}	556

UNITS

V
V
mA
mA
A
A
kV
kV
$^\circ\text{C}$
$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=3.3\text{V}$		12	30	nA
I_R	$V_R=70\text{V}$		0.03	1.0	μA
I_R	$V_R=70\text{V}, T_J=150^\circ\text{C}$		55	100	μA
BV_R	$I_R=100\mu\text{A}$	70			V
V_F	$I_F=1.0\text{mA}$		0.61	0.715	V
V_F	$I_F=10\text{mA}$		0.74	0.855	V
V_F	$I_F=50\text{mA}$		0.88	1.0	V
V_F	$I_F=150\text{mA}$		1.07	1.25	V
C_J	$V_R=0\text{V}, f=1.0\text{MHz}$ (I/O to I/O)		0.45	0.9	pF
C_J	$V_R=0\text{V}, f=1.0\text{MHz}$ (I/O to GND)		0.77	1.0	pF


R4 (5-August 2015)

CMXESD70-4

**SURFACE MOUNT SILICON
LOW CAPACITANCE
ESD PROTECTION
4-LINE DIODE ARRAY**




SOT-26 CASE - MECHANICAL OUTLINE

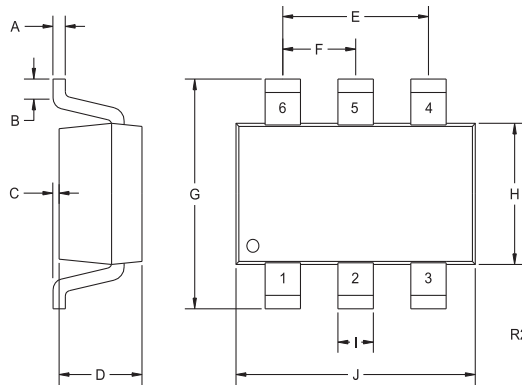

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.004	0.007	0.11	0.19
B	0.016	-	0.40	-
C	-	0.004	-	0.10
D	0.039	0.047	1.00	1.20
E	0.074	0.075	1.88	1.92
F	0.037	0.038	0.93	0.97
G	0.102	0.118	2.60	3.00
H	0.059	0.067	1.50	1.70
I	0.016		0.41	
J	0.110	0.118	2.80	3.00

SOT-26 (REV: R2)

PIN CONFIGURATION




LEAD CODE:

- 1) I/O 1
- 2) Ground
- 3) I/O 2
- 4) I/O 3
- 5) Supply Voltage (V_{CC})
- 6) I/O 4

MARKING CODE: CTV70

Theory of operation: In this configuration, when the transient voltage exceeds the sum of the diode forward voltage drop (V_F), plus the supply voltage (V_{CC}), the diode will direct the surge to the supply, thereby protecting the high speed data line.

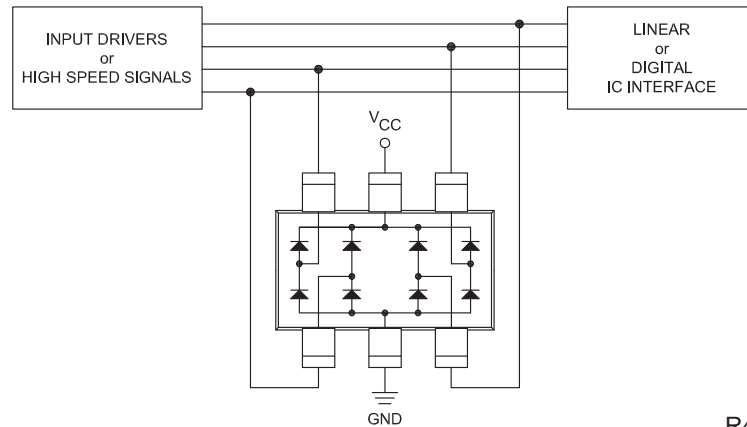




R4 (5-August 2015)

CMXESD70-4

SURFACE MOUNT SILICON
LOW CAPACITANCE
ESD PROTECTION
4-LINE DIODE ARRAY



TYPICAL ELECTRICAL CHARACTERISTICS

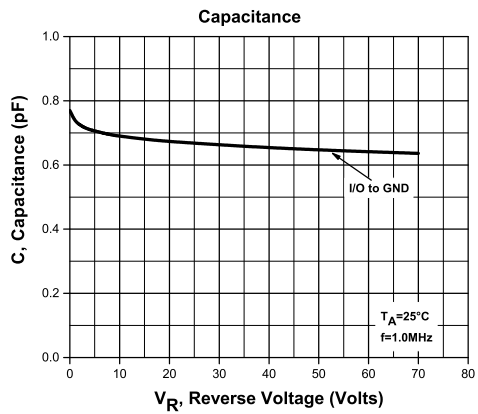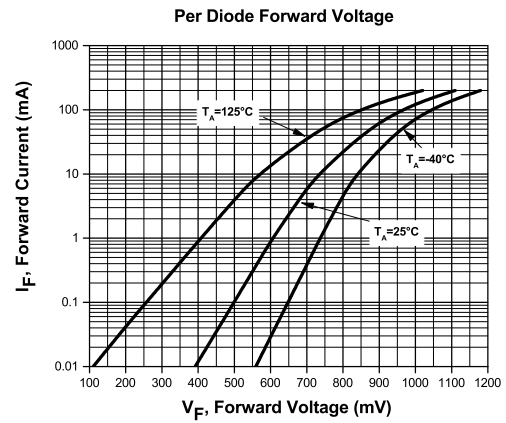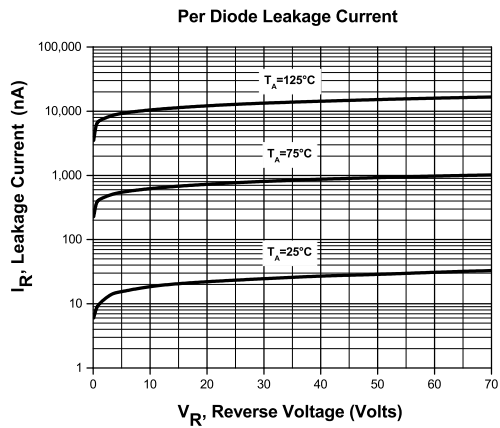

R4 (5-August 2015)

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.