


RoHS  **SL1411A Series Two-terminal Gas Plasma Arrester**

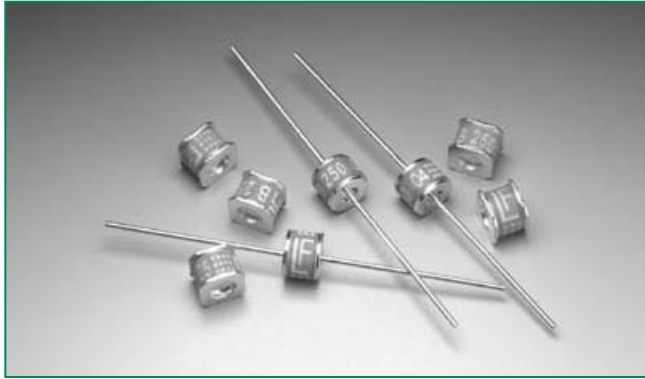

### Description


The Greentube™ SL1411A (Delta) Series Gas Plasma Arrester (improved gas discharge tube (GDT)) features a high-performance transient voltage suppressor designed for heavy-duty protection of telecom and industrial equipment.

The Delta range provides high levels of protection against fast rising transients measuring 100V/μs to 1kV/μs and is usually caused by lightning disturbances.

The high surge rating of these devices makes them ideal for arduous service conditions and Outside Plant locations.

The Delta range also features ultra low capacitance (typically 1 pF or less) and optimized internal geometry which provides low insertion loss at high frequencies, so are ideal for the protection of broadband equipment.

### Agency Approvals

| AGENCY  | AGENCY FILE NUMBER |
|---|--------------------|
|  | E128662            |

### 2 Electrode GDT Graphical Symbol



### Features

- RoHS compliant and Lead-free
- Can be used to meet the requirements of GR-1361, RUS PE-80, ITU K.12 and YD/T940, 950, 1082, 993, 694
- Excellent response to fast rising transients
- Up to 1.5 GHz working frequency
- 10 kA surge capability tested with 8/20μs pulse as defined by IEC 61000-4-5 (20 kA for 90 V)
- 20,000 A single shot surge capability tested with 8/20μs pulse as defined by IEC 61000-4-5
- Excellent service life characteristics

### Applications

- Outside Plant and MDF protector modules
- ADSL equipment
- XDSL equipment (including ADSL2, VDSL, VDSL2)
- Satellite and CATV equipment
- General telecom equipment
- Cell phone base stations

### Electrical Characteristics

| Part Number* | DC Breakover Voltage @ 100 V/s <sup>1,2</sup> Volts |      | MAX Dynamic Breakover Voltage |                    | AC Discharge Current <sup>4</sup> Amps | Max Repetitive Impulse Current <sup>3</sup> kAmps | Max Single Impulse Current |                      | Max Leakage Current <sup>6</sup> nAmps | Holdover Voltage <sup>7,8</sup> Volts | Nominal On-state Voltage @ 1A Volts |
|--------------|---|------|-------------------------------|--------------------|--|---|----------------------------|----------------------|--|---------------------------------------|-------------------------------------|
|              | MIN   | MAX  | 100 V/ $\mu$ s Volts          | 1kV/ $\mu$ s Volts |  |   | 8/20 $\mu$ s kAmps         | 10/350 $\mu$ s kAmps |  |                                       |                                     |
| SL1411A075   | 60  | 90   | 500                           | 700                | 10                                     | 10  | 20                         | 3                    | 50                                     | 50                                    | 20                                  |
| SL1411A090   | 72  | 108  | 500                           | 600                | 10                                     | 10  | 20                         | 3                    | 50                                     | 50                                    | 20                                  |
| SL1411A150   | 120   | 180  | 500                           | 600                | 10                                     | 10  | 20                         | 3                    | 50                                     | 50                                    | 20                                  |
| SL1411A230   | 184   | 276  | 550                           | 700                | 10                                     | 10  | 20                         | 3                    | 100                                    | 135                                   | 20                                  |
| SL1411A250   | 200   | 300  | 600                           | 800                | 10                                     | 10  | 20                         | 3                    | 100                                    | 135                                   | 20                                  |
| SL1411A350   | 280   | 420  | 800                           | 900                | 10                                     | 10  | 20                         | 3                    | 100                                    | 135                                   | 20                                  |
| SL1411A470   | 400   | 540  | 1000                          | 1100               | 10                                     | 10  | 20                         | 3                    | 100                                    | 135                                   | 20                                  |
| SL1411A600   | 510   | 690  | 1250                          | 1400               | 10                                     | 10  | 20                         | 3                    | 100                                    | 135                                   | 20                                  |
| SL1411A800   | 680   | 920  | 1400                          | 1600               | 10                                     | 10  | 20                         | 3                    | 100                                    | 135                                   | 20                                  |
| SL1411A1000  | 850   | 1150 | 1600                          | 1800               | 10                                     | 10  | 20                         | 3                    | 100                                    | 135                                   | 20                                  |

\*Max capacitance is 1.5 pF, measured at 1 MHz.

**NOTES:**

1. At delivery AQL 0.65 level II, DIN ISO 2859
2. In ionized mode
3. Comparable to the silicon measurement Switching Voltage (V<sub>s</sub>)
4. 10 shots, AC 60 Hz, 1s duration
5. 10 shots, 8/20  $\mu$ s waveform
6. Measured at 100 V, except for devices 90 VDC which are measured at 50 V
7. With network applied, 52V for 75 VDC and 90VDC ratings
8. Tested according to ITU-T Rec. K 12

### Voltage vs. Time Characteristic



### Service Life Rating

|      |                 |                 |
|------|-----------------|-----------------|
| 10A  | 10/1000 $\mu$ s | 1500 Operations |
| 100A | 10/1000 $\mu$ s | 100 Operations  |
| 300A | 10/1000 $\mu$ s | 50 Operations   |

### Physical Specifications

|                           |   |
|---------------------------|---|
| <b>Weight:</b>            | 1.5 g   |
| <b>Plating Materials:</b> | "SM" and "C" surface mount devices:<br>Dull tin base on nickel<br><br>"A" axial leaded devices:<br>Core: Nickel<br>Lead wire: Hot dip tin |
| <b>Part Marking:</b>      | Littelfuse 'LF' marking, Voltage and date code.   |

### Environmental Specifications

| Component    | Storage Temperature | Operating Temperature |
|--------------|---------------------|-----------------------|
| Standard GDT | -40°C to +150°C     | -40°C to +100°C       |

### Dimensions mm [inches]



RECOMMENDED PAD LAYOUT  
FOR "SM" AND "C"  
SURFACE MOUNT DEVICES



### Part Numbering System





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.