

## DESCRIPTION

The popular 1N746 thru 1N759A and 1N4370 thru 1N4372A series of 0.5 watt Zener Voltage Regulators provides a selection from 2.4 to 12 volts in standard 5% or 10% tolerances as well as tighter tolerances identified by different suffix letters on the part number. These glass axial-leaded DO-35 Zeners are also available with an internal-metallurgical-bond option by adding a "-1" suffix. These are also available in JAN, JANTX, and JANTXV military qualifications. Microsemi also offers numerous other Zener products to meet higher and lower power applications.

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

## APPEARANCE

**DO-35  
(DO-204AH)**



## FEATURES

- JEDEC registered 1N746 thru 1N759A and 1N4370 thru 1N4372A series
- Internal metallurgical bond option available by adding a "-1" suffix
- Also available in JAN, JANTX, and JANTXV qualifications per MIL-PRF-19500/127 by adding the JAN, JANTX, or JANTXV prefixes to part numbers for desired level of screening as well as "-1" suffix; (e.g. JANTX1N751A-1, JANTXV1N758C-1, etc.)
- Military Surface Mount equivalents also available in DO-213AA by adding a UR-1 suffix in addition to the JAN, JANTX, and JANTXV prefix; e.g. JANTX1N962BUR-1 (see separate data sheet)
- Commercial Surface Mount equivalents available as MLL746 to MLL759A and MLL4370 to MLL4372A including the "-1" suffix in the DO-213AA MELF style package (consult factory for others)
- DO-7 glass body axial-leaded Zener equivalents are also available

## APPLICATIONS / BENEFITS

- Regulates voltage over a broad operating current and temperature range
- Selection from 2.4 to 12 V
- Standard voltage tolerances are plus/minus 5% with A suffix identification and 10 % with no suffix
- Tight tolerances available in plus or minus 2% or 1% with C or D suffix respectively
- Flexible axial-lead mounting terminals
- Nonsensitive to ESD per MIL-STD-750 Method 1020
- Minimal capacitance (see Figure 3)
- Inherently radiation hard as described in Microsemi MicroNote 050

## MAXIMUM RATINGS

- Operating and Storage temperature: -65°C to +175°C
- Thermal Resistance: 250 °C/W junction to lead at 3/8 (10 mm) lead length from body, or 310 °C/W junction to ambient when mounted on FR4 PC board (1 oz Cu) with 4 mm<sup>2</sup> copper pads and track width 1 mm, length 25 mm
- Steady-State Power: 0.5 watts at  $T_L \leq 50^\circ\text{C}$  3/8 inch (10 mm) from body or 0.48 W at  $T_A \leq 25^\circ\text{C}$  when mounted on FR4 PC board as described for thermal resistance above (also see Figure1)
- Forward voltage @200 mA: 1.1 volts
- Solder Temperatures: 260 °C for 10 s (max)

## MECHANICAL AND PACKAGING

- CASE: Hermetically sealed axial-lead glass DO-35 (DO-204AH) package
- TERMINALS: Leads, tin-lead plated solderable per MIL-STD-750, method 2026
- POLARITY: Cathode indicated by band. Diode to be operated with the banded end positive with respect to the opposite end for Zener regulation
- MARKING: Part number
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number)
- WEIGHT: 0.2 grams
- See package dimensions on last page

**ELECTRICAL CHARACTERISTICS\* @ 25°C**

| JEDEC<br>TYPE NO.<br><br>(NOTE1) | NOMINAL<br>ZENER<br>VOLTAGE<br>V <sub>Z</sub> @ I <sub>ZT</sub><br>(NOTE 2) | ZENER<br>TEST<br>CURRENT<br>I <sub>ZT</sub> | MAXIMUM<br>ZENER<br>IMPEDANCE<br>Z <sub>ZT</sub> @ I <sub>ZT</sub><br>(NOTE 3) | MAXIMUM REVERSE<br>CURRENT I <sub>R</sub><br>@ V <sub>R</sub> = 1 VOLT |         | MAXIMUM<br>ZENER<br>CURRENT<br>I <sub>ZM</sub><br>(NOTE 4) | TYPICAL<br>TEMP COEFF.<br>OF ZENER<br>VOLTAGE<br><br>α <sub>VZ</sub> |
|----------------------------------|-----------------------------------------------------------------------------|---------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------|---------|------------------------------------------------------------|----------------------------------------------------------------------|
|                                  |                                                                             |                                             |                                                                                | @25°C                                                                  | @+150°C |                                                            |                                                                      |
|                                  |                                                                             | VOLTS                                       | mA                                                                             | OHMS                                                                   | μA      | μA                                                         | mA                                                                   |
| 1N4370                           | 2.4                                                                         | 20                                          | 30                                                                             | 100                                                                    | 200     | 150                                                        | -.085                                                                |
| 1N4371                           | 2.7                                                                         | 20                                          | 30                                                                             | 75                                                                     | 150     | 135                                                        | -.080                                                                |
| 1N4372                           | 3.0                                                                         | 20                                          | 29                                                                             | 50                                                                     | 100     | 120                                                        | -.075                                                                |
| 1N746                            | 3.3                                                                         | 20                                          | 28                                                                             | 10                                                                     | 30      | 110                                                        | -.066                                                                |
| 1N747                            | 3.6                                                                         | 20                                          | 24                                                                             | 10                                                                     | 30      | 100                                                        | -.058                                                                |
| 1N748                            | 3.9                                                                         | 20                                          | 23                                                                             | 10                                                                     | 30      | 95                                                         | -.046                                                                |
| 1N749                            | 4.3                                                                         | 20                                          | 22                                                                             | 2                                                                      | 30      | 85                                                         | -.033                                                                |
| 1N750                            | 4.7                                                                         | 20                                          | 19                                                                             | 2                                                                      | 30      | 75                                                         | -.015                                                                |
| 1N751                            | 5.1                                                                         | 20                                          | 17                                                                             | 1                                                                      | 20      | 70                                                         | +/- .010                                                             |
| 1N752                            | 5.6                                                                         | 20                                          | 11                                                                             | 1                                                                      | 20      | 65                                                         | + .030                                                               |
| 1N753                            | 6.2                                                                         | 20                                          | 7                                                                              | .1                                                                     | 20      | 60                                                         | + .049                                                               |
| 1N754                            | 6.8                                                                         | 20                                          | 5                                                                              | .1                                                                     | 20      | 55                                                         | + .053                                                               |
| 1N755                            | 7.5                                                                         | 20                                          | 6                                                                              | .1                                                                     | 20      | 50                                                         | + .057                                                               |
| 1N756                            | 8.2                                                                         | 20                                          | 8                                                                              | .1                                                                     | 20      | 45                                                         | + .060                                                               |
| 1N757                            | 9.1                                                                         | 20                                          | 10                                                                             | .1                                                                     | 20      | 40                                                         | + .061                                                               |
| 1N758                            | 10.0                                                                        | 20                                          | 17                                                                             | .1                                                                     | 20      | 35                                                         | + .062                                                               |
| 1N759                            | 12.0                                                                        | 20                                          | 30                                                                             | .1                                                                     | 20      | 30                                                         | + .062                                                               |

**\* JEDEC Registered Data**

**NOTE 1:** Standard tolerance on JEDEC types shown is +/- 10%. Suffix letter A denotes +/- 5% tolerance; suffix letter C denotes +/- 2%; and suffix letter D denotes +/- 1% tolerance.

**NOTE 2:** Voltage measurements to be performed 20 seconds after application of dc test current.

**NOTE 3:** Zener impedance derived by superimposing on  $I_{ZT}$ , a 60 cps, rms ac current equal to 10%  $I_{ZT}$  (2mA ac). See MicroNote 202 for typical zener impedance variation with different operating currents.

**NOTE 4:** Allowance has been made for the increase in  $V_Z$  due to  $Z_Z$  and for the increase in junction temperature as the unit approaches thermal equilibrium at the power dissipation of 400 mW.

**GRAPHS**


**FIGURE 1**  
POWER DERATING CURVE

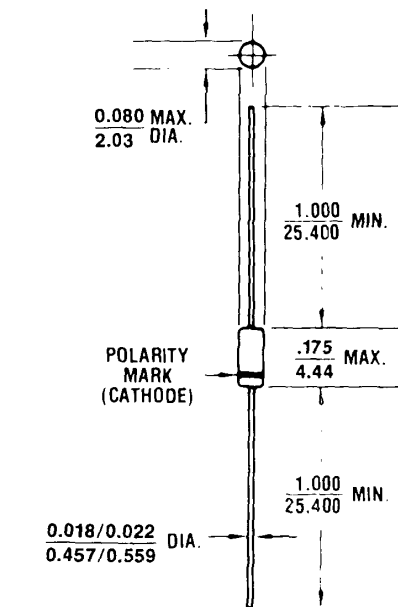


**FIGURE 2**  
ZENER VOLTAGE TEMPERATURE  
COEFFICIENT vs. ZENER VOLTAGE



**FIGURE 3**  
CAPACITANCE vs. ZENER VOLTAGE  
(TYPICAL)

**PACKAGE DIMENSIONS**



All dimensions in:  $\frac{\text{INCH}}{\text{mm}}$



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.