

INTEGRATED WIRELESS POWER SUPPLY RECEIVER, Qi (WIRELESS POWER CONSORTIUM) COMPLIANT — AN32258A —

FEATURES

- Integrated Wireless Power Receiver Solution
- WPC Ver. 1.1 Compliant
- Synchronous Full Bridge Rectifier Control
- Input Voltage Range : VRECT = 4.4 V to 19 V
- Output Voltage: 5 V
- Temperature Detecting Circuit
- Full Charge Detection with Adjustable Current Level
- Switching Control of External Power Supply
- Supports Under Voltage Lockout , Thermal Shutdown, Over Voltage Detection, and Over Current Detection.
- LED Indicator
- 3.16 mm X 3.16 mm WLCSP
48 Pins with 0.4mm pitch

DESCRIPTION

AN32258A is a wireless power system controller IC which is compliant with Qi version 1.1 of the System Description Wireless Power Transfer, Volume 1 for Low Power defined by Wireless Power Consortium. AN32258A is a controller IC of a power receiver (Rx) which can be used with any Qi-compliant wireless chargers.


APPLICATIONS

- WPC Compliant Receivers
- Cell Phones, Smartphones
- Headsets
- Digital Cameras
- Tablet Devices
- Portable Media Players etc.

IMPORTANT

AN32258A is designed to be used based on the circuits and external components described in this document and Application Note. Therefore, Panasonic cannot support any inquiries of modified solution.

Wireless Power System

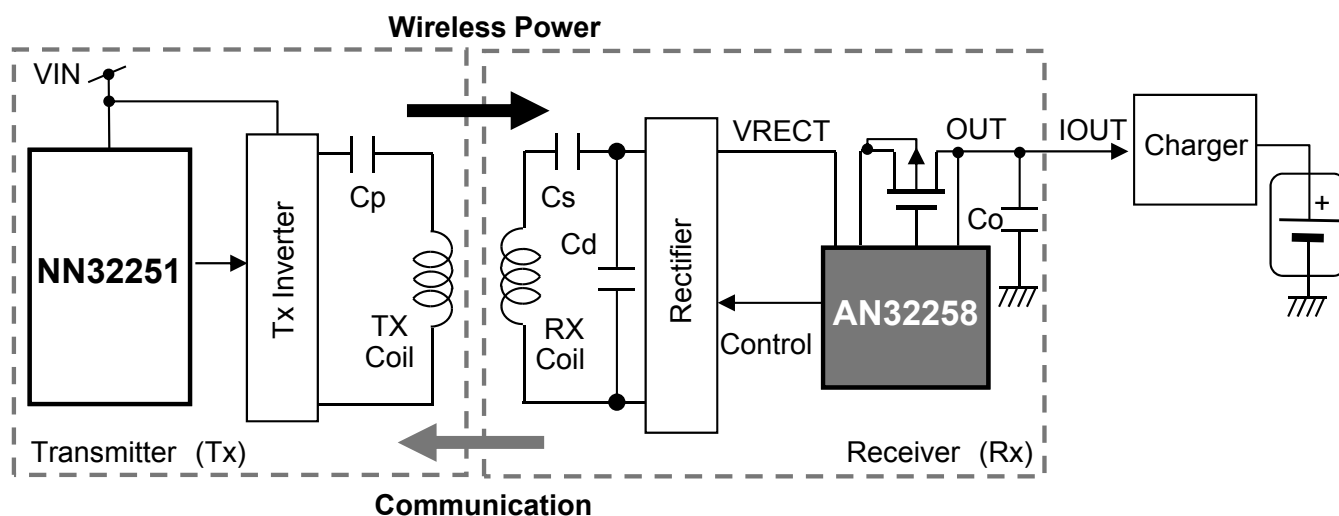



CONTENTS

■ FEATURES	1
■ DESCRIPTION	1
■ APPLICATIONS	1
■ ABSOLUTE MAXIMUM RATINGS	3
■ POWER DISSIPATION RATING	4
■ RECOMMENDED OPERATING CONDITIONS	4
■ ELECTRICAL CHARACTERISTICS	5
■ PIN CONFIGURATION	8
■ PIN FUNCTIONS	9
■ CIRCUIT DIAGRAM	14
■ FUNCTIONS	15
■ PACKAGE INFORMATION	29
■ IMPORTANT NOTICE	30

DELIVERY INFORMATION

Order Number	Package	Output Supply	Minimum Quantity
AN32258A-PR	48 pin WLCSP(3.2 × 3.2mm)	Embossed Taping	5000pcs

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Unit	Notes
Supply voltage	V_{RECT}	20	V	*1
	V_{EXT}	6.9	V	*1
Output current	I_{RECT}	—	A	*1
Operating ambient temperature	T_{opr}	– 30 to + 85	°C	*2
Operating junction temperature	T_j	–40 to +125	°C	*2
Storage temperature	T_{stg}	– 50 to + 125	°C	*2
Input voltage range	$V_{TD2}, V_{TD1}, V_{SC2}, V_{SC1}, V_{ISENSE1}$	– 0.3 to 20	V	*1
	V_{OUT}, V_{LED}	– 0.3 to 12	V	*1
	$V_{VTH}, V_{FCCNT}, V_{FODG}, V_{FULLCH}, V_{FOD}, V_{FODL}$	– 0.3 to ($V_{VREG34V} + 0.3$)	V	*1
Output voltage range	V_{VPGATE}	– 0.3 to ($V_{RECT} + 0.3$)	V	*1
	V_{DT1H}	– 0.3 to ($V_{sc1} + V_{VREG47V} + 0.3$)	V	*1
	V_{DT2H}	– 0.3 to ($V_{sc2} + V_{VREG47V} + 0.3$)	V	*1
	V_{DT2L}, V_{DT1L}	– 0.3 to ($V_{VREG47V} + 0.3$)	V	*1
	V_{EXTCNT}	– 0.3 to ($V_{EXT} + 0.3$)	V	*1
	V_{MEMBAT}	– 0.3 to ($V_{VREG34V} + 0.3$)	V	*1
ESD	TD2	1.0	kV	—
	HBM (Human Body Model) ISENSE1, ISENSE2, ISENSE1-S, ISENSE1-S1	1.5	kV	—
	HBM (Human Body Model) Except for pins above	2	kV	—

Note) This product may sustain permanent damage if the actual condition is higher than the absolute maximum rating stated above. This rating is the maximum stress, and device will not be guaranteed to operate in case it is higher than our stated range. When exposed to the absolute maximum rating for a long time, the reliability of the product may be affected.

*1: The values under the condition not exceeding the above absolute maximum ratings and the power dissipation.

*2: Except for the power dissipation, operating ambient temperature, and storage temperature, all ratings are for $T_a = 25\text{ }^{\circ}\text{C}$.

POWER DISSIPATION RATING

PACKAGE	θ_{j-a}	θ_{j-c}	PD (Ta = 25 °C)	PD (Ta = 85 °C)	Notes
Wafer Level Chip Size Package (WLCSP type)	631.4 °C / W	7.2 °C /W	0.158 W	0.0632 W	*1

Note). *1 :For the actual usage, please refer to the PD-Ta characteristics diagram in the package specification, and follow the power supply voltage, load and ambient temperature conditions to ensure that there is enough margin and the thermal design does not exceed the allowable value.



CAUTION

Although this device has limited built-in ESD protection circuit, permanent damage may occur on it. Therefore, proper ESD precautions are recommended to avoid electrostatic damage to the MOS gates

RECOMMENDED OPERATING CONDITIONS

Parameter	Pin Name	Min.	Typ.	Max.	Unit	Notes
Supply voltage range	V _{RECT}	4.4	8	19	V	*2
	V _{EXT}	4.4	5	6	V	
Input voltage range	V _{ISENSE1}	4.4	8	19	V	
	V _{TD2}	-0.3	—	20	V	
	V _{TD1}	-0.3	—	20	V	
	V _{SC2}	-0.3	—	20	V	
	V _{SC1}	-0.3	—	20	V	
	V _{OUT}	-0.3	—	7	V	
	V _{LED}	-0.3	—	7	V	
	V _{VTH}	-0.3	—	V _{VREG34V} + 0.3	V	
	V _{FCCNT}	-0.3	—	V _{VREG34V} + 0.3	V	
	V _{FODG}	-0.3	—	V _{VREG34V} + 0.3	V	
	V _{FULLCH}	-0.3	—	V _{VREG34V} + 0.3	V	
	V _{FOD}	-0.3	—	V _{VREG34V} + 0.3	V	

Note) Do not apply external currents or voltages to any pin not specifically mentioned.

*2 : The values under the condition not exceeding the above absolute maximum ratings and the power dissipation.

ELECTRICAL CHARACTERISTICS

$C_o = 10 \mu F$, $V_{RECT} = 8 V$, $T_a = 25 ^\circ C \pm 2 ^\circ C$ unless otherwise noted.

Parameter	Symbol	Condition	Limits			Unit	Note
			Min	Typ	Max		
Current Consumption							
Quiescent current	I _{STBY}		10	12	14	mA	
Under-voltage lock-out (UVLO)							
Under-voltage lock-out	V _{UVLO}	V _{RECT} : 0V -> 5V	3.29	3.5	3.71	V	
Hysteresis on UVLO	V _{UVLOHY}	V _{RECT} : 5V -> 3V	-	0.7	-	V	*1
Over-voltage protection (OVP)							
Input overvoltage threshold	V _{OVP}	V _{RECT} : 5V -> 19V	17	18	19	V	
Hysteresis on OVP	V _{OVPOHY}	V _{RECT} : 19V -> 5V	-	4	-	V	*1
V _{RECT} (5W, LDO 5V mode)							
V _{RECT} Threshold1	V _{RECTTH1}	In increasing I _{OUT} < 125mA In decreasing I : I _{OUT} < 60mA	-	8	-	V	*1
V _{RECT} Threshold2	V _{RECTTH2}	In increasing 125mA < I _{OUT} < 420mA In decreasing 60mA < I _{OUT} < 360mA	-	5.4	-	V	*1
V _{RECT} Threshold3	V _{RECTTH3}	In increasing I _{OUT} > 420mA In decreasing I _{OUT} > 360mA	-	5.1	-	V	*1
OUTPUT							
V _{OUT} (5W, LDO 5V mode)	V _{OUT1}	V _{RECT} =8V ,I _{OUT} =10mA	4.76	5	5.24	V	
	V _{OUT2}	V _{RECT} =5.1V , I _{OUT} =1000mA	4.76	—	—	V	

Note) *1 : Designed typical values

ELECTRICAL CHARACTERISTICS (Continued)

Co = 10 μ F, V_{RECT} = 8 V, T_a = 25 °C \pm 2 °C unless otherwise noted.

Parameter	Symbol	Condition	Limits			Unit	Note
			Min	Typ	Max		
Temperature Detection [Thermistor : ERTJ0EV104F]							
Over-temperature Detection Voltage	V _{TH}	60 ℄C detection VTHR:47 kohm (±1%)	0.887	0.975	1.069	V	
Over-current protection (OCP)							
Over-current threshold voltage 1	V _{OCPL}	—	1.25	1.5	1.75	A	
Thermal protection							
Thermal shutdown temperature	T _j	—	—	150	—	℃	*1
Thermal shutdown hysteresis	T _{jhys}	—	—	20	—	℃	*1
External voltage detection							
V _{EXT} Rising threshold voltage	V _{EXTTH}	—	3.99	4.2	4.41	V	
V _{EXT} hysteresis	V _{EXTHY}	—	—	0.4	—	V	*1
Terminal voltage (FULLCH)							
High input threshold (Termination)	V _{IH1}	—	1.6	—	—	V	
Low input threshold	V _{IL1}	—	-0.2	—	0.2	V	
Terminal voltage (FODL)							
High input threshold (Termination)	V _{IH1}	—	1.6	—	—	V	
Low input threshold	V _{IL1}	—	-0.2	—	0.2	V	

Notes) *1 : Designed typical values



ELECRRICAL CHARACTERISTICS (Continued)

Co = 10 μF, VRECT = 8 V, Ta = 25 °C ± 2 °C unless otherwise noted.

Parameter	Symbol	Condition	Limits			Unit	Note	
			Min	Typ	Max			
LEDCNT								
	LED Saturation voltage	LED _{SAT}	I _{LED} = 20mA	—	—	0.5	V	—
	LED Leak current	LED _{LEAK}	LED = 7.5V	—	—	10	μA	—

Pin Layout

Top View

A	TEST2	GND	PGATE	OUT	TD2	TD1	DT2L
B	GND	EXT CNT	EXT	SCL	SDA	DET IN	DT1L
C	ISEN SE2	VTH	VREG 34V_S	EXT CLK	FCC NT	FODG	SC2
D	ISEN SE_S	MEM BAT	TEST1	SC2_S	VREG 47V_S	VIO	SC1
E		ISEN SE_S1	SEL VER	GND	FULL CH	FOD	DT2H
F	ISEN SE1	OUT HP	SEL HP	SEL OSR	FODL	EN I2C	DT1H
G	VRE CT	SEL HV	VREG 34V	LED	VREG 47V	BT1	BT2
	1	2	3	4	5	6	7

PIN FUNCTIONS

Pin	Name	I/O	Function	Description
A1	TEST2	I	Test pin	Connect to GND. Panasonic uses this pin for test purposes only.
A2,B1, E4	GND	GND	Ground	—
A3	PGATE	O	LDO control	Controls the PMOS gate of the LDO
A4	OUT	I	LDO feedback	Connects to the PMOS drain of the LDO
A5	TD2	O	Drive load to transmit 2	Controls capacitive load modulation for Qi data
A6	TD1	O	Drive load to transmit 1	Controls capacitive load modulation for Qi data
A7	DT2L	O	Rectification low side switch gate control 2	Controls the switching gate of the low side of the rectifier
B2	EXTCNT	O	External PMOS control	Controls the switch to an external power supply. This pin is internally connected to the drain of NMOS to use under 2mA. When EXT is larger than 4.2V, EXTCNT will become low and the external MOSFET will turn on.
B3	EXT	Power Supply	External power detection	Supplies power externally in direct. When EXT becomes larger than 4.2V, EXTCNT will become low and the wireless power transmission will stop. The external power supply will then directly output, and the Tx will be stopped. (Refer to the circuit diagram followed by Pin Functions.)
B4	SCL	I	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.
B5	SDA	I/O	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.
B6	DETIN	I	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.

PIN FUNCTIONS (Continued)

Pin	Name	I/O	Function	Description
B7	DT1L	O	Rectification Low side Switch Gate Control 1	Controls the switching gate of the low side of the rectifier
C1	ISENSE2	I	Current sensor 2	Detects the output current from LDO. Connect this pin to ISENSE1-S1(E2).
C2	VTH	I	Thermistor voltage	Connect to a thermistor placed where temperature needs to be measured to prevent over heat. Connect to VREG34V (G3) if thermistors are not in use.
C3	VREG34V_S	O	Internal regulator sense output	This pin is shorted internally to VREG34V(G3).
C4	EXTCLK	I	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.
C5	FCCNT	I	Full charge control	Connect a pull-down resistor to set an automatic full-charge detecting current. For example, when a resistor of 100kohm is used, decreasing output current to less than 80mA will shutdown the LDO, and also data is sent to Tx to stop power transmission. The current detection starts 5 seconds after power transmission starts. Using this pin can also replace the full-charge control from FULLCH(E5).

PIN FUNCTIONS (Continued)

Pin	Name	I/O	Function	Description
C6	FODG	I	FOD gain control	Connect a pull-down resistor to adjust the gain level of Received Power Packet defined in WPC specification. The resistance can be varied from 10k ohms to 180k ohms.
C7	SC2	I	Synchronous rectifier control 2	Connect to the rectifier to detect its voltage level.
D1	ISENSE1_S	I	Sense pin for ISENSE1	Connect to the source of the LDO's MOSFET to detect the output current. A sense resistor of 50mohms is connected to ISENSE1(F1) inside the IC.
D2	MEMBAT	O	Random number memory adjustment	Connect a capacitor of 1uF to fix a memory time.
D3	TEST1	O	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.
D4	SC2_S	I	Synchronous rectifier sense pin	Leave this pin open. Panasonic uses this pin to sense SC2(C7) for test purposes only.
D5	VREG47V_S	O	Internal regulator sense output	This pin is shorted internally to VREG47V(G5).
D6	VIO	I	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.
D7	SC1	I	Synchronous rectifier control 1	Connect to the rectifier to detect its voltage level.
E2	ISENSE1_S1	I	Sense pin 1 for ISENSE1	Connect to ISENSE2(C1) to detect the output current. Refer to the circuit diagram followed by Pin Functions.
E3	SELVER	I	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.


PIN FUNCTIONS (Continued)

Pin	Name	I/O	Function	Description
E5	FULLCH	I	Full charge detection	This input controls the full charge detection externally such as from an MCU. When a high voltage level (over 1.6V) is inputted for over 50us, AN32258A will recognize it as full-charge and send packets to Tx to stop the power transmission. Right after the input becomes low, the power transmission can restart.
E6	FOD	O	Foreign object detection offset	Connect a pull-down resistor to adjust the offset level of received power of WPC specification. For example, a pull-down resistor of 100kohm will set the offset to be zero. Refer to No.3 of the Functions section.
E7	DT2H	O	Rectification high side switch gate control 2	Controls the switching gate of the high side of the rectifier
F1	ISENSE1	I	Current sensor 1	Connect to VRECT(G1) to detect the output current. A sense resistor of 50mohms is connected to ISENSE1-S(D1) inside the IC.
F2	OUTHHP	O	TEST pin	Leave this pin open. Panasonic uses this pin for test purposes only.
F3	SELHP	I	TEST pin	Connect to GND. Panasonic uses this pin for test purposes only.
F4	SELOSR	I	TEST pin	Connect to GND. Panasonic uses this pin for test purposes only.

PIN FUNCTIONS (Continued)

Pin	Name	I/O	Function	Description
F5	FODL	I	Foreign object detection offset for low current	Inputting a logical high level (over 1.6V) will introduce an offset to Received Power Packet when IOUT is small. When GND is inputted, no offset will be added.
F6	ENI2C	O	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.
F7	DT1H	O	Rectification high side switch gate control 1	Controls the switching gate of high side of the rectifier
G1	VRECT	Power Supply	Voltage of rectifier	Voltage of the rectifier output becomes the power supply of AN32258A.
G2	SELHV	I	Test pin	Leave this pin open. Panasonic uses this pin for test purposes only.
G3	VREG34V	O	Internal regulator output	Outputs a voltage level of 3.4V.
G4	LED	O	LED control	This pin is internally connected to the drain of NMOS which turns on when the LDO outputs a voltage.
G5	VREG47V	O	Internal regulator output	Outputs a voltage level of 4.7V.
G6	BT1	O	Boot strap 1	Connect to the rectifier
G7	BT2	O	Boot strap 2	Connect to the rectifier

CIRCUIT DIAGRAM

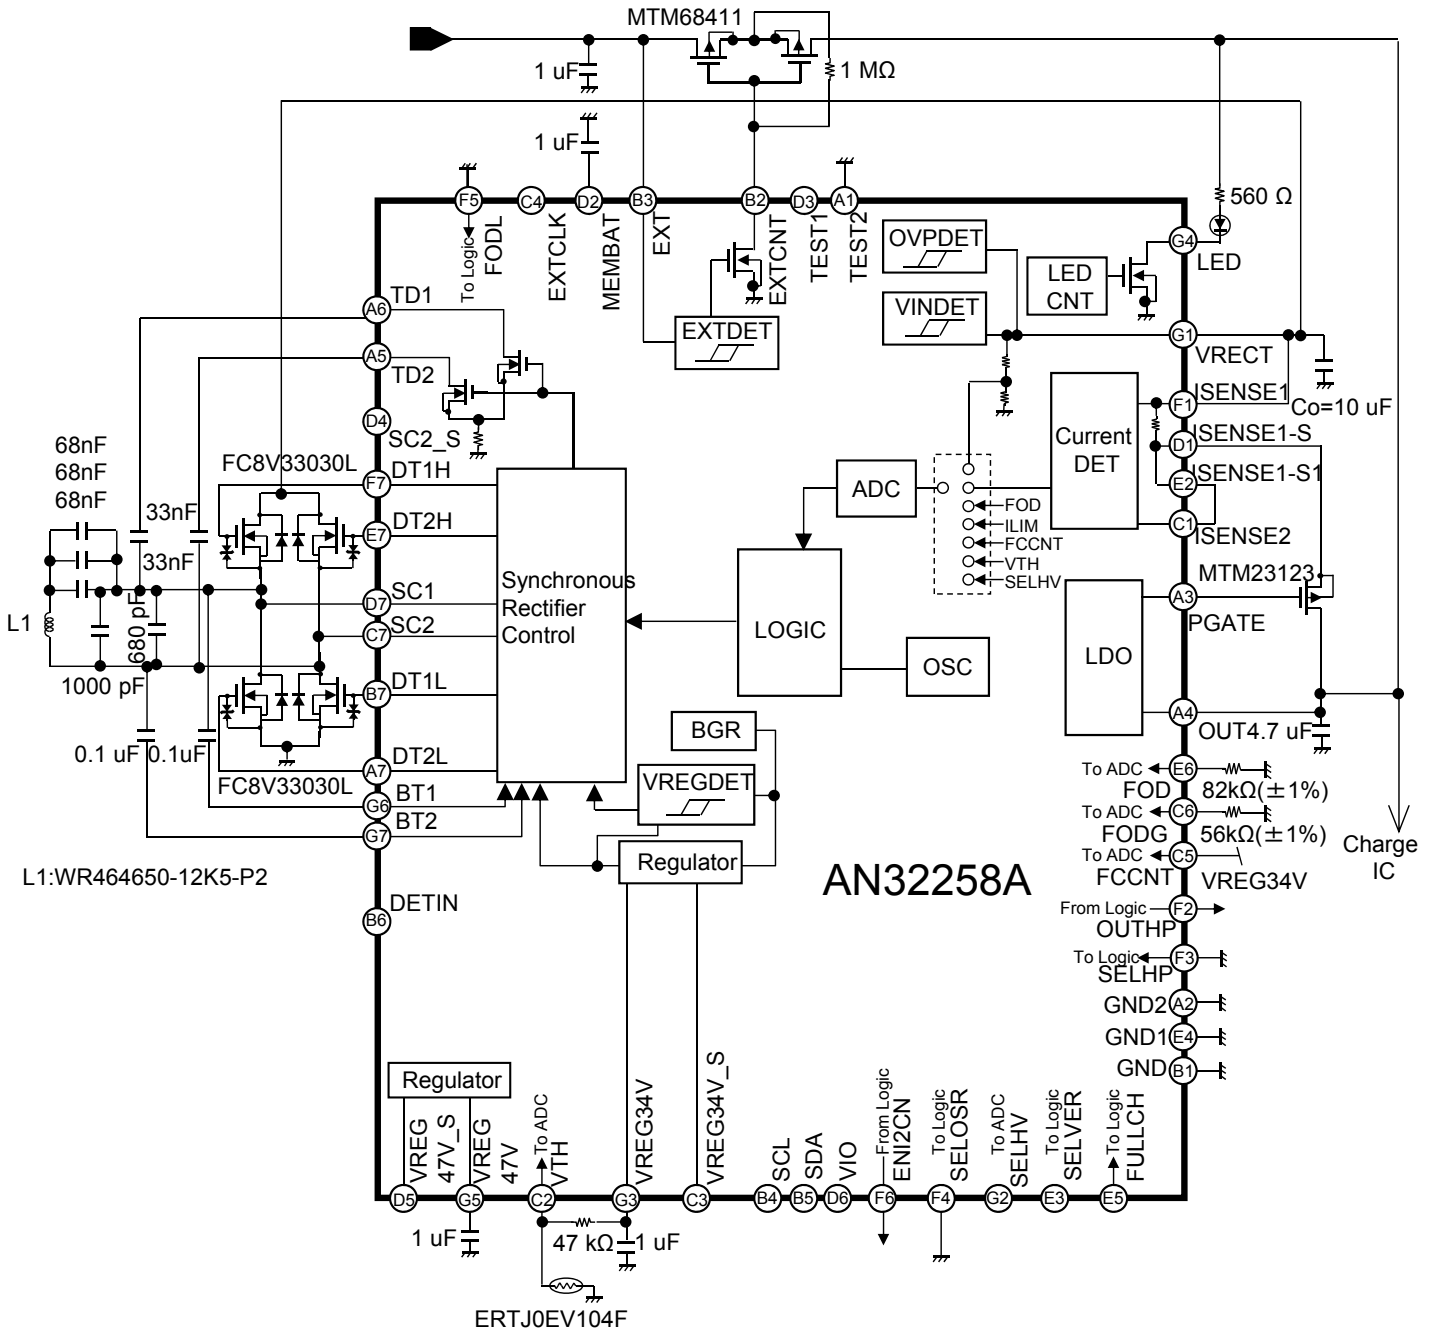

FUNCTIONS

AN32258A has the following functions.

No.	Function
1	Full charge control
2	Over current control
3	Foreign object detection
4	Over temperature detection
5	Rectifier voltage control
6	LED display
7	External voltage supply switch

1. Full Charge Control

AN32258A has two ways to detect full-charge.

1-1. Switch ON/OFF externally : FULLCH (Pin E5)

AN32258A recognizes an input of high level to FULLCH as full-charge detected and an input of low level as full-charge not detected. When full-charge is detected, a Qi protocol of End Power Transfer Packet will be sent to Tx. The Tx will then stop the power transmission, and the output of AN32258A will shutdown.

Keep the high level to FULLCH for longer than 50μs for full-charge detection. Change it to low level to restart charging. When this function with FULLCH is not needed, connect the pin to GND.

*Time to resume power transmission depends on the Tx. When NN32251A is used, it will take 15 minutes to restart power transmission after full-charge is detected. Notice that the charge may start and stop repeatedly, if the Tx does not have sufficient time to resume power transmission.

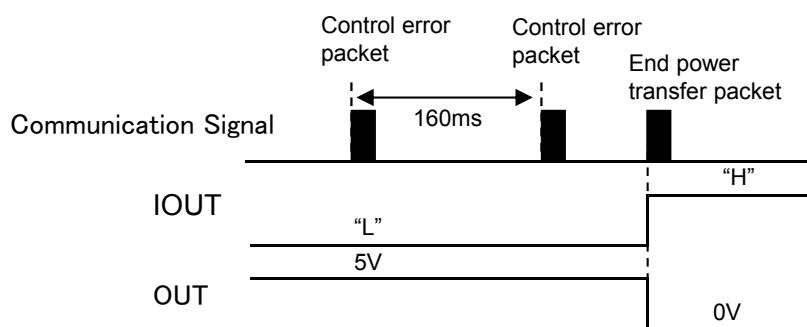


Figure A-1. Full Charge Detection by FULLCH

FUNCTIONS (Continued)

1-2. Control by output current: FCCNT (Pin C5)

When charging current becomes less than the value set at FCCNT (Pin C5), the power transmission stops as full charge. The threshold is determined by a pull-down resistor connected at this pin.

For example, when a resistor of 100kohm is used, decreasing output current to less than 80mA will shutdown the LDO, and also data is sent to Tx to stop power transmission. The data to transmit is defined in Qi and called End Power Transfer packet. The current detection starts 5 seconds after power transmission starts.

Connect this pin to VREG34V, when this full-charge detection is not needed. When FULLCH pin is connected to high level to be activated, FCCNT will not control the full-charge detection. This function does not work for FCCNT voltage of over 3V. Also, note that the minimum threshold is 40mA.

*Time to resume power transmission depends on the Tx. When NN32251A is used, it will take 15 minutes to restart power transmission after full-charge is detected. Notice that the charge may start and stop repeatedly, if the Tx does not have sufficient time to resume power transmission.


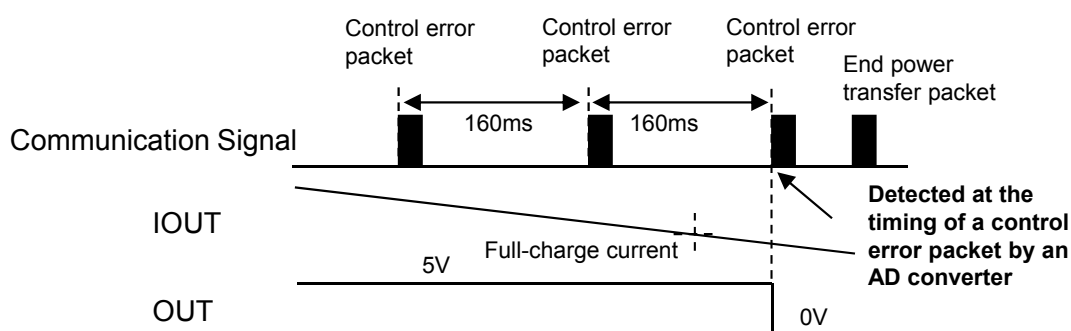


Figure A-2. Full Charge Detection by FCCNT

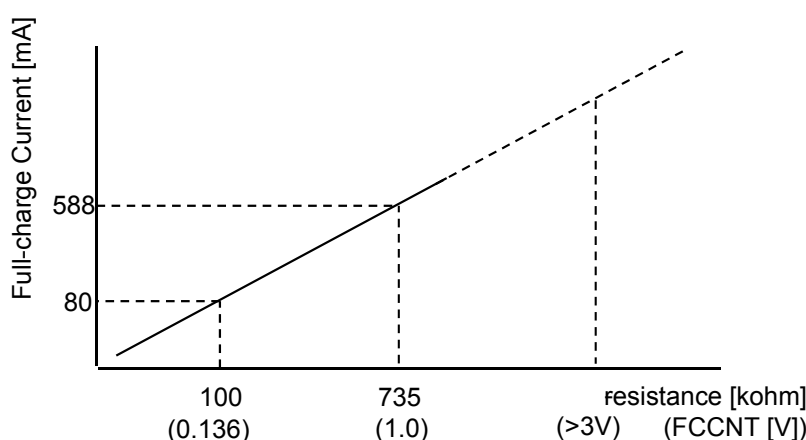

FigureA-3. Full charge detecting current is controlled by a resistor connected to FCCNT.

$$\text{Full-charge Current [mA]} = 2000/3.4 \times 0.00000136 \times R[\Omega]$$

FUNCTIONS (Continued)

2.Current Limit Control

When the output current exceeds the threshold value, AN32258A will shutdown the output.

When this over-current is detected, data is sent to Tx to stop power transmission. The data to transmit to Tx is End Power Transfer packet defined in Qi, and right after the Tx receives the data, it stops its power transmission. The threshold value is about 1.5A.

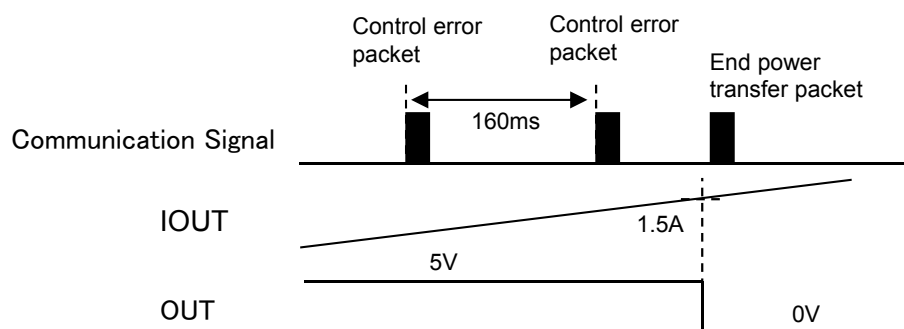


Figure A-4. Timing characteristics for current limit control

3.Foreign Object Detection

AN32258A has a foreign object detection complying with the WPC 1.1 specification. The specification defines a foreign object when the difference between transmitted power and received power is large. The Tx measures the power difference and stops power transmission when the difference is large.

The value of Received Power (address 04h) can be adjusted by the following three pins.

3-1. Offset Control : FOD (Pin E6)

Connect a pull-down resistor at FOD pin to adjust the offset level of received power sent to the Tx.

For example, a pull-down resistor of 100kohm will set the offset to be zero. This function does not work for FOD voltage of over 3V.

If this function is not needed, connect the FOD pin to VREG34V.

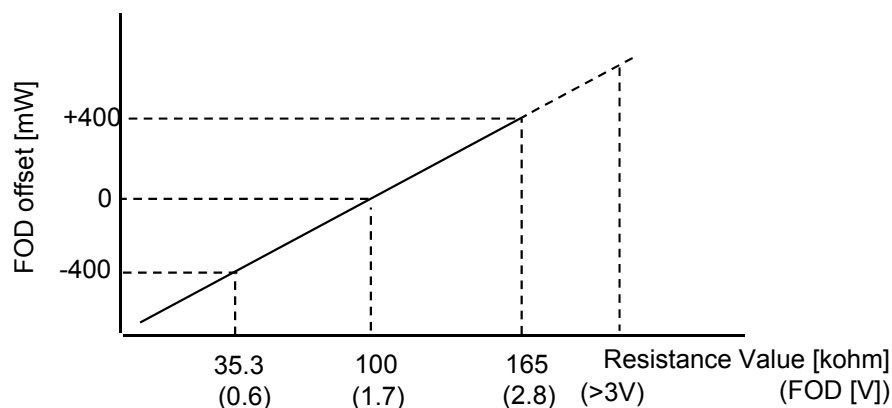


Figure A-5. FOD offset is controlled by a resistor connected to FOD pin

FUNCTIONS (Continued)

3.Foreign Object Detection (Continued)

3-2. Offset Control for low current : FOD (Pin F5)

An offset can be introduced to the received power for low current at IOUT.

Set the FODL pin to either logical high or low.

Low (GND) : No offset

High (over 1.6V) : Offset added (IOUT < ~125mA)

3-3. Gain control : FODG (Pin C6)

The gain of received power can be adjusted by a pull-down resistor connected at this pin. The resistance can be varied from 10k ohms to 180k ohms as the following figure shows.

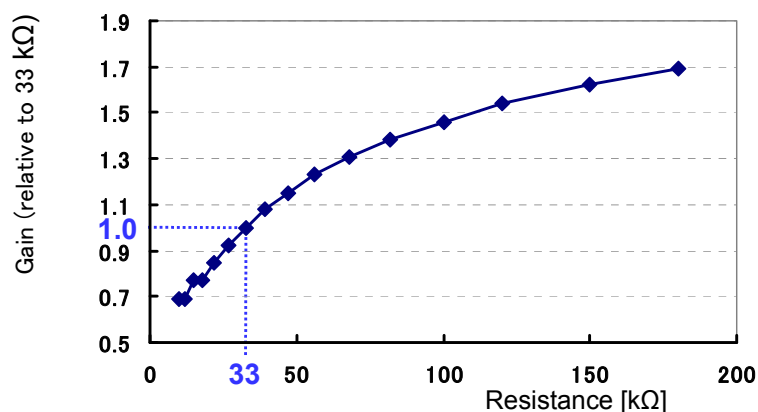


Figure A-5-1. The relationship between received power gain and pull-down resistance at FODG

4. Over Temperature Detection : VTH (Pin C2)

A thermistor, ERTJ0EV104F recommended, can be connected to VTH pin. Connecting a resistor from VTH to VREG34V will fix the threshold temperature. For example, a 47kΩ resistor yields a threshold of 60 °C.

Refer to TYPICAL CHARACTERISTICS section for more detail.

Connect to VREEG34V (G3) if thermistors are not in use.

FUNCTIONS (Continued)

5. Rectifier Voltage Control

AN32258A controls the rectifier output (VRECT) depending on the current value (IOUT). The following figure shows the change of VRECT due to IOUT. Note that the changed timing in increasing IOUT is different from that in decreasing IOUT.

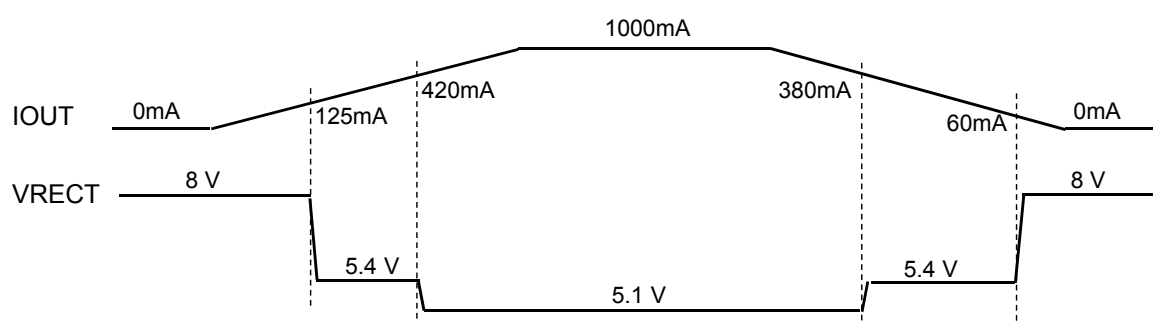


Figure A-8. VRECT changes by the value of output current.
(Values shown are for reference.)

FUNCTIONS (Continued)

6. LED Display : LED (Pin G4)

AN32258A has LED driver. Connect an LED and a resistor in series from OUT to LED pins.
The LED turns on and off as the following figure shows.

Table A-1. LED Display

Status	Display
	LED
Standby	OFF
Charging	ON
Full-charge detected	OFF
External power supply detected	OFF
Over-current detected	OFF
Over-temperature detected	OFF

7. External Voltage Supply Switch : EXT (Pin B3), EXTCNT (Pin B2)

The voltage supply to a charger can be switched from AN32258A to some external voltage supply, such as USB.
For this function to work, introduce an external voltage to EXT pin. When EXT becomes larger than 4.2V,
the external MOSFET switch will turn on to output the external voltage in direct. Also, End Power Transfer
Packet is sent to Tx to stop power transmission at the same time.

If the external voltage supply becomes lower than 3.8V, the external MOSFET switch will turn off. Then, Tx will
resume power transmission, and AN32258A will start to output at the LDO. Refer to the circuit diagram before
FUNCTIONS section for the configuration at EXT pin.

EVALUATION RESULTS

Evaluation Circuit Diagram

Conditions :

EXT (B3) : 5V input

FCCNT (C5): Pulled down with a 100kΩ resistor for section 3, and connected to REG34V for other evaluations.

FULLCH (E5) : Voltage swept for section 3, and connected to GND for other evaluations.

Coil (L1): 13.94μH (TDK: WR464650-12K5-P2)

Charger: NN32251AA_EVM(A11) (except section 12)

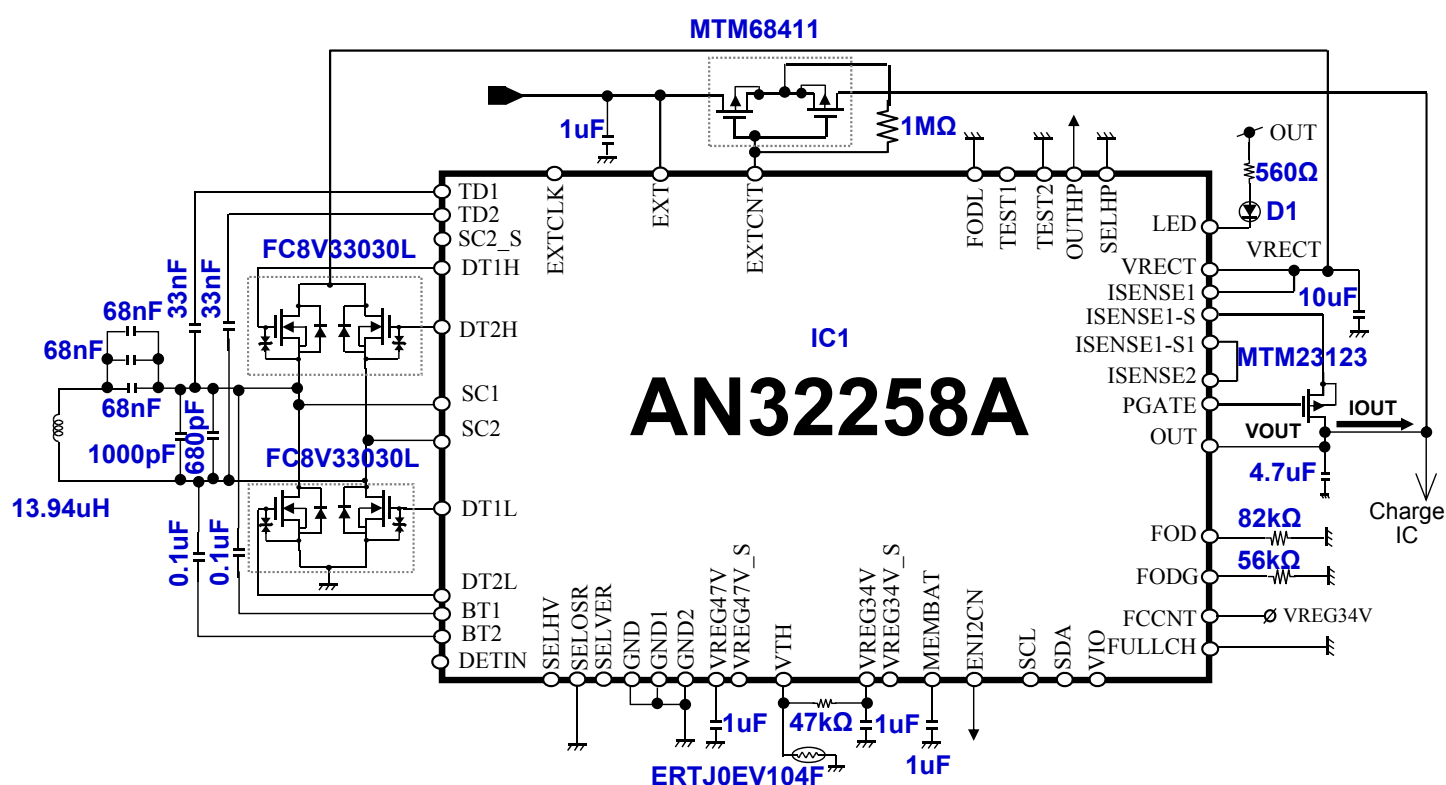


Figure B-1. AN32258A Evaluation Circuit

TYPICAL CHARACTERISTICS (Continued)

1. Output Voltage Characteristics

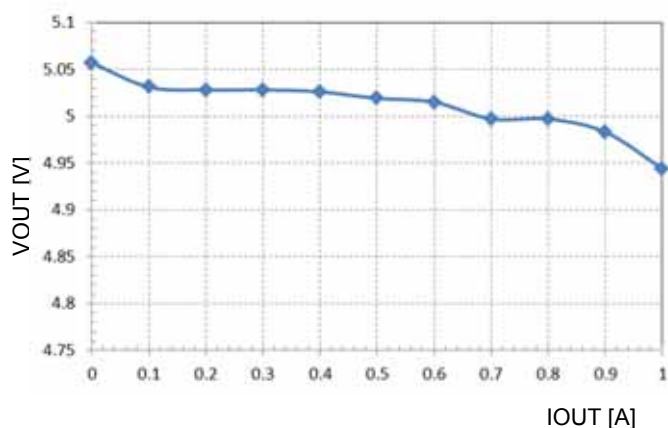


Figure B-2 Output Voltage vs Output Current

2. V_{RECT} Voltage Characteristics

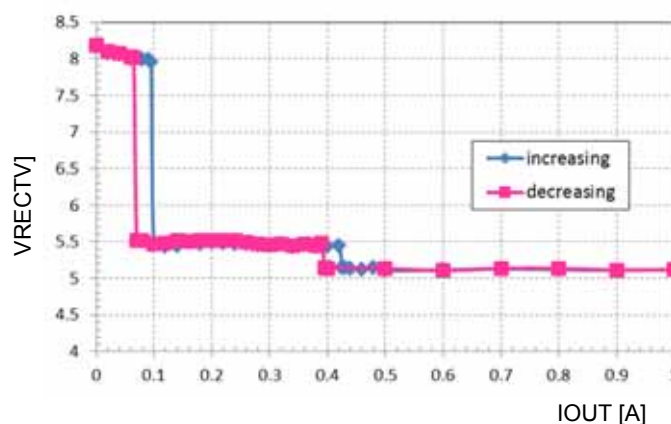


Figure B-3 VRECT Voltage vs Output Current

3. Full-Charge Characteristics

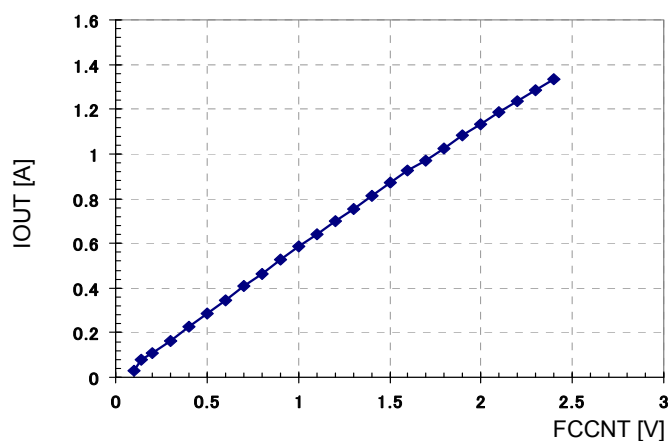


Figure B-4 Full-Charge Detecting Current vs FCCNT Voltage with a 100kΩ Resistor Connected

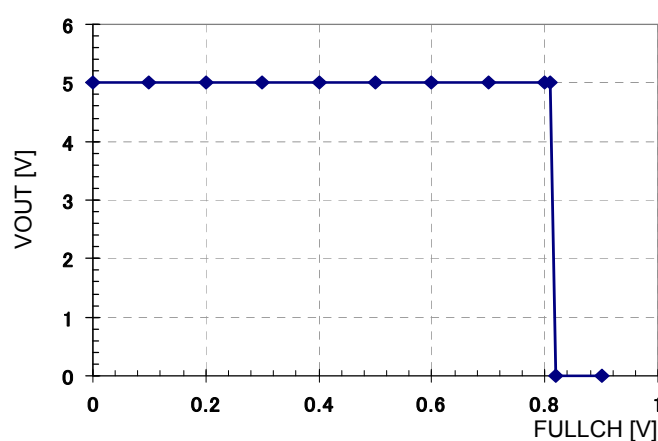


Figure B-5 Output Voltage vs FULLCH Level

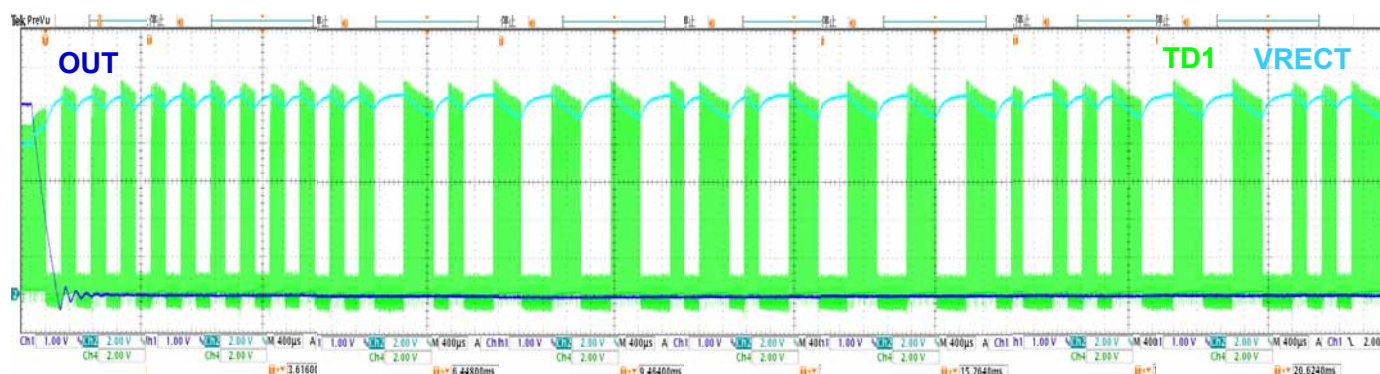


Figure B-6 Received Signal Characteristics after a Full-Charge Detection

*After the output voltage becomes zero, an End Power Transfer Packet is sent.

TYPICAL CHARACTERISTICS (Continued)

4. Over Current Protection Characteristics

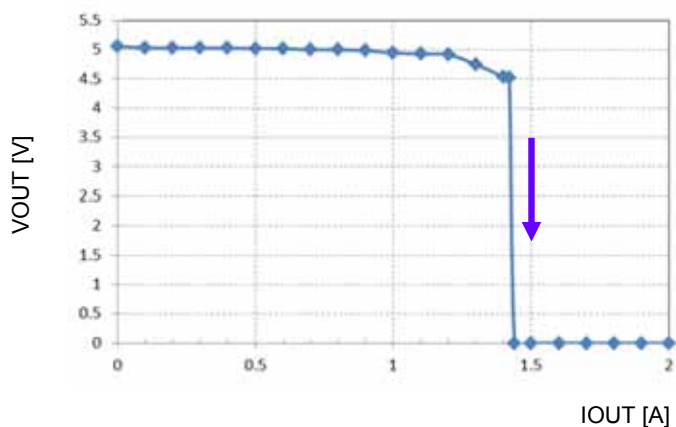


Figure B-7 VOUT vs IOU

5. Temperature Detection Characteristics

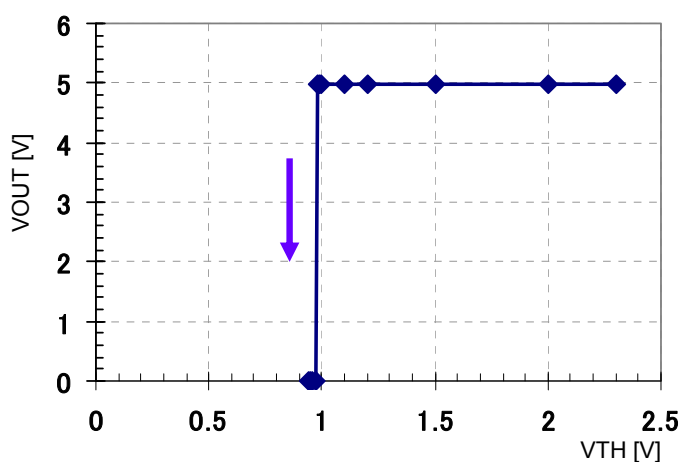


Figure B-8 Output Voltage vs VTH

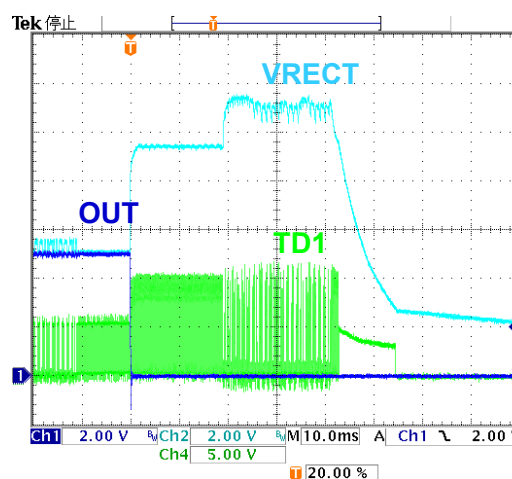


Figure B-9 Received Signal Characteristics after a Temperature Detection

*Conditions : IOU =500mA

The power transmission from Tx stops due to temperature detection (VTH).

TYPICAL CHARACTERISTICS (Continued)

6. Over Voltage Protection Characteristics

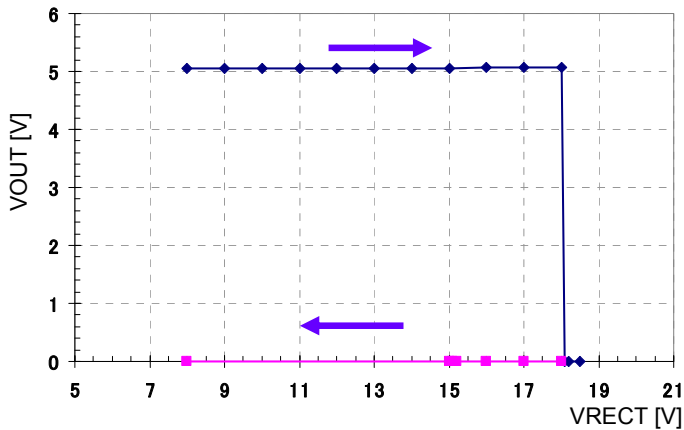


Figure B-10 VOUT vs VRECT by OVP

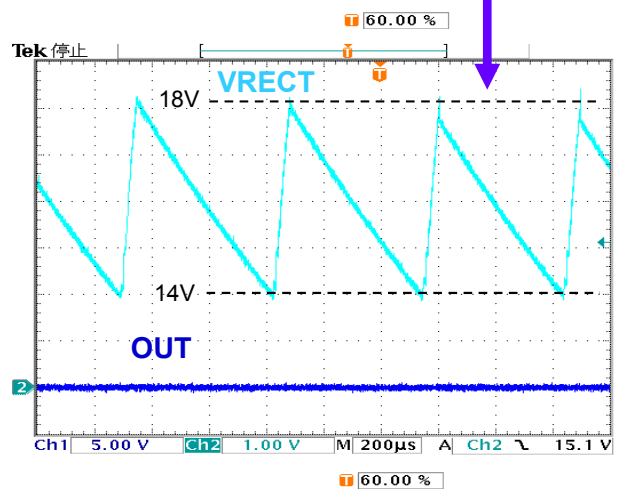
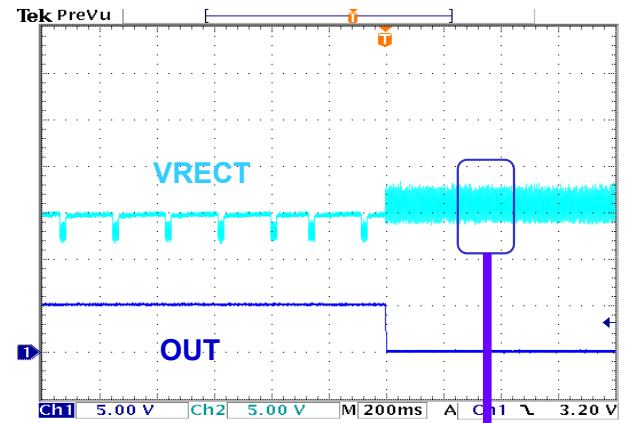


Figure B-11 Output Voltage Response by OVP

7. Foreign Object Detection Characteristics

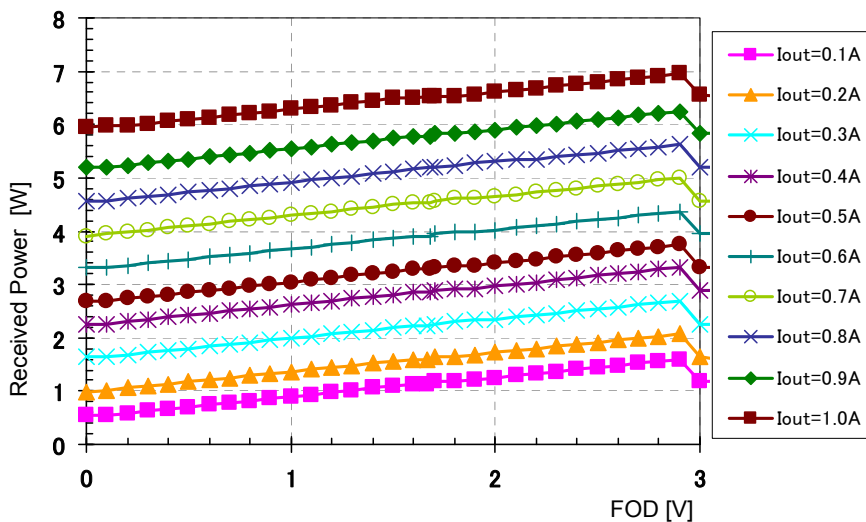


Figure B-12 Received Power vs FOD Voltage

*Received Power = (RPWR[7:0] / 128) × (Maximum Power / 2) × 10Power Class W

TYPICAL CHARACTERISTICS (Continued)

8. External Power Supply Switch Characteristics

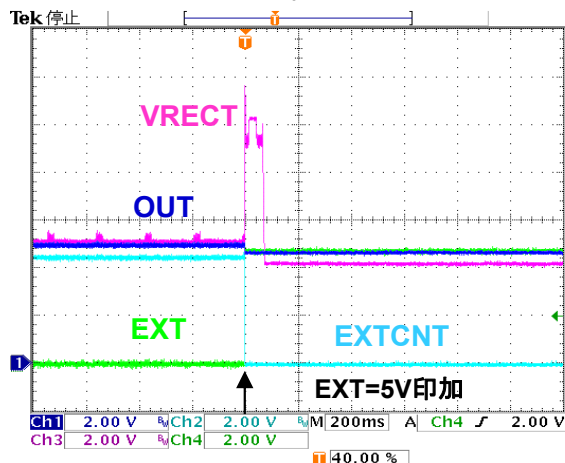


Figure B-13 Voltage when an External Power is Inputted during Normal Wireless Power Transmission

*Condition : IO_{UT}=500mA

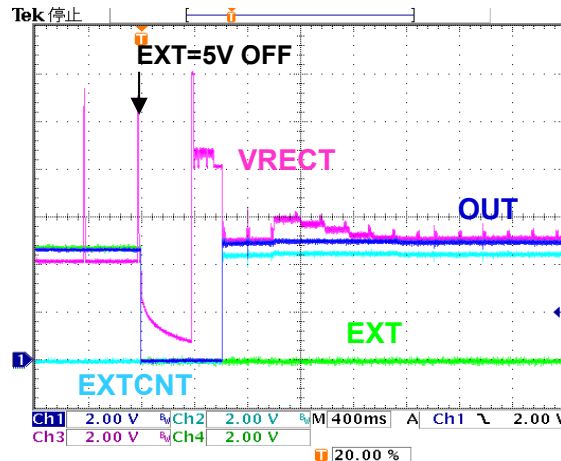


Figure B-14 Normal Power Transmission Resumes after the External Power Turns Off.

*Condition : IO_{UT}=500mA

9. Start-up Characteristics

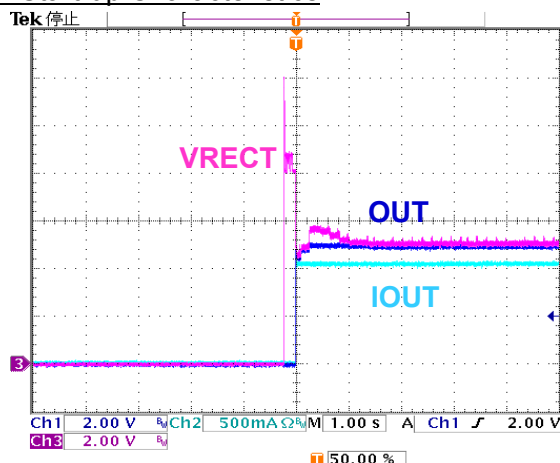


Figure B-15 Characteristics of Starting Wireless Power Transmission

*Condition : IO_{UT}=1000mA

10. Communication Packet Configuration

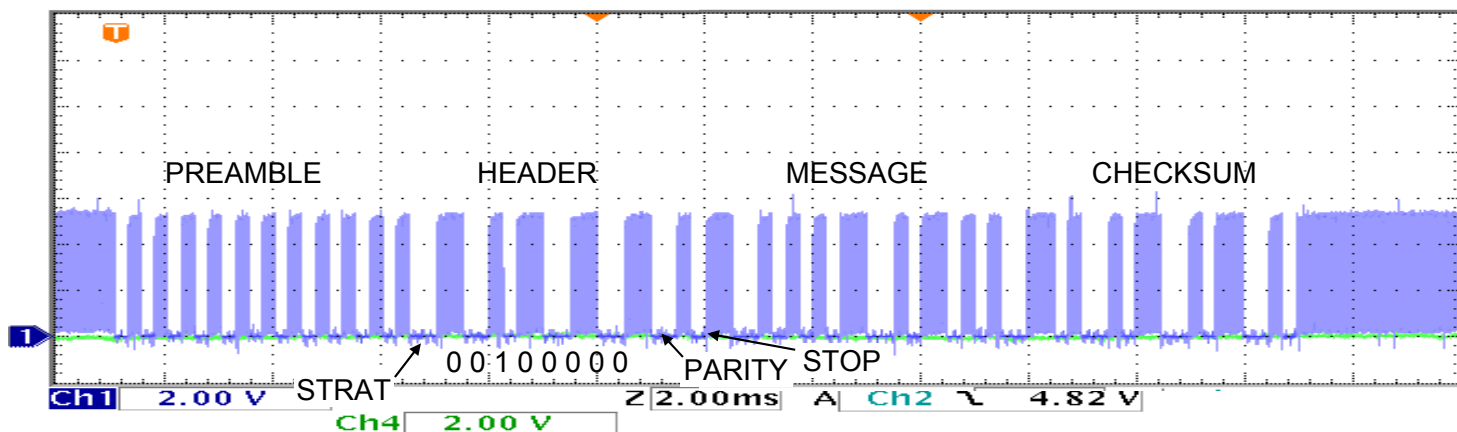


Figure B-16 Rx Communication Packet Structure

TYPICAL CHARACTERISTICS (Continued)

11. LED Display Characteristics

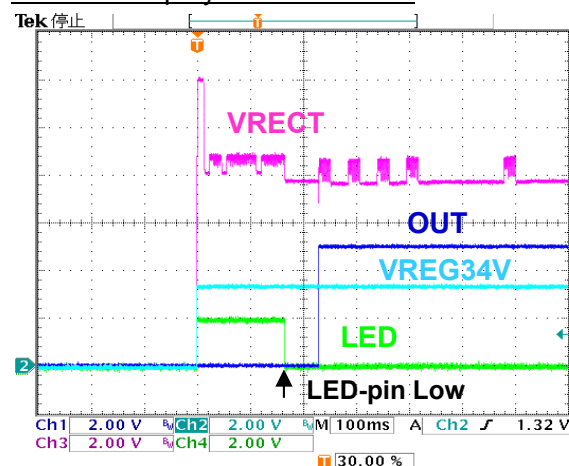


Figure B-17 LED Characteristics 1

*Condition : LED is pulled up to VREG34V first

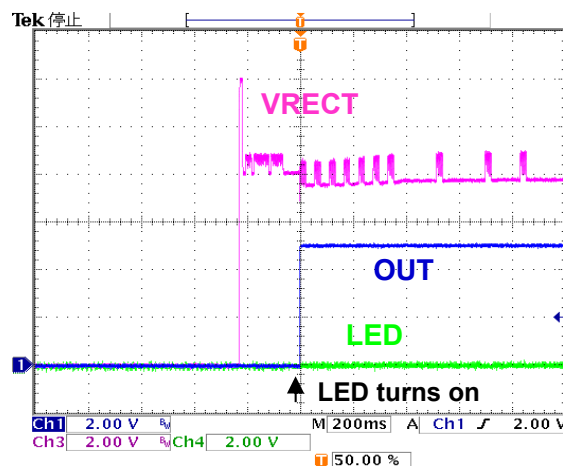


Figure B-18 LED Characteristics 2

*LED lights up when the output starts.

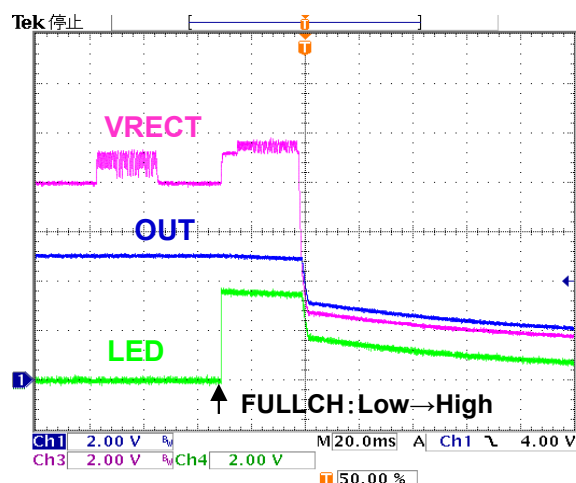


Figure B-19 LED Turned off by a Full Charge

*FULLCH detects a full-charge, and LED turns off when the output goes down.

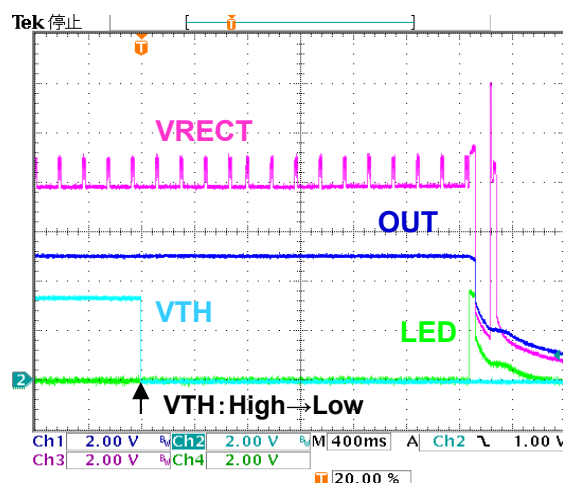


Figure B-20 LED Turned off by an over temperature

*VTH detects an over temperature, and LED turns off when the output goes down.

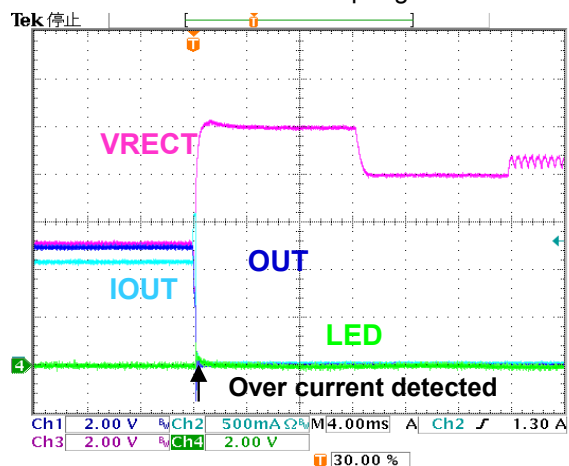


Figure B-21 LED Turned off by an over current

After an over current is detected, LED turns off when the output goes down.

TYPICAL CHARACTERISTICS (Continued)

12. Power Efficiency

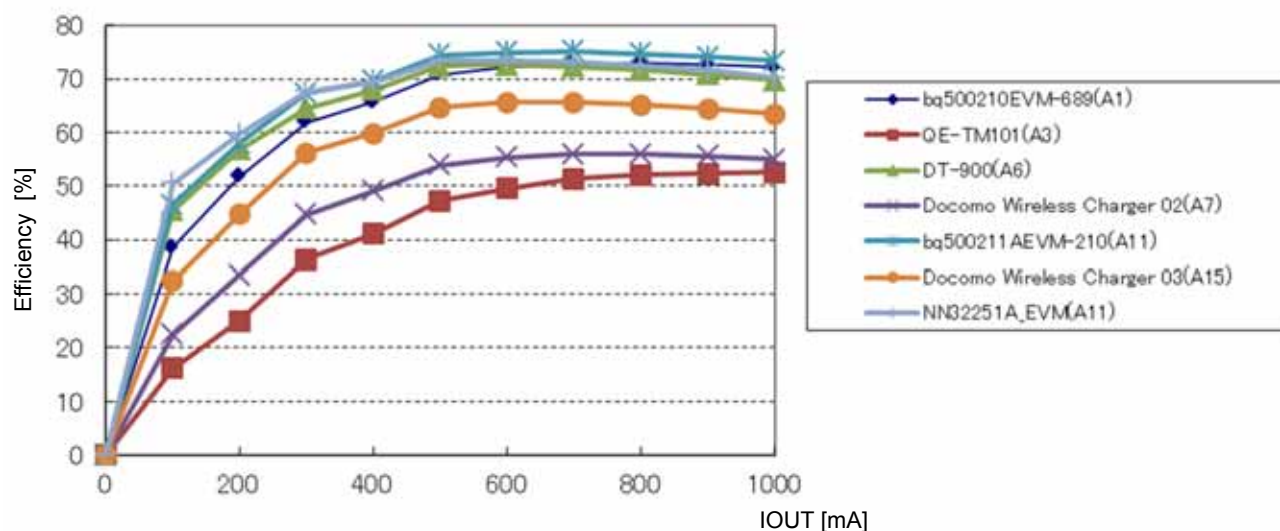


Figure B-22. Power Efficiency

13. Transient Characteristics

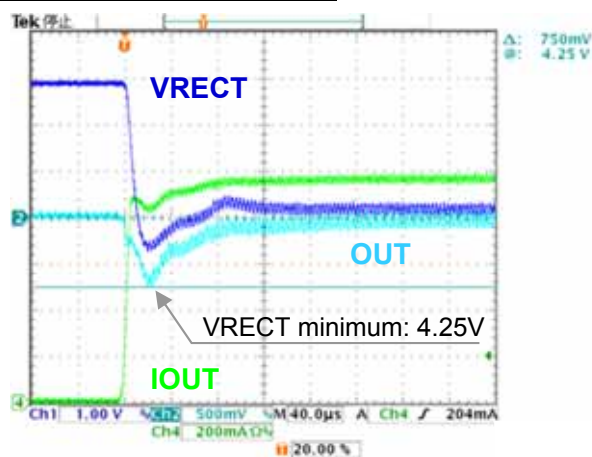


Figure B-23. Load current changed
0mA→1000mA

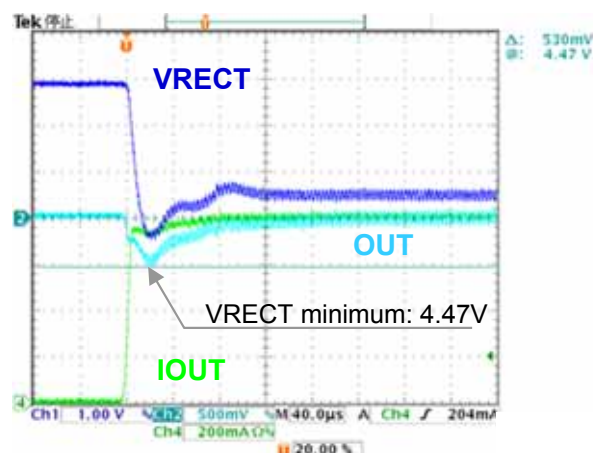


Figure B-24. Load Current Changed
0mA→800mA

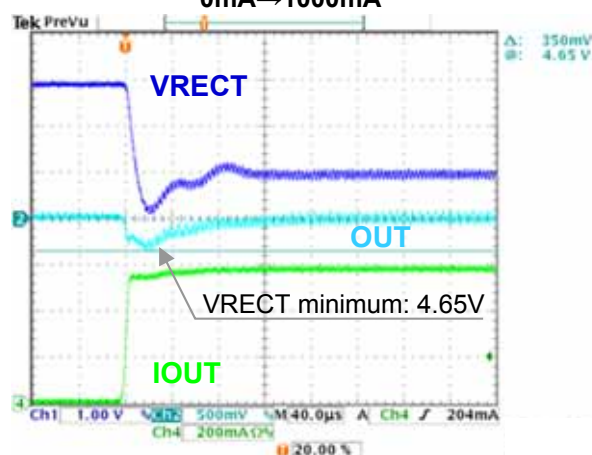


Figure B-25. Load current changed
0mA→600mA


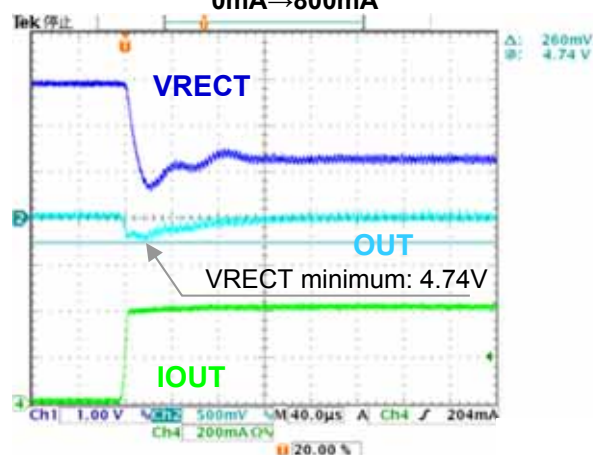


Figure B-26. Load current changed
0mA→400mA

TYPICAL CHARACTERISTICS (Continued)

13. Transient Characteristics (Continued)

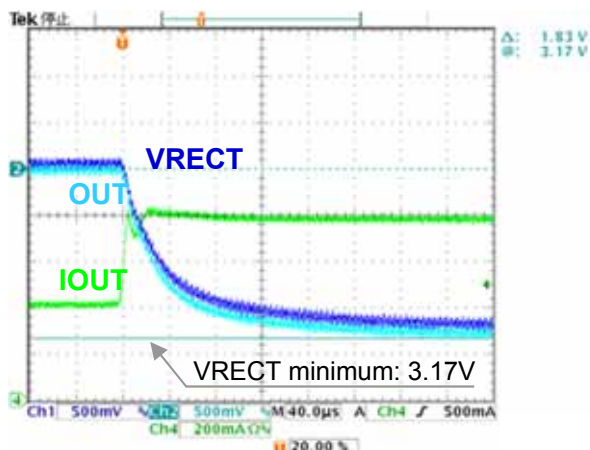

FigureB-27. Load Current Changed
(400mA→1000mA)

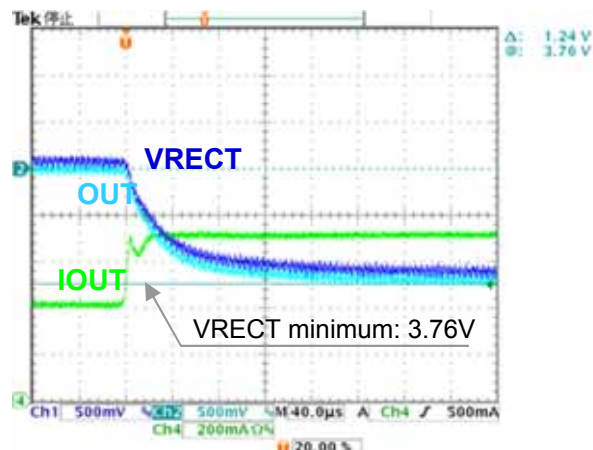


Figure B-28. Load Current Changed
(400mA→800mA)


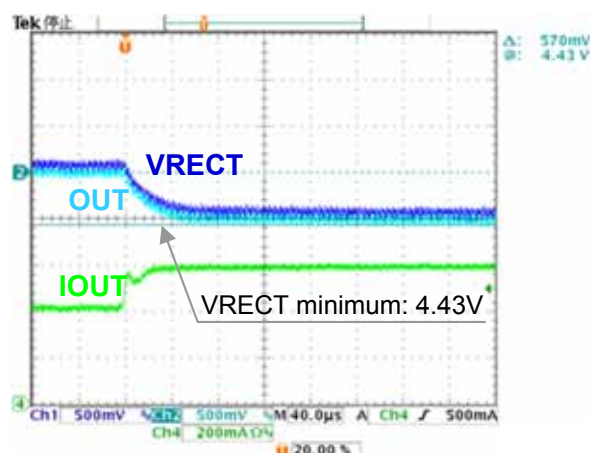


Figure B-29. Load Current Changed
(400mA→600mA)

14. VOUT Ripple Voltage

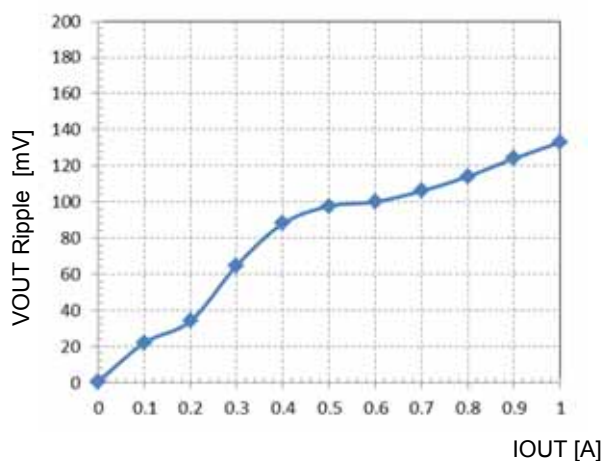


FigureB-30. VOUT Ripple Characteristics

Package Information

Unit: mm

Package Code : XBGA048-W-3232AML

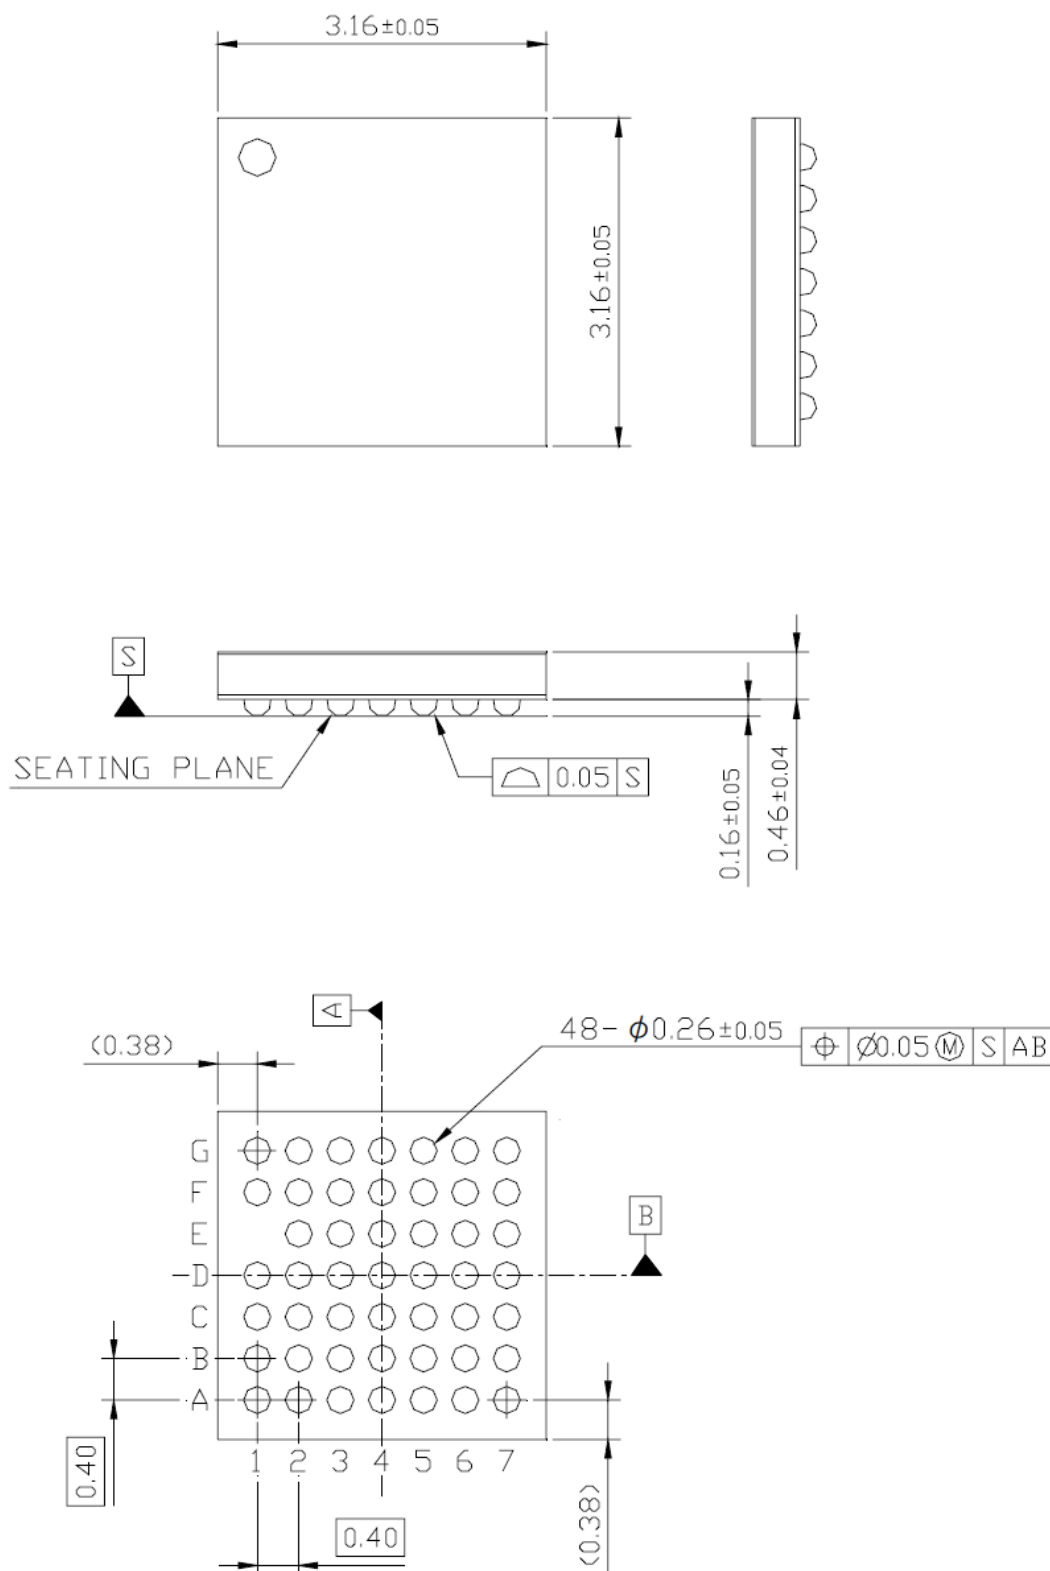

IMPORTANT NOTICE

1. When using the IC for new models, verify the safety including the long-term reliability for each product.
2. When the application system is designed by using this IC, please confirm the notes in this book.
Please read the notes to descriptions and the usage notes in the book.
3. This IC is intended to be used for general electronic equipment.
Consult our sales staff in advance for information on the following applications: Special applications in which exceptional quality and reliability are required, or if the failure or malfunction of this IC may directly jeopardize life or harm the human body.
Any applications other than the standard applications intended.
 - (1) Space appliance (such as artificial satellite, and rocket)
 - (2) Traffic control equipment (such as for automotive, airplane, train, and ship)
 - (3) Medical equipment for life support
 - (4) Submarine transponder
 - (5) Control equipment for power plant
 - (6) Disaster prevention and security device
 - (7) Weapon
 - (8) Others : Applications of which reliability equivalent to (1) to (7) is requiredOur company shall not be held responsible for any damage incurred as a result of or in connection with the IC being used for any special application, unless our company agrees to the use of such special application.
However, for the IC which we designate as products for automotive use, it is possible to be used for automotive.
4. This IC is neither designed nor intended for use in automotive applications or environments unless the IC is designated by our company to be used in automotive applications.
Our company shall not be held responsible for any damage incurred by customers or any third party as a result of or in connection with the IC being used in automotive application, unless our company agrees to such application in this book.
5. Please use this IC in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Our company shall not be held responsible for any damage incurred as a result of our IC being used by our customers, not complying with the applicable laws and regulations.
6. Pay attention to the direction of the IC. When mounting it in the wrong direction onto the PCB (printed-circuit-board), it might be damaged.
7. Pay attention in the PCB (printed-circuit-board) pattern layout in order to prevent damage due to short circuit between pins. In addition, refer to the Pin Description for the pin configuration.
8. Perform visual inspection on the PCB before applying power, otherwise damage might happen due to problems such as solder-bridge between the pins of the IC. Also, perform full technical verification on the assembly quality, because the same damage possibly can happen due to conductive substances, such as solder ball, that adhere to the IC during transportation.
9. Take notice in the use of this IC that it might be damaged when an abnormal state occurs such as output pin-VCC short (Power supply fault), output pin-GND short (Ground fault), or output-to-output-pin short (load short). Safety measures such as installation of fuses are recommended because the extent of the above-mentioned damage will depend on the current capability of the power supply.
10. The protection circuit is for maintaining safety against abnormal operation. Therefore, the protection circuit should not work during normal operation.
Especially for the thermal protection circuit, if the area of safe operation or the absolute maximum rating is momentarily exceeded due to output pin to VCC short (Power supply fault), or output pin to GND short (Ground fault), the IC might be damaged before the thermal protection circuit could operate.
11. Unless specified in the product specifications, make sure that negative voltage or excessive voltage are not applied to the pins because the IC might be damaged, which could happen due to negative voltage or excessive voltage generated during the ON and OFF timing when the inductive load of a motor coil or actuator coils of optical pick-up is being driven.
12. Verify the risks which might be caused by the malfunctions of external components.

**Request for your special attention and precautions in using the technical information and
semiconductors described in this book**

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.It is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application, unless our company agrees to your using the products in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.