


Quick Connection Screw Protective Conductor Terminal Block QTCU...-PE

Article description	QTCU 2,5-PE
Article no.	3206555
EC-TYPE EXAMINATION CERTIFICATE IECEX-CERTIFICATE	KEMA 05ATEX2148 U IECEX KEM 07.0010 U
Marking	Ex e II KEMA 05ATEX2148 U IECEX KEM 07.0010 U
Assembly on mounting rails	NS 35 acc. to EN 60715-TH 35
Stripping length ¹⁾	9 mm
Torque ¹⁾	0,6 - 0,8 Nm
Frequency of circuit at same cross-section ²⁾	100
Assembly instructions	See page 2
Operating temperature range	-45 °C ... +90 °C
Wiring temperature range	-10 °C ... +90 °C

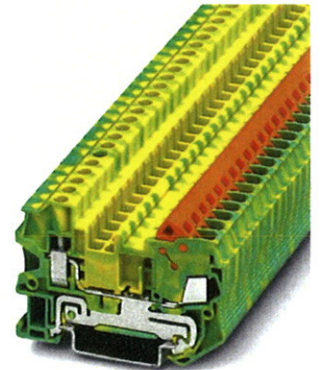

Technical data according to EN 60079-7 (increased safety „e“)

Connection capacity

Rated cross-section	2,5 mm ²	AWG 14
Max conductor cross-section	2,5 mm ² rigid and flexible ²⁾	AWG 14
	4 mm ² flexible ¹⁾	AWG 12
	6 mm ² rigid ¹⁾	AWG 10
Connectable conductor cross-section	0,14 - 4 mm ² flexible ¹⁾	AWG 26 - 12
	0,14 - 6 mm ² rigid ¹⁾	AWG 26 - 10
	0,5 - 2,5 mm ² rigid and flexible ²⁾	AWG 20 - 14

Data to the explosion protection

Rated voltage	550 V	to the adjacent QTCU 2,5
---------------	-------	--------------------------

Insulation material

Description	PA 6,6
Creep resistance acc. to IEC 60112 / material group	CTI 600 / I

Accessories

	Description	Article no.
Cover	D-QTCU 2,5	3206597

¹⁾ only Screw connection

²⁾ only Quick connection

Important assembly instructions – increased safety „e“


The Quick Connection (Hybrid) Protective Conductor Terminal Blocks are suitable for use in enclosures in Atmospheres with flammable gases or combustible dust. For flammable gases these enclosures must satisfy the requirements according to EN 60079-0 and EN 60079-7. For combustible dust these enclosures must satisfy the requirements according to EN 50281-1-1.

When assembling with other certified series and sizes of terminal blocks and using belonging accessories, the required creepage distances and clearances have to be observed.

When using the jumpers to achieve a skipped bridging of protective terminal block QTCU 2,5-PE the rated voltage is reduced to 352 V.

The Quick Connection (Hybrid) Protective Conductor Terminal Blocks may be used at ambient temperatures of -45 °C to +40 °C at the mounting position in electrical apparatus, e.g. junction and connection boxes, for temperature class T6. When the Terminal Blocks are used in electrical apparatus of temperature classes T1 up to T5, the highest temperature of the insulating material shall not exceed the maximum value of the operating temperature range.

The Terminal Blocks and their appropriate accessories have to be assembled as specified below.

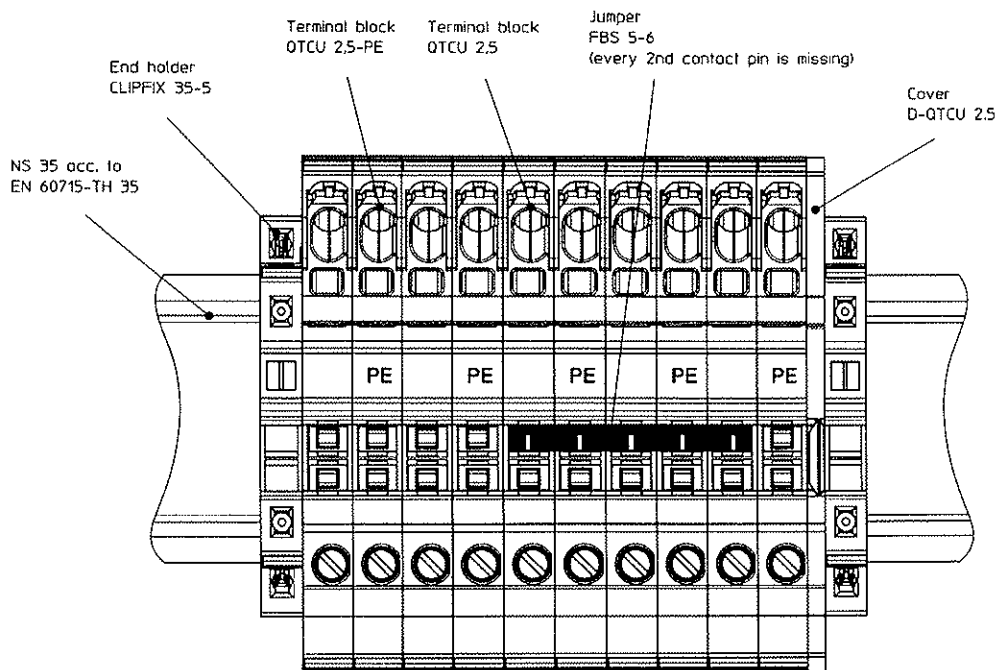

Attestation of Conformity

The above mentioned product is in line with the provisions of the below marked directive and their modification directive(s):

94/9/EC ATEX Directive

Compliance with Essential Health and Safety Requirements has been assured by compliance with:

EN 60079-0:2004

EN 60079-7:2003

EN 50281-1-1:1998 + A1

The conformity with the provisions of the ATEX directive were certified by

Notified Body: KEMA Quality B.V.


Address: Utrechtseweg 310, NL-6812 AR Arnhem, The Netherlands [Ident.-No.: 0344]

Certificate: KEMA 05ATEX2148 U, 2005-12-23
(No., Date)

Blomberg, 2007-12-11




V.A. Gerhard Leßmann
Business Unit Device Connection
Technology
Ex-Representative




Dirk Görliitzer
Business Unit Industrial Connection
Technology
Head of Business Unit

This attestation certifies the conformity with the indicated directive, it does not, however, covenant any characteristics.
The instructions for safety and installation have to be observed.

Phoenix Contact GmbH & Co. KG
Flachmarktstraße 8
32825 Blomberg
Germany

 +49 – (0) 52 35 – 3-00

 +49 – (0) 52 35 – 3-4 12 00

 www.phoenixcontact.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.