



Powermite High Efficiency 2.5 Amp Ultrafast Rectifier

DESCRIPTION

The Microsemi UPR5e3, UPR10e3, and UPR15e3 Powermite high efficiency rectifiers are RoHS compliant and offers optimized forward voltage characteristics with reverse blocking capabilities up to 150 Volts. They are ideal for surface mount applications that operate at high frequencies.

In addition to its size advantages, Powermite package features include a full metallic bottom that eliminates possibility of solder flux entrapment during assembly and a unique locking tab acts as an efficient heat path from die to mounting plane for external heat sinking with very low thermal resistance junction to case (bottom). Its innovative design makes this device ideal for use with automatic insertion equipment.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Low thermal resistance DO-216 package for higher current operation
- Ultrafast recovery time of 25 ns
- Efficient heat path with Integral locking bottom metal tab
- Low forward voltage
- Full metallic bottom eliminates flux entrapment
- Compatible with automatic insertion equipment
- Low profile-maximum height of 1 mm
- RoHS compliant.


APPLICATIONS / BENEFITS

- Switching and regulating power supplies
- Charge pump circuits
- Reduces reverse recovery loss with low I_{RM}
- Small 8.45 mm² foot print (See [mounting pad](#) details)

MAXIMUM RATINGS @ 25 °C unless otherwise specified

| Parameters/Test Conditions | Symbol | Value | Unit |
|--|---------------------|------------------------------|------|
| Junction and Storage Temperature | T_J and T_{STG} | -55 to +150 | °C |
| Thermal Resistance Junction-to-Tab | | 30 | °C/W |
| Thermal Resistance Junction-to-Bottom | | 10 | °C/W |
| Non-Repetitive Peak Forward Surge Current (At 8.3 ms Single half-sine wave) | I_{FSM} | 25 | A |
| Working Peak Reverse Voltage | V_{RWM} | 50 100 150 | V |
| | | UPR5e3 UPR10e3 UPR15e3 | |
| Average Rectified Output Current (At rated V_{RWM} , $T_C = 75^\circ\text{C}$) | I_O | 2.5 | A |
| Solder Temperature @ 10 s | | 260 | °C |

Notes: 1. When mounted on FR-4 PC board using 1 oz copper with recommended minimum foot print.



DO-216 Package

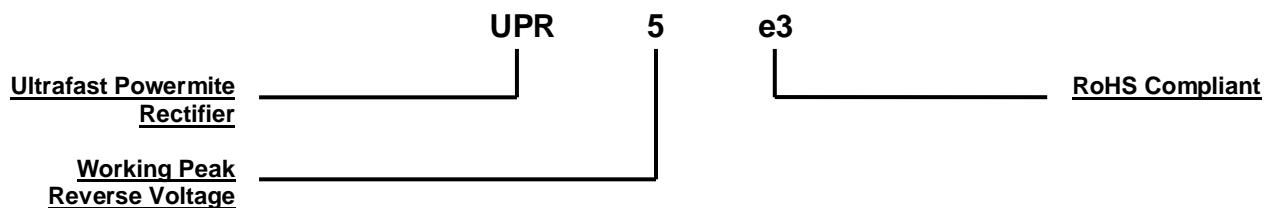
MSC – Lawrence
6 Lake Street,
Lawrence, MA 01841
1-800-446-1158
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland
Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:
www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Void-free transfer molded thermosetting epoxy compound meeting UL94V-0
- TERMINALS: Annealed matte-tin plating over copper and readily solderable per MIL-STD-750, method 2026. (Consult factor for tin-lead plating.)
- MARKING: R05• for UPR5e3, R10• for UPR10e3, and R15• for UPR15e3 (dot indicates “e3” designation)
- POLARITY: Cathode designated by TAB 2
- TAPE & REEL option: 12 mm tape per standard EIA-481-B. Consult factory for quantities.
- WEIGHT: Approximately 0.016 gram
- See [Package Dimensions](#) on last page.

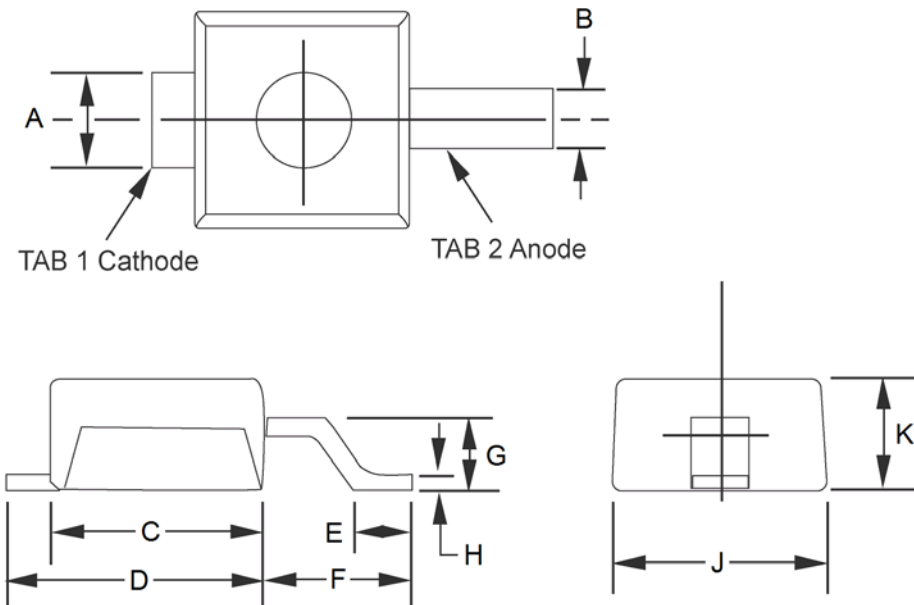
PART NOMENCLATURE

SYMBOLS & DEFINITIONS

| Symbol | Definition |
|-----------|--|
| f | Frequency |
| I_F | Forward Current: The dc current flowing from the external circuit into the anode terminal |
| I_{FSM} | Surge Peak Forward Current: The forward current including all nonrepetitive transient currents but excluding all repetitive transients (ref JESD282-B) |
| I_O | Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle. |
| I_R | Reverse Current: The dc current flowing from the external circuit into the cathode terminal at the specified voltage V_R |
| I_{REC} | Recovery Current: |
| V_R | Reverse Voltage: A positive dc cathode-anode voltage below the breakdown region |
| V_{RWM} | Working Peak Reverse Voltage: The peak voltage excluding all transient voltages (ref JESD282-B). Also sometimes known historically as PIV. |

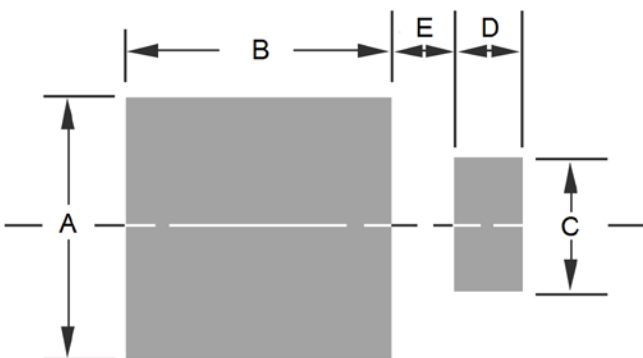
ELECTRICAL CHARACTERISTICS @ $T_A = +25\text{ }^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | Conditions | Min | Max | Units |
|--------------------------|----------|---|-----|-------|---------------|
| Forward Voltage (Note 1) | V_F | $I_F = 2.0\text{ Amps}$ | | 0.975 | V |
| Forward Voltage (Note 1) | V_F | $I_F = 2.0\text{ Amps}, T_J = 100\text{ }^\circ\text{C}$ | | 0.895 | V |
| Reverse Current | I_R | $V_R = V_{RWM}, T_J = 25\text{ }^\circ\text{C}$ | | 2.0 | μA |
| Reverse Current | I_R | $V_R = V_{RWM}, T_J = 100\text{ }^\circ\text{C}$ | | 50 | μA |
| Reverse Recovery Time | t_{rr} | $I_F = 0.5\text{ A}; I_R = 1.0\text{ A}; I_{REC} = 0.25\text{ A}$ | | 25 | ns |

Note 1: Short duration test pulse used to minimize self – heating effect.

PACKAGE DIMENSIONS


| Ltr | Dimensions | | | |
|----------|------------|-------|-------------|------|
| | Inch | | Millimeters | |
| | Min | Max | Min | Max |
| A | 0.029 | 0.039 | 0.73 | 0.99 |
| B | 0.016 | 0.026 | 0.40 | 0.66 |
| C | 0.070 | 0.080 | 1.77 | 2.03 |
| D | 0.087 | 0.097 | 2.21 | 2.46 |
| E | 0.020 | 0.030 | 0.50 | 0.76 |
| F | 0.051 | 0.061 | 1.29 | 1.54 |
| G | 0.021 | 0.031 | 0.53 | 0.78 |
| H | 0.004 | 0.008 | 0.10 | 0.20 |
| J | 0.070 | 0.080 | 1.77 | 2.03 |
| K | 0.035 | 0.045 | 0.89 | 1.14 |

MOUNTING PAD DIMENSIONS


| Ltr | Dimensions | |
|----------|------------|-------------|
| | Inch | Millimeters |
| A | 0.100 | 2.54 |
| B | 0.105 | 2.67 |
| C | 0.050 | 1.27 |
| D | 0.030 | 0.76 |
| E | 0.025 | 0.64 |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.