

Type VPR –55 to 105 °C Radial Leaded Aluminum Electrolytic

Low ESR, Optional 3rd Lead Case Styles, Aluminum Electrolytic Capacitors



Type VPR is a radial leaded aluminum electrolytic capacitor with a 105 °C, 2000 hours long life ratings. The VPR has 3 optional case styles with a third lead. The low ESR rating makes it ideal for output filtering in switching power supplies.


Highlights

- 105 °C
- Long life
- Low ESR
- High reliability

Specifications

| Temperature Range | -55 °C to +105 °C | | | | | | | | | | | | | | |
|----------------------------|---|------------------|------|-----|----|------|----|----|------------|------|------|------|-----|---|------|
| Rated Voltage Range | 6.3 to 100 Vdc (250 Vdc on special request) | | | | | | | | | | | | | | |
| Capacitance Range | 250 to 12,000 μ F | | | | | | | | | | | | | | |
| Capacitance Tolerance | -10% +75% (others on special request) | | | | | | | | | | | | | | |
| Leakage Current | $I = .002 CV$ after 2 minutes @ 25 °C C = Capacitance in (μ F) V = Rated voltage I = Leakage current in μ A | | | | | | | | | | | | | | |
| Ripple Current Multipliers | <table border="1"> <thead> <tr> <th>Temperature (°C)</th> <th>45</th> <th>55</th> <th>65</th> <th>75</th> <th>85</th> <th>95</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>1.66</td> <td>1.52</td> <td>1.37</td> <td>1.2</td> <td>1</td> <td>0.75</td> </tr> </tbody> </table> | Temperature (°C) | 45 | 55 | 65 | 75 | 85 | 95 | Multiplier | 1.66 | 1.52 | 1.37 | 1.2 | 1 | 0.75 |
| Temperature (°C) | 45 | 55 | 65 | 75 | 85 | 95 | | | | | | | | | |
| Multiplier | 1.66 | 1.52 | 1.37 | 1.2 | 1 | 0.75 | | | | | | | | | |
| QA Stability Test | Apply WVDC for 2000 h at 105 °C Capacitance change within 15% of initial limits DC leakage current meets initial limits ESR \leq 150% of initial measured value | | | | | | | | | | | | | | |
| RoHS Compliant | | | | | | | | | | | | | | | |


Part Numbering System

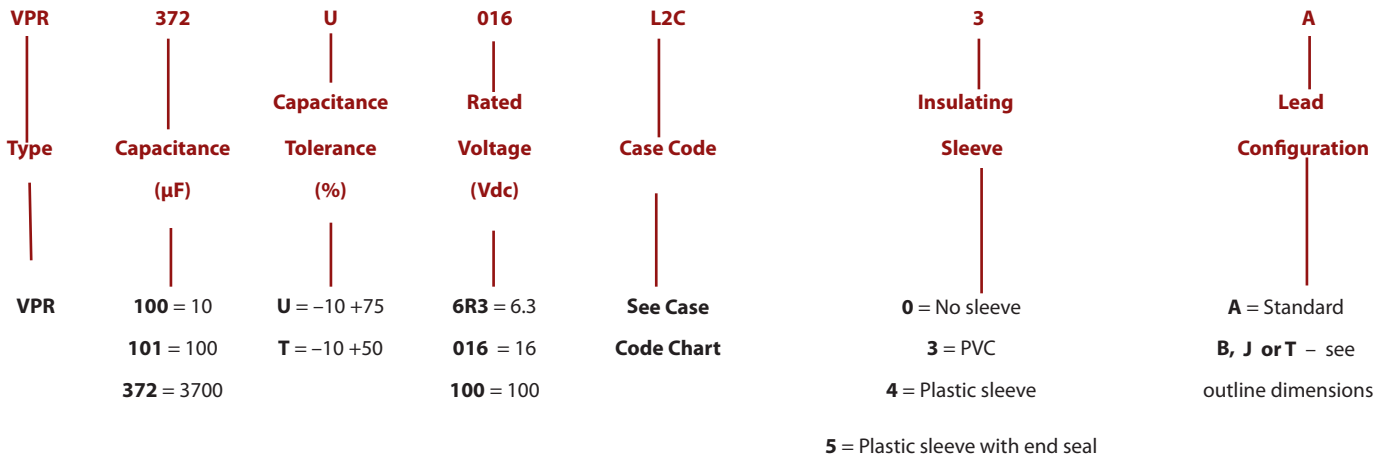

Type VPR -55 to 105 °C Radial Leaded Aluminum Electrolytic

Low ESR, Optional 3rd Lead Case Styles, Aluminum Electrolytic Capacitors

Outline Drawing

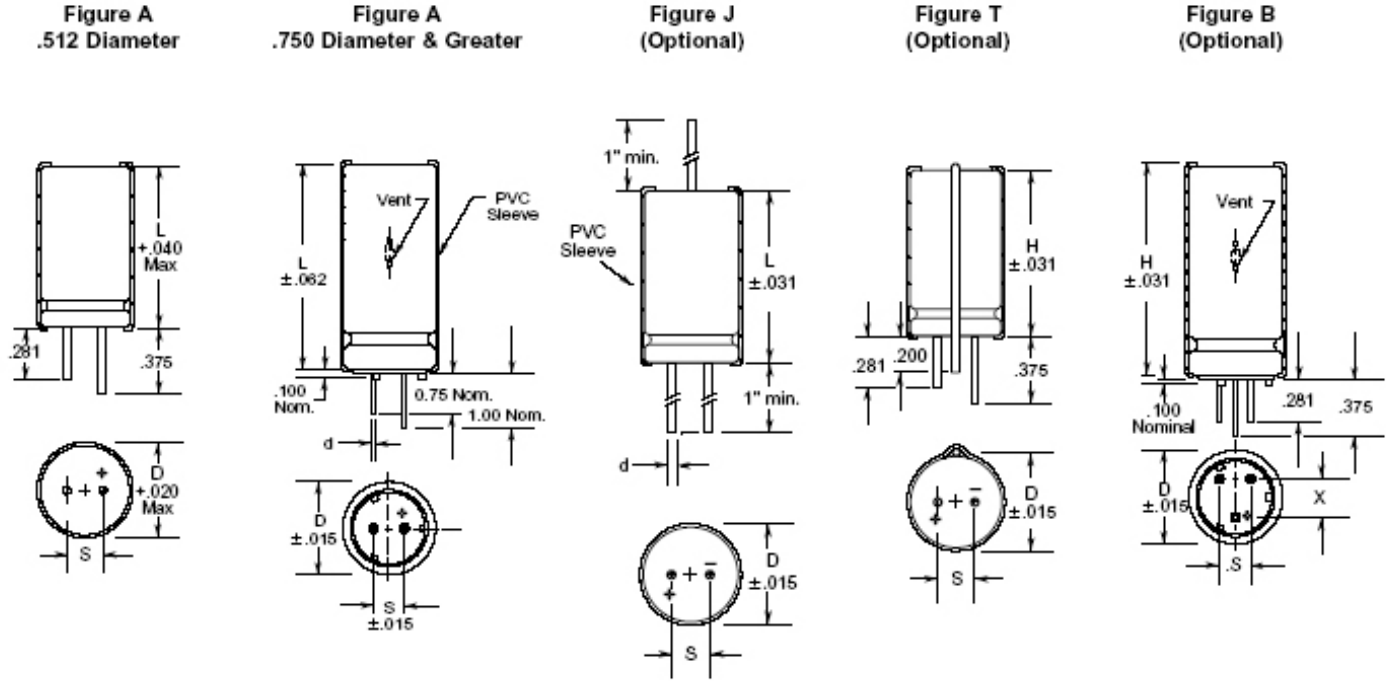

PVC sleeve adds .015 to diameter and length.

(Inches)

Case Code

Case Code Chart
Uninsulated Case Size

| Case Code | Inches | | | Millimeters | | | Lead Wire Size | |
|-----------|--------|-------|------|-------------|------|-------|----------------|-----|
| | D | L | S | D | L | S | Inches | AWG |
| L1C | 0.875 | 1.125 | 0.30 | 22.2 | 28.6 | 7.62 | 0.04 | #18 |
| L1L | 0.875 | 1.625 | 0.30 | 22.2 | 41.3 | 7.62 | 0.04 | #18 |
| L2C | 0.875 | 2.125 | 0.30 | 22.2 | 53.9 | 7.62 | 0.04 | #18 |
| L2L | 0.875 | 2.625 | 0.30 | 22.2 | 66.7 | 7.62 | 0.04 | #18 |
| L3C | 0.875 | 3.125 | 0.30 | 22.2 | 79.4 | 7.62 | 0.04 | #18 |
| L3L | 0.875 | 3.625 | 0.30 | 22.2 | 92.1 | 7.62 | 0.04 | #18 |
| N1C | 1.000 | 1.125 | 0.40 | 25.4 | 28.6 | 10.16 | 0.04 | #18 |
| N1L | 1.000 | 1.625 | 0.40 | 25.4 | 41.3 | 10.16 | 0.04 | #18 |
| N2C | 1.000 | 2.125 | 0.40 | 25.4 | 53.9 | 10.16 | 0.04 | #18 |
| N2L | 1.000 | 2.625 | 0.40 | 25.4 | 66.7 | 10.16 | 0.04 | #18 |
| N3C | 1.000 | 3.125 | 0.40 | 25.4 | 79.4 | 10.16 | 0.04 | #18 |
| N3L | 1.000 | 3.625 | 0.40 | 25.4 | 92.1 | 10.16 | 0.04 | #18 |

Type VPR -55 to 105 °C Radial Leaded Aluminum Electrolytic

Low ESR, Optional 3rd Lead Case Styles, Aluminum Electrolytic Capacitors

Ratings

| Cap (μ F) | Catalog Part Number | Max ESR 10 kHz 25 °C (Ω) | Max Ripple 10 kHz 85 °C (A) | Size in. (mm) | | | |
|---------------------------------|------------------------|--|--------------------------------------|-----------------|---------------|-------------------|------------------|
| | | | | Diameter (D) | Length (L) | Lead Space (S) | Lead Dia. (d) |
| 6.3 Vdc (8 Volts Surge) | | | | | | | |
| 5,600 | VPR562U6R3N1L | 0.034 | 3.767 | 1.000 (25.4) | 1.625 (41.3) | 0.40 (10.2) | 0.040 (1.0) |
| 8,800 | VPR882U6R3N2C | 0.023 | 5.131 | 1.000 (25.4) | 2.125 ((54.0) | 0.40 (10.2) | 0.040 (1.0) |
| 12,000 | VPR123U6R3N2L | 0.018 | 6.364 | 1.000 (25.4) | 2.625 (66.7) | 0.40 (10.2) | 0.040 (1.0) |
| 7.5 Vdc (10 Volts Surge) | | | | | | | |
| 4,900 | VPR492U7R5N1L | 0.031 | 3.820 | 1.000 (25.4) | 1.625 (41.3) | 0.40 (10.2) | 0.040 (1.0) |
| 10 Vdc (13 Volts Surge) | | | | | | | |
| 4,200 | VPR422U010N1L | 0.032 | 3.702 | 1.000 (25.4) | 1.625 (41.3) | 0.40 (10.2) | 0.040 (1.0) |
| 12 Vdc (18 Volts Surge) | | | | | | | |
| 5,600 | VPR562U012N2C | 0.021 | 4.932 | 1.000 (25.4) | 2.125 ((54.0) | 0.40 (10.2) | 0.040 (1.0) |
| 16 Vdc (20 Volts Surge) | | | | | | | |
| 2,300 | VPR232U016L1L | 0.040 | 2.863 | 0.875 (22.2) | 1.625 (41.3) | 0.30 (7.6) | 0.040 (1.0) |
| 3,200 | VPR322U016N1L | 0.029 | 3.637 | 1.000 (25.4) | 1.625 (41.3) | 0.40 (10.2) | 0.040 (1.0) |
| 3,700 | VPR372U016L2C | 0.026 | 3.981 | 0.875 (22.2) | 2.125 ((54.0) | 0.30 (7.6) | 0.040 (1.0) |
| 5,000 | VPR502U016N2C | 0.020 | 4.887 | 1.000 (25.4) | 2.125 ((54.0) | 0.40 (10.2) | 0.040 (1.0) |
| 6,900 | VPR692U016N2L | 0.017 | 6.105 | 1.000 (25.4) | 2.625 (66.7) | 0.40 (10.2) | 0.040 (1.0) |
| 10,000 | VPR103U016N3L | 0.012 | 8.033 | 1.000 (25.4) | 3.625 (92.1) | 0.40 (10.2) | 0.040 (1.0) |
| 25 Vdc (30 Volts Surge) | | | | | | | |
| 640 | VPR641U025E1L | 0.067 | 2.390 | 0.512 (13.0) | 1.654 (42.0) | 0.20 (5.1) | 0.023 (.58) |
| 1,300 | VPR132U025L1L | 0.035 | 2.729 | 0.875 (22.2) | 1.625 (41.3) | 0.30 (7.6) | 0.040 (1.0) |
| 1,800 | VPR182U025N1L | 0.035 | 3.006 | 1.000 (25.4) | 1.625 (41.3) | 0.40 (10.2) | 0.040 (1.0) |
| 2,800 | VPR282U025L2L | 0.018 | 4.732 | 0.875 (22.2) | 2.625 (66.7) | 0.30 (7.6) | 0.040 (1.0) |
| 2,800 | VPR282U025N2C | 0.023 | 4.107 | 1.000 (25.4) | 2.125 ((54.0) | 0.40 (10.2) | 0.040 (1.0) |
| 3,900 | VPR392U025N2L | 0.018 | 5.191 | 1.000 (25.4) | 2.625 (66.7) | 0.40 (10.2) | 0.040 (1.0) |
| 5,900 | VPR592U025N3L | 0.014 | 6.616 | 1.000 (25.4) | 3.625 (92.1) | 0.40 (10.2) | 0.040 (1.0) |

Type VPR -55 to 105 °C Radial Leaded Aluminum Electrolytic

Low ESR, Optional 3rd Lead Case Styles, Aluminum Electrolytic Capacitors

| Cap (μ F) | Catalog Part Number | Max ESR 10 kHz 25 °C (Ω) | Max Ripple 10 kHz 85 °C (A) | Size in. (mm) | | | |
|----------------------------------|------------------------|--|--------------------------------------|-----------------|---------------|-------------------|------------------|
| | | | | Diameter (D) | Length (L) | Lead Space (S) | Lead Dia. (d) |
| 40 Vdc (50 Volts Surge) | | | | | | | |
| 760 | VPR761U040L1L | 0.040 | 2.194 | 0.875 (22.2) | 1.625 (41.3) | 0.30 (7.6) | 0.040 (1.0) |
| 1,600 | VPR162U040N2C | 0.021 | 3.755 | 1.000 (25.4) | 2.125 ((54.0) | 0.40 (10.2) | 0.040 (1.0) |
| 2,200 | VPR222U040N2L | 0.017 | 4.732 | 1.000 (25.4) | 2.625 (66.7) | 0.40 (10.2) | 0.040 (1.0) |
| 2,800 | VPR282U040N3C | 0.014 | 5.651 | 1.000 (25.4) | 3.125 (79.4) | 0.40 (10.2) | 0.040 (1.0) |
| 3,300 | VPR332U040N3L | 0.014 | 6.437 | 1.000 (25.4) | 3.625 (92.1) | 0.40 (10.2) | 0.040 (1.0) |
| 50 Vdc (65 Volts Surge) | | | | | | | |
| 600 | VPR601U050L1L | 0.049 | 1.964 | 0.875 (22.2) | 1.625 (41.3) | 0.30 (7.6) | 0.040 (1.0) |
| 1200 | VPR122U050N2C | 0.028 | 3.297 | 1.000 (25.4) | 2.125 ((54.0) | 0.40 (10.2) | 0.040 (1.0) |
| 2,400 | VPR242U050N3L | 0.015 | 5.639 | 1.000 (25.4) | 3.625 (92.1) | 0.40 (10.2) | 0.040 (1.0) |
| 75 Vdc (95 Volts Surge) | | | | | | | |
| 450 | VPR451U075N1L | 0.102 | 1.779 | 1.000 (25.4) | 1.625 (41.3) | 0.40 (10.2) | 0.040 (1.0) |
| 680 | VPR681U075N2C | 0.069 | 2.420 | 1.000 (25.4) | 2.125 ((54.0) | 0.40 (10.2) | 0.040 (1.0) |
| 1,100 | VPR112U075N3C | 0.044 | 3.577 | 1.000 (25.4) | 3.125 (79.4) | 0.40 (10.2) | 0.040 (1.0) |
| 100 Vdc (125 Volts Surge) | | | | | | | |
| 250 | VPR251U100N1L | 0.111 | 1.818 | 1.000 (25.4) | 1.625 (41.3) | 0.40 (10.2) | 0.040 (1.0) |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.