


### FEATURES

- Efficiency up to 97%, Non-isolated
- SIP Package 11.5x7.5x10.2 mm
- Excellent Line/Loads Regulation
- Short Circuit Protection, Thermal Shutdown
- Low Ripple and Noise
- Operating Temperature range -40°C to +80°C
- Low Stand-by Current
- Wideinputrange (4.75V~32V)
- 3 Years Product Warranty

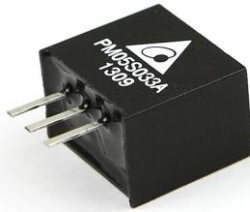

The PM05S series provides high efficiency switching regulators. The high efficiency of these step-down converters allow an operating temperature up to 80°C at full-load without heatsink. The regulators come in a package which fits in the standard TO-220 footprint of linear regulators.

The high efficiency of up to 97% and low stand-by power consumption of these switching regulators offer a cost-efficient solution for different applications.

These high efficiency DC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc..

### Model List

| Model Number | Input Voltage (Range)<br>VDC | Output Voltage<br>VDC | Output Current | Max. capacitive Load<br>μF | Efficiency (typ.)<br>@Min. Vin | Efficiency (typ.)<br>@Max. Vin |
|--------------|------------------------------|-----------------------|----------------|----------------------------|--------------------------------|--------------------------------|
|              |                              |                       | Max.<br>mA     |                            | %                              | %                              |
| PM05S015A    | 4.75 ~ 32                    | 1.5                   | 500            | 220                        | 73                             | 63                             |
| PM05S018A    |                              | 1.8                   | 500            | 220                        | 82                             | 71                             |
| PM05S025A    |                              | 2.5                   | 500            | 220                        | 87                             | 77                             |
| PM05S033A    |                              | 3.3                   | 500            | 220                        | 91                             | 81                             |
| PM05S050A    | 6.5 ~ 32                     | 5                     | 500            | 220                        | 94                             | 86                             |
| PM05S065A    | 8 ~ 32                       | 6.5                   | 500            | 220                        | 95                             | 88                             |
| PM05S090A    | 11 ~ 32                      | 9                     | 500            | 220                        | 96                             | 92                             |
| PM05S120A    | 15 ~ 32                      | 12                    | 500            | 220                        | 97                             | 94                             |
| PM05S150A    | 18 ~ 32                      | 15                    | 500            | 220                        | 97                             | 95                             |

### Input Characteristics

| Parameter                         | Conditions | Min.      | Typ. | Max. | Unit |
|-----------------------------------|------------|-----------|------|------|------|
| Input Surge Voltage (1 sec. max.) |            | -0.3      | ---  | 34   | VDC  |
| Internal Filter Type              |            | Capacitor |      |      |      |
| Internal Power Dissipation        |            | ---       | ---  | 0.4  | W    |
| Short Circuit Input Power         |            | ---       | ---  | 1.5  | W    |
| Input Current                     | @No Load   | ---       | 5    | 7    | mA   |



## Output Characteristics

| Parameter                       | Conditions                  |              | Min. | Typ.  | Max.   | Unit              |
|---------------------------------|-----------------------------|--------------|------|-------|--------|-------------------|
| Output Voltage Setting Accuracy |                             |              | ---  | ±2.0  | ±3.0   | %Vnom.            |
| Line Regulation                 | Vin=Min. to Max.            | 1.5V to 6.5V | ---  | ±0.2  | ±0.4   | %                 |
|                                 |                             | 9V to 15V    | ---  | ±0.1  | ±0.2   | %                 |
| Load Regulation                 | Io=10% to 100%              | 1.5V to 6.5V | ---  | ±0.4  | ±0.6   | %                 |
|                                 |                             | 9V to 15V    | ---  | ±0.25 | ±0.4   | %                 |
| Min.Load                        | No minimum Load Requirement |              |      |       |        |                   |
| Ripple & Noise (20MHz)          | 1.5V to 6.5V                |              | ---  | 20    | 30     | mV <sub>P-P</sub> |
|                                 | 9V to 15V                   |              | ---  | 30    | 40     | mV <sub>P-P</sub> |
| Transient Recovery Time         | 50% Load Step Change        |              | ---  | 100   | ---    | µsec              |
| Transient Response Deviation    |                             |              | ---  | ±2    | ---    | %                 |
| Temperature Coefficient         |                             |              | ---  | ---   | ±0.015 | %/°C              |
| Output Current Limit            |                             |              | ---  | ---   | 1      | A                 |
| Short Circuit Protection        | Continuous                  |              |      |       |        |                   |

## General Characteristics

| Parameter             | Conditions                        | Min.      | Typ. | Max. | Unit  |
|-----------------------|-----------------------------------|-----------|------|------|-------|
| I/O Isolation Voltage | none                              |           |      |      |       |
| Switching Frequency   |                                   | 280       | 330  | 380  | KHz   |
| MTBF(calculated)      | MIL-HDBK-217F@25°C, Ground Benign | 2,000,000 | ---  | ---  | Hours |


## Environmental Characteristics

| Parameter  | Conditions           | Min. | Typ. | Max. | Unit     |
|--|----------------------|------|------|------|----------|
| Operating Ambient Temperature Range (See Power Derating Curve) | Natural Convection   | -40  | ---  | +90  | °C       |
| Case Temperature   |                      | ---  | ---  | +100 | °C       |
| Storage Temperature  |                      | -55  | ---  | +125 | °C       |
| Thermal Shutdown   | Internal IC junction | ---  | 160  | ---  | °C       |
| Humidity (non condensing)                                      |                      | ---  | ---  | 95   | % rel. H |
| Lead Temperature (1.5mm from case for 10Sec.)                  |                      | ---  | ---  | 260  | °C       |

## EMC Characteristics

| Parameter                   | Standards & Level                     | Performance          |
|-----------------------------|---------------------------------------|----------------------|
| Conducted EMI               | Compliance to EN55022 and FCC part 15 | Class B (See Page 3) |
| Radiated Emissions          | EN55022                               | Class B              |
| ESD                         | EN61000-4-2                           | Class A              |
| Radiated immunity           | EN61000-4-3                           | Class A              |
| Fast transient (See Note 5) | EN61000-4-4                           | Class A              |
| Conducted immunity          | EN61000-4-6                           | Class A              |
| Magnetic Field Immunity     | EN61000-4-8                           | Class A              |


## Power Derating Curve

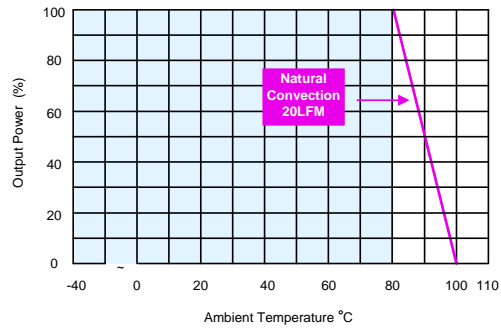

## Notes

- 1 Specifications typical at  $T_a=+25^{\circ}\text{C}$ , resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 Ripple & Noise measurement bandwidth is 0-20 MHz.
- 3 All DC/DC converters should be externally fused at the front end for protection.
- 4 Other input and output voltage may be available, please contact factory.
- 5 The PM05S series can meet EN61000-4-4 by adding a capacitor across the input pins. Suggested capacitor CHEMI-CON KY 330 $\mu\text{F}/100\text{V}$ .
- 6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 7 It needs to increase 1V for  $V_{in}(\text{min})$  under high and low temperature.
- 8 Specifications are subject to change without notice.


## EMI-Filter to meet EN 55022, class A, class B; FCC part 15 ,level A

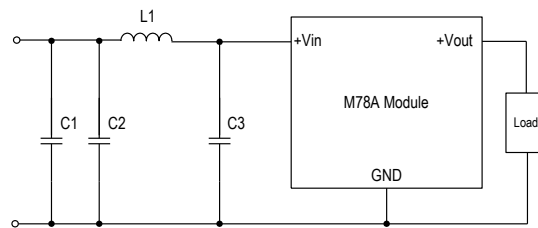

| Class   | Model        | C1                                     | C2                                     | C3                                     | L1                             |
|---------|--------------|--|--|--|--------------------------------|
| Class A | PM05S series | ---                                    | 4.7 $\mu\text{F}/50\text{V}$ 1206 MLCC | 4.7 $\mu\text{F}/50\text{V}$ 1206 MLCC | Würth Elektronik NO. 744774033 |
| Class B | PM05S series | 4.7 $\mu\text{F}/50\text{V}$ 1206 MLCC | 4.7 $\mu\text{F}/50\text{V}$ 1206 MLCC | 4.7 $\mu\text{F}/50\text{V}$ 1206 MLCC | Würth Elektronik NO. 74477410  |

## Mechanical Drawing

### Mechanical Dimensions

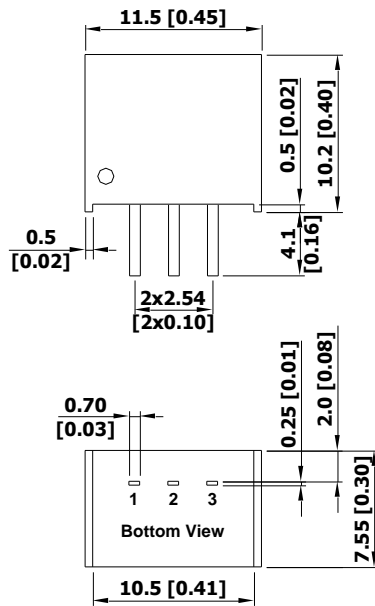

### Pin Connections

| Pin | Function |
|-----|----------|
| 1   | +Vin     |
| 2   | GND      |
| 3   | +Vout    |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05(±0.002)

## Physical Characteristics

Case Size : 11.5x7.55x10.2mm (0.45x0.30x0.40 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)

Pin Material : Alloy 42

Weight : 1.95g

## Part Numbering System

| P           | M             | 05        | S                 | 033            | A                  |
|-------------|---------------|-----------|-------------------|----------------|--------------------|
| Form factor | Family series | Watt      | Number of Outputs | Output Voltage | Option Code        |
| P-SIP       | M-Regulator   | 05:0.5AMP | S - Single        | 033:3.3VDC     | A - Std. Functions |

## WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.