

HFBR-3810Z & HFBR-3810MSZ

650 nm Fiber Optics Link for DC to 10Mbaud



Data Sheet



Description

HFBR-3810Z consists of an optic transmitter and receiver operating at 650nm wavelength. The pin to pin air gap distance of 25.1mm provides transient voltage suppression of 12kV.

Applications

- Drives/Inverters
- Galvanic isolation on one single PCB

Features

- Data transmission at signal rates of DC to 10MBaud
- DC coupled receiver with CMOS/TTL output for easy designs: no data encoding or digitizing circuitry required
- High noise immunity
- RoHS compliant
- Transient voltage suppression of up to 12kV according IEC 60664-1
- Laser class 1 according to IEC-60825: Amendment 2001

HFBR-3810Z & HFBR-3810MSZ DC to 10MBaud Data Link

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Signaling Rate	f_s	DC	10	Mbd
Storage and Operating Temperature	$T_{S,O}$	-40	+85	°C
Receiver supply voltage	V_{CC}	-0.5	+5.5	V
Receiver Average Output Current	$I_{O,AVG}$	-16	16	mA
Receiver Output Power Dissipation	P_{OD}		80	mW
Transmitter Peak Forward Input Current ^[1]	$I_{F,PK}$		90	mA
Transmitter Reverse Input Voltage	V_R		3	V
Rated impulse voltage ^[2]	V_T		12	kV
Lead Soldering Cycle ^[3, 4]	Temp	T_{SOL}	+260	°C
	Time		10	Sec
Nominal Voltage of the supply system ^[2]	V_{eff}		1000	V

Notes:

- For $I_{F,PK} > 60\text{mA}$, the duty cycle factor must maintain $I_{F,AV} \leq 60\text{mA}$ and pulse width $\leq 1\mu\text{s}$
- [IEC 60664-1] Overvoltage category 4; inhomogeneous field; pollution degree 3; material group 2; altitude up to 2000m for HFBR-3810MSZ and up to 3000m for HFBR-3810Z above sea level
- 1.6mm below seating plane; wave soldering only
- MSL class 3

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Units
Ambient Temperature	T_A	-40	85	°C
Power Supply Voltage ^[1]	V_{CC}	4.75	5.25	V
Transmitter Peak Forward Current ^[2]	$I_{F,P}$	54	90	mA
Transmitter Average Forward Current ^[2]	$I_{F,AV}$		60	mA

Note:

- <100m_{p-p} Noise
- Current applied at the transmitter must not exceed 50μA in order to guarantee a logical "1" at the RX output

Mechanical Dimensions

Parameter	Symbol	HFBR 3810Z	HFBR 3810MSZ	Unit
Clearance	d_C	25.1	20.1	mm
Creepage	d_{CP}	28.7	23.1	mm
Clearance Internal ^[1]	d_{CI}	21.1	21.1	mm
Creepage Internal ^[1]	d_{CPI}	25.1	25.1	mm

Notes:

- Only air gap with non conductive mold the distance is 24.6mm.
- CTI value of the housing material is 600.

All the data in this specification refers to the operating conditions above and over lifetime unless otherwise stated.

ATTENTION: Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Input Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units
Forward Voltage ^[1]	V _F	1.8	2.1	2.65	V
Forward Voltage Temperature Coefficient	$\Delta V_F / \Delta T$		-1.8		mV/°C
Reverse Input Breakdown Voltage ^[2]	V _{BR}	3.0	13		V
Diode Capacitance ^[3]	C ₀		60		pF

Notes:

1. I_{F,dc} = 60mA
2. I_{F,dc} = -10μA
3. V_F = 0V; f = 1MHz

Electrical Output Signal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Condition
Supply Current (without LED current)	I _{CC}		27	45	mA	
High Level Output Voltage	V _{OH}	4.2	4.7		V	
Low Level Output Voltage	V _{OL}		0.22	0.4	V	
Output Risettime (10-90%) ^[1, 2]	t _r		10	20	ns	
Output Falltime (90-10%) ^[1, 2]	t _f		10	20	ns	
Power Supply Noise Immunity	PSNI	0.1	0.4		V _{pp}	Sine Wave DC - 10MHz

Notes:

1. C_L = 10pF
2. In the recommended drive circuit
3. Typical Value measured from junction to PC board solder joint for horizontal mount package


Specified Link Performance, T_A = -40° to +85°C, DC to 10MBaud, unless otherwise noted.

Parameter	Symbol	Min.	Typ	Max.	Unit	Condition
Signaling Rate	f _S	DC		10	Mbaud	NRZ
Pulse Width Variation ^[1]	PWV	80		120	ns	10Mbaud
Propagation Delay Time ^[2]	t _D		95		ns	Assuming a delay of 10ns from the application (already included)
Duty Cycle Distortion ^[3]	DCD	-10		+10	ns	10Mbaud


Notes:

1. Minimum/maximum duty cycle distortion +/-10ns
2. Determined from 50% of the rising edge of data_in to 50% of the consecutive falling egde of data_out
3. +/-10% of the nominal pulse width


Package views - HFBR-3810Z

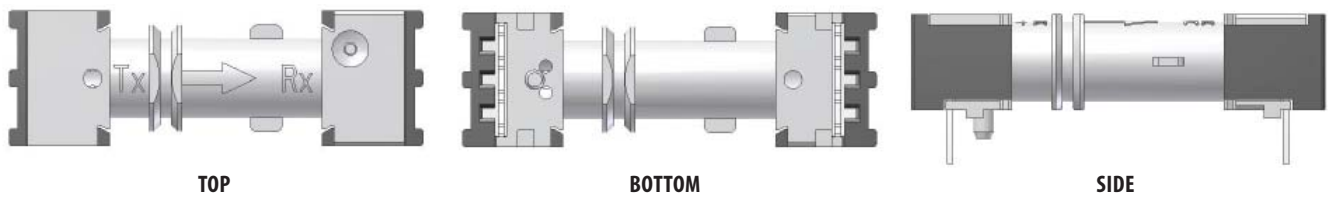

Package views - HFBR-3810MSZ

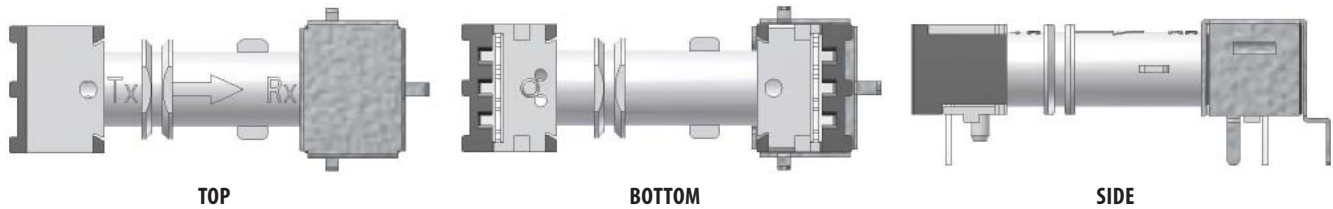

Mandatory Drive circuit – Top view

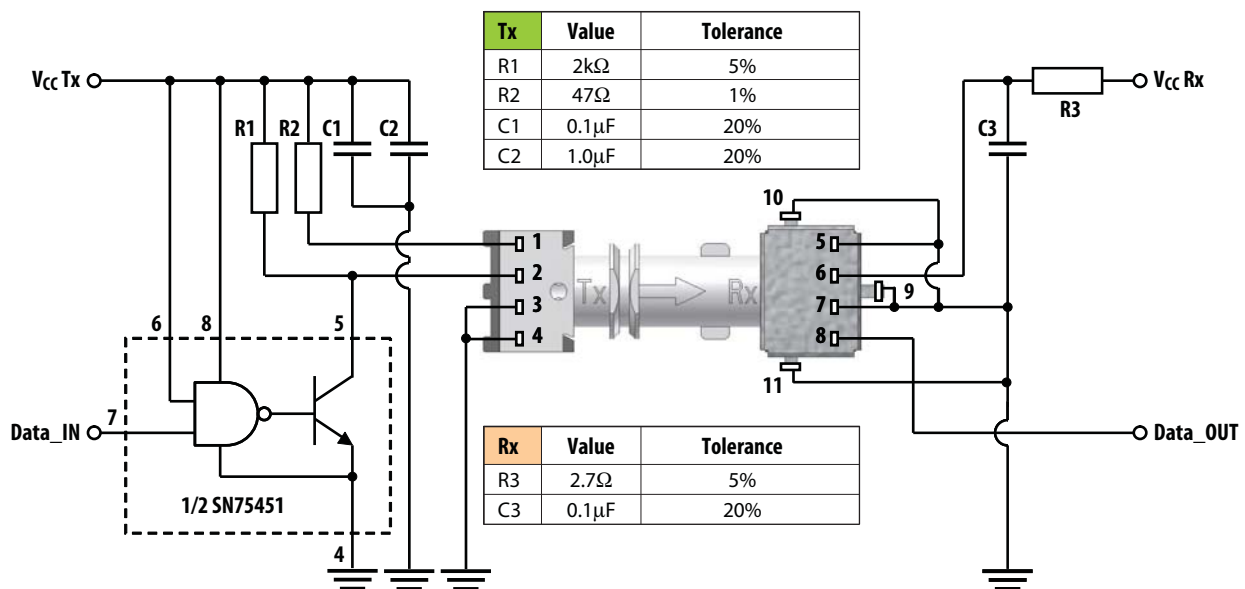

Pin description


Pin No.	Transmitter
1	Anode
2	Cathode
3	GND
4	GND

Pin No.	Receiver
5	GND
6	VCC(5V)
7	GND
8	Data_OUT
9, 10, 11	GND (shield option ⁽¹⁾)


Note:

- Pin 9,10 and 11 are not available if HFBR-3810Z is used and therefore do not need to be considered.

Mechanical Dimensions - HFBR-3810Z

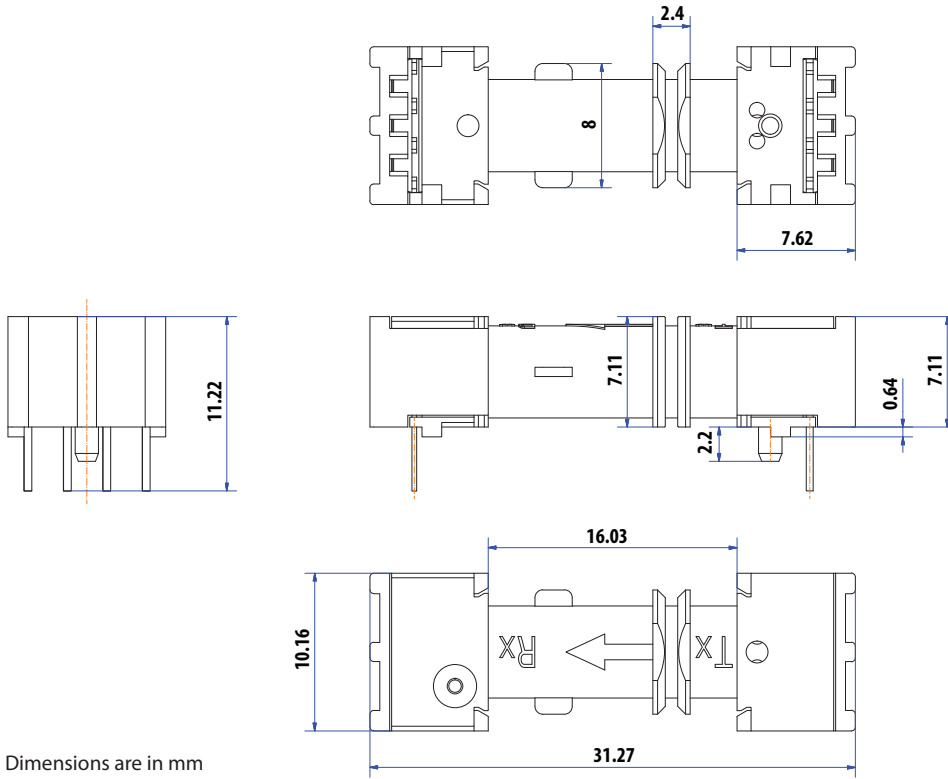


Mechanical Dimensions - HFBR-3810MSZ

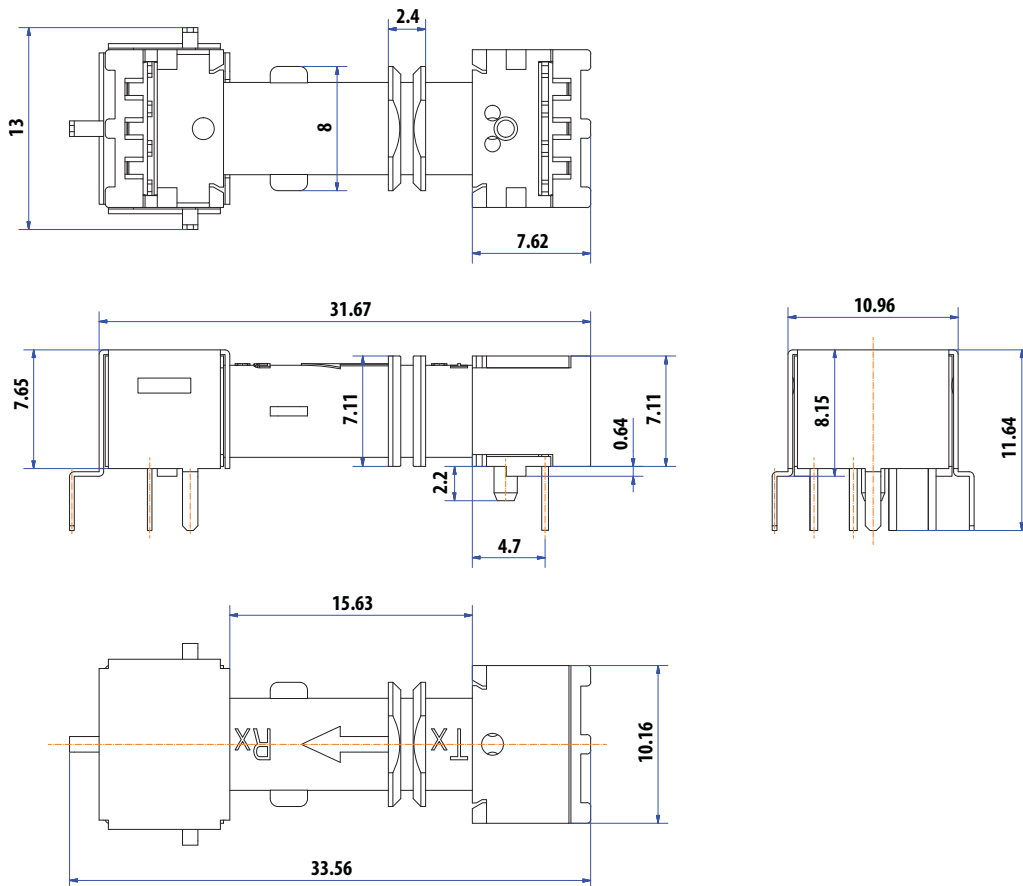


Dimensions are in mm

Footprint bottom view - HFBR-3810Z and HFBR-3810MSZ

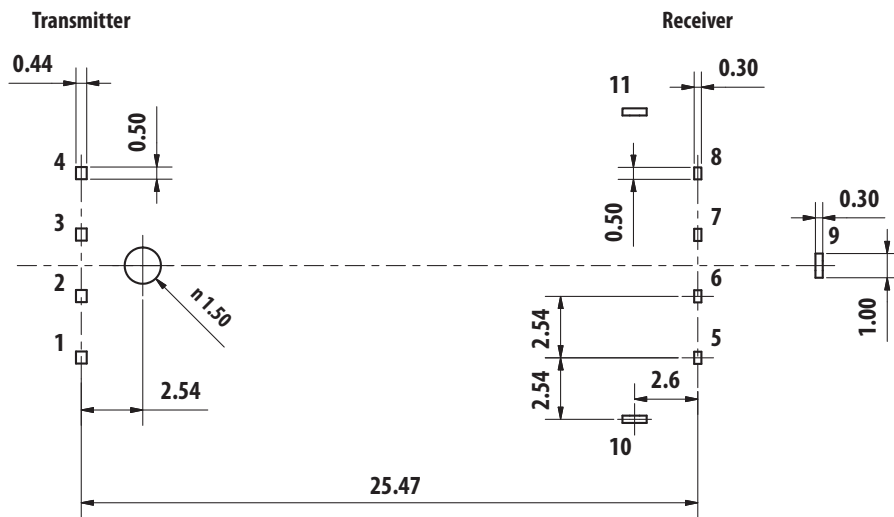

Dimensions are in mm

Marking - HFBR-3810Z and HFBR-3810MSZ

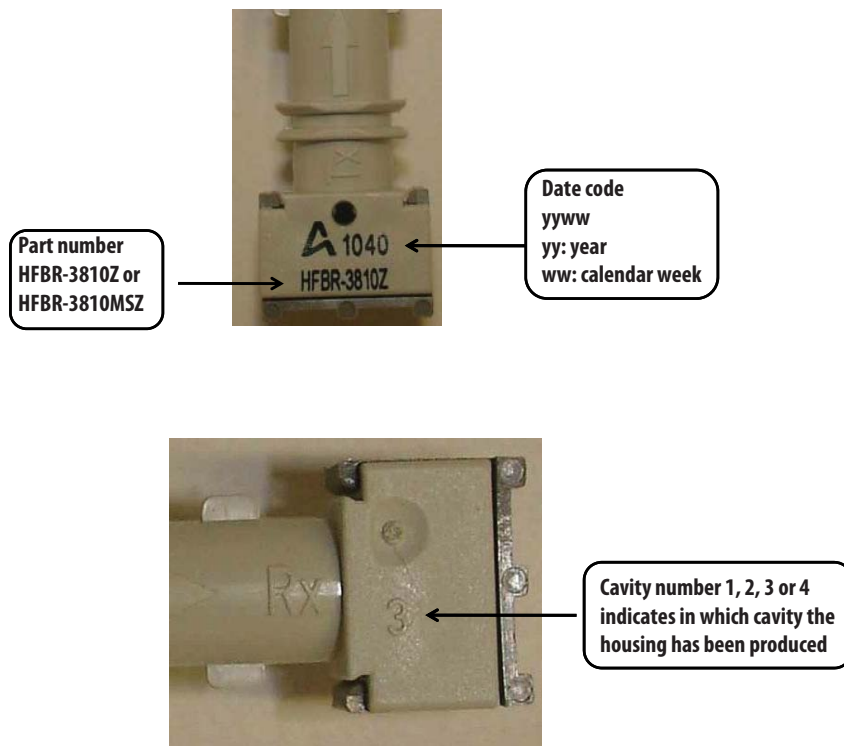

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2011 Avago Technologies. All rights reserved.
AV02-2510EN - November 21, 2011

Avago
TECHNOLOGIES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.