

Embedded Device Server

- ▶ Flexible, well-developed IP protocol stack
- ▶ TTL serial interface
- ▶ Two serial ports
- ▶ Accepts 5 VDC regulated input power
- ▶ HTTP, serial, Telnet and SNMP management
- ▶ Flash ROM for easy software upgrades
- ▶ Custom protocol support available
- ▶ 256-bit AES encryption for secure communications



Build 10/100 Base-T Ethernet Connectivity into Your Products Quickly and Economically

The Lantronix Micro125 is a board-level product for OEM users who want to embed proven mainstream Ethernet connectivity in their products quickly and economically.

Building Ethernet connectivity into a product is no simple task. It requires a significant investment in hardware and software integration – often in areas outside of core competencies. So why build it yourself when there is a better alternative?

The Micro125 embedded device server provides an integrated solution to add proven Ethernet connectivity to an existing design quickly and economically, and with a high level of flexibility.

Device networking starts with a Device Server.™ These amazing products enable most any device with serial capability (TTL) to become a fully functional member of an Ethernet network. Device Servers include all of the elements needed to network-enable your products – a processor, real-time operating

system (RTOS), a robust TCP/IP stack, a web server, and a network connection. All the connected product additionally needs is a header, providing connections to a power source and to a TTL serial port.

The Micro125 brings over a decade of device networking experience, rock-solid IP firmware, extensive applications support and advanced encryption standards to industrial and commercial environments.

Measuring only 49 x 40 mm the Micro125 can easily fit into almost any size serial device that would benefit from network connectivity. It includes a serial interface TTL connector and 10/100 Base-T Ethernet RJ45 jack. The Micro125 includes the same IP protocol stack found on the other Lantronix embedded products.

RoHS-compliant, the Micro125 meets Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.





Features

Protocols

ARP, UDP, TCP/IP, Telnet, ICMP, SNMP, DHCP, TFTP and HTTP

Networking Interface

RJ45 (10/100Base-T) Ethernet

Serial Interface

TTL level (Asynchronous)

Data Rates

300 bps to 230 Kbps

Serial Line Formats

Characters: 7 or 8 data bits

Stop bits: 1 or 2

Parity: odd, even, none

Modem Controls

DTR, RTS, CTS, DCD

Flow Control

XON/XOFF (Software)

CTS/RTS (Hardware)

Management

HTTP

SNMP

Serial login

Telnet login

Security

Optional 256-bit AES

Password protection

System Software

Flash ROM standard:
downloadable from a TCP/IP host (TFTP)
or over serial port

Diagnostic LEDs

Serial Channel Status

Ethernet Link Status

Diagnostic Information

Compatibility

Ethernet: Version 2.0/IEEE 802.3

Power Requirements

5 VDC +/-5% at ~ 200 mA

Memory

Flash: 512K

RAM: 256K - zero wait

Environmental

Standard Temperature

0° to 70°C (32° to 158°F)


Storage Temperature

-40° to 85°C (-40° to 185°F)

Physical Dimensions (W x H)

49 x 40 mm (1.929 x 1.575 in)

Board Layout and Pinouts

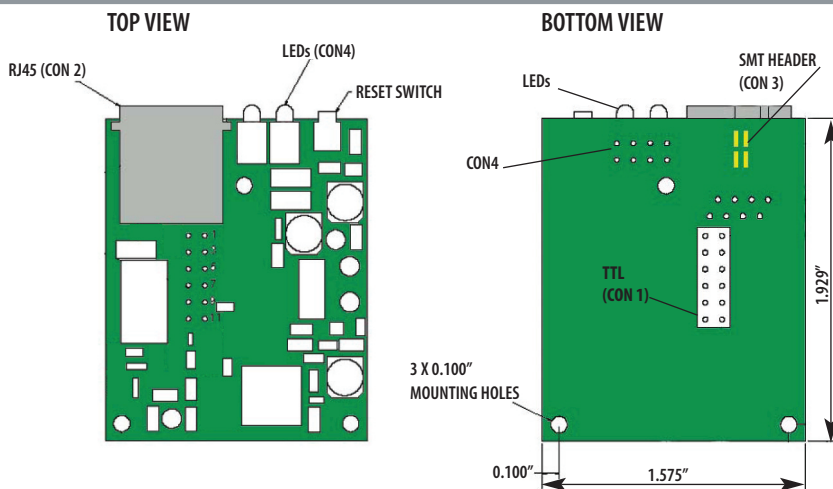

CON1 (2 x 6 Pins)TTL

Pin	Function
1	+5V
2	GND
3	RXA (Input)
4	TXA (Output)
5	RTSA (Output)
6	DTRA (Output)
7	CTSA (Input)
8	DCDA (Input)
9	R/V/A (Output)
10	RESET
11	RXB (Input)
12	TXB (Output)

CON2 (RJ45)

Pin	Con1
1	TX+
2	TX-
3	RX+
4	NC
5	NC
6	RX-
7	NC
8	NC

CON3 (2 x 2 SMT in place of RJ45)

Pin	Function
1	TX+
2	TX-
3	RX+
4	RX-

CON4 (2 x 4 pins in place of LEDs)

Pin	Function
1	+3.3V
2	+3.3V
3	DIAG (Red)
4	CH1 (Green)
5	+3.3V
6	+3.3V
7	CH2 (Yellow)
8	Link (Green)

Warranty

2-year limited warranty

Ordering Information

Part Number	Description
M000AA003-01R	Micro125, No RJ45 connector, No LEDs, with TTL pin header, RoHS
M000AA0E3-01R	AES Encrypted Micro125, No RJ45 connector, No LEDs, with TTL pin header, RoHS
M011AA003-01R	Micro125 with RJ45 connector, LEDs, with TTL pin header, RoHS
M011AA0E3-01R	AES Encrypted Micro125 with RJ45 connector, LEDs, with TTL pin header, RoHS
M022AA003-01R	Micro125, Pin header for Ethernet, Pin header for LED connection, with TTL pin header, RoHS
M022AA0E3-01R	AES Encrypted Micro125, Pin header for Ethernet, Pin header for LED connection, with TTL pin header, RoHS





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.