

Type C1F

Surface Mount Fast Acting Chip Fuse

HF  C1F Series – 1206 Size



RoHS 2 Compliant


Features

- Fast Acting, with improved surge withstand performance
- Small size, 1206 SMD
- Current rating from 250mA to 8A, fuse marked with ampere code
- Wide operating temperature range from -55°C to 125°C
- Tape and Reel for automatic SMD placement
- Compatible with 260°C IR Pb-free and wave soldering process
- AEC-Q Compliant
- RoHS 2 compliant (MSL = 1)
- Halogen Free
- Lead Free
- Meets Bel automotive qualification*
- * - Largely based on internal AEC-Q test plan

Applications

- Automotive Navigation System
- Thin film transistor LCD flat-panel display screen
- Notebook
- PC computer
- Office electronic equipment
- Industrial equipment
- Medical equipment
- POE, POE+
- LCD / LED monitor
- Power supply
- LCD / LED TV
- DC-DC Converter

LEAD FREE = 
 HALOGEN FREE = 

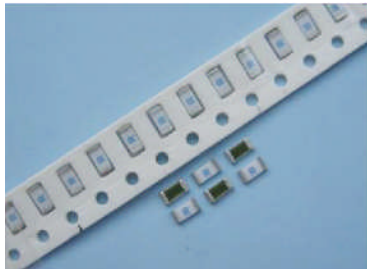



AEC-Q Compliant

Typical Part Marking

Fuse body (ceramic white side) marked with marking code.

Example:




| Current Rating | Marking Code | Current Rating | Marking Code |
|----------------|--------------|----------------|--------------|
| 250mA | E | 2.5A | T |
| 375mA | H | 3A | 3 |
| 500mA | J | 3.5A | Z |
| 750mA | M | 4A | 4 |
| 1A | 1 | 5A | 5 |
| 1.25A | P | 6A | 6 |
| 1.5A | R | 7A | 7 |
| 2A | 2 | 8A | 8 |

Electrical Characteristics (UL STD. 248-14)



| Testing Current | Blow Time | |
|-----------------|-----------|---------|
| | Minimum | Maximum |
| 100% | 4 Hrs. | N/A |
| 200% | N/A | 5 Sec |
| 300% | N/A | 0.2 Sec |

Safety Agency Approvals

| Safety Agency | Safety Agency Certificate | Voltage Rating (V) | Ampere Range / Volt @ I.R. ability* |
|---|---------------------------|-----------------------------|--------------------------------------|
|  | E20624 | 250mA–8A/125V AC /63V DC | 250mA–6A/100A @ 125V AC |
| | | | 7A–8A/35A @ 125V AC /50A @ 63V DC |

*I.R.= Interrupting Rating = Short Circuit Rating(Amps)

Physical Specifications


| | |
|--|--|
| Materials | Body : Ceramic Substrate |
| | Terminations : Ag / Ni / Sn (100% Lead-free) |
| | Element Cover Coating : Lead-free Glass |
| Marking | On Fuse : |
| | Marking Code |
| | On Label : |
| "bel", "C1F", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "  ", "  " (China RoHS compliant). | |

Specifications subject to change without notice

Temperature Derating Curve



Average Time Current Curve

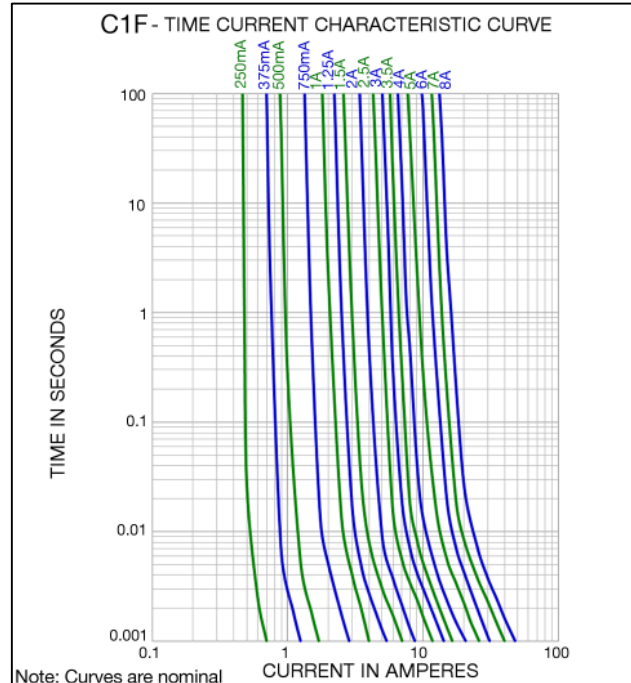

Electrical Specifications

| Part Number | Ampere Rating (A) | Marking Code | Nominal Cold Resistance (ohms) | Maximum Volt-drop @100% In (Volt) max. | Voltage and Interrupting Ratings | Nominal Melting I ² T @ 10 In (A ² Sec) | Maximum Power Dissipation @100% In (W) | Agency Approvals |
|--------------|-------------------|--------------|--------------------------------|--|---|---|--|------------------|
| 0685F0250-XX | 250mA | E | 2.30 | 0.813 | See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings | 0.0002 | 0.20 | Y |
| 0685F0375-XX | 375mA | H | 1.25 | 0.789 | | 0.0007 | 0.30 | Y |
| 0685F0500-XX | 500mA | J | 0.87 | 0.693 | | 0.0015 | 0.35 | Y |
| 0685F0750-XX | 750mA | M | 0.43 | 0.476 | | 0.0051 | 0.36 | Y |
| 0685F1000-XX | 1A | 1 | 0.28 | 0.421 | | 0.012 | 0.42 | Y |
| 0685F1250-XX | 1.25A | P | 0.210 | 0.411 | | 0.023 | 0.51 | Y |
| 0685F1500-XX | 1.5A | R | 0.165 | 0.400 | | 0.040 | 0.60 | Y |
| 0685F2000-XX | 2A | 2 | 0.068 | 0.194 | | 0.085 | 0.39 | Y |
| 0685F2500-XX | 2.5A | T | 0.049 | 0.198 | | 0.15 | 0.50 | Y |
| 0685F3000-XX | 3A | 3 | 0.039 | 0.166 | | 0.19 | 0.50 | Y |
| 0685F3500-XX | 3.5A | Z | 0.032 | 0.164 | | 0.21 | 0.57 | Y |
| 0685F4000-XX | 4A | 4 | 0.026 | 0.164 | | 0.33 | 0.66 | Y |
| 0685F5000-XX | 5A | 5 | 0.020 | 0.164 | | 0.83 | 0.82 | Y |
| 0685F6000-XX | 6A | 6 | 0.015 | 0.163 | | 1.3 | 0.98 | Y |
| 0685F7000-XX | 7A | 7 | 0.012 | 0.154 | | 2.2 | 1.08 | Y |
| 0685F8000-XX | 8A | 8 | 0.010 | 0.148 | 3.5 | 1.18 | Y | |

Consult manufacturer for other ratings

NOTES: Test Conditions

All test for ratings 250mA - 5A were conducted with fuse samples soldered on a PCB (1.6mm thick) test board with copper traces measuring 0.035 mm (35µm) nominal thickness (1 oz. clad), 5mm wide and 100mm overall length.

All test for ratings 6A-8A were conducted with fuse samples soldered on a PCB (1.6mm thick) test board with copper traces measuring 0.070 mm (70µm) nominal thickness (2 oz. clad), 7.5mm wide and 100mm overall length.

Device designed to be mounted with marking facing up.

Device designed to carry rated current for 4 hours minimum. It is recommended that device be operated continuously at no more than 80% of rated current when in a +25°C ambient, with further derating at elevated ambient temperatures.



Specifications subject to change without notice

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection


Environmental Specifications

| | |
|----------------------------|--|
| Shock Resistance | MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform) |
| Vibration Resistance | MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion). |
| Salt Spray Resistance | MIL-STD-202G, Method 101E, Test Condition B (48 hrs.). |
| Insulation Resistance | MIL-STD-202G, Method 302, Test Condition A (After Opening) 10,000 ohms minimum. |
| Solderability | MIL-STD-202G, Method 208H |
| Resistance to solder Heat | MIL-STD-202G, Method 210F, Test Condition C. Top Side(260°C,20 sec) MIL-STD-202G, Method 210F, Test Condition D. Bottom Side(260°C, 10 sec) |
| Thermal Shock | MIL-STD-202G, Method 107G, Test Condition B (-65°C to +125°C). |
| Operating Temperature | -55°C to +125°C |
| Moisture Sensitivity Level | 1 (According to IPC J-Std-020) |


| | |
|------------------------------|---|
| High temperature storage | MIL-STD-202 Method 108 |
| Temperature cycling | JESD22 Method JA-104, Test Condition B |
| Biased humidity | MIL-STD-202 Method 103, 85C/85% RH with 10% operating power for 1000 hrs. |
| Operational life | MIL-STD-202 Method 108, Test Condition D |
| Resistance to solvents | MIL-STD-202 Method 215 |
| Mechanical shock | MIL-STD-202 Method 213, Test Condition C |
| Vibration | MIL-STD-202 Method 204 |
| Resistance to soldering heat | MIL-STD-202 Method 210, Test condition B |
| Thermal shock | MIL-STD-202 Method 107 |
| Solderability | J-STD-002 |
| Board flex(SMD) | AEC-Q200-005 |
| Terminal strength | AEC-Q200-006 |
| Electrical characterization | 3 temperature electrical |

Soldering Parameters

| IR Reflow Profile (IPC/JEDEC J-STD-020D) | |
|---|-----------------|
| Preheat & Soak | |
| Temperature min (T_{smin}) | 150°C |
| Temperature max (T_{smax}) | 200°C |
| Time (T_{smin} to T_{smax}) (t_s) | 60-120 seconds |
| Average ramp-up rate (T_{smax} to T_p) | 3°C/second max. |
| Liquidous temperature (T_L) | 217°C |
| Time at liquidous (t_L) | 60-150 seconds |
| Peak temperature (T_p) | 260°C max |
| Time (t_p) within 5°C of the specified classification temperature (T_c) | 30 seconds |
| Average ramp-down rate (T_p to T_{smax}) | 6°C/second max. |
| Time 25°C to peak temperature | 8 minutes max. |

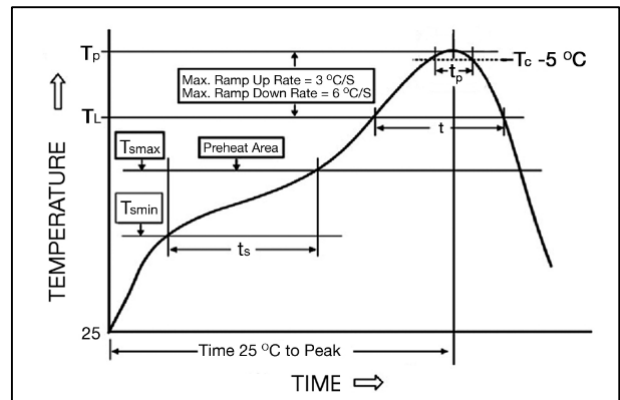

| Lead-free Wave Soldering Profile | |
|--|--|
| Wave Soldering Parameter | |
| Average ramp-up rate | 200°C / second |
| Heating rate during preheat | typical 1 - 2°C / second Max 4°C / second |
| Final preheat temperature | within 125°C of soldering temperature |
| Peak temperature T_p | 260°C |
| Time within +0°C / -5°C of actual peak temperature | 10 seconds |
| Ramp-down rate | 5°C / second max. |

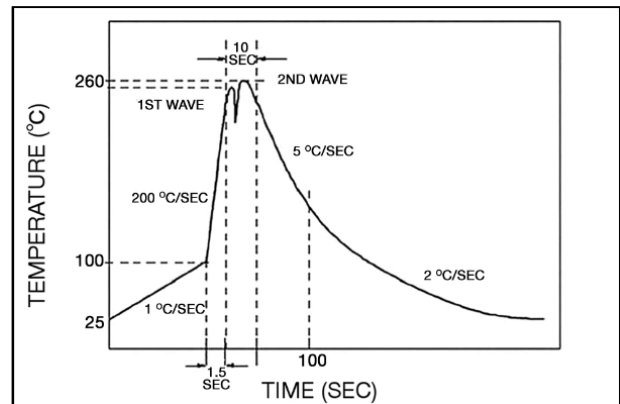

Specifications subject to change without notice

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection

Fuse FGNO Explanation


0685 F [XXXX] -XX

0685F=C1F; [XXXX]=Ampere Rating; XX=See Ordering Information as below


| Fraction | Decimal | Milliamps | Bel FGNO[XXXX] |
|----------|---------|-----------|----------------|
| 1/4 | 0.250 | 250 | 0250 |
| 3/8 | .375 | 375 | 0375 |
| 1/2 | .500 | 500 | 0500 |
| 3/4 | .750 | 750 | 0750 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| Fraction | Decimal | Amps | Bel FGNO[XXXX] |
|----------|---------|------|----------------|
| | 1.0 | 1 | 1000 |
| 1-1/4 | 1.25 | 1.25 | 1250 |
| 1-1/2 | 1.50 | 1.5 | 1500 |
| | 2.0 | 2 | 2000 |
| 2-1/2 | 2.5 | 2.5 | 2500 |
| | 3.0 | 3 | 3000 |
| 3-1/2 | 3.5 | 3.5 | 3500 |
| | 4.0 | 4 | 4000 |
| | 5.0 | 5 | 5000 |
| | 6.0 | 6 | 6000 |
| | 7.0 | 7 | 7000 |
| | 8.0 | 8 | 8000 |

Mechanical Dimensions

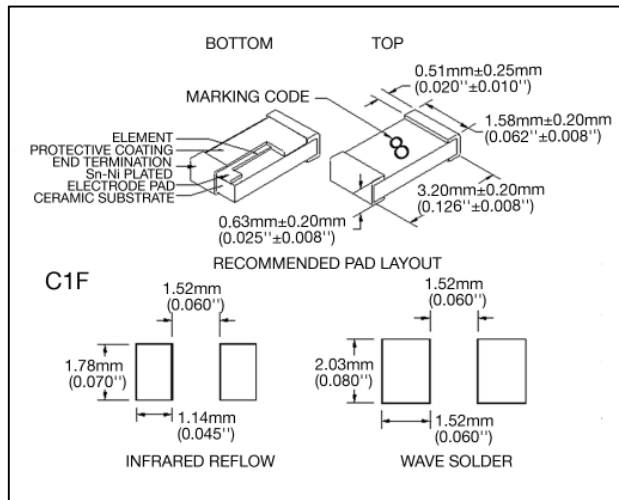

Ordering Information

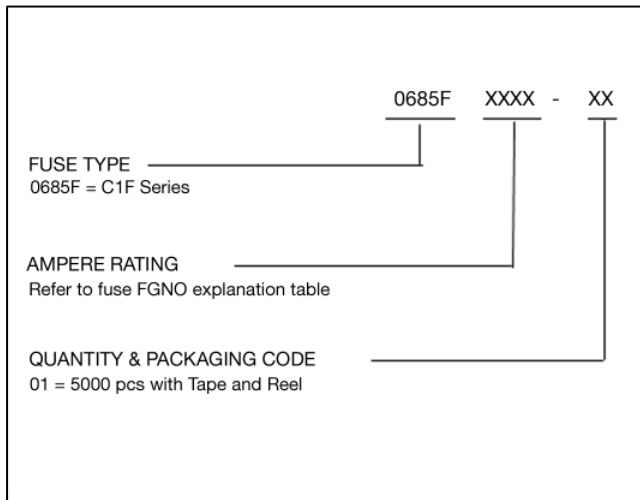

Packaging

| Packaging Tape & Reel | Packaging Specification | Quantity | Quantity & Packaging Code |
|--|-------------------------|----------|---------------------------|
| 8 mm wide tape with 7 inches Diameter reel | EIA Standard 481-E | 5000 | 0685FXXXX-01 |



Specifications subject to change without notice

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.