

MJE5850, MJE5851, MJE5852

SWITCHMODE Series PNP Silicon Power Transistors

The MJE5850, MJE5851 and the MJE5852 transistors are designed for high-voltage, high-speed, power switching in inductive circuits where fall time is critical. They are particularly suited for line operated SWITCHMODE applications.

Features


- Switching Regulators
- Inverters
- Solenoid and Relay Drivers
- Motor Controls
- Deflection Circuits
- Fast Turn-Off Times
 - ◆ 100 ns Inductive Fall Time @ 25°C (Typ)
 - ◆ 125 ns Inductive Crossover Time @ 25°C (Typ)
- Operating Temperature Range -65 to +150°C
- 100°C Performance Specified for:
 - ◆ Reversed Biased SOA with Inductive Loads
 - ◆ Switching Times with Inductive Loads
 - ◆ Saturation Voltages
 - ◆ Leakage Currents
- Pb-Free Packages are Available*




ON Semiconductor®

<http://onsemi.com>

**8 AMPERE
PCP SILICON
POWER TRANSISTORS
300-350-400 VOLTS
80 WATTS**

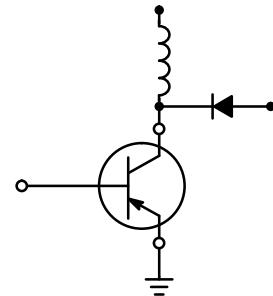

MARKING
DIAGRAM

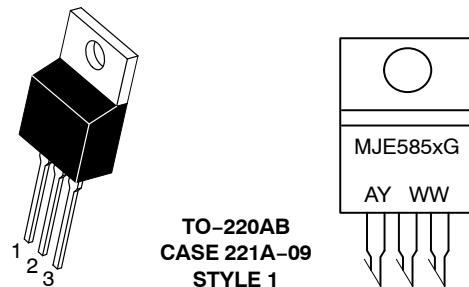

MJE585x	=	Device Code
	x = 0, 1, or 2	
G	=	Pb-Free Package
A	=	Assembly Location
Y	=	Year
WW	=	Work Week

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

MJE5850, MJE5851, MJE5852

MAXIMUM RATINGS

Rating	Symbol	MJE5850	MJE5851	MJE5852	Unit
Collector-Emitter Voltage	$V_{CEO(sus)}$	300	350	400	Vdc
Collector-Emitter Voltage	V_{CEV}	350	400	450	Vdc
Emitter Base Voltage	V_{EB}		6.0		Vdc
Collector Current	– Continuous – Peak (Note 1)	I_C I_{CM}		8.0 16	Adc
Base Current	– Continuous – Peak (Note 1)	I_B I_{BM}		4.0 8.0	Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D		80 0.640		W $\text{W}/^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{stg}		–65 to 150		°C

THERMAL CHARACTERISTICS

Rating	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.25	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	T_L	275	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Pulse Test: Pulse Width = 5 ms, Duty Cycle $\leq 10\%$.

ORDERING INFORMATION

Device	Package	Shipping
MJE5850	TO-220	50 Units / Rail
MJE5850G	TO-220 (Pb-Free)	
MJE5851	TO-220	
MJE5851G	TO-220 (Pb-Free)	
MJE5852	TO-220	
MJE5852G	TO-220 (Pb-Free)	

MJE5850, MJE5851, MJE5852

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector-Emitter Sustaining Voltage ($I_C = 10 \text{ mA}$, $I_B = 0$)	$V_{CEO(\text{sus})}$	300 350 400	— — —	— — —	Vdc
Collector Cutoff Current (V_{CEV} = Rated Value, $V_{BE(\text{off})} = 1.5 \text{ Vdc}$) (V_{CEV} = Rated Value, $V_{BE(\text{off})} = 1.5 \text{ Vdc}$, $T_C = 100^\circ\text{C}$)	I_{CEV}	— —	— —	0.5 2.5	mAdc
Collector Cutoff Current ($V_{CE} = \text{Rated } V_{CEV}$, $R_{BE} = 50 \Omega$, $T_C = 100^\circ\text{C}$)	I_{CER}	—	—	3.0	mAdc
Emitter Cutoff Current ($V_{EB} = 6.0 \text{ Vdc}$, $I_C = 0$)	I_{EBO}	—	—	1.0	mAdc

SECOND BREAKDOWN

Second Breakdown Collector Current with base forward biased	$I_{S/b}$	See Figure 12
Clamped Inductive SOA with base reverse biased	RBSOA	See Figure 13

ON CHARACTERISTICS (Note 2)

DC Current Gain ($I_C = 2.0 \text{ Adc}$, $V_{CE} = 5 \text{ Vdc}$) ($I_C = 5.0 \text{ Adc}$, $V_{CE} = 5 \text{ Vdc}$)	h_{FE}	15 5	— —	— —	—
Collector-Emitter Saturation Voltage ($I_C = 4.0 \text{ Adc}$, $I_B = 1.0 \text{ Adc}$) ($I_C = 8.0 \text{ Adc}$, $I_B = 3.0 \text{ Adc}$) ($I_C = 4.0 \text{ Adc}$, $I_B = 1.0 \text{ Adc}$, $T_C = 100^\circ\text{C}$)	$V_{CE(\text{sat})}$	— — —	— — —	2.0 5.0 2.5	Vdc
Base-Emitter Saturation Voltage ($I_C = 4.0 \text{ Adc}$, $I_B = 1.0 \text{ Adc}$) ($I_C = 4.0 \text{ Adc}$, $I_B = 1.0 \text{ Adc}$, $T_C = 100^\circ\text{C}$)	$V_{BE(\text{sat})}$	— —	— —	1.5 1.5	Vdc

DYNAMIC CHARACTERISTICS

Output Capacitance ($V_{CB} = 10 \text{ Vdc}$, $I_E = 0$, $f_{\text{test}} = 1.0 \text{ kHz}$)	C_{ob}	—	270	—	pF
---	----------	---	-----	---	----

SWITCHING CHARACTERISTICS

Resistive Load (Table 1)						
Delay Time	$(V_{CC} = 250 \text{ Vdc}$, $I_C = 4.0 \text{ A}$, $I_{B1} = 1.0 \text{ A}$, $t_p = 50 \mu\text{s}$, Duty Cycle $\leq 2\%$)	t_d	—	0.025	0.1	μs
Rise Time		t_r	—	0.100	0.5	μs
Storage Time	$(V_{CC} = 250 \text{ Vdc}$, $I_C = 4.0 \text{ A}$, $I_{B1} = 1.0 \text{ A}$, $V_{BE(\text{off})} = 5 \text{ Vdc}$, $t_p = 50 \mu\text{s}$, Duty Cycle $\leq 2\%$)	t_s	—	0.60	2.0	μs
Fall Time		t_f	—	0.11	0.5	μs

Inductive Load, Clamped (Table 1)

Storage Time	$(I_{CM} = 4 \text{ A}$, $V_{CEM} = 250 \text{ V}$, $I_{B1} = 1.0 \text{ A}$, $V_{BE(\text{off})} = 5 \text{ Vdc}$, $T_C = 100^\circ\text{C}$)	t_{sv}	—	0.8	3.0	μs
Crossover Time		t_c	—	0.4	1.5	μs
Fall Time		t_{fi}	—	0.1	—	μs
Storage Time	$(I_{CM} = 4 \text{ A}$, $V_{CEM} = 250 \text{ V}$, $I_{B1} = 1.0 \text{ A}$, $V_{BE(\text{off})} = 5 \text{ Vdc}$, $T_C = 25^\circ\text{C}$)	t_{sv}	—	0.5	—	μs
Crossover Time		t_c	—	0.125	—	μs
Fall Time		t_{fi}	—	0.1	—	μs

2. Pulse Test: $PW = 300 \mu\text{s}$. Duty Cycle $\leq 2\%$

MJE5850, MJE5851, MJE5852

TYPICAL ELECTRICAL CHARACTERISTICS

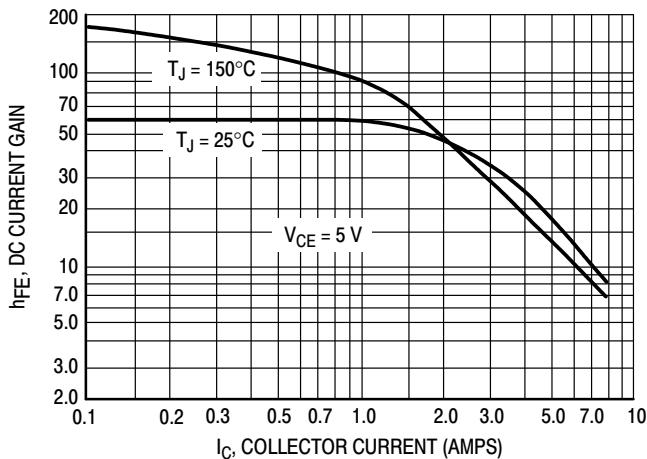


Figure 1. DC Current Gain

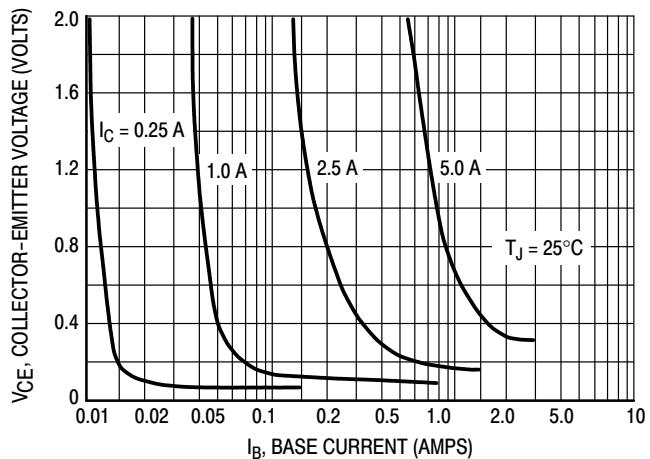


Figure 2. Collector Saturation Region

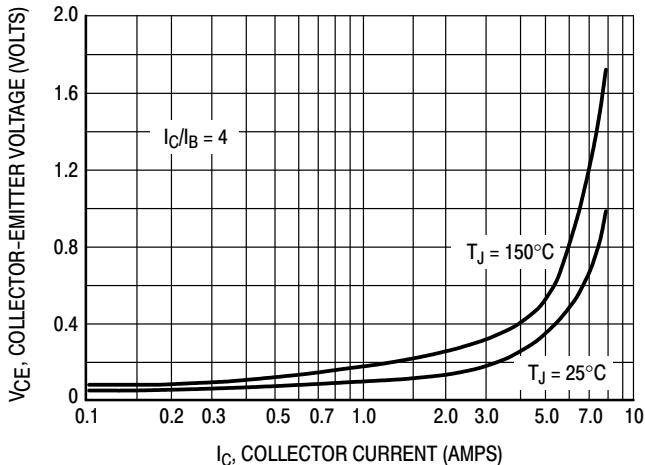


Figure 3. Collector-Emitter Saturation Voltage

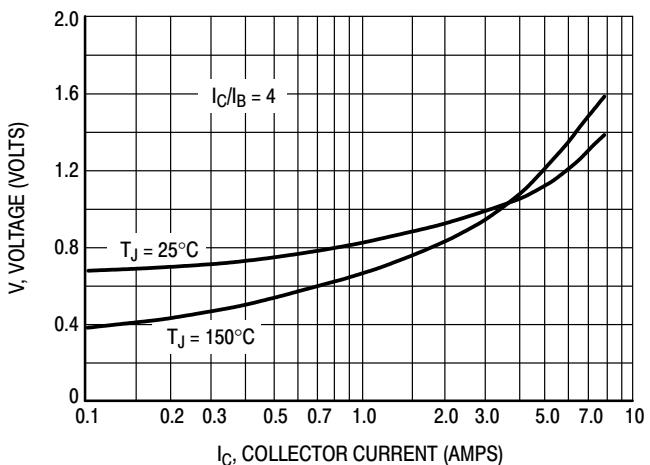


Figure 4. Base-Emitter Voltage

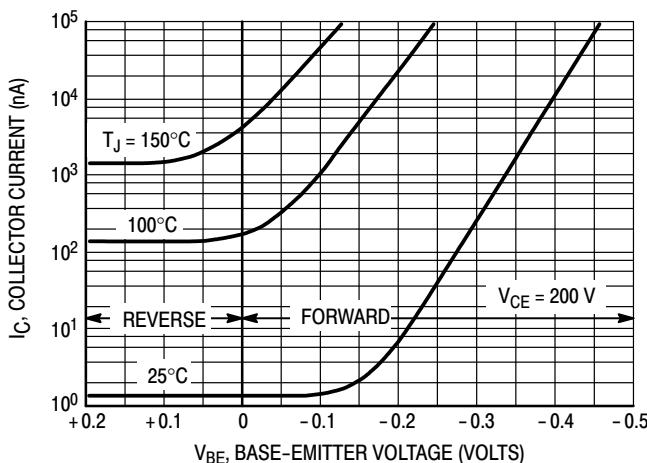


Figure 5. Collector Cutoff Region

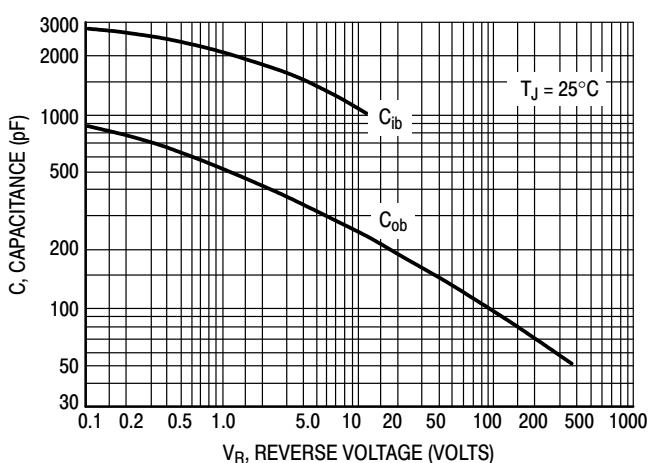

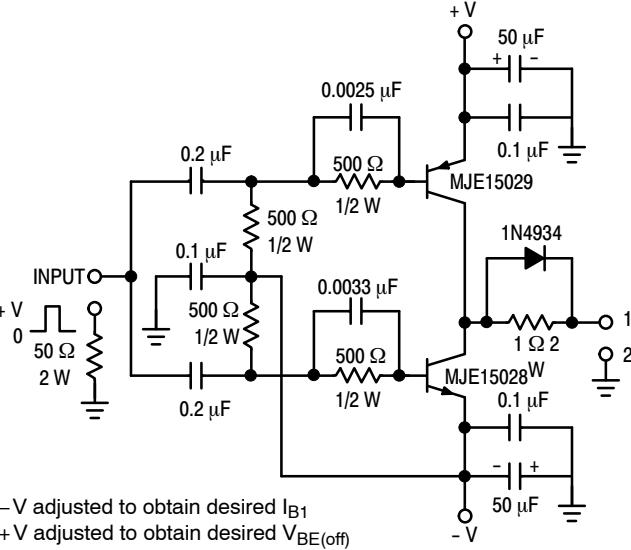

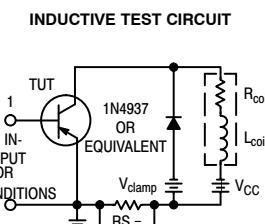
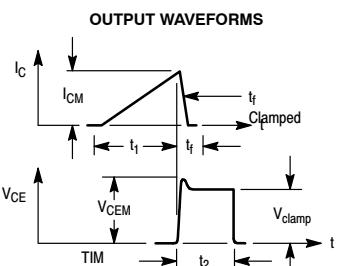



Figure 6. Capacitance

MJE5850, MJE5851, MJE5852

Table 1. Test Conditions for Dynamic Performance

V _{CEO(sus)}	RBSOA AND INDUCTIVE SWITCHING	RESISTIVE SWITCHING
INPUT CONDITIONS  PW Varied to Attain I_C = 100 mA 	 -V adjusted to obtain desired I_{B1} +V adjusted to obtain desired V_{BE(off)}	TURN-ON TIME  I _{B1} adjusted to obtain the forced h _{FE} desired
CIRCUIT VALUES L _{coil} = 80 mH, V _{CC} = 10 V R _{coil} = 0.7 Ω	L _{coil} = 180 μH R _{coil} = 0.05 Ω V _{CC} = 20 V V _{clamp} = 250 V R _B adjusted to attain desired I _{B1}	V _{CC} = 250 V R _L = 62 Ω Pulse Width = 10 μs
TEST CIRCUITS INDUCTIVE TEST CIRCUIT  SEE ABOVE FOR DETAILED CONDITIONS	OUTPUT WAVEFORMS 	RESISTIVE TEST CIRCUIT  t ₁ Adjusted to Obtain I _C t ₁ = L _{coil} (I _{CM}) / V _{CC} t ₂ = L _{coil} (I _{CM}) / V _{Clamp} Test Equipment Scope — Tektronix 475 or Equivalent

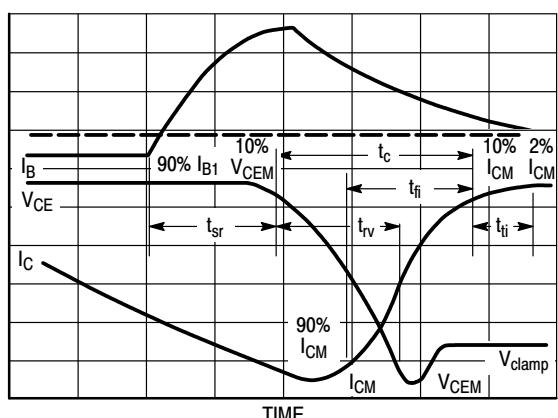


Figure 7. Inductive Switching Measurements

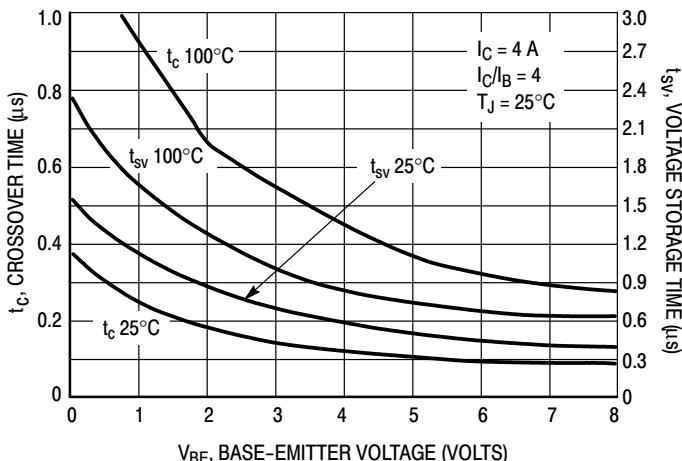


Figure 8. Inductive Switching Times

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{CEM}

t_{rv} = Voltage Rise Time, 10–90% V_{CEM}

t_{fi} = Current Fall Time, 90–10% I_{CM}

t_{ti} = Current Tail, 10–2% I_{CM}

t_c = Crossover Time, 10% V_{CEM} to 10% I_{CM}

An enlarged portion of the inductive switching waveform is shown in Figure 7 to aid on the visual identity of these terms.

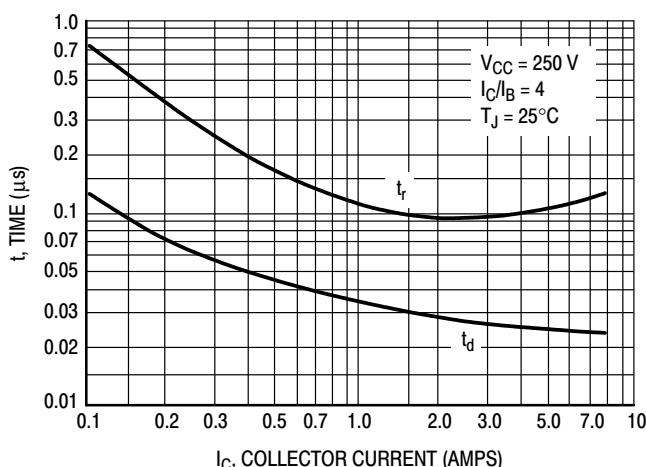


Figure 9. Turn-On Switching Times

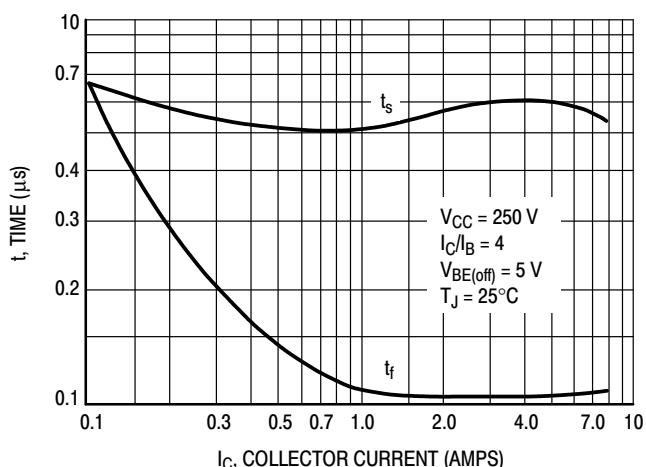


Figure 10. Turn-Off Switching Time

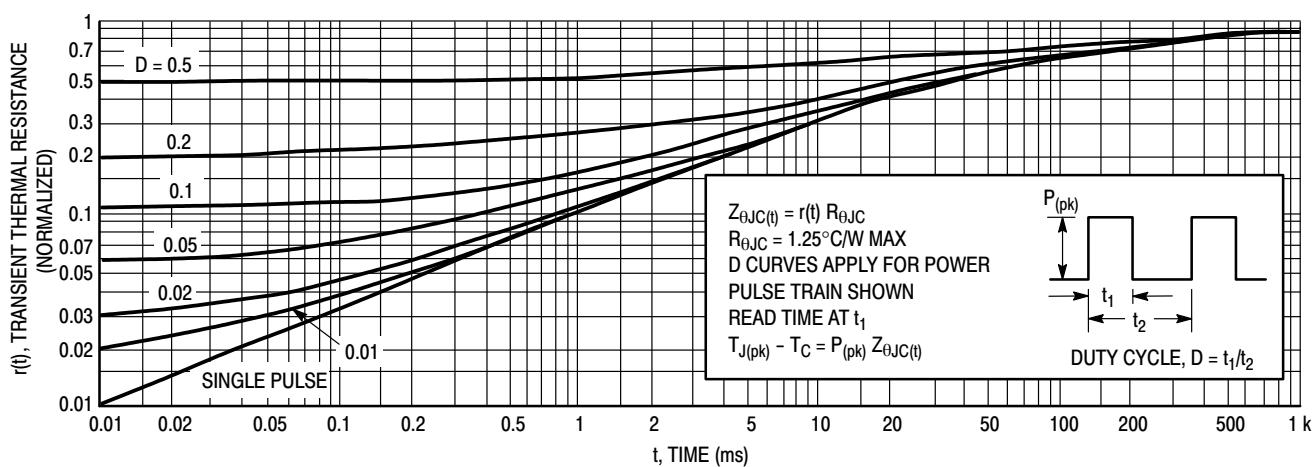


Figure 11. Typical Thermal Response [$Z_{\theta JC}(t)$]

The Safe Operating Area figures shown in Figures 12 and 13 are specified for these devices under the test conditions shown.

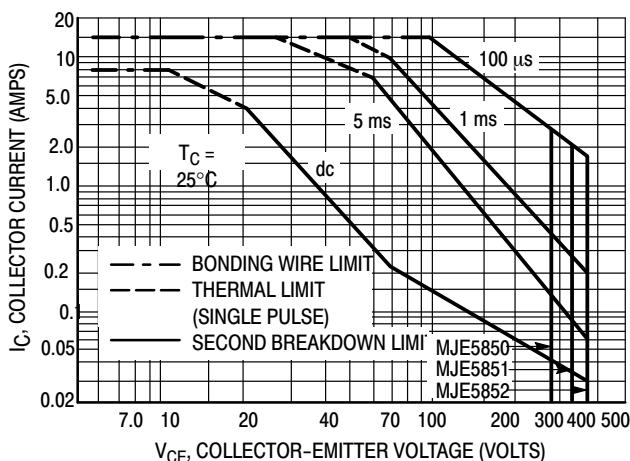


Figure 12. Maximum Forward Bias Safe Operating Area

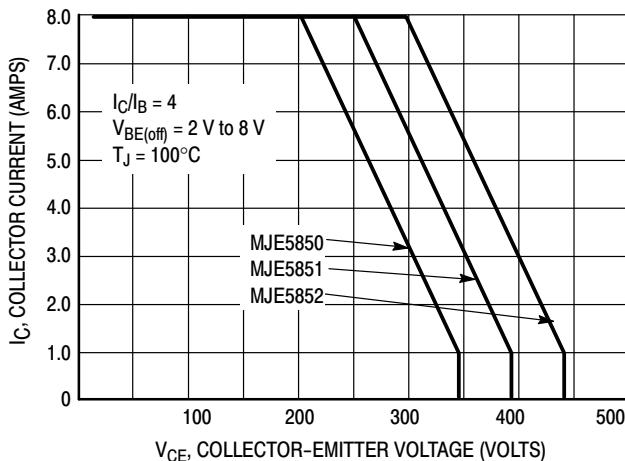


Figure 13. RBSOA, Maximum Reverse Bias Safe Operating Area

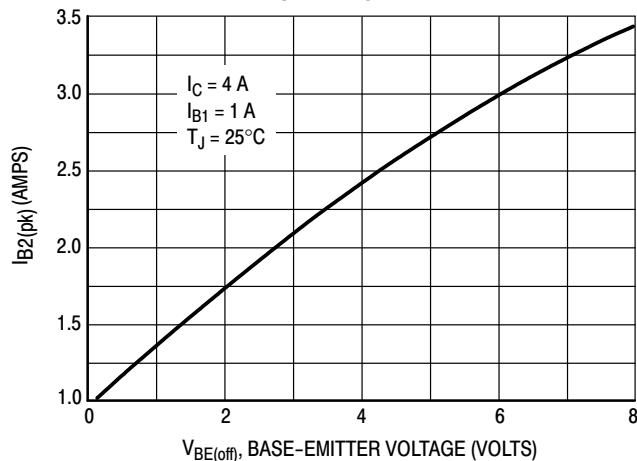


Figure 14. Peak Reverse Base Current

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation, i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 12 is based on $T_C = 25^\circ\text{C}$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^\circ\text{C}$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 12 may be found at any case temperature by using the appropriate curve on Figure 15.

$T_{J(pk)}$ may be calculated from the data in Figure 11. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current condition allowable during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 13 gives the RBSOA characteristics.

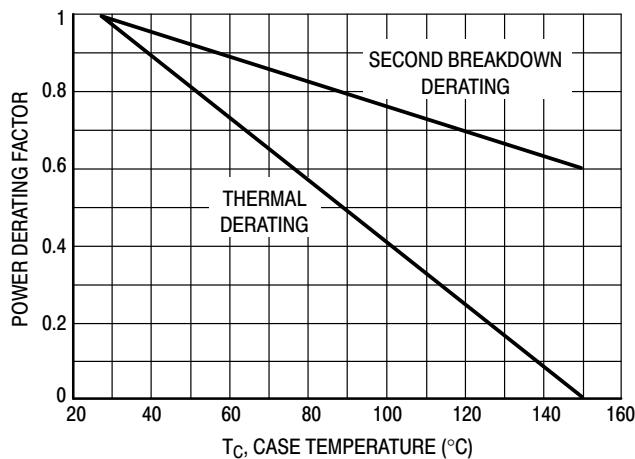
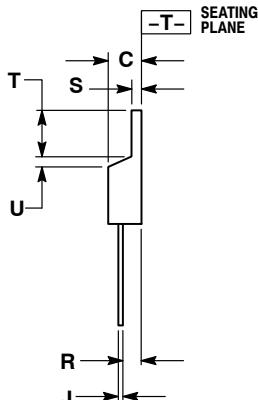
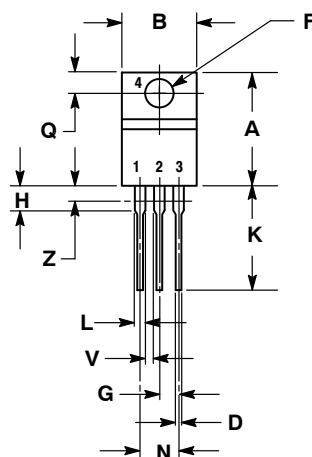


Figure 15. Forward Bias Power Derating

PACKAGE DIMENSIONS

TO-220
CASE 221A-09
ISSUE AG

NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.570	0.620	14.48	15.75
B	0.380	0.405	9.66	10.28
C	0.160	0.190	4.07	4.82
D	0.025	0.036	0.64	0.91
F	0.142	0.161	3.61	4.09
G	0.095	0.105	2.42	2.66
H	0.110	0.161	2.80	4.10
J	0.014	0.025	0.36	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.045	0.055	1.15	1.39
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
V	0.045	---	1.15	---
Z	---	0.080	---	2.04

STYLE 1:
 PIN 1. BASE
 2. COLLECTOR
 3. Emitter
 4. COLLECTOR

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
 P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free

USA/Canada

Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910

Japan Customer Focus Center

Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.comOrder Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.