

# Surge Protection Made Simple™

## Photovoltaic Applications

### Modular DIN Rail SPD Solutions



Type 4

RoHS  
2002/95/EC



#### Description

The Cooper Bussmann® multi-pole, modular Surge Protective Device (SPD) (with three-step DC switching device) features *easyID*™ visual indication and optional remote contact signaling (floating changeover contact) for use in PV systems.


These complete surge protective devices are suitable for all PV systems in accordance with UL 1449 3rd Edition and IEC 60364-7-712. Includes a five year limited warranty.

These prewired solutions consist of a base and locking modules that feature a combined disconnection and short-circuiting (shunting) device with safe electrical isolation to prevent fire damage due to DC arcs. An integrated DC fuse allows safe module replacement without arc formation.

In case of insulation faults in the generator circuit, a reliable and tested fault-resistant Y circuit prevents damage to the surge protective devices.

The green and red visual indicator flags show the module protective status (green = good, red = replace). Apart from this visual indication, the remote signaling option features a three terminal floating changeover contact that can be used as a make or break contact depending on the particular monitoring system design employed.

#### Dimensions - mm

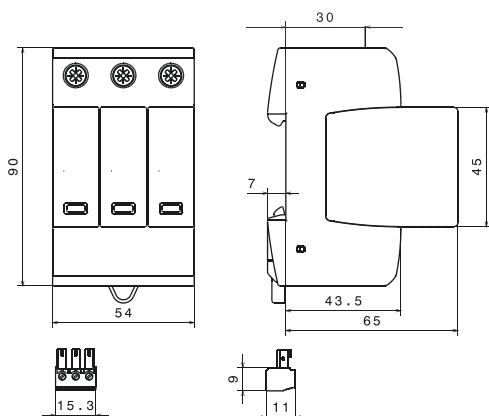

Shown with optional remote contact signaling



BSPH\_\_\_YPV(R)

*easyID*™


Visual Status Indication



Remote Signal  
Contact Available




#### Module Circuit Diagrams

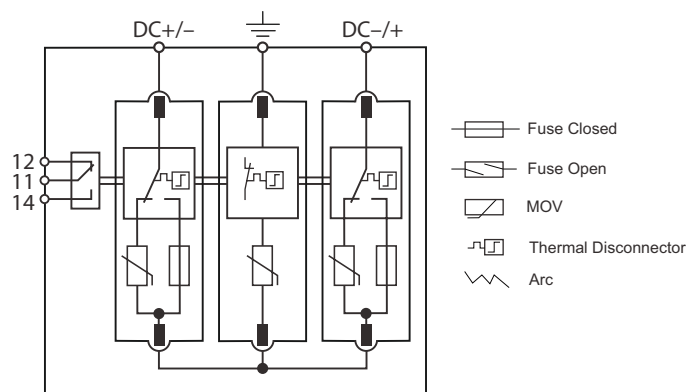

BSPH\_\_\_YPV(R)

Shown with optional remote contact signaling


#### Short-Circuit Interrupting (SCI) Technology

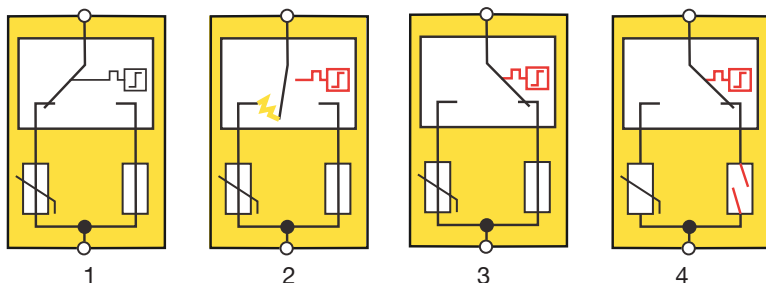


1. Original State
2. Disconnection Device Response
3. Arc Extinguishes
4. Safe Electrical Isolation

| Ordering Information                                                           |                          |                                                         |               |               |
|--------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------|---------------|---------------|
| Nominal PV System Voltage                                                      |                          | 600Vdc                                                  | 1000Vdc       | 1200Vdc       |
| Catalog Numbers:<br>(Base + Modules)                                           | Without Remote Signaling | BSPH3600YPV                                             | BSPH31000YPV  | BSPH31200YPV  |
|                                                                                | With Remote Signaling    | BSPH3600YPVR                                            | BSPH31000YPVR | BSPH31200YPVR |
| Replacement Modules:                                                           | Outer (2)                | BPH300YPV                                               | BPH500YPV     | BPH600YPV     |
|                                                                                | Center (1)               | BPM300YPV                                               | BPM500YPV     | BPM600YPV     |
| Specifications                                                                 |                          |                                                         |               |               |
| Nominal PV System Voltage                                                      |                          | 600V                                                    | 1000V         | 1200V         |
| MCOV [U <sub>CPV</sub> ]                                                       |                          | 700Vdc                                                  | 1170Vdc       | 1200Vdc       |
| Max System Discharge Current (8/20 μs) [I <sub>max</sub> ]                     |                          | 40kA                                                    | 40kA          | 30kA          |
| Voltage Protection Level [U <sub>p</sub> ]                                     |                          | ≤2.5kV                                                  | ≤4.0kV        | ≤4.5kV        |
| Voltage Protection Level at 5kA [U <sub>p</sub> ]                              |                          | ≤2.0kV                                                  | ≤3.5kV        | ≤4.0kV        |
| Integrated Fuse Breaking Capacity/Interrupting Rating                          |                          | 30kA/1000Vdc                                            | 30kA/1000Vdc  | 30kA/1200Vdc  |
| Technology                                                                     |                          | Short-Circuit Interruption (SCI) Overcurrent Protection |               |               |
| Operating Temperature Range [T <sub>U</sub> ]                                  |                          | -40°C to +80°C                                          |               |               |
| Nominal Discharge Current (8/20 μs) [(DC+/DC-) --> PE] [I <sub>n</sub> ]       |                          | 12.5kA                                                  |               |               |
| Response Time [t <sub>A</sub> ]                                                |                          | ≤25ns                                                   |               |               |
| Operating State/Fault Indication                                               |                          | Green (good)/Red (replace)                              |               |               |
| Conductor Ratings and Cross-Sectional Area: Minimum                            |                          | 60/75°C 1.5mm²/14AWG Solid/Flexible                     |               |               |
| Maximum                                                                        |                          | 60/75°C 35mm²/2AWG Stranded/25mm²/4AWG Flexible         |               |               |
| Mounting                                                                       |                          | 35mm DIN Rail per EN 60715                              |               |               |
| Enclosure Material                                                             |                          | UL 94V0 Thermoplastic                                   |               |               |
| Degree of Protection                                                           |                          | IP20                                                    |               |               |
| Capacity                                                                       |                          | 3 Modules, DIN 43880                                    |               |               |
| Standards Information:                                                         | UL                       | UL 1449 3 <sup>rd</sup> Edition (Type 2)*               |               |               |
|                                                                                | IEC                      | IEC 61643-11 Type 2, IEC 61643-1 Class II               |               |               |
| Product Warranty                                                               |                          | Five Years**                                            |               |               |
| Remote Contact Signaling                                                       |                          |                                                         |               |               |
| Remote Contact Signaling Type                                                  |                          | Changeover Contact                                      |               |               |
| AC Switching Capacity (Volts/Amps)                                             |                          | 250V/0.1A                                               |               |               |
| DC Switching Capacity (Volts/Amps)                                             |                          | 250V/0.1A; 125V/0.2A; 75V/0.5A                          |               |               |
| Conductor Ratings and Cross-Sectional Area for Remote Contact Signal Terminals |                          | 60/75°C Max. 1.5mm²/14AWG Solid/Flexible                |               |               |
| Ordering Information                                                           |                          | Order from Catalog Numbers Above                        |               |               |

## Typical Application Schematics

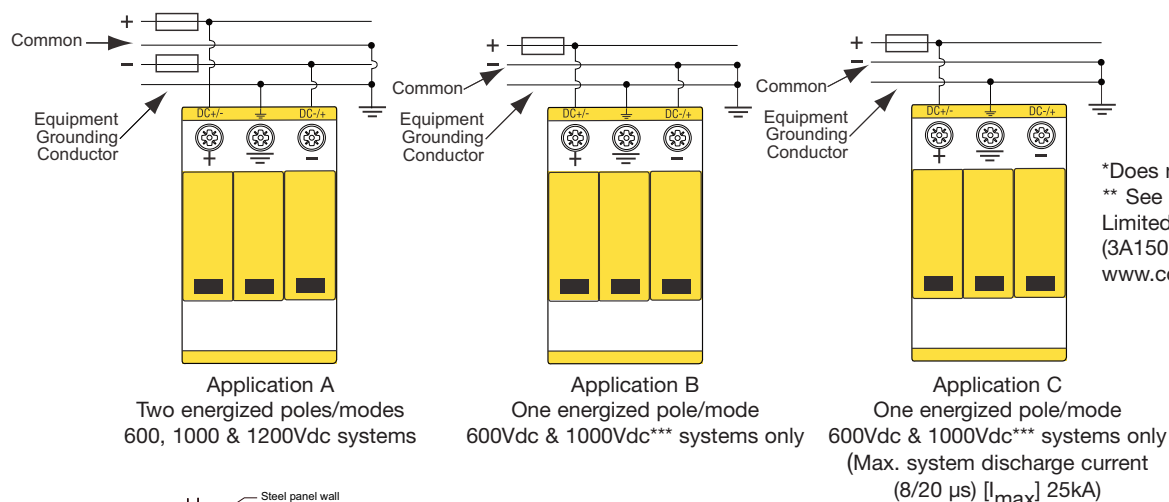

\*Does not apply to 1200Vdc.  
\*\* See Cooper Bussmann SPD  
Limited Warranty Statement  
(3A1502) for details at  
[www.cooperbussmann.com/surge](http://www.cooperbussmann.com/surge)



1000Vdc One energized pole/mode mounting detail.

\*\*\*BSPH31000YPV(R) 1000Vdc one energized pole/mode requires the following:

1. Use a suitable electrical insulator to keep a 10mm min. safety distance from the PV-SPD and other grounded parts in the housing as shown
2. No metal covers are in the area of the module release buttons as shown.

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.