CIT CONNECTOR

Board-to-wire

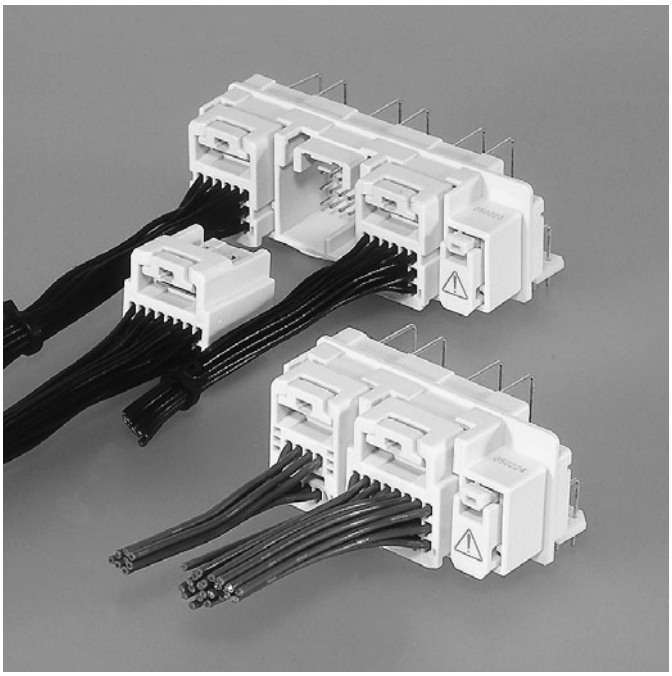

The miniaturization is realized as air-bag ECU I/O connector for automobile.
This product has various circuit development and several adoption results proven, hence it enables to select the type to meet the automobile.

Features

●Two types circuits
60 circuit and 36 circuit types are available, and the specifications matched to the automobile are selectable.

●Incomplete mating detection mechanism
Mis-insertion and insertion error at the assembly line can detect with a CPA terminal.

●Terminal construction
It is designed to prevent the deformation of the contact area when processing wire harness by protecting the contact area of each terminal with a box.

●Press-fit
There are dip type and press-fit type in the male connector.

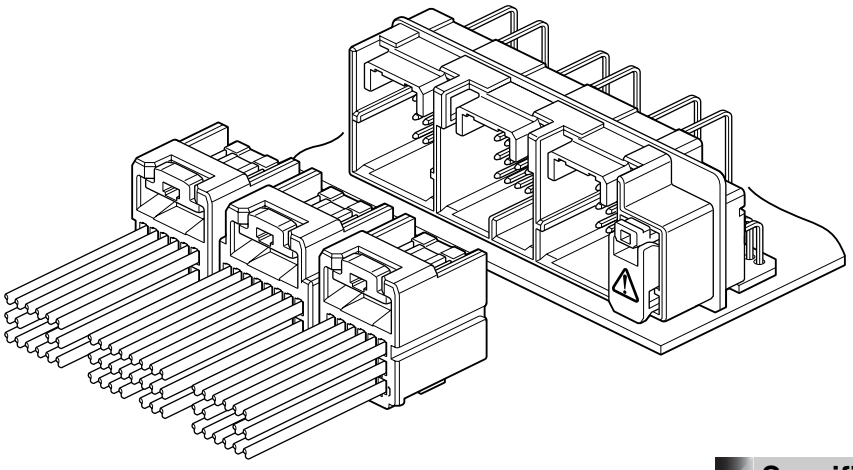

Specifications

- Current rating: 5A AC, DC (0.5mm^2, Single circuit)
- Voltage rating: 50V AC, DC
- Temperature range: -40°C to +105°C
  (including temperature rise in applying electrical current)
- Contact resistance: Initial value/8mΩ max.
  After environmental testing/16mΩ max.
- Insulation resistance: 100MΩ min.
- Withstanding voltage: 100V DC/minute
- Applicable wire: AVSS/CAVS
  0.64 Terminal S; 0.3mm^2 to 0.5mm^2
  CHFUS
  0.64 Terminal SSS/SS; 0.13mm^2 to 0.35mm^2

∗ Compliant with ELV/RoHS.
∗ Contact JST for details.

Female terminal

● 0.64 Female terminal SSS/SS

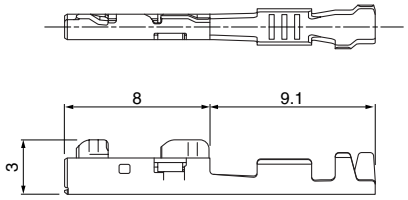

● 0.64 Female terminal S

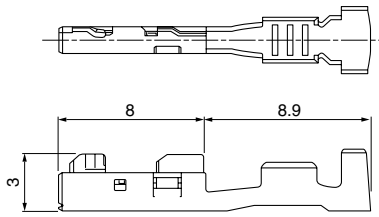

Terminal	Model No.	Applicable wire range		Q'ty/reel
		Conductor (mm^2)	Insulation O.D. (mm)	
0.64 SSS	①**SNAC3-A001T-M0.64**	0.13	0.85	6,000
0.64 SS	①**SNAC3-A011T-M0.64**	0.22 to 0.35	0.95 to 1.10	5,000
0.64 S	①**SNAC3-A021T-M0.64**	0.3 to 0.5	1.4 to 1.8	5,000
	②**SNAC3-A021GI-M0.64-1**			
	③**SNAC3-A021GF-M0.64-1**			

Material and Finish
①Copper alloy, tin-plated (reflow treatment)
②Copper alloy, nickel-undercoated, Male contact area; tin-plated (reflow treatment) Short terminal contact area; gold-plated
③Copper alloy, nickel-undercoated, Male contact area; gold-plated Short terminal contact area; gold-plated

Female connector

● 8 circuits

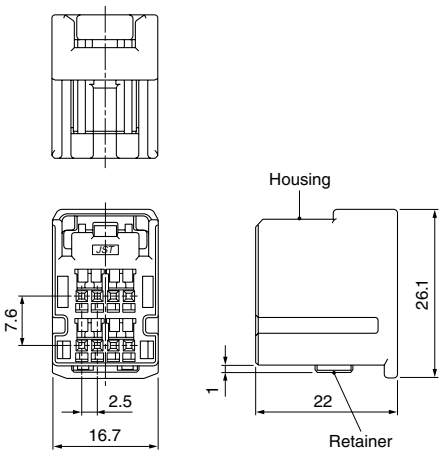

● 16 circuits

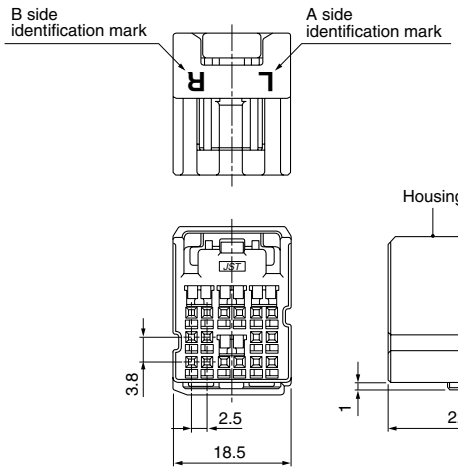

Model No.	
16CIT-B-1A	16CIT-B-2A
	
A figure	B figure

● 23 circuits

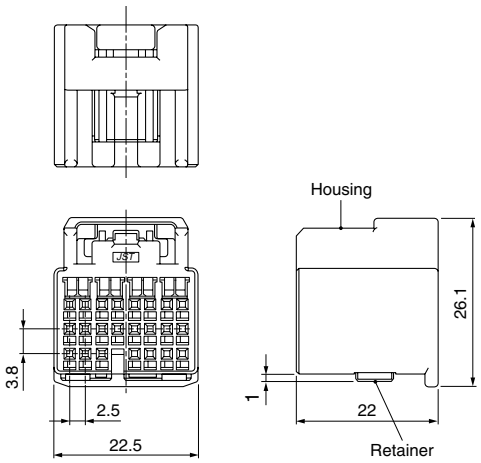

Circuits	Model No.	Q'ty/box
8	**08CIT-B-1A**	84
16	**16CIT-B-1A**	72
	16CIT-B-2A	72
23	**23CIT-B-1A**	60

Material and Finish
Housing: PBT, yellow
Lock housing: Glass-filled PBT, yellow
Short terminal: Copper alloy, nickel-undercoated, Contact area; gold-plated
CPA terminal: Copper alloy, nickel-undercoated, Contact area; gold-plated
Retainer: PBT, natural (white)

Male connector

Dip type

● **36 circuits**

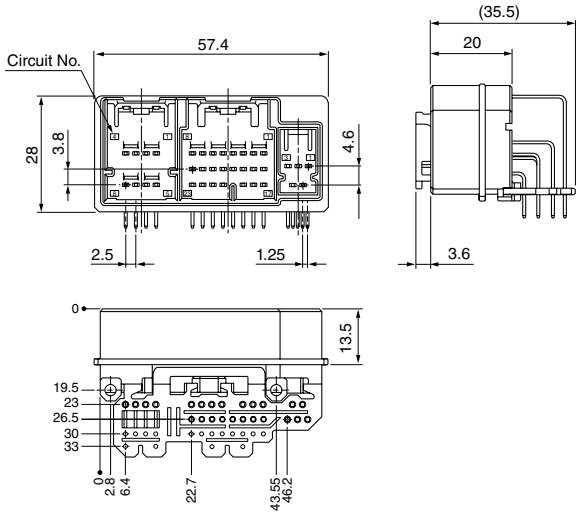

● **60 circuits**

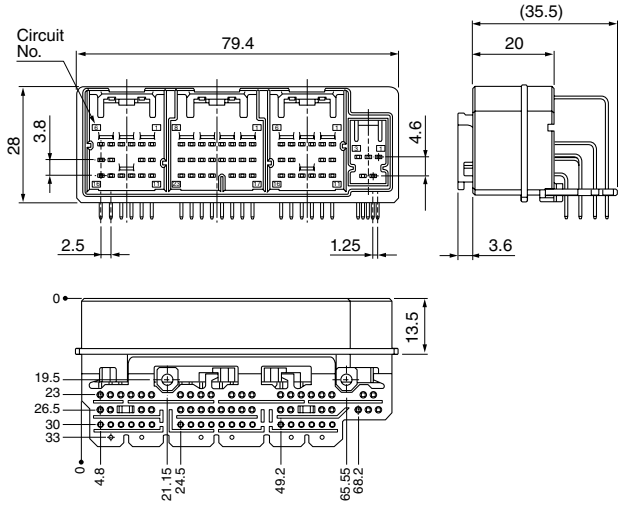

Press-fit type

● **60 circuits**

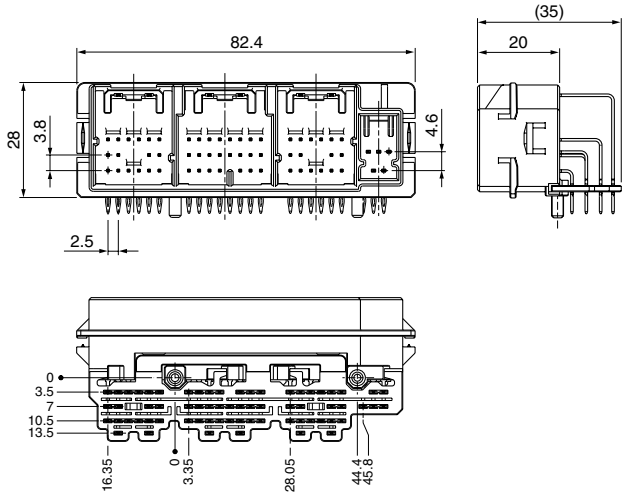

Dip type

Circuits	Model No.	Q'ty/box
36	**S36B-CITYTP-01B**	126
60	**S60B-CITYTP-01B**	98

Material and Finish
0.64 pin: Brass, nickel-undercoated, tin-plated (reflow treatment) 1.0 pin: Brass, nickel-undercoated, tin-plated (reflow treatment) CPA pin: Brass, nickel-undercoated, Contact area; gold-plated Solder tail; tin-plated (reflow treatment) Housing: Glass-filled PBT, yellow Tine-plate: Glass-filled PBT, natural (white) Protect cap: PBT, yellow

Press-fit type

Circuits	Model No.	Q'ty/box
60	**S60B-CITYTP-P-04B**	60

Material and Finish
0.64 pin(S, M): Phosphor bronze, nickel-undercoated, tin-plated (reflow treatment) 0.64 pin(L): Phosphor bronze, nickel-undercoated, Contact area; gold-plated Press-fit area; tin-plated (reflow treatment) 1.0 pin(S, M): Phosphor bronze, nickel-undercoated, tin-plated (reflow treatment) CPA pin: Phosphor bronze, nickel-undercoated, Contact area; gold-plated Press-fit area; tin-plated (reflow treatment) Housing: Glass-filled PBT, yellow Tine-plate: Glass-filled PBT, natural (white) Protect cap: PBT, yellow

PC board layout, Assembly layout

Dip type

● **36 circuits**

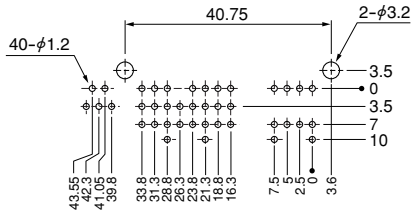

● **60 circuits**

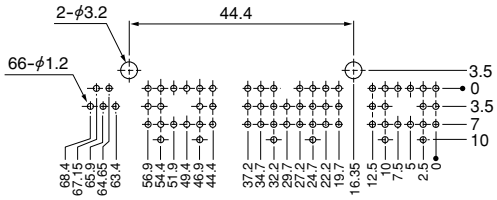



Press-fit type

● **60 circuits**

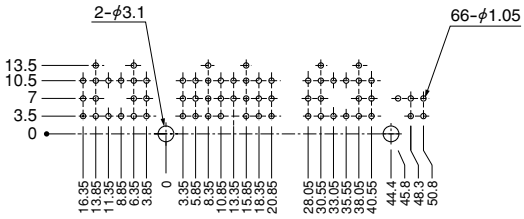



Note: 1. Tolerances are non-cumulative: ±0.05mm for all centers.
2. Hole dimensions differ according to the type of PC board and piercing method.
The dimensions above should serve as guideline. Contact JST for details.

Crimping machine, Applicator, Hand crimp tool

Strip terminal	Crimping machine	Crimp applicator MKS-L		Hand crimp tool	Applicable wire
		Dies	Crimp applicator with dies		
SNAC3-A001T-M0.64	AP-K2N	MK/SNAC3-A001-064	APLMK SNAC3-A001-064	—	—
SNAC3-A011T-M0.64		MK/SNAC3-A011-064	APLMK SNAC3-A011-064	—	—
SNAC3-A021T-M0.64		MK/SNAC3-A021-064	APLMK SNAC3-A021-064	YRK-1003	AVSS0.5, CAVS0.5
SNAC3-A021GI-M0.64-1				—	—
SNAC3-A021GF-M0.64-1				—	—

Note: When crimping operation is conducted using an applicator and die set other than the above, JST cannot guarantee the performance of the terminal.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JST:

23CIT-B-1A 08CIT-B-1A 16CIT-B-1A 16CIT-B-2A S36B-CITYTP-01B (M)(D1) S60B-CITYTP-01B (M)(D1)

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.