THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT ALL RIGHTS RESERVED.

LOC	DIST
EH	02

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	J2	REVISED PER ECO-11-005140	30MAR11	RK	HMR

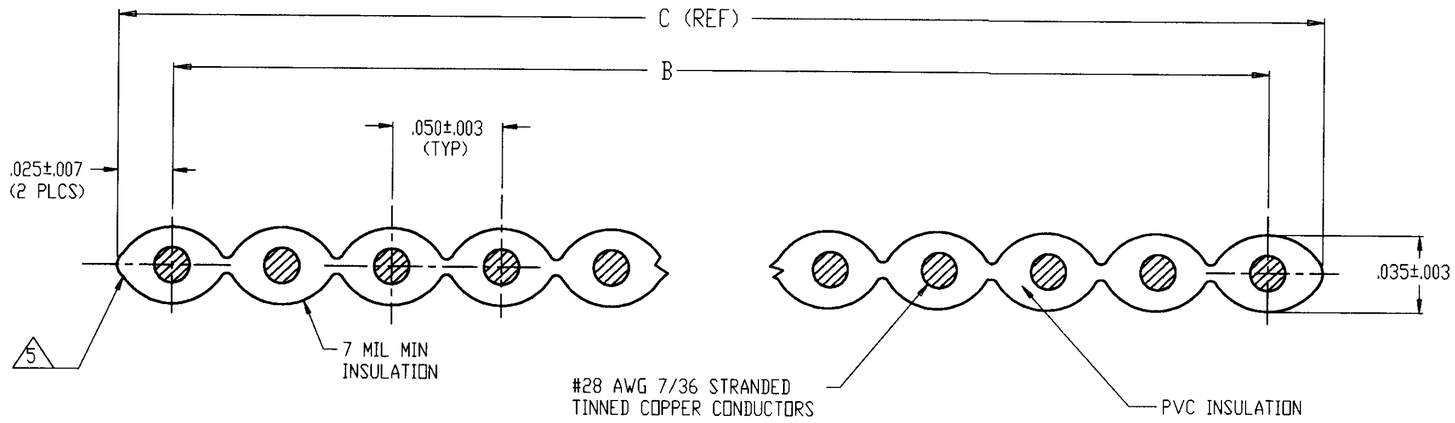

FLAT CABLE CROSS-SECTION

1. CABLE CERTIFIED TO:
   -UL CABLE STYLE: 2651
   -CSA: CSA AWM IA 105°C 300 V FT1

2. CABLE PHYSICAL SPECIFICATIONS:
   2.1 TEMPERATURE RATING: 105°C
   2.2 FLAMMABILITY:
   -UL: VW1
   -CSA: FT1
   2.3 INSULATION: GRAY FLAME RETARDANT FLEXIBLE PVC
   2.4 CONDUCTORS: 28 AWG 7/36 STRANDED TINNED COPPER

3. TYPICAL ELECTRICAL VALUES:
   3.1 VOLTAGE RATING: 300 V
   3.2 INSULATION RESISTANCE: 10,000 MEGOHMS/10 FT
   3.3 IMPEDANCE: 105 OHMS NOMINAL (GND-SIG-GND)
   3.4 CAPACITANCE: 13.5 pf/FT
   3.5 PROPAGATION DELAY: 1.45 ns/FT
   3.6 CROSSTALK: 10 FT SAMPLE 5ns RISE TIME
   NEAR END: 3.0%
   FAR END: 4.0%

4. CABLE SURFACE PRINTED PER UL AND CSA REQUIREMENTS.

5 RED EDGE MARK ON CONDUCTOR #1.

6 REEL QUANTITY: 100 FT. REEL MAY CONTAIN SEPARATE LENGTHS. 20 FT MIN PER LENGTH. TWO LENGTHS MAX PER REEL.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	REEL QTY	DIM C	DIM B	NO OF COND	PART NUMBER
6		1.000	.950±.010	20	57040-1
		1.250	1.200±.010	25	57040-2
		1.300	1.250±.010	26	57040-3
		1.700	1.650±.010	34	57040-4
		2.000	1.950±.015	40	57040-5
		2.500	2.450±.015	50	57040-6
		3.000	2.950±.015	60	57040-7
		1.400	1.350±.010	28	57040-8
		.450	.400±.010	9	1-57040-2
		.500	.450±.010	10	1-57040-3
		.700	.650±.010	14	1-57040-4
		.750	.700±.010	15	1-57040-5
		.800	.750±.010	16	1-57040-6
		1.200	1.150±.010	24	1-57040-7
		1.850	1.800±.010	37	1-57040-8
		.300	.250±.010	6	1-57040-9
		.400	.350±.010	8	2-57040-0
		1.500	1.450±.010	30	2-57040-1
		3.200	3.150±.015	64	2-57040-2
7 OBSOLETE		.900	.850±.010	18	~~2-57040-3~~
		2.200	2.150±.015	44	2-57040-4
		1.800	1.750±.015	36	2-57040-5
6		.600	.550±.010	12	2-57040-9

57040

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
1 PLC DEC ±.1
2 PLC DEC ±.02
3 PLC DEC ±.005
4 PLC DEC ±.0005
ANGLES ± –

MATERIAL –
FINISH –

DWN J.KOPPEN 17JUL92
CHK W.HARRIS 17JUL92
APVD W.HARRIS 17JUL92
PRODUCT SPEC –
APPLICATION SPEC –
WEIGHT –
CUSTOMER DRAWING

TE Connectivity

NAME CABLE, PLANAR RIBBON, #28 AWG 7/36 STRANDED

SIZE	CAGE CODE	DRAWING NO	REV
A2	00779	C- 57040	J2

SCALE 20:1 SHEET 1 OF 1

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.