




### FEATURES


- **Standard 5.0mm x 3.2mm Ceramic Surface Mount Package**
- **Fundamental Crystal Design**
- Frequency Range 6.76438 – 50 MHz
- Frequency Tolerance,  $\pm 30$  ppm Standard  
[other tolerances available]
- Frequency Stability,  $\pm 50$  ppm Standard  
[other stabilities available]
- Operating Temperature to  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Stable Frequency Over Temperature and Drive Level
- Tape & Reel Packaging Standard, EIA-481-2
- **RoHS/Green Compliant (6/6)**

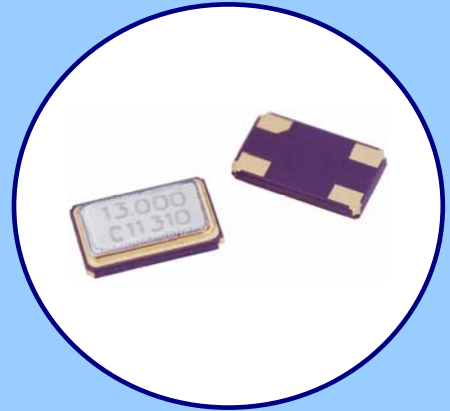

### APPLICATIONS

The Model 405 is a seam sealed ceramic packaged crystal offering reduced size, ideal for high-density circuit board applications. M405 offers reliable precision and excellent shock performance suitable for wireless communications, broadband access, WLAN/WiMax/WiFi, portable equipment, test and measurement, PCMCIA, computers and modems.

### ORDERING INFORMATION

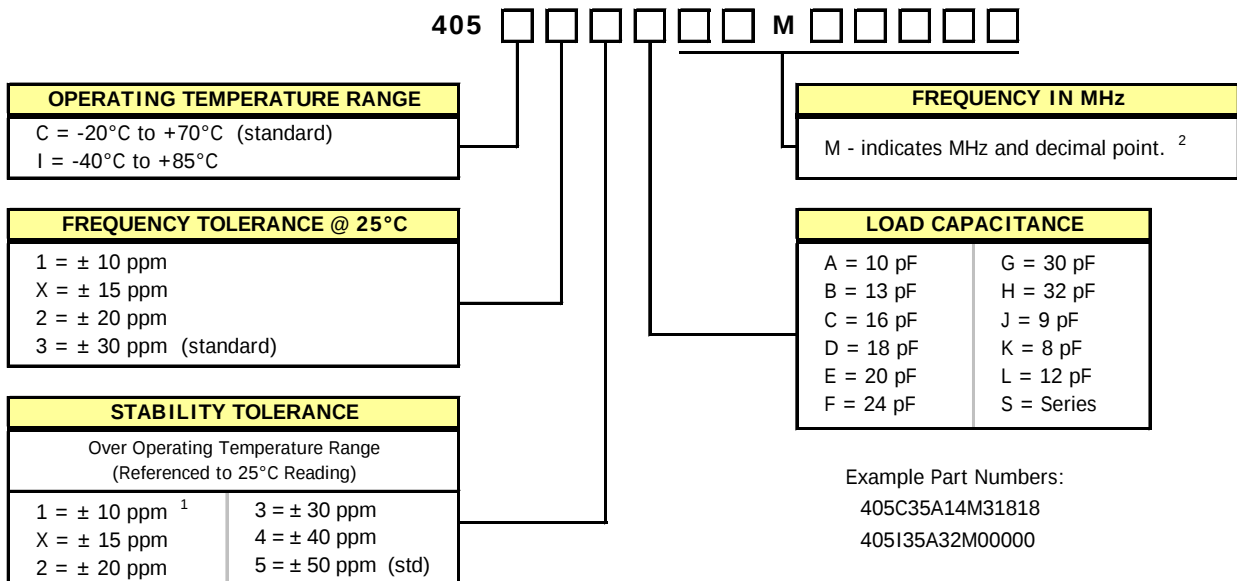

Use form C052 to detail non-standard parameters.

1] Only available with temperature range code "C".

2] Frequency is recorded with two leading digits before the 'M' and 5 significant digits after the 'M' (including zeros).

[Ex. XXMXXXXX (16M38400), XXMXXXXX (14M31818)]

**Not all performance combinations and frequencies may be available.**  
**Contact your local CTS Representative or CTS Customer Service for availability.**

## ELECTRICAL CHARACTERISTICS


| ELECTRICAL PARAMETERS | PARAMETER                                                                                  | VALUE                                                                                      |
|-----------------------|--------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
|                       | Frequency Range                                                                            | 6.76438 MHz to 50.0 MHz                                                                    |
|                       | Operating Mode                                                                             | Fundamental                                                                                |
|                       | Crystal Cut                                                                                | AT-Cut                                                                                     |
|                       | Frequency Tolerance @ 25°C                                                                 | ± 30 ppm standard<br>[± 10 ppm, ± 15 ppm and ± 20 ppm Available]                           |
|                       | Frequency Stability Tolerance<br>[Operating Temperature Range, Referenced to 25°C Reading] | -20°C to +70°C standard<br>[± 10 ppm, ± 15 ppm, ± 20 ppm, ± 30 ppm and ± 40 ppm Available] |
|                       | Operating Temperature Range                                                                | -20°C to +70°C<br>-40°C to +85°C                                                           |
|                       | Equivalent Series Resistance                                                               | See ESR Table                                                                              |
|                       | Load Capacitance or Resonance Mode                                                         | See Ordering Information                                                                   |
|                       | Shunt Capacitance (C <sub>0</sub> )                                                        | 3.0 pF typical<br>7.0 pF maximum                                                           |
|                       | Drive Level                                                                                | 10 µW typical<br>100 µW maximum                                                            |
|                       | Aging @ +25°C                                                                              | ±3 ppm/yr typical<br>±5 ppm/yr maximum                                                     |
|                       | Storage Temperature Range                                                                  | -55°C to +125°C                                                                            |
|                       | Reflow Condition, per JEDEC J-STD-020                                                      | +260°C maximum, 10 Seconds maximum                                                         |

## EQUIVALENT SERIES RESISTANCE TABLE

| FREQUENCY RANGE          | MODE of OSCILLATION | ESR Maximum |
|--------------------------|---------------------|-------------|
| 6.76438 MHz - 10.999 MHz | Fundamental         | 80 Ohms     |
| 11.00 MHz - 20.00 MHz    | Fundamental         | 60 Ohms     |
| 20.001 MHz - 50.00 MHz   | Fundamental         | 50 Ohms     |

## MECHANICAL SPECIFICATIONS

### PACKAGE DRAWING

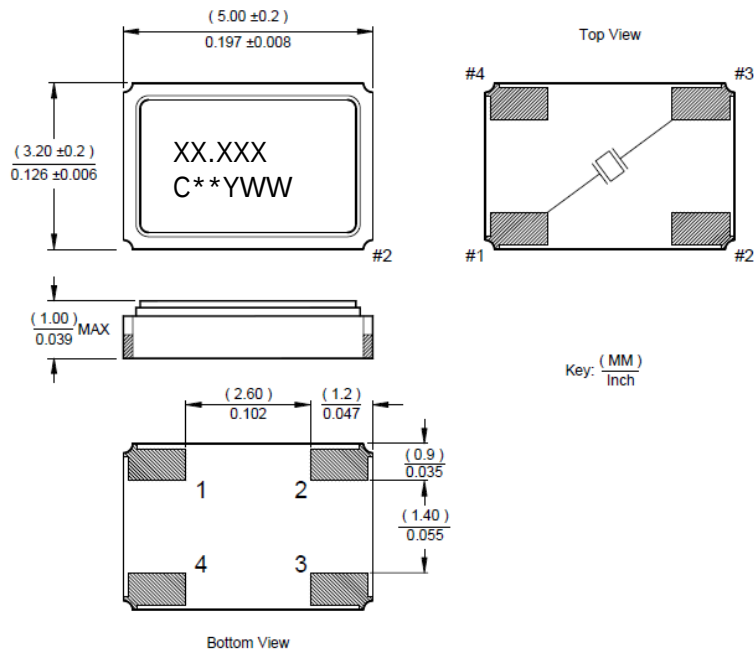


### MARKING INFORMATION

- XX.XXX – Frequency marked with 3 significant digits after the decimal.
- C – CTS and Pin 1 identifier.
- \*\* - Manufacturing Site Code.
- YWW – Date Code, Y – Last Digit of Year, WW – Week.
- Complete CTS part number, frequency value and date code information must appear on reel and box labels.

### NOTES

- Complete CTS part number, frequency value and date code information must appear on reel and carton labels.
- Termination pads (e4); barrier plating is nickel (Ni) with gold (Au) flash plate.
- Terminations #2, #4 and metal lid are connected internally and may be connected to ground for EMI suppression.
- Reflow conditions per JEDEC J-STD-020, 260°C maximum.


### SUGGESTED SOLDER PAD GEOMETRY

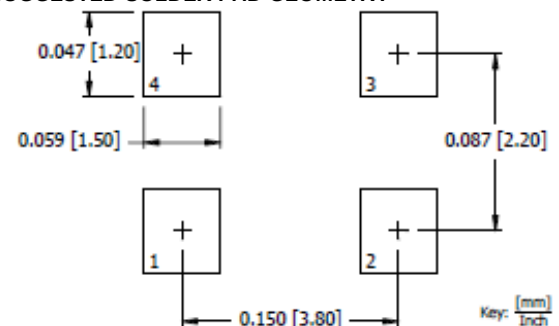

## PACKAGING INFORMATION


Device quantity is 1,000 pieces per 180mm reel.

DIMENSIONS IN MILLIMETERS

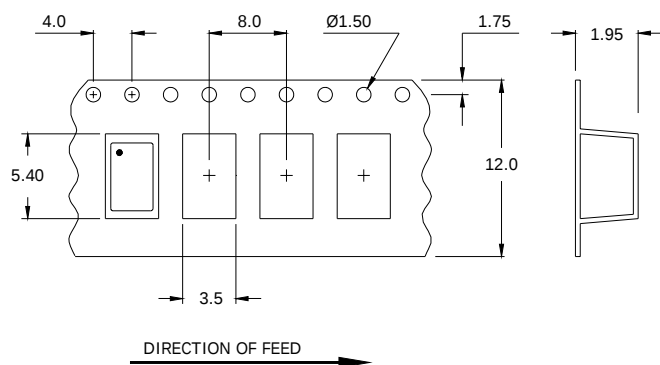

## ENVIRONMENTAL SPECIFICATIONS

|                                  |                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------|
| Temperature Cycle:               | 400 cycles from -55°C to between temperatures.                                       |
| Mechanical Shock:                | 1,500g's, 0.5mS duration, planes (18 total shocks).                                  |
| Sinusoidal Vibration:            | 0.06 inches double amplitude perpendicular planes (9 times each plane).              |
| Gross Leak:                      | No leak shall appear while in service.                                               |
| Fine Leak:                       | Mass spectrometer leak rates less than $2 \times 10^{-8}$ ATM cc/sec air equivalent. |
| Resistance to Solder Heat:       | Product must survive 3 reflows of +250°C maximum, 10 seconds maximum.                |
| High Temperature Operating Bias: | 2,000 hours at +125°C, disregarding frequency shift.                                 |
| Frequency Aging:                 | 1,000 hours at +85°C.                                                                |
| Insulation Resistance:           | 500M Ohms @ 100V <sub>DC</sub> ±15V <sub>DC</sub> .                                  |
| Moisture Sensitivity Level:      | Level 1 per JEDEC J-STD-020.                                                         |

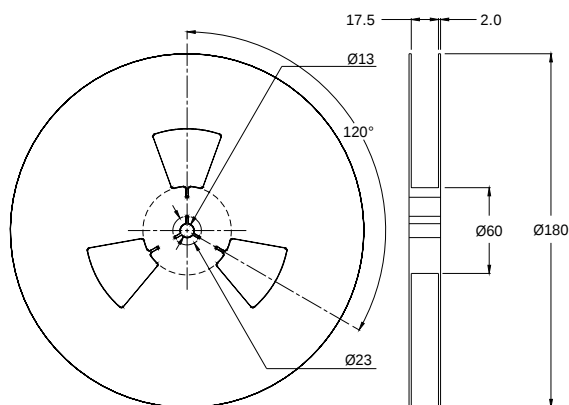



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.