



## SinglFuse™ SF-1206SxxxW Series Features

- Single blow fuse for overcurrent protection
- 3216 (EIA 1206) footprint
- Slow blow fuse
- UL 248-14 listed
- RoHS compliant\* and halogen free\*\*
- Wire core SMD design
- Surface mount packaging for automated assembly

## SF-1206SxxxW Series - Slow Blow Wire Core Surface Mount Fuses

### Electrical Characteristics

| Model           | Rated Current (Amps) | Fusing Time                               | Resistance (Ω) Typ.*** | Rated Voltage | Interrupting Rating | Typical I <sup>2</sup> t (A <sup>2</sup> s) **** |
|-----------------|----------------------|-------------------------------------------|------------------------|---------------|---------------------|--------------------------------------------------|
| SF-1206S150W-2  | 1.50                 | Open within 5 sec. at 250 % rated current | 0.050                  | DC 65 V       | DC 65 V<br>50 A     | 0.37                                             |
| SF-1206S160W-2  | 1.60                 |                                           | 0.043                  |               |                     | 0.52                                             |
| SF-1206S200W-2  | 2.00                 |                                           | 0.032                  |               |                     | 0.88                                             |
| SF-1206S250W-2  | 2.50                 |                                           | 0.028                  |               |                     | 1.10                                             |
| SF-1206S300W-2  | 3.00                 |                                           | 0.022                  |               |                     | 1.90                                             |
| SF-1206S315W-2  | 3.15                 |                                           | 0.020                  |               |                     | 2.20                                             |
| SF-1206S350W-2  | 3.50                 |                                           | 0.018                  |               |                     | 2.60                                             |
| SF-1206S400W-2  | 4.00                 |                                           | 0.016                  |               |                     | 3.30                                             |
| SF-1206S500W-2  | 5.00                 |                                           | 0.013                  | DC 32 V       | DC 32 V<br>50 A     | 5.40                                             |
| SF-1206S630W-2  | 6.30                 |                                           | 0.010                  |               |                     | 8.90                                             |
| SF-1206S700W-2  | 7.00                 |                                           | 0.0092                 |               |                     | 10.40                                            |
| SF-1206S800W-2  | 8.00                 |                                           | 0.0084                 |               |                     | 13.50                                            |
| SF-1206S1000W-2 | 10.00                |                                           | 0.0050                 |               |                     | 11.20                                            |
| SF-1206S1200W-2 | 12.00                |                                           | 0.0041                 |               |                     | 15.00                                            |
| SF-1206S1500W-2 | 15.00                |                                           | 0.0035                 |               |                     | 24.50                                            |

\*\*\* Resistance value measured with ≤10 % rated current at 25 °C ambient.

\*\*\*\* Melting I<sup>2</sup>t calculated at 0.001 second pre-arcing time.

### Reliability Testing

| No. | Test                      | Requirement                                                                                           | Test Condition                                                                         | Test Reference         |
|-----|---------------------------|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------|
| 1   | Reflow and bend           | DCR change ≤ 20 % (≤ 10 % for ≤1 A)<br>No mechanical damage                                           | 3 reflows at 245 °C followed by a 2 mm bend                                            | Refer to STP document  |
| 2   | Solderability             | Minimum 90 % coverage                                                                                 | One dip at 245 °C for 5 seconds                                                        | MIL-STD-202 Method 208 |
| 3   | Soldering heat resistance | DCR change ≤ 20 % (≤ 10 % for ≤1 A)<br>New solder coverage ≤ 75 %                                     | One dip at 260 °C for 10 seconds                                                       | MIL-STD-202 Method 210 |
| 4   | Moisture resistance       | DCR change ≤ ±15 %<br>No excessive corrosion                                                          | 10 cycles                                                                              | MIL-STD-202 Method 106 |
| 5   | Salt spray                | DCR change ≤ ±10 %<br>No excessive corrosion                                                          | 48 hour exposure, 5 % salt solution                                                    | MIL-STD-202 Method 101 |
| 6   | Mechanical vibration      | DCR change ≤ ±10 %<br>No mechanical damage                                                            | 0.4 inch D.A. or 30 G between 5-3000 Hz                                                | MIL-STD-202 Method 204 |
| 7   | Mechanical shock          | DCR change ≤ ±10 %<br>No mechanical damage                                                            | 1500 G, 0.5 ms, half-sine shocks                                                       | MIL-STD-202 Method 213 |
| 8   | Thermal Shock             | DCR change ≤ ±10 %<br>No mechanical damage                                                            | 100 cycles between -65 °C and +125 °C                                                  | MIL-STD-202 Method 107 |
| 9   | Life                      | No electrical "opens" during testing<br>Voltage drop change shall be less than ±20 % of initial value | 80 % rated current (75 % for < 1 A fuses) for 2000 hours at ambient temperature +25 °C | Refer to STP document  |

### Agency Recognition

UL File Number ..... E198545

<http://www.ul.com/> Follow link to Online Certificates Directory, then enter UL File No. E198545, or [click here](#)

\* RoHS Directive 2015/863, Mar 31, 2015 and Annex..

\*\* Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

"SinglFuse" is a trademark of Bourns, Inc.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

## SinglFuse™ SF-1206SxxxW Series Applications

- LCD monitors
- Backlight drivers
- Set top boxes
- DC/DC converters
- Notebooks / ultrabooks
- Low voltage lighting power
- Industrial controllers

### SF-1206SxxxW Series - Slow Blow Wire Core Surface Mount Fuses

**BOURNS®**

#### Environmental Characteristics

|                                  |                                 |
|----------------------------------|---------------------------------|
| Operating Temperature.....       | -55 °C to +125 °C               |
| Storage Conditions               |                                 |
| Temperature .....                | +5 °C to +35 °C                 |
| Humidity.....                    | 40 % to 75 %                    |
| Shelf Life.....                  | 2 years from manufacturing date |
| Moisture Sensitivity Level ..... | 1                               |
| ESD Classification (HBM).....    | Class 6                         |

#### Typical Part Marking

Represents total content. Layout may vary.




| RATED CURRENT (A) |           |
|-------------------|-----------|
| G = 1.50          | N = 5.00  |
| T = 1.60          | O = 6.30  |
| I = 2.00          | P = 7.00  |
| J = 2.50          | R = 8.00  |
| K = 3.00          | Q = 10.00 |
| V = 3.15          | X = 12.00 |
| L = 3.50          | Y = 15.00 |
| M = 4.00          |           |

#### How to Order

**SF - 1206 S 150 W - 2**

SinglFuse™  
 Product Designator  
 SMD Footprint  
 1206 = 3216 (EIA1206) size  
 Fuse Blow Type  
 S = Slow Blow  
 Rated Current  
 150 ~ 1500 (1.50 A ~ 15.00 A)  
 Structure Type  
 W = Wire Core  
 Packaging Type  
 - 2 = Tape & Reel


#### Construction

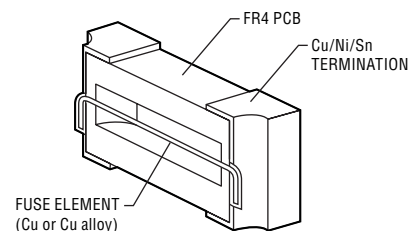


#### Packaging Quantity

3,500 pieces per 7-inch reel


#### Product Dimensions

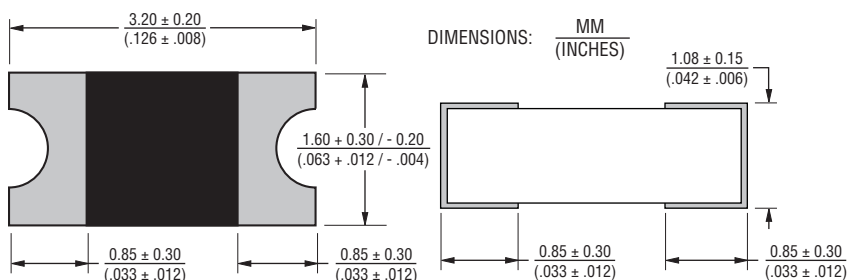

#### Recommended Pad Layout

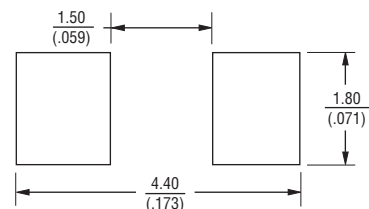


#### Current Rating Thermal Derating Curve

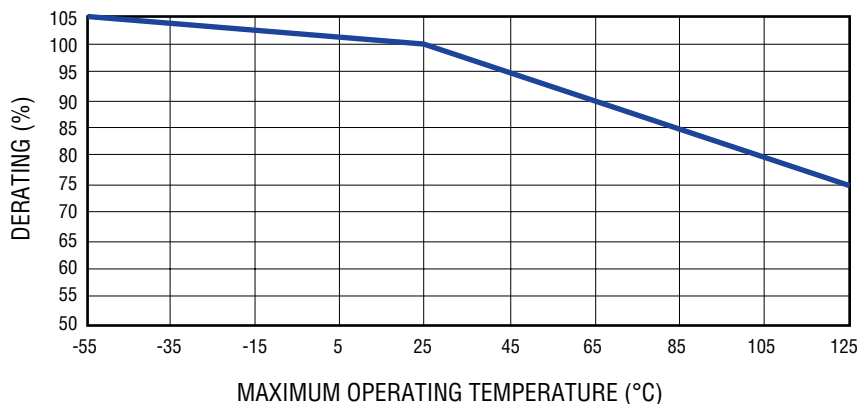


Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

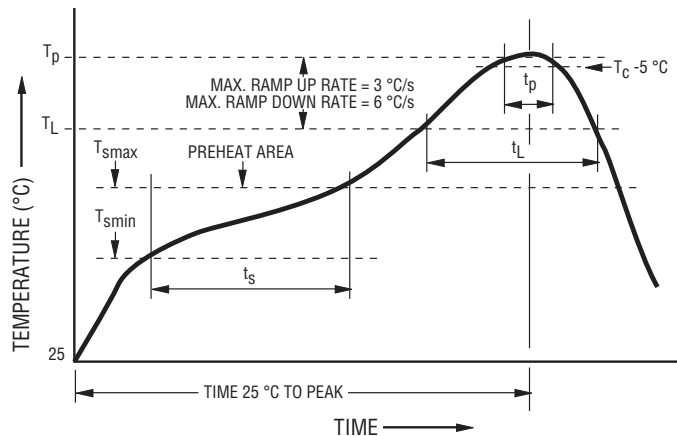**Solder Reflow Recommendations**

| Profile Feature                                                                                                                           | Pb-Free Assembly                   |
|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Preheat / Soak:<br>Temperature Min. ( $T_{smin}$ )<br>Temperature Max. ( $T_{smax}$ )<br>Time ( $t_s$ ) from ( $T_{smin}$ to $T_{smax}$ ) | 150 °C<br>200 °C<br>60~120 seconds |
| Ramp Up Rate ( $T_L$ to $T_p$ )                                                                                                           | 3 °C / second max.                 |
| Liquidous Temperature ( $T_L$ )<br>Time ( $t_L$ ) maintained above $T_L$                                                                  | 217 °C<br>60~150 seconds           |
| Peak Package Body Temperature ( $T_p$ )                                                                                                   | 260 °C                             |
| Time ( $t_p$ )* within 5 °C of the specified classification temperature ( $T_c$ )                                                         | 30 seconds*                        |
| Ramp Down Rate ( $T_p$ to $T_L$ )                                                                                                         | 6 °C / second max.                 |
| Time 25 °C to Peak Temperature                                                                                                            | 8 minutes max.                     |

\* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

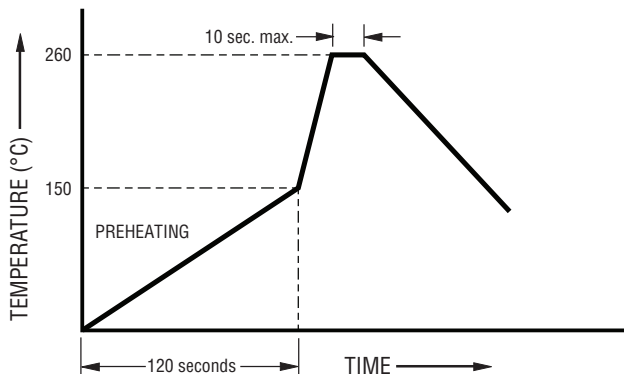
**Recommended Temperature Profile for Wave Soldering**

Wave soldering is suitable for 1206 size models.


# SF-1206SxxxW Series - Slow Blow Wire Core Surface Mount Fuses

**BOURNS®**

Average Pre-Arcing Time vs. Current Curves

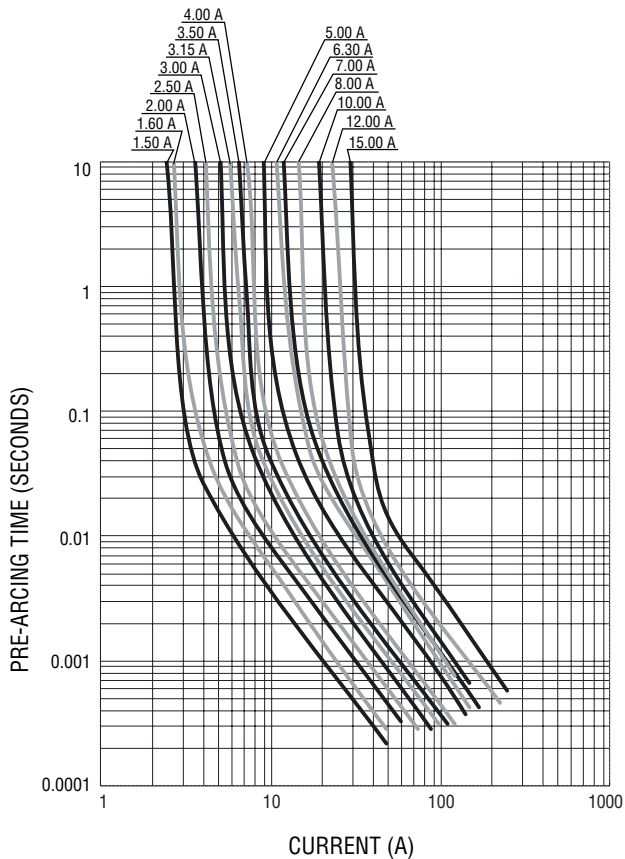

Average  $I^2t$  vs.  $t$  Curves

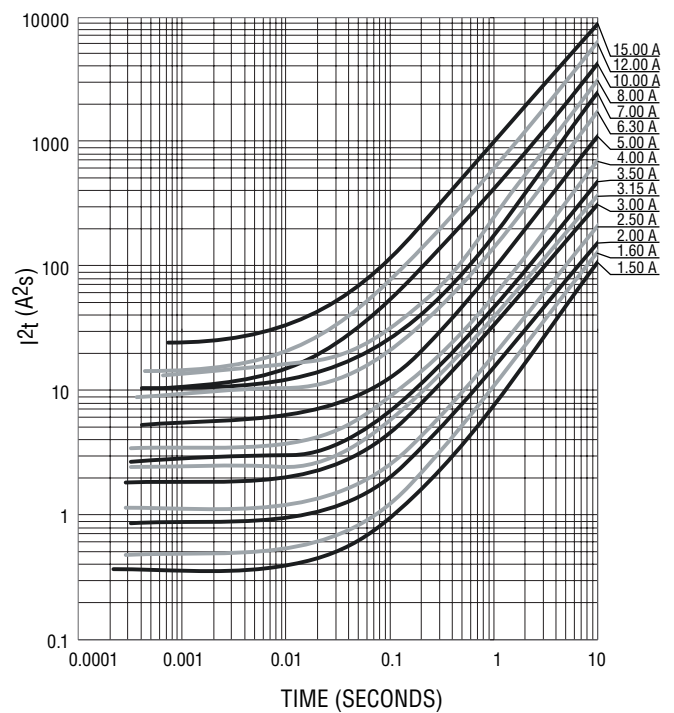

**BOURNS®**

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 520 390 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

[www.bourns.com](http://www.bourns.com)

REV. A 03/18

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# SF-1206SxxxW Series Tape and Reel Packaging Specifications

**BOURNS®**

| Tape Dimensions | SF-1206SxxxW Series<br>per EIA 481-2    |
|-----------------|-----------------------------------------|
| W               | $\frac{8.10 \pm 0.20}{(.319 \pm .008)}$ |
| P <sub>0</sub>  | $\frac{4.0 \pm 0.10}{(.157 \pm .004)}$  |
| P <sub>1</sub>  | $\frac{4.0 \pm 0.10}{(.157 \pm .004)}$  |
| P <sub>2</sub>  | $\frac{2.0 \pm 0.05}{(.079 \pm .002)}$  |
| A <sub>0</sub>  | $\frac{2.05 \pm 0.10}{(.081 \pm .004)}$ |
| B <sub>0</sub>  | $\frac{3.50 \pm 0.10}{(.138 \pm .004)}$ |
| F               | $\frac{3.50 \pm 0.05}{(.138 \pm .002)}$ |
| E <sub>1</sub>  | $\frac{1.75 \pm 0.10}{(.069 \pm .004)}$ |
| D <sub>0</sub>  | $\frac{1.50 \pm 0.10}{(.059 \pm .004)}$ |
| K <sub>0</sub>  | $\frac{1.30 \pm 0.10}{(.051 \pm .004)}$ |
| T               | $\frac{0.22 \pm 0.05}{(.009 \pm .002)}$ |

PACKAGING: Plastic tape, 3,500 pcs. per reel

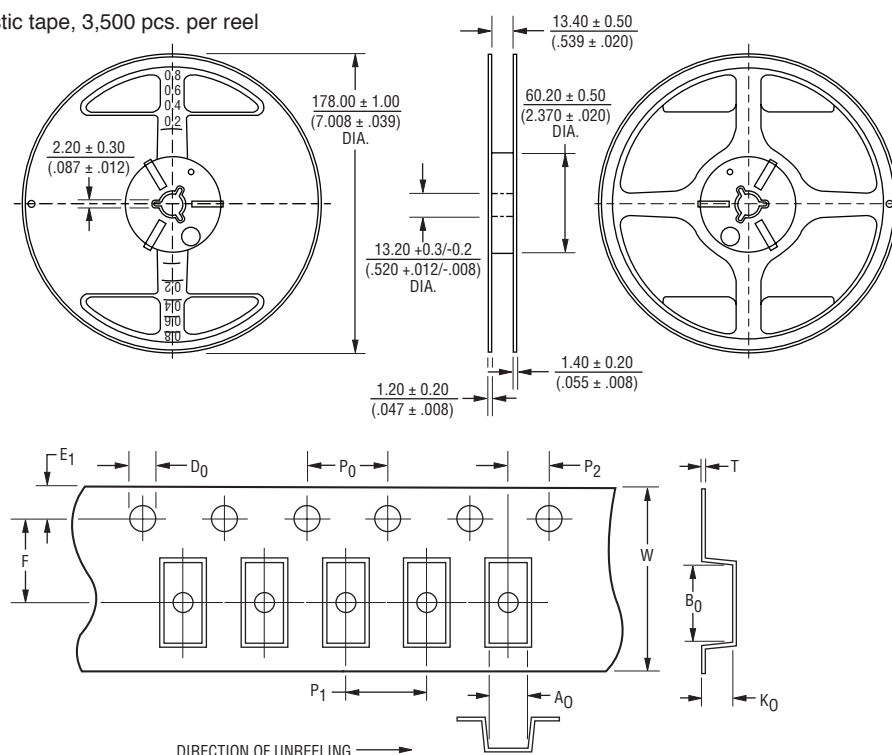

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.