

HCP0805

High current power inductors



Product description

- High current carrying capacity
- Magnetically shielded, low EMI
- Frequency range up to 2MHz
- Inductance range from 0.40uH to 2.2uH
- Current range from 10 to 32 amps
- 7.9 x 7.6 mm footprint surface mount package in a 5.0mm height
- Iron powder core material
- Halogen free, lead free, RoHS compliant

Applications

- Multi-phase regulators
- Voltage Regulator Modules (VRMs)
- Distributed power systems DC-DC converters
- Desktop and server VRMs and EVRDs
- Point-of-Load (POL) modules
- Field Programmable Gate Array (FPGA) DC-DC converters
- Battery power systems
- High current power supplies
- Data networking and storage systems

Environmental data

- Storage temperature range (Component): -40°C to +125°C
- Operating temperature range: -40°C to +125°C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020D compliant






Product specifications


Part Number ^a	OCL ¹ (uH) ±20%	FLL ² (uH) minimum	I _{rms} ³ (amps)	I _{sat} ⁴ (amps)	DCR (mΩ) ±6.0% @ 20°C	K-factor ⁵
HCP0805-R40-R	0.40	0.26	20	32	3.1	376
HCP0805-R68-R	0.68	0.44	17.5	25	4.5	292
HCP0805-1R0-R	1.0	0.64	14.5	22	5.8	239
HCP0805-1R5-R	1.5	0.96	13.3	18	6.8	202
HCP0805-2R2-R	2.2	1.41	10	14	11.2	175

1. Open Circuit Inductance (OCL) Test Parameters: 100kHz, 0.1Vrms, 0.0Adc @ +25°C
2. Full Load Inductance (FLL) Test Parameters: 100kHz, 0.10Vrms, @ Isat, @ +25°C
3. I_{rms}: DC current for an approximate temperature rise of 40°C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed 125°C under worst case operating conditions verified in the end application.
4. I_{sat}: Peak current for approximately 20% rolloff @ +25°C
5. K-factor: Used to determine B p-p for core loss (see graph). B p-p = K*L*ΔI, B p-p:(Gauss), K: (K factor from table), L: (Inductance in uH), ΔI (Peak to peak ripple current in Amps).
6. Part number definition: HCP0805-xxx-R
HCP0805 = Product code and size
XXX = Inductance value in uH, R = decimal point,
If no R is present then last character equals number of zeroes
-R suffix indicates RoHS compliant

Dimensions (mm)

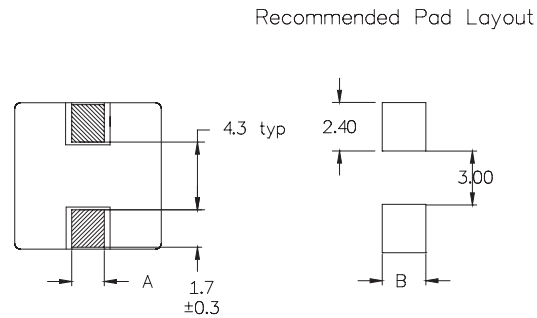

Schematic




Part marking: HCP0805, XXX= Inductance value in uH, R=decimal point,
If no R is present then last character equals number of zeros
wwllly = date code, R = revision level
Tolerances are ±0.25 millimeters unless stated otherwise
PCB tolerances are ±0.1 millimeters unless stated otherwise
DCR measured from point "a" to point "b"
Do not route traces or vias underneath the inductor


Dimensions		
Part Number	A (mm)	B (mm)
HCP0805-R40-R	1.3 ±0.2	1.70
HCP0805-R68-R	1.1 ±0.2	1.50
HCP0805-1R0-R	1.1 ±0.2	1.50
HCP0805-1R5-R	1.1 ±0.2	1.50
HCP0805-2R2-R	0.8 ±0.2	1.20

Packaging information (mm)


Supplied in tape and reel packaging, 700 parts per 13" diameter reel.

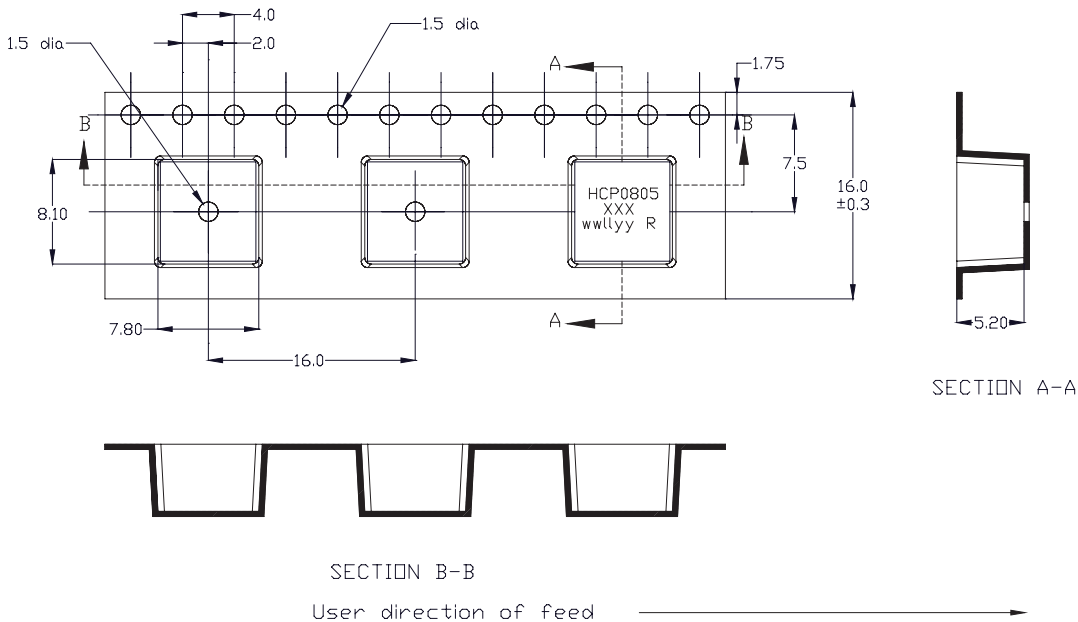

Temperature rise vs. total loss

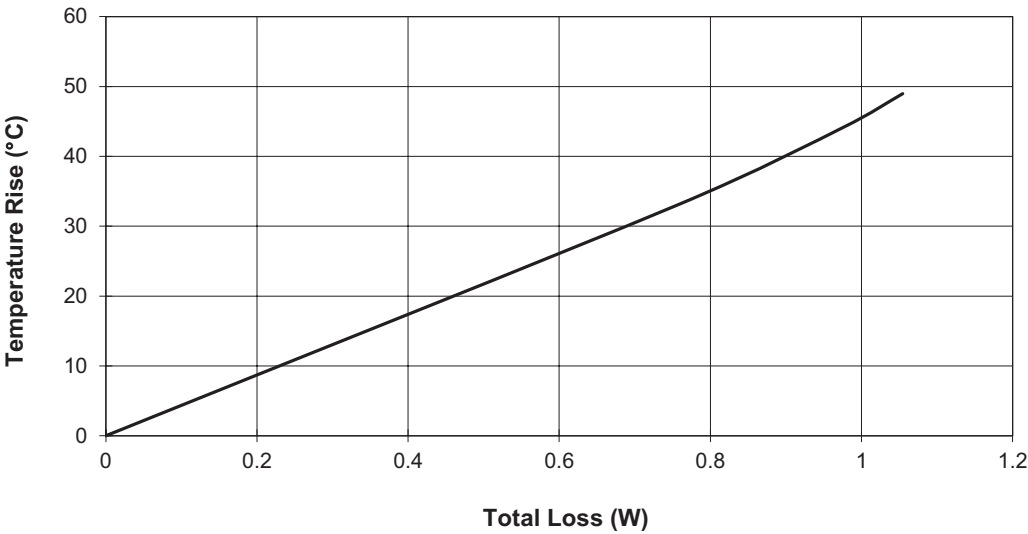


Core loss vs B_{p-p}

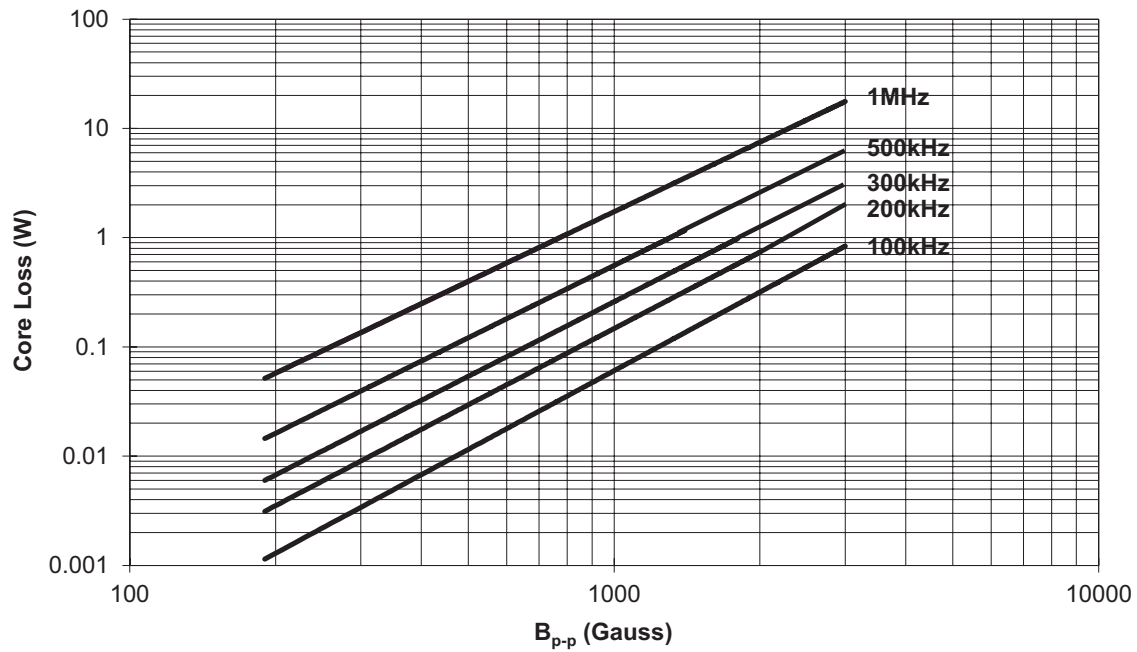

Inductance characteristics

% of OCL vs. % of Isat

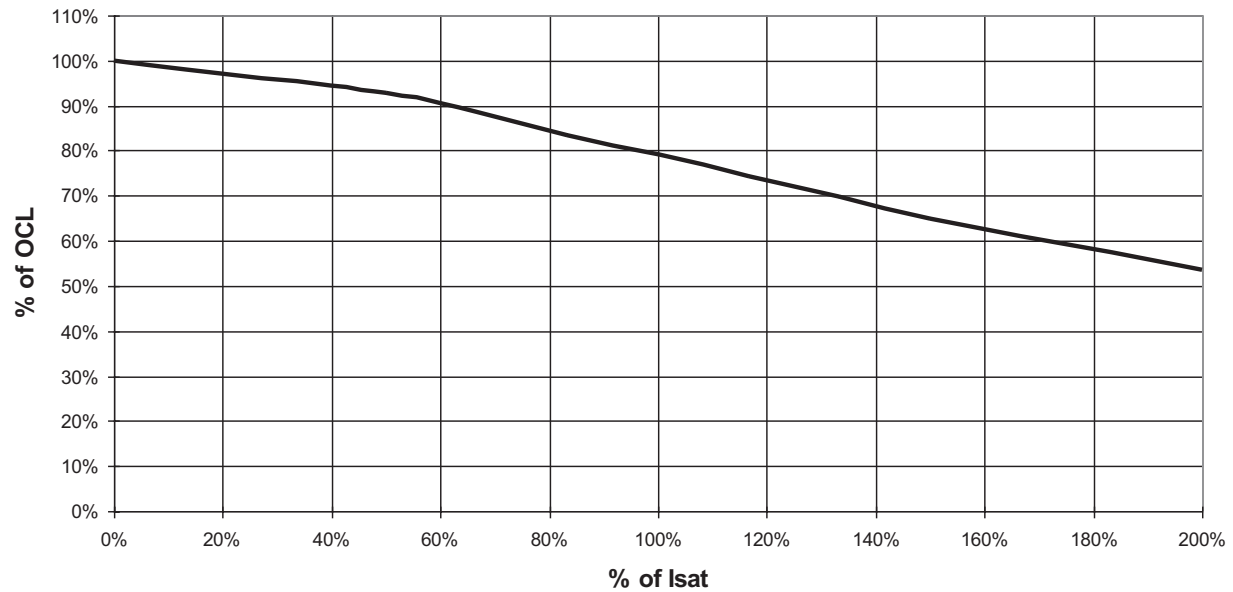

Solder reflow profile

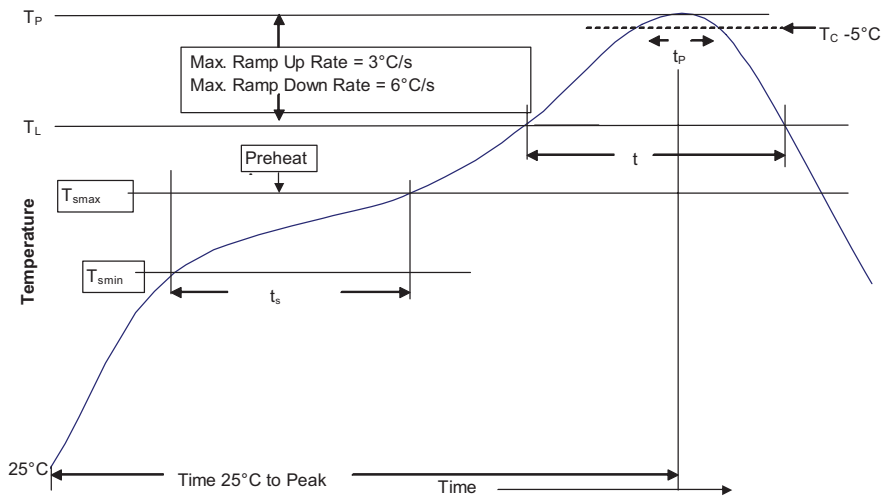


Table 1 - Standard SnPb Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm)	235°C	220°C
≥2.5mm	220°C	220°C

Table 2 - Lead (Pb) Free Solder (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Reference JDEC J-STD-020D

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak		
• Temperature min. (T_{smin})	100°C	150°C
• Temperature max. (T_{smax})	150°C	200°C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 Seconds	60-120 Seconds
Average ramp up rate T_{smax} to T_p	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60-150 Seconds	60-150 Seconds
Peak package body temperature (T_p)*	Table 1	Table 2
Time (t_p)** within 5 °C of the specified classification temperature (T_C)	20 Seconds**	30 Seconds**
Average ramp-down rate (T_p to T_{smax})	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/elx

© 2016 Eaton
All Rights Reserved
Printed in USA
Publication 4349 BU-MC16003
January 2016



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.