

APPLICATIONS

- ✓ Laptop Computers
- ✓ Cellular Phones
- ✓ Digital Cameras
- ✓ Personal Digital Assistant (PDA)

IEC COMPATIBILITY (EN61000-4)

- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 24A, 8/20 μ s - Level 2(Line-Gnd) & Level 3(Line-Line)

FEATURES

- ✓ Unidirectional: 500 Watts Peak Pulse Power per Line ($t_p = 8/20\mu$ s)
- ✓ Bidirectional: 400 Watts Peak Pulse Power per Line ($t_p = 8/20\mu$ s)
- ✓ Unidirectional & Bidirectional Configurations
- ✓ Replacement for MLV (0805)
- ✓ Protects One Power or I/O Port
- ✓ ESD Protection > 40 kilovolts
- ✓ Low Clamping Voltage
- ✓ Available in Multiple Voltage Types Ranging from 3V to 36V
- ✓ RoHS Compliant


MECHANICAL CHARACTERISTICS

- ✓ Molded JEDEC SOD-323 Package
- ✓ Weight 5 milligrams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating (Annealed)
- ✓ Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Tape and Reel Per EIA Standard 481
- ✓ Device Marking: Marking Code & Polarity Band (*Unidirectional Only*)




PIN CONFIGURATIONS

UNIDIRECTIONAL



BIDIRECTIONAL



PSD03 thru PSD36C

DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Unidirectional Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	500	Watts
Bidirectional Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	400	Watts
Operating Temperature	T_L	-55 to 150	°C
Storage Temperature	T_{STG}	-55 to 150	°C


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified							
PART NUMBER (See Notes 1-2)	DEVICE MARKING	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 1A$ V_c VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 μs V_c @ I_{PP}	MAXIMUM LEAKAGE CURRENT @ V_{WM} I_b μA	TYPICAL CAPACITANCE 0V @ 1 MHz C pF
PSD03	A	3.3	4.0	6.5	10.9V @ 43.0A	125	500
PSD03C	G	3.3	4.0	7.0	10.9V @ 39.0A	125	200
PSD05	B	5.0	6.0	9.8	13.5V @ 42.0A	10	350
PSD05C	H	5.0	6.0	9.8	14.5V @ 28.0A	10	175
PSD08	C	8.0	8.5	13.4	16.9V @ 34.0A	10	250
PSD08C	J	8.0	8.5	13.4	18.5V @ 17.0A	10	150
PSD12	D	12.0	13.3	19.0	25.9V @ 21.0A	1	150
PSD12C	K	12.0	13.3	19.0	29.5V @ 14.0A	1	50
PSD15	E	15.0	16.7	24.0	30.0V @ 17.0A	1	100
PSD15C	L	15.0	16.7	24.0	33.0V @ 12.0A	1	40
PSD18	G	18.0	20.0	29.0	40.0V @ 9.0A	1	90
PSD18C	N	18.0	20.0	29.0	40.0V @ 9.0A	1	40
PSD24	F	24.0	26.7	43.0	49.0V @ 12.0A	1	88
PSD24C	M	24.0	26.7	43.0	46.2V @ 9.0A	1	40
PSD36	R	36.0	40.0	60.0	75.0V @ 5.0A	1	75
PSD36C	T	36.0	40.0	60.0	75.0V @ 5.0A	1	35

Note 1: Part numbers with an additional "C" suffix are bidirectional devices, i.e., PSD05C.


Note 2: *Unidirectional Only:* Positive potential is applied from pin 2 to 1 or pin 3 to 4.

GRAPHS


**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

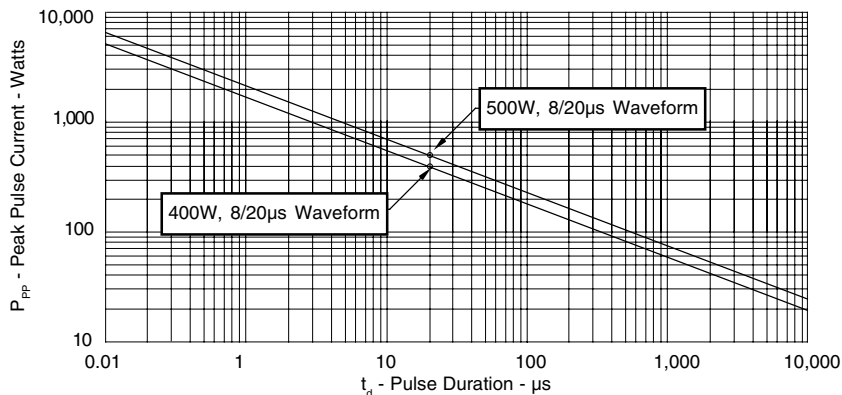


**FIGURE 2
PULSE WAVE FORM**

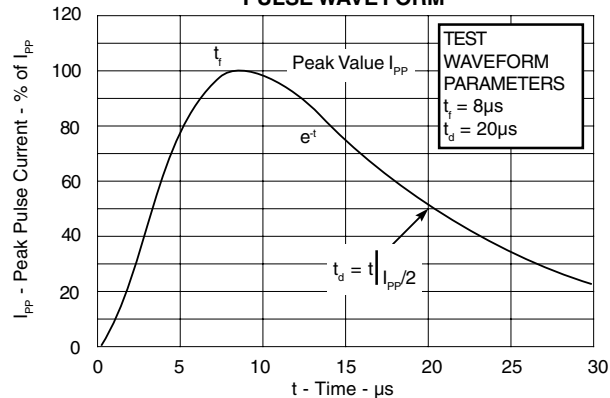


**FIGURE 3
POWER DERATING CURVE**

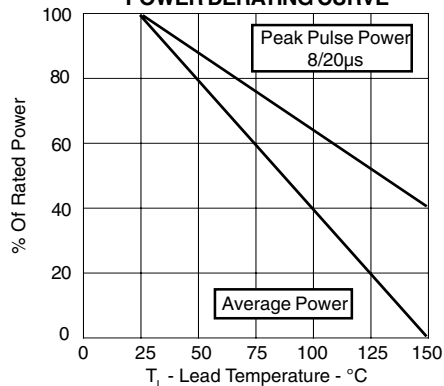

**FIGURE 4
OVERSHOOT & CLAMPING VOLTAGE FOR PSD03**


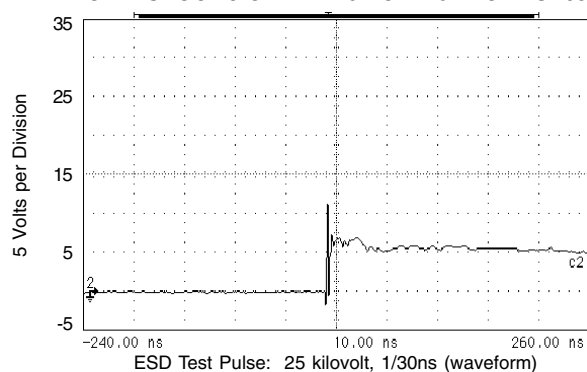


**FIGURE 5
TYPICAL REVERSE VOLTAGE VS CAPACITANCE FOR PSD05**

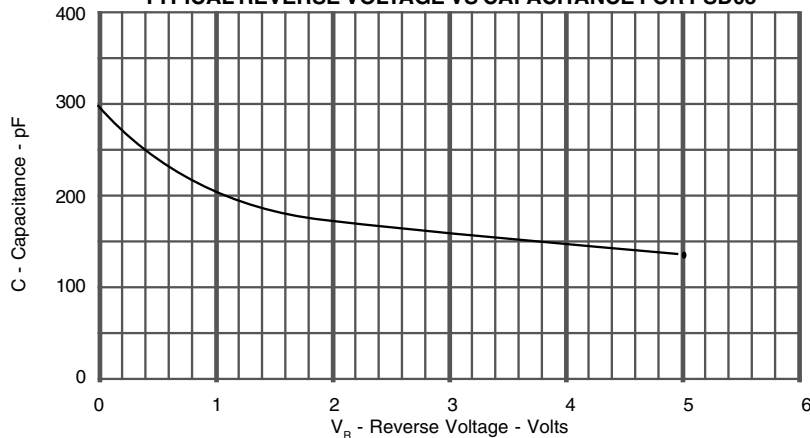


PSD03 thru PSD36C

SOD-323 PACKAGE OUTLINE & DIMENSIONS

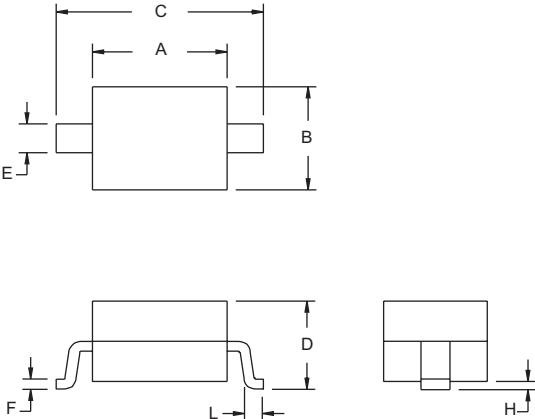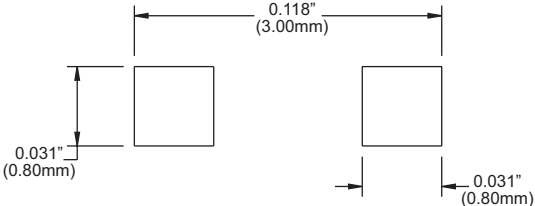PACKAGE OUTLINE 	SOD-323 PACKAGE  PACKAGE DIMENSIONS <table><tr><th rowspan="2">DIM</th><th colspan="2">MILLIMETERS</th><th colspan="2">INCHES</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr><tr><td>A</td><td>1.60</td><td>1.90</td><td>0.063</td><td>0.075</td></tr><tr><td>B</td><td>1.15</td><td>1.45</td><td>0.045</td><td>0.057</td></tr><tr><td>C</td><td>2.39</td><td>2.70</td><td>0.094</td><td>0.106</td></tr><tr><td>D</td><td>0.92</td><td>1.10</td><td>0.033</td><td>0.043</td></tr><tr><td>E</td><td>0.25</td><td>0.40</td><td>0.010</td><td>0.016</td></tr><tr><td>F</td><td>0.10</td><td>0.20</td><td>0.004</td><td>0.008</td></tr><tr><td>H</td><td>-</td><td>0.10</td><td>-</td><td>0.004</td></tr><tr><td>L</td><td>0.20</td><td>-</td><td>0.08</td><td>-</td></tr></table>	DIM	MILLIMETERS		INCHES		MIN	MAX	MIN	MAX	A	1.60	1.90	0.063	0.075	B	1.15	1.45	0.045	0.057	C	2.39	2.70	0.094	0.106	D	0.92	1.10	0.033	0.043	E	0.25	0.40	0.010	0.016	F	0.10	0.20	0.004	0.008	H	-	0.10	-	0.004	L	0.20	-	0.08	-
DIM	MILLIMETERS		INCHES																																															
	MIN	MAX	MIN	MAX																																														
A	1.60	1.90	0.063	0.075																																														
B	1.15	1.45	0.045	0.057																																														
C	2.39	2.70	0.094	0.106																																														
D	0.92	1.10	0.033	0.043																																														
E	0.25	0.40	0.010	0.016																																														
F	0.10	0.20	0.004	0.008																																														
H	-	0.10	-	0.004																																														
L	0.20	-	0.08	-																																														
MOUNTING PAD 	NOTES 1. Controlling Dimensions in Millimeters. 2. Dimensions are exclusive of mold flash and metal burrs. TAPE & REEL ORDERING NOMENCLATURE 1. Surface mount product is taped and reeled in accordance with EIA-481. 2. Suffix-T7 = 7 Inch Reel - 3,000 pieces per 8mm tape, i.e., <i>PSD05C-T7</i>. 3. Suffix -LF = Lead-Free, Pure-Tin Plating, i.e., <i>PSD05C-LF-T7</i>. Outline & Dimensions: Rev 2 - 9/05, 06010																																																	

Tape & Reel Specifications (Dimensions in millimeters)

Reel Dia.	Tape Width	A0	B0	K0	D	E	F	W	P0	P2	P	tmax
178mm (7")	8mm	1.55 ± 0.10	2.90 ± 0.10	1.35 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	3.50 ± 0.05	8.00 ± 0.30	4.00 ± 0.10	2.00 ± 0.05	4.00 ± 0.10	0.25

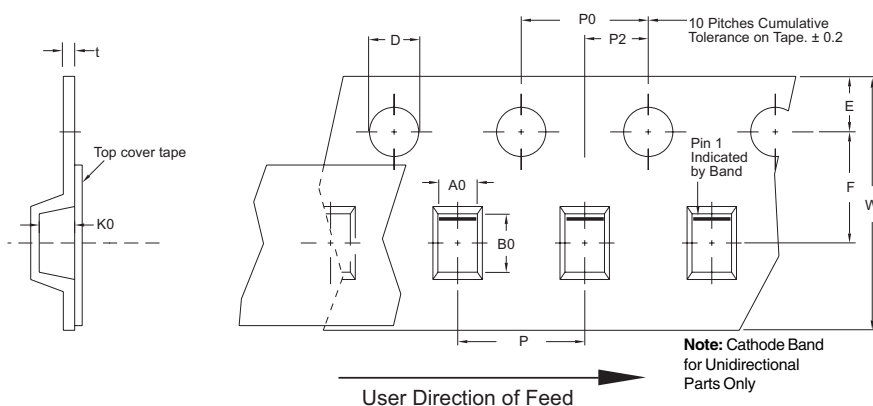

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: sales@protekdevices.com

Web Site: www.protekdevices.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.