



EVERLIGHT

CATALOGUE 2011
OPTOELECTRONIC COMPONENTS

www.everlight.com

EVERLIGHT.

THE SOURCE OF LIGHT.

EVERLIGHT illuminates the way for many of the world's brightest companies. Acclaimed as a premiere global solution provider in the opto-semiconductor industry and held in high regard as a reliable partner for many of the world's leading electronics companies, EVERLIGHT incorporates versatility and creativity to provide customer driven value.

Since its foundation in 1983, EVERLIGHT has been an innovator in the production of LED for home appliances. Today EVERLIGHT brings decades of knowledge to a wide range of applications in the LED market including automotive, backlighting, solid state lighting, infrared products, mobile devices and signage.

From intelligent infrared sensors in mobile devices and backlit dashboards in automobiles to high-precision controls for industrial applications, EVERLIGHT improves the way we live. In addition, with applications for highly efficient indoor and outdoor lighting in offices, homes, landmarks and cities, EVERLIGHT's technology lights up the very spaces and places we enjoy everyday. In other words: EVERLIGHT makes the world brighter, more colorful and enhances quality of life.

For more information, please visit our website :

www.everlight.com

CONTENTS

	Alphanumeric Index		04
	Conditions of RoHS		12
	Application Notice		14
	Technical Data		15
Visible LED	High Power LED		38
	Low Power LED		44
	Flash LED		47
	High Power Flash LED	2016 Package	47
		3333 Package	48
	Low Power Flash LED	Triple Dice	49
		Four Dice	49
	SMD LED	Subminiature LED Lamps (Leadframe)	50
	Surface Mount Chip LEDs (PCB)	Top View LED	52
		Top View 0402 (0.2T~0.5T)	53
	Top View 0603 (0.2T~0.8T)	54	
	Top View 0805	59	
	Top View 1206	61	
	Top View Bi-Color	64	
	Top View Full Color	68	
	Side View (0.2T~1.0T)	70	
	Side View Bi-Color	74	
	Side View Full Color	75	
	Reverse Mount	77	
	Reverse Mount Bi-Color	79	
	Reverse Mount Full Color	80	
	Surface Mount PLCC LED (Reflector)	Top View LED	81
		Top View Bi-Color	82
		Top View White LED	83
		Top View PLCC2	84
		Top View PLCC3	88
		Top View PLCC4	90
		Side View LED	91
Super Flux LED	3 mm		93
	5 mm		94
	Flat		94
LED Lamps	2 mm Tower Type		95
	3 mm Round Type		96
	5 mm Round Type		101
	8 mm Round Type		107
	10 mm Round Type		107
	3 mm Cylindrical		108
	5 mm Cylindrical		108
	5 mm Square		108
	Rectangular		109
	3 mm Assembly LED		112
	5 mm Assembly LED		115
LED Digital Displays	Chip On Board Display	Single Digit Display	117
		Dual Digit Display	120
		Three Digit Display	123
		Four Digit Display	124
	SMD Display	Single Digit Display	126
		Dual Digit Display	128
		Three Digit Display	130
		Four Digit Display	132
	Dot Matrix Display		133
	Light Bar Display		134

Infrared LED, Sensors, Couplers

Infrared LED and Silicon Detector

Infrared Receiver Module

Optic-Fiber Device (Photo Link)

Optical Sensor

Photo Coupler

Emitter	Lamp 3mm	138
	Lamp 5mm	139
	Piranha	142
	Side Look	143
	SMD	144
Photo Diode	DIP	149
	Side Look	150
	SMD	151
Photo Transistor	DIP	153
	Side Look	156
	SMD	158
33KHz	IRM-8xxx Vo-GND-Vcc	Standard Burst 162
36KHz	DIP-Vo-GND-Vcc	Standard Burst 165
		Short Burst 165
	DIP-Vo-Vcc-GND	Standard Burst 166
		Short Burst 166
	IRM-8xxx Vo-GND-Vcc	Standard Burst 167
38KHz	DIP-Vo-GND-Vcc	Standard Burst 168
		Short Burst 168
	DIP-Vo-Vcc-GND	Standard Burst 169
		Short Burst 169
	SMD Top View	Standard Burst 170
	SMD Side View	Standard Burst 171
40KHz	DIP-Vo-GND-Vcc	Standard Burst 171
56KHz	DIP-Vo-GND-Vcc	Standard Burst 172
	DIP-Vo-Vcc-GND	Standard Burst 172
	IRM-8xxx Vo-GND-Vcc	Standard Burst 173
Receiver (PLR) Component		174
Receiver (PLR) Module		176
Transmitter (PLT) Component		180
Transmitter (PLT) Module		182
Ambient Light Sensor	Analog	186
	Digital	190
Proximity Sensor	Digital	190
RGB Color Sensor	Single Color Sensor (Analog)	191
Reflective Sensor		192
Transmissive Sensor		196
Darlington Transistor	4Pin DIP-DC	201
	6Pin DIP-DC	201
	8Pin DIP-DC	202
High Speed	8Pin SOP	202
	8Pin DIP	203
Schmitt Trigger	6Pin DIP	204
Transistor	4Pin DIP-AC	204
	4Pin DIP-DC	205
	4Pin High Isolation	205
	4Pin SOP-AC	206
	4Pin SOP-DC	206
	4Pin SSOP-DC	206
	4Pin/5Pin Long Creepage	207
	6Pin DIP-DC	208
	6Pin DIP-AC	208
	8Pin DIP-DC	209
	8Pin SOP-DC	209
Triac	4Pin SOP	210
	6Pin DIP	211

ALPHANUMERIC INDEX

VISIBLE LED

10-01-C84-YSC-AAS2T2DH-AM	94	1383SURT/S530-A3	105	17-21/R7C-AN2Q1B/3T	59
1003SURD/S530-A3	111	1383SYGD/S530-E2	105	17-21/S2C-AN1P2B/3T	59
1003SYGD/S530-E2	111	1383SYGT/S530-E2	105	17-21/S2C-AP1Q2B/3T	59
1003UYD/S530-A3	111	1383UYD/S530-A3	105	17-21/T1D-ANPHY/3T	59
1006SYGSURW/S530-A3	111	15-11/BHC-AN1P2/2T	61	17-21/T1D-CP2R1TY/3T	59
103SUBD/S400-A4	95	15-11/BHC-ZL2N1QY/2T	61	17-21/T1D-KN2P2HY/3T	59
103SURD/S530-A3	95	15-11/W1D-APQHY/2T	61	17-21/W1D-APQHY/3T	59
103SYGD/S530-E2	95	15-13D/R6GHBHC-A01/2T	68	17-21/Y2C-AN1P2/3T	59
11-21/BHC-AP2R1/2T	61	15-21/B6C-YR1S2B2/2T	62	17-21/Y2C-CN1P2B/3T	59
11-21/BHC-YR1S1/2T	61	15-21/B6C-ZQ1R1N/2T	62	17-21/Y2C-CP2Q2B/3T	59
11-21/G6C-BQ1R2B/2T	61	15-21/BHC-AN1P2/2T	62	17-215/B6C-YP2R2/3T	60
11-21/G6C-FN2P2B/2T	61	15-21/G6C-BK1L2VY/2T	62	17-215/BHC-AN1P2/3T	60
11-21/GHC-YT1U2/2T	61	15-21/G6C-FM1N2B/2T	62	17-215/BHC-BP2Q2M/3T	60
11-21/R6C-AP1Q2LZ/2T	61	15-21/G6C-FP1Q1L/2T	62	17-215/G6C-BM1N2L/3T	60
11-21/R6C-AR2S2B/2T	61	15-21/GHC-R2S2/2T	62	17-215/G6C-FN2P2B/3T	60
11-21/Y2C-CP2Q2B/2T	61	15-21/GHC-YR1S1/2T	62	17-215/R6C-AQ1R2B/3T	60
11-22/R6G6C-A01/2T	64	15-21/R6C-AN1P2/2T	62	17-215/S2C-AQ1R2B/3T	60
11-22/R6G6C-QSANP/2T	64	15-21/R6C-FQ1R1B/2T	62	17-215/S2C-CP2R1B/3T	60
11-22/R6SGAC-A30/2T	64	15-21/S2C-AL2M2VY/2T	62	17-21-GPC-A0L1M2B0E-3T-AM	60
12-11/BHC-ZL1M2QY/2C	70	15-21/S2C-AQ2R2B/2T	62	17-21-R7C-A0N1P2B0C-3T-AM	60
12-21/BHC-AN1P2/2C	70	15-21/S3C-AP1Q2/2T	62	17-21-S3C-6FQ2R2L0E-3T-AM	60
12-21/BHC-ZL1M2RY/2C	70	15-21/T1D-CP1Q2TY/2T	62	17-21-Y2C-A0L1M2V0B-3T-AM	60
12-21/GHC-YR2S2/2C	70	15-21/T7D-JQ2S1PY/2T	62	17-223/BHR7C-C30/3C	74
12-21/R8C-AN1P2B/2D	70	15-21/W1D-APQHY/2T	62	18-225/B6R6C-C01/3T	65
12-21/T3D-AQ2S2M/2C	70	15-21/Y2C-AN1P2/2T	62	18-225/R6G6C-A01/3T	65
12-215/BHC-AN1P2/3C	71	15-21/Y2C-CP1Q2B/2T	62	18-225/S2G6C-A01/3T	65
12-215/BHC-XL1M2HY/3C	71	15-215/G7C-BN1P2B/2T	63	18-225A/R6GHW-B01/3T	65
12-215/G6C-AL2M2B/3C	71	15-215/R6C-AM2P1VY/2T	63	19-117/BHC-YJ2K2TX/3T	54
12-215/G6C-BP1Q2L/3C	71	15-215/R6C-AP1Q1L/2T	63	19-117/BHC-ZL1M2RY/3T	54
12-215/R6C-AR1S1B/3C	71	15-21-G6C-A0N1P2B0E-2T-AM	62	19-117/T1D-AP2Q2QY/3T	54
12-215/T1D-ANPHY/3C	71	15-21-R6C-B0Q1R2B0E-2T-AM	62	19-118/BHC-ZL1M2QY/3T	54
12-215/W1D-ANPHY/3C	71	15-21-S2C-A0N2P2L0B-2T-AM	62	19-123/Y2ST1D-C30/2T	65
12-215/Y2C-BR1S1L/3C	71	15-21-Y2C-A0P1Q2B0E-2T-AM	62	19-137/R6GHBHC-A01/2T	68
12-215/Y2C-CP1Q2B/3C	71	15-22/R6G6C-A32/2T	64	19-21/B6C-AP2Q2M/3T	55
12-215/Y2C-CQ1R1B/3C	71	15-22/R6GHC-A01/2T	64	19-21/BHC-AP1Q2/3T	55
12-21C/BHC-AN1P2/2C	70	1533SYGD/S530-E2/O	111	19-21/BHC-YL1M1RY/3T	55
12-21C/BHC-YL1M2HY/2C	70	16-213/BHC-AN1P2/3T	53	19-21/BHC-ZQ1R2N/3T	55
12-21C/T3D-CP1Q2B12Y/2C	70	16-213/BHC-ZL1M2QY/3T	53	19-21/G6C-AL1M2LY/3T	55
12-21C/W1D-AR1S2/2C	70	16-213/GHC-YR1S1/3T	53	19-21/G6C-FM1N2B/3T	55
12-22/BHR6C-A01/2C	74	16-213/R6C-A2225VZ/3T	53	19-21/G6C-FP1Q1L/3T	55
12-22/G6R8C-A30/2C	74	16-213/T3D-AP1Q2QY/3T	53	19-21/GHC-YN1P2QY/3T	55
12-22/R6GHC-A30/2C	74	16-213/T7D-AQ1R1QY/3T	53	19-21/GPC-FL1M2B/3T	55
12-22/Y2G6C-A30/2C	74	16-216/T3D-AQ1R2TY/3T	53	19-21/R6C-AL2N1VY/3T	55
12-23C/R6GHBHC-A01/2C	75	16-219A/T2D-AR2T1QY/3T	53	19-21/R6C-FP1Q2L/3T	55
12-23C/S2GHBHC-A01/2C	75	16-916/T1D-AP1Q2QY/3T	71	19-21/R7C-AK1L2BY/3T	55
1224SYGC/S530-E2	98	17-11/BHC-AN1P2/3T	59	19-21/R7C-AN2Q1B/3T	55
1224USOC/S530-A3	98	17-21/BHC-AN1P2/3T	59	19-21/R8C-FN2Q1L/3T	55
1224UTC/S400-A6	98	17-21/BHC-AP1Q2/3T	59	19-21/S2C-AL2M2VY/3T	55
1254-10SDRD/S530-A3	99	17-21/BHC-XLMJY/3T	59	19-21/S2C-AQ1R2B/3T	55
1254-10SURD/S530-A3	99	17-21/G6C-AN1P1B/3T	59	19-21/T1D-ANPHY/3T	55
1254-10SURT/S530-A3	99	17-21/G6C-AP1Q1B/3T	59	19-21/T1D-CPQTY/3T	55
1254-10SYGD/S530-E2	99	17-21/G6C-FM1N2B/3T	59	19-21/W1D-ANPHY/3T	55
1254-10SYGT/S530-E2	99	17-21/G6C-FN1P2B/3T	59	19-21/Y2C-AL1M2VY/3T	55
1254-10UYD/S530-A3	99	17-21/G6C-FP1Q1B/3T	59	19-21/Y2C-CP1Q2L/3T	55
1259-7SDRSYGW/S530-A3	99	17-21/GHC-XS1T2M/3T	59	19-213/Y2C-CQ1R2/3T	57
1259-7SURSYGW/S530-A3	99	17-21/GHC-YR1S2/3T	59	19-213/B7C-AQ2S1B2/3T	57
1259-7UYSYGW/S530-A3	99	17-21/GPC-AK0M1B/3T	59	19-213/BHC-AN1P2/3T	57
1383-2SDRD/S530-A3	105	17-21/GVC-AMPB/3T	59	19-213/G6C-AP1Q2/3T	57
1383-2SURD/S530-A3	105	17-21/R6C-AN2Q1B/3T	59	19-213/G6C-BM1N2B/3T	57
1383SDRD/S530-A3	105	17-21/R6C-AP1Q2L/3T	59	19-213/G6C-FN2Q1L/3T	57

19-213/G6W-FN1P1B/3T	57	19-237B/R6GHBHC-C01/2T	69	264-7SYGC/S530-E3	97
19-213/GHC-XS1T1N/3T	57	19-337/R6GHBHC-A01/2T	69	264-7SYGD/S530-E2	97
19-213/GHC-YP1Q2QY/3T	57	204-10SDRD/S530-A3	96	264-7SYGT/S530-E2	97
19-213/GHC-YR1S2/3T	57	204-10SUBC/S400-A4	96	264-7UYC/S400-A9	97
19-213/R6C-AM2P1VY/3T	57	204-10SUGC/S400-A5	96	27-21/BHC-AN1P2/3C	72
19-213/R6C-AN1P2/3T	57	204-10SURC/S400-A8	96	27-21/BHC-AP1Q2/3C	72
19-213/R6C-AN2Q1B/3T	57	204-10SURC/S530-A3	96	27-21/GHC-YR1S2M/3C	72
19-213/R6C-AP1Q2B/3T	57	204-10SURC/S530-A3-L	96	27-21/R6C-AP1Q2B/3C	72
19-213/R6C-AQ1R2B/3T	57	204-10SURD/S530-A3	96	27-21/S2C-FP1Q1L/3C	72
19-213/R8C-FN1P2/3T	57	204-10SURD/S530-A3-L	96	27-21/T1D-ANPHY/3C	72
19-213/S2C-AN1P2B/3T	57	204-10SURT/S530-A3	96	27-21/T1D-CQ1R2NW/3C	72
19-213/S3C-AN2P2B/3T	57	204-10SYGC/S530-E2	96	27-21/T3D-AP2Q2HY/3C	72
19-213/T1D-ANPHY/3T	57	204-10SYGD/S530-E3	96	27-21/W1D-APQHY/3C	72
19-213/Y2C-AP1Q2B/3T	57	204-10SYGT/S530-E2	96	27-21/Y2C-CPQB/3D	72
19-213/Y2C-CN1P2/3T	57	204-10SUC/S400-A9	96	28-21SDRC/S530-A3/TR8	50
19-213/Y2C-CP1Q2L/3T	57	204-10UYC/S400-A9	96	28-21SURC/S530-A2/TR8	50
19-213/Y2C-CQ2R2L/3T	57	204-10UYC/S530-A3	96	28-21UYC/S530-A3/TR8	50
19-213A/T1D-CP2Q2HY/3T	56	204-10UYC/S530-A3-L	96	30-01/B4C-AKNB	93
19-217/B9C-ANQE/3T	56	204-10UYD/S530-A3	96	30-01/G4C-ARTB	93
19-217/BHC-AN1P2/3T	56	204-10UYD/S530-A3-L	96	30-01-B74-S3NC-C6T1U1DH-AM	93
19-217/BHC-XK1L2B11X/3T	56	204-10UYOC/S530-A3	96	30-01-B84-RFC-D4T1U1DH-AM	93
19-217/BHC-YL2M2TY/3T	56	204-10UYT/S530-A3	96	30-01-B84-YSC-A1T1U1DH-AM	93
19-217/G7C-AL1M2B/3T	56	209SDRSYGW/S530-A3	97	31-01/B4C-AKNB	93
19-217/GHC-YR1S2/3T	56	209SRSYGC/S530-A3	97	31-01/T4C-4PRB	93
19-217/R6C-P1Q2/3T	56	209SRSYGW/S530-A3	97	31-01-B14-S3NC-C6T1U1DH-AM	93
19-217/S2C-AL1M2VY/3T	56	209SRSYGW/S530-A3	97	313-2SYGC/S530-E2	101
19-217/S3C-AL2N1VY/3T	56	209UYOSUGC/S530-A3	97	313-2SYGD/S530-E2	101
19-217/T1D-ANPHY/3T	56	22-21/BHC-AN1P2/2C	72	313-2UYD/S530-A3	101
19-217/T1D-JP1Q2QY/3T	56	22-21/GHC-YR1S2/2C	72	32-01/B4C-AJMB	94
19-217/T7D-CS2T2B2/3T	56	22-23/R6GHBHC-A01/2C	75	32-01/G4C-AQSB	94
19-217/W1D-CPQTY/3T	56	22-23C/R6GHBHW-C01/2C	76	32-01/T4C-4PRB	94
19-217/Y5C-AM1N1VY/3T	56	23-21/G6C-AL2N1/2T	77	323-2SURD/S530-A3	101
19-217/Y5C-APQB/3T	56	23-21/GHC-YR2T1/2A	77	323-2SYGD/S530-E2	101
19-217/Y5C-AQ2R2/3T	56	23-21/R6C-AM1N2AY/2A	77	3294-15SUBC/S400-A6	100
19-218/BHC-ZL1M2QY/3T	58	23-21/R8C-AN2Q1B/2T	77	3294-15SUGC/S400-A6	100
19-218/GHC-YR1S2M/3T	58	23-215A/BHC-DN2P2E/5A	78	3294-15SURC/S400-A7	100
19-218/R6C-AL1M2VY/3T	58	23-21B/BHC-AN1P2/2A	77	3294-15UBGC/S400-A6	100
19-218/R6C-FM2P1B7Y/3T	58	23-21B/BHC-ZL1M1Y/2A	77	33-01/B4C-AHKB	93
19-218/T1D-CQ2R2TY/3T	58	23-21B/G6C-AM2P1/2A	77	33-01/G4C-ARTB	93
19-219/T3D-AQ2R2TY/3T	58	23-21B/S2C-AN1P2/2A	77	33-01-C34-YYSC-A5T1U1CH-AM	93
19-219/T7D-AV1W1E/3T	58	23-21B/T1D-ANQHY/2A	77	33-01-C44-RRFC-D1T1U1CH-AM	93
19-219/Y5C-AM1N2VY/3T	58	23-21B/T1D-CP2Q2TY/2A	77	333-2SDRC/S530-A4	102
19-22/G6R6C-A31/2T	66	23-21B/W1D-ANQHY/2A	77	333-2SDRD/S530-A3	102
19-22/R6BHC-B01/2T	66	23-21C/T1D-CP2Q2TY/2A	77	333-2SDRT/S530-A3	102
19-22/R6G6C-A01/2T	66	23-22B/R7G6C-A30/2T	79	333-2SUBC/C470/S400-A6	102
19-22/R6GHC-C02/2T	66	23-22B/S2BHC-C30/2A	79	333-2SUBD/S400-A4	102
19-22/Y2G6C-A14/2T	66	23-22C/S2BHC-B30/2A	79	333-2SUBW/C470/S400-A4	102
19-223/G6S2C-A01/2T	67	23-23B/R6GHBHC-A01/2A	80	333-2SUGC/C525	102
19-223/R6BHC-A05/2T	67	24-21/BHC-AN1P2/2A	78	333-2SUGC/S400-A5	102
19-223/R6G6C-A01/2T	67	24-21/GHC-YR2T1/2A	78	333-2SURC/S400-A8	102
19-223/R7BHC-A30/2T	67	25-21/BHC-APR/2T	78	333-2SURC/S530-A2	102
19-223/R7G6C-A01/2T	67	25-21/GHC-YSU/2A	78	333-2SURD/S530-A3	102
19-223/S2BHC-A01/2T	67	25-21/T1D-ANQHY/2A	78	333-2SURT/S530-A3	102
19-223/S2T1D-C30/2T	67	25-21/W1D-APQHY/2A	78	333-2SYGC/S530-E2	102
19-223/Y2G6C-A01/2T	67	264-7SDRC/S530-A3	97	333-2SYGD/S530-E2	102
19-226/R6BHC-B01/2T	66	264-7SDRD/S530-A3	97	333-2SYGT/S530-E2	102
19-226/R6G7C-B02/2T	66	264-7SUGC/C525	97	333-2SYGW/S530-E2	102
19-226/R6GHC-A03/2T	66	264-7SURC/S400-A8	97	333-2UBC/C430	102
19-237/R6GHBHC-A04/2T	68	264-7SURD/S530-A3	97	333-2UTC/S400-A6	102
19-237A/BHR6GHC-A01/2T	69	264-7SURT/S530-A3	97	333-2UYC/S400-A4	102

ALPHANUMERIC INDEX

VISIBLE LED

333-2UYC/S400-A7	102	423-2ASUGC/S400-A6-P/TR1(A)	108	61-238/LK2C-B50638F6GB2/ET	46
333-2UYC/S530-A3	102	423-2UYC/S530-A6	108	61-238/LK2C-B50638F6GB2/ET	81
333-2UYC/S530-A6	102	45-21/KK2C-S30308BACB41/2T	44	61-238/LK2C-B56706F4GB2/ET	46
333-2UYD/S530-A3	102	45-21/KK2C-S4040AC4CB41/2T	44	61-238/QK2C-B28322FAGB2/ET	46
334-15/T1C1-1VXA	103	45-21/LK2C-B2832AC2CB2/2T	44	61-238/QK2C-B45562FAGB2/ET	46
334-15/T1C1-4VXC	103	45-21/LK2C-B38452C4CB2/2T	44	61-238/QK2C-B50632FAGB2/ET	46
334-15/T1C1-7VXC	103	45-21/LK2C-B45562C4CB2/2T	44	61-238/RSGBB7C-B02/ET	81
334-15/T1C3-7TVA	103	45-21/LK2C-B50634C6CB2/2T	44	61-238UMC/S3085/TR8/LT	81
334-15/T1C5-4PRA	103	45-21/LK2C-B56702C4CB2/2T	44	62-227B/KK2C-N3030N4P3S2Z6/2T	46
334-15/T2C1-1SUB	103	45-21/QK2C-B2832AC2CB2/2T	44	62-227B/KK2C-N4040N4P3S2Z6/2T	46
334-15/T2C1-1UWA	103	45-21/QK2C-B3845AC2CB2/2T	44	62-227B/LK2C-N3030N4P3S2Z6/2T	46
334-15/T2C1-1UWB	103	45-21/QK2C-B45562C4CB2/2T	44	62-227B/LK2C-N4040N4P3S2Z6/2T	46
334-15/T2C1-2UWC	103	45-21/QK2C-B50632C4CB2/2T	44	6324-15SUBC/S400-X10	105
334-15/T2C1-4UWC	103	45-21/QK2C-B56702C4CB41/2T	44	6324-15SURC/S400-A9	105
334-15/T2C1-4UWC/R10	103	45-21/UMC/3235A54/TR8	81	65-11/BHC-AR1S2B2/2T	84
334-15/T2C1-7UWC	103	48-213/BHC-ZM2P1QY/3C	73	65-11/T2C-FV1W2E/2T	84
334-15/T2C2-1TVB	103	48-213/R6C-AM1N2VY/3C	73	65-11/UTC/S933/TR8	84
334-15/T2C2-6TVB	103	48-213/T2D-AQ2R2QY/3C	73	65-21/G6C-AN2Q1/3T	84
334-15/T2C2-6TWB	103	48-213/T3D-AP1Q2TY/3C	73	65-21/Y2C-CJ2L2X/3T	84
334-15/T2C2-7TVA	103	48-213/T7D-AQ1R2QY/3C	73	65-21/Y2SC-AR1S2B/2T	84
334-15/T2C3-1RTB	103	484-10SURT/S530-A3	98	65-21/Y2SC-FR2S1B/2T	84
334-15/T2C3-2RTC	103	484-10UTC/S400-A6	98	65-21-B1C-A1H2K1A1C-2T8-AM	85
334-15/T2C3-4RTB	103	484-10UYT/S530-A3	98	65-21-B3T-A0S1T1A7E-2T8-AM	85
334-15/T2C5-1MQB	103	494-10SURT/S530-A3	98	65-21-G6C-Y2P2R1B7E-2T8-AM	85
334-15/X1C2-1UWA	103	494-10SYGT/S530-E2	98	65-21-R7C-A6Q2S1B0E-2T8-AM	85
334-15/X1C5-6QSA	103	50-215BUMC/3437425/TR8	81	65-21-S2SC-B2S1T1B7E-2T8-AM	85
334-15/X2C1-1UWB	103	50-215UMC/3437555/TR8	91	67-03/BHGH6W-B11/2T	90
334-15/X2C1-4UWA	103	513SURT/S530-A3	109	67-03/RSGHBHC-B06/1T	90
336SURSYGW/S530-A3	101	513SYGD/S530-E2	109	67-11/BHC-FQ2S1F/2T	85
336SYGSYGD/S530-E2	101	514SURT/S530-A3	109	67-11/GHC-AT2V1/2T	85
339-1SURSYGC/S530-A3	104	514SYGD/S530-E2	109	67-11/W1C-ES1T2N/2T	85
339-1SURSYGW/S530-A3	104	514UYD/S530-A3	109	67-11/W1C-FV1W2F/2T	85
339-1UYSYGW/S530-A3	104	519-1SURSYGW/S530-A3	109	67-21/B3C-BN1Q2N/2T	87
339-1UYUBW/S530-A4	104	523-2SDRD/S530-A3	110	67-21/B7C-AS2U1N/2T	87
35-01/B4C-AKNB	94	523-2SURT/S530-A3	110	67-21/BHC-FP1Q2F/2T	87
35-01/T4C-4PRB	94	523-2UYD/S530-A3	110	67-21/G4C-BQ1T2N/2T	87
363-2SURT/S530-A3	107	523SURT/S530-A3	110	67-21/G6C-FN2P2B/2T	87
363-2SYGD/S530-E2	107	523SYGD/S530-E2	110	67-21/GBC-YV2W2N/2T	87
363SYGD/S530-E2	107	523UYD/S530-A3	110	67-21/GHC-AS2U1B17Z/2T	87
38-01-A74-YSC-A2T1U1DH-AM	93	57-11UTC/S827-1/TR8	91	67-21/GHC-BV1/2T	87
38-01-A84-RAC-D4T1U1DH-AM	93	57-21/R6C-AP1Q2B/BF	91	67-21/KK2C-S3030AC2CB2/2T	45
38-01-A84-S3NC-C1S2T2CH-AM	93	57-21-B1C-A1J1K2A1C-BT8-AM	92	67-21/KK2C-S4040AC2CB2/2T	45
383-2SUBC/C470/S400-A6	104	57-21-B5P-A9V1ABBHE-BT8-AM	92	67-21/LK2C-B28322C4CB2/2T	45
383-2SURC/S400-A6	104	57-21-GPSC-U8M1N2A5E-BT8-AM	92	67-21/LK2C-B38454C6CB2/2T	45
383-2SURC/S400-A8	104	57-21SYGC/S530-E3/TR8	91	67-21/LK2C-B45564C6CB2/2T	45
383-2SURC/S530-A3	104	57-21-Y2C-H5S1T1B0E-BT8-AM	92	67-21/LK2C-B50634C6CB2/2T	45
383-2SURC/S530-A6	104	573SURT/S530-A3	110	67-21/LK2C-B56704C6CB2/2T	45
383-2SYGC/S530-E2	104	573SYGD/S530-E2	110	67-21/QK2C-B28322C4CB2/2T	45
383-2SYGD/S530-E2	104	583SURT/S530-A3	108	67-21/QK2C-B38452C4CB2/2T	45
383-2UBC/C470	104	583SYGD/S530-E2	108	67-21/QK2C-B45562C4CB2/2T	45
383-2USOC/S530-A6	104	583UYD/S530-A3	108	67-21/QK2C-B50632C4CB2/2T	45
383-2UYC/S400-A6	104	59-146UTD/TR8	49	67-21/QK2C-B56702C4CB2/2T	45
383-2UYC/S530-A3	104	594SUBC/C470/S400-A4	110	67-21/R6C-AP2R1B/2T	87
393-2SURT/S530-A3	107	594SURT/S530-A3	110	67-21/R6C-FN2Q1BZ/2T	87
393UYD/S530-A3	107	594SYGD/S530-E2	110	67-21/R6C-FR2T1B/2T	87
414-10UYD/S530-A3	108	594UYD/S530-A3	110	67-21/R6C-FS1U1B/2T	87
4204-10SYGC/S530-E4	100	61-238/KK2C-S30306F4GB2/ET	46	67-21/RSC-FT2V1B/2T	87
42-21/BHC-AUW/1T	52	61-238/KK2C-S40408F6GB2/ET	46	67-21/RSC-T1V1/2T	87
42-21A/BHC-ZV1W2N/1T	52	61-238/LK2C-B28322FAGB2/ET	46	67-21/S2C-FQ2R2B/2T	87
42-21A/GHC-YX1Y2N/1T	52	61-238/LK2C-B45568F6GB2/ET	46	67-21/S3C-AS1T1/2T	87

67-21/T2C-YV2W2B22/2A0	87
67-21/T2C-ZV1W2E/2T	87
67-21/T3C-EU1V2M/2A0	87
67-21/Y2C-AP1Q1B/2T	87
67-21/Y2C-AS1T1/2T	87
67-21/Y2C-BR2T1B/2T	87
67-21/YSC-FU1U2B/2T	87
67-21/YSC-FU1V2B/2T	87
67-21-B1C-R3K1M1C6C-2T8-AM	86
67-21-B3T-Q8R1S2M0E-2T8-AM	86
67-21-GHC-Z1T2U2A6C-2T8-AM	86
67-21-R7C-F3K1L1B6A-2T8-AM	86
67-21-S2C-B2K2L2B7A-2T8-AM	86
67-21SUBC/S400-X9/TR8	87
67-21SURC/S530-A7/TR8	87
67-21UBC/C430/TR8	87
67-21UYC/S530-A6/TR8	87
67-22/G3G3C-B45/2T	82
67-22/R6BHC-B07/2T	82
67-22/R6G6C-B09/2T	82
67-22/R6Y2C-B31/2T	82
67-22SURSYGC/S530-A2/TR8	82
67-22UYSYGC/S530-A5/TR8	82
67-23/R6GHBHC-B05/2T	83
67-23/T2C-EY2Z0/2T	83
67-23SUWC/TR8	83
67-23SDRSYGUBC/TR8	83
67-31A/B7C-AT1U2MZ3/2T	88
67-31A/GHC-YY1W2EZ3/2T	88
67-31A/SAC-AW1X2B9Z5/2T	88
67-31E/RSC-AV1W2B9Z5/2T	88
67-31E-GPSC-U8P2R1B7G-2T8-AM89	
67-31E-S3SC-M1U2V2C1G-2T8-AM89	
67-31E-Y9NC-E9V1AAC1G-2T8-AM 89	
67-31EZ-BLT-2AV2ABC2F-2T8-AM 89	
69-23BUMD/TR8	49
7343-2SURC/S400-A9	105
7343-2SURD/S530-A3	105
7343-2SYGD/S530-E3	105
7343-2USRC/S1060	105
7343-2UYC/H2/S400-A9	105
7343-2UYC/S1060	105
7343-2UYC/S400-A9	105
7343-2UYC/S530-A3	105
7344-15SUBC/C470/S400-A6	106
7344-15SUGC/S400-A5	106
7344-15SUGC/S400-X6	106
7383/R2C3-AMQB/P	106
7383USRW/S1089-2	106
91-21SUBC/S400-A4/TR7	50
91-21SUGC/S400-A4/TR7	50
91-21SURC/S530-A6/TR7	50
91-21SYGC/S530-E4/TR7	50
91-21UBC/C430/TR7	50
91-21USRC/S530-A4/TR7	50
93-22SURSYGC/S530-A3/TR8	82
94-22SUBC/S400-A4/S2	92
95-21SDRC/S530-A3/TR10	51
95-21SUBC/S400-A5/TR10	51
95-21SUGC/S400-A4/TR7	51

95-21SYGC/S530-E2/TR7	51
95-21USRD/S357/TR7	51
95-21UYC/S530-A5/TR7	51
A1394B/3SYG/S530-E2	113
A1479-1B/SURSYGW/S530-A3	115
A1844B/4SYG/S530-E2	114
A203B/SUR/S530-A3	115
A203B/SYG/S530-E2	115
A203B/UY/S530-A3	115
A214B/SUR/S530-A3	112
A214B/SYG/S530-E2	112
A214B/UY/S530-A3	112
A253B/SUR/S530-A3	116
A253B/SYG/S530-E2	116
A264B/SUB/S400-A4	112
A264B/SUR/S530-A3	112
A264B/SYG/S530-E2	112
A264B/UY/S530-A3	112
A274B/SYG/S530-E2	112
A2774B/SYG/S530-E2	114
A2784B/2SYGSDRW/S530-A3	114
A694B/2SUR/S530-A3	113
A694B/2SYG/S530-E2	113
A694B/2UY/S530-A3	113
A694B/SURSYG/S530-A3	113
A694B/SYGUY/S530-A3	113
A93B/SUR/S530-A3	116
B1001SDRW/S530-A3	134
B1001SURWB/S530-A3	134
B1001SYGWA/S530-E2	134
B1001USOWA/S530-A4	134
B1010SURD/S530-A3	134
B1010SYGD/S530-E2	134
D305SURWA/S530-A3	120
D306SURWA/S530-A3	120
D425SURWA/S530-A3	120
D425SYGWA/S530-E2	120
D425USOWA/S530-A4	120
D426SURWB/S530-A3	121
D426SYGWA/S530-E2	121
D426USOWA/S530-A3	121
D426UYOWB/S530-A3	121
D511SURWB/S530-A3	121
D512SURWB/S530-A3	121
D512UBWA/C470	121
D515SURWA/S530-A3	122
D525SURWA/S530-A3	122
D525SYGWA/S530-E2	122
D525USOWA/S530-A3	122
D526SURWA/S530-A3	122
EHP-69/GT01C-P01/TR	48
EHP-A09K-BRTT-5670HDBED9K-1T8-AM 43	
EHP-A09K-S5TC-S3000CADA1K-1T8-AM 43	
EHP-A09K-Y8TC-E9000BDAE1K-1T8-AM 43	
EHP-C04/NT01A-P01/TR	47
EHP-C04/NT01H-P01/TR	47
ELCH06/BJ4J6Z10-N0	48
ELSH-E61B1-OLPNM-CB7B8	40
ELSH-E71B1-OLPNM-CB7B8	40
ELSH-E81B3-OLPNM-DB6B8	40

ELSH-E91B3-OLPNM-DB6B8	40
ELSH-F31Y1-OLPNM-AA3A5	40
ELSH-F31Y1-OLPNM-AA4A6	40
ELSH-F41O1-OLPNM-AR3R4	40
ELSH-F41R1-OLPNM-AR5R6	40
ELSH-F41Y1-OLPNM-AA3A5	40
ELSH-F41Y1-OLPNM-AA4A6	40
ELSH-F51O1-OLPNM-AR3R4	40
ELSH-F51R1-OLPNM-AR5R6	40
ELSH-F61M1-OCPHS-C2700	39
ELSH-F61M1-OLPGS-C2700	39
ELSH-F61M1-OLPGS-C3000	39
ELSH-F61O1-OLPNM-AR3R4	40
ELSH-F61R1-OLPNM-AR5R6	40
ELSH-F71G1-OLPNM-CG1G2	40
ELSH-F71G1-OLPNM-CG2G3	40
ELSH-F71M1-OCPGS-C2700	39
ELSH-F71M1-OCPHS-C3000	39
ELSH-F71M1-OCPHS-C3500	39
ELSH-F71M1-OLPGS-C3000	39
ELSH-F71N1-OLPGS-C4000	39
ELSH-F81C1-OLPGS-C5000	39
ELSH-F81C1-OLPGS-C5700	39
ELSH-F81C1-OLPGS-C6500	39
ELSH-F81M1-OCPGS-C3000	39
ELSH-F81M1-OCPGS-C3500	39
ELSH-F81M1-OPVPHS-C2700	39
ELSH-F81M1-OPVPHS-C3000	39
ELSH-F81N1-OLPGS-C4000	39
ELSH-F81N1-OLPGS-C4500	39
ELSH-F81N1-OPVPHS-C4000	39
ELSH-F81R3-OLPNM-BR4R6	40
ELSH-F81Y3-OLPNM-BA3A5	40
ELSH-F91C1-OCPGS-C5000	39
ELSH-F91C1-OLPGS-C5700	39
ELSH-F91C1-OLPGS-C6500	39
ELSH-F91G3-OLPNM-DG1G3	40
ELSH-F91M1-OPVGS-C2700	39
ELSH-F91M1-OPVGS-C3000	39
ELSH-F91M1-OPVGS-C3500	39
ELSH-F91N1-OCPGS-C4000	39
ELSH-F91N1-OCPGS-C4500	39
ELSH-F91R3-OLPNM-BR4R6	40
ELSH-J11C1-OCPGS-C5700	39
ELSH-J11C1-OCPGS-C6500	39
ELSH-J11C1-OPVGS-C5000	39
ELSH-J11G3-OLPNM-DG1G3	40
ELSH-J11N1-OPVGS-C4000	39
ELSH-J11N1-OPVGS-C4500	39
ELSH-J21C1-OPVGS-C5700	39
ELSH-J21C1-OPVGS-C6500	39
ELSH-J21M3-OCPHS-D2700	40
ELSH-J21M3-OCPHS-D3000	40
ELSH-J21M3-OLPGS-D2700	40
ELSH-J21M3-OLPGS-D3000	40
ELSH-J21M3-OLPGS-D3500	40
ELSH-J31M3-OCPGS-D2700	40
ELSH-J31M3-OCPGS-D3000	40
ELSH-J31M3-OCPGS-D3500	40
ELSH-J31N3-OLPGS-D4000	40

ALPHANUMERIC INDEX

VISIBLE LED

ELSH-J41N3-0CPGS-D4000	40	ELSW-J21M3-0CPHS-D3000	42	SF512SURWA/S530-A3/S290	132
ELSH-J41N3-0LPGS-D4500	40	ELSW-J21M3-0LPGS-D2700	42	SF512SYGWA/S530-E2/S290	132
ELSH-J51C3-0LPGS-D5000	40	ELSW-J21M3-0LPGS-D3000	42	SS205SURWA/S530-A3/S290	126
ELSH-J51N3-0CPGS-D4500	40	ELSW-J21M3-0LPGS-D3500	42	SS205SYGWA/S530-E2/S290	126
ELSH-J61C3-0CPGS-D5000	40	ELSW-J31M3-0CPGS-D2700	42	SS205UYOWA/S530-A3/S290	126
ELSH-J61C3-0LPGS-D5700	40	ELSW-J31M3-0CPGS-D3000	42	SS205UYWA/S530-A3/S290	126
ELSH-J61C3-0LPGS-D6500	40	ELSW-J31M3-0CPGS-D3500	42	SS206SURWA/S530-A3/S290	126
ELSH-J71C3-0CPGS-D5700	40	ELSW-J31N3-0LPGS-D4000	42	SS206UYWA/S530-A3/S290	126
ELSH-J71C3-0CPGS-D6500	40	ELSW-J41N3-0CPGS-D4000	42	SS405SURWB/S530-A3/S290	126
ELSH-Q61F1-0LPNM-JF3F8	40	ELSW-J41N3-0LPGS-D4500	42	SS406SURWA/S530-A3/S290	127
ELSH-Q91E1-0LPNM-JD3D8	40	ELSW-J51C3-0LPGS-D5000	42	SS511SURWA/S530-A3/S290	127
ELSH-Q91L1-0LPNM-CB5B6	40	ELSW-J51N3-0CPGS-D4500	42	SS511SYGWA/S530-E2/S290	127
ELSW-E61B1-0LPNM-CB7B8	42	ELSW-J61C3-0CPGS-D5000	42	SS512SURWA/S530-A3/S290	128
ELSW-E71B1-0LPNM-CB7B8	42	ELSW-J61C3-0LPGS-D5700	42	SS512UBWA/C470/S290	128
ELSW-E81B3-0LPNM-DB6B8	42	ELSW-J61C3-0LPGS-D6500	42	ST405SURWA/S530-A3/S290	130
ELSW-E91B3-0LPNM-DB6B8	42	ELSW-J71C3-0CPGS-D5700	42	ST406SURWA/S530-A3/S290	130
ELSW-F41Y1-0LPNM-AA3A5	42	ELSW-J71C3-0CPGS-D6500	42	ST505SYGWA/S530-E2/S290	130
ELSW-F51O1-0LPNM-AR3R4	42	ELYI-K42M5-0LPGS-P3000	43	ST511SYGWA/S530-E2/S290	131
ELSW-F51R1-0LPNM-AR5R6	42	ELYI-K72C5-0LPGS-P5700	43	ST512SURWA/S530-A3/S290	131
ELSW-F61M1-0CPHS-C2700	41	ELYI-K72C5-0LPGS-P6500	43	ST512SYGWA/S530-E2/S290	131
ELSW-F61M1-0LPGS-C2700	41	F415SURWA/S530-A3	124	T315SYGWA/S530-E2	123
ELSW-F61M1-0LPGS-C3000	41	F416SURWA/S530-A3/S685	125	T316SURWA/S530-A3	123
ELSW-F61O1-0LPNM-AR3R4	42	F416SYGWA/S530-E3	125	T316SYGWA/S530-E2	123
ELSW-F61R1-0LPNM-AR5R6	42	F511SURWA/S530-A3	125	T511SURWA/S530-A3	123
ELSW-F71G1-0LPNM-CG1G2	42	F511SYGWA/S530-E2	125	T511SYGWA/S530-E2	123
ELSW-F71G1-0LPNM-CG2G	42	F512SURWA/S530-A3	125	T511UYOWA/S530-A3	123
ELSW-F71M1-0CPGS-C2700	41	F512SYGWA/S530-E2	125	T512SURWA/S530-A3	124
ELSW-F71M1-0CPHS-C3000	41	M2881SURWA/S530-A3	133	T512SYGWA/S530-E2	124
ELSW-F71M1-0CPHS-C3500	41	M2881SYGWA/S530-E2	133	T512UYOWA/S530-A3	124
ELSW-F71M1-0LPGS-C3000	41	M2881UYWA/S530-A3	133		
ELSW-F71N1-0LPGS-C4000	41	M2882SYGWA/S530-E2	133		
ELSW-F81C1-0LPGS-C5700	41	S1006SURWA/S530-A3	118		
ELSW-F81C1-0LPGS-C6500	41	S2325SURWA/S530-A3	118		
ELSW-F81M1-0CPGS-C3000	41	S2326SURWA/S530-A3	118		
ELSW-F81M1-0CPGS-C3500	41	S2326SYGWA/S530-E2	118		
ELSW-F81M1-0VPHS-C2700	41	S2326UBWA/C470	118		
ELSW-F81M1-0VPHS-C3000	41	S2326USOWA/S530-A4	118		
ELSW-F81N1-0LPGS-C4000	41	S315SURWA/S530-A3	117		
ELSW-F81N1-0VPHS-C4000	41	S315SYGWA/S530-E2	117		
ELSW-F81R3-0LPNM-BR4R6	42	S321SURWA/S530-A3	117		
ELSW-F81Y3-0LPNM-BA3A5	42	S321SYGWA/S530-E2	117		
ELSW-F91C1-0CPGS-C5000	41	S321USOWA/S530-A4	117		
ELSW-F91C1-0LPGS-C5700	41	S322SURWA/S530-A3	117		
ELSW-F91C1-0LPGS-C6500	41	S322SYGWA/S530-E2	117		
ELSW-F91G3-0LPNM-DG1G3	42	S322UBWA/C470	117		
ELSW-F91M1-0VPGS-C2700	41	S322USOWA/S530-A4	117		
ELSW-F91M1-0VPGS-C3000	41	S4005SYGWA/S530-E2	119		
ELSW-F91M1-0VPGS-C3500	41	S4005USOWA/S530-A3	119		
ELSW-F91N1-0CPGS-C4000	41	S4006SURWA/S530-A3	119		
ELSW-F91N1-0CPGS-C4500	41	S4006USOWA/S530-A4	119		
ELSW-F91R3-0LPNM-BR4R6	42	S506SYGWA/S530-E2	127		
ELSW-J11C1-0CPGS-C5700	41	SD405SURWA/S530-A3/S290	128		
ELSW-J11C1-0CPGS-C6500	41	SD406SURWA/S530-A4/S290	128		
ELSW-J11C1-0VPGS-C5000	41	SD406SYGWA/S530-E2/S290	128		
ELSW-J11G3-0LPNM-DG1G3	42	SD506SURWA/S530-A4/S290	129		
ELSW-J11N1-0VPGS-C4000	41	SD511SYGWA/S530-E2/S290	129		
ELSW-J11N1-0VPGS-C4500	41	SD512SYGWA/S530-E2/S290	129		
ELSW-J21C1-0VPGS-C5700	41	SF405SURWA/S530-A3/S290	132		
ELSW-J21C1-0VPGS-C6500	41	SF405SYGWA/S530-E2/S290	132		
ELSW-J21M3-0CPHS-D2700	42	SF511SURWA/S530-A3/S290	132		

INFRARED LED, SENSORS, COUPLERS

4N25	208	EL1113-G	207	ELM3052	210
4N26	208	EL1114-G	207	ELM3053	210
4N27	208	EL1116-G	207	ELM3054	210
4N28	208	EL1117-G	207	ELM3062	210
4N29	201	EL1118-G	207	ELM3063	210
4N30	201	EL1119-G	207	ELM3064	210
4N31	201	EL205	209	ELM3082	210
4N32	201	EL206	209	ELM3083	210
4N33	201	EL207	209	ELM3084	210
4N35	208	EL208	209	H11A1	208
4N36	208	EL211	209	H11A2	208
4N37	208	EL212	209	H11A3	208
4N38	208	EL213	209	H11A4	208
6N135	203	EL215	209	H11A5	208
6N136	203	EL216	209	H11AA1	208
6N137	203	EL217	209	H11AA2	208
6N138	203	EL3010	211	H11AA3	208
6N139	203	EL3011	211	H11AA4	208
ALS-PD70-01C/TR7	186	EL3012	211	H11B1	201
ALS-PDIC144-6B	188	EL3021	211	H11B2	201
ALS-PDIC144-6C/L378	188	EL3022	211	H11B255	201
ALS-PDIC15-21B/TR8	186	EL3023	211	H11B3	201
ALS-PDIC15-21C/L230/TR8	186	EL3031	211	H11L1	204
ALS-PDIC17-55C/TR8	187	EL3032	211	HIR11-21C/L11/TR8	144
ALS-PDIC17-77B/TR8	187	EL3033	211	HIR19-21C/L11/TR8	145
ALS-PDIC17-77C/TR8	187	EL3041	211	HIR204	138
ALS-PDIC17-79NB/TR8	190	EL3042	211	HIR204/H0	138
ALS-PDIC243-3C	188	EL3043	211	HIR204C	138
ALS-PT17-51C/L177/TR8	188	EL3051	211	HIR204C/H0	138
ALS-PT19-315C/L177/TR8	189	EL3052	211	HIR234C	138
ALS-PT204-6C/L177	189	EL3053	211	HIR30-01C/S16	142
ALS-PT243-3C/L177	189	EL3061	211	HIR323C	139
APS-12D-1-02/TR8	190	EL3062	211	HIR323C/H0	139
CLS15-22C/L213B/TR8	191	EL3063	211	HIR333/H0	139
CLS15-22C/L213G/TR8	191	EL3081	211	HIR333C/H0	139
CLS15-22C/L213R/TR8	191	EL3082	211	HIR36-01C/S32	142
CNY17-1	208	EL3083	211	HIR38-01C	142
CNY17-2	208	EL354	206	HIR67-21C/L11/TR8	147
CNY17-3	208	EL357N-G	206	HIR7373C	140
CNY17-4	208	EL3H7-G	206	HIR7393C	140
CNY17F-1	208	EL4502	203	HIR83-01B/TR8	147
CNY17F-2	208	EL814	204	HIR8323/C16	141
CNY17F-3	208	EL815	201	HIR89-01C/1R	148
CNY17F-4	208	EL816	205	HIR928-6C-F	143
CNY64	205	EL817	205	IR11-21C/TR8	144
CNY65	205	EL817-G	205	IR12-21C/TR8	144
EL0452	202	EL825	202	IR15-21C/TR8	144
EL0500	202	EL827	209	IR17-21C/TR8	145
EL0501	202	ELD205	209	IR19-21C/TR8	145
EL0600	202	ELD206	209	IR19-315C/TR8	145
EL0601	202	ELD207	209	IR204/H16/L10	138
EL1010-G	207	ELD211	209	IR204/H60	138
EL1012-G	207	ELD213	209	IR204-A	138
EL1013-G	207	ELD217	209	IR204C/H16/L10	138
EL1014-G	207	ELM3022	210	IR204C-A	138
EL1017-G	207	ELM3023	210	IR25-21C/TR8	146
EL1018-G	207	ELM3024	210	IR26-21C/L110/TR8	146
EL1019-G	207	ELM3042	210	IR26-51C/L110/TR8	146
EL1110-G	207	ELM3043	210	IR323	139
EL1112-G	207	ELM3044	210	IR323/H0-A	139

ALPHANUMERIC INDEX

INFRARED LED, SENSORS, COUPLERS

IR333/H0	139	ITR20403	200	PLT132	180
IR333/H0/L10	139	ITR20501	195	PLT133	180
IR333-A	139	ITR20510/TR8	195	PLT133/T	182
IR333C	139	ITR20904	195	PLT133/T1	182
IR333C/H0/L10	139	ITR8010	196	PLT133/T10W	185
IR333C/H2	139	ITR8102	196	PLT133/T2	182
IR383	139	ITR8104	196	PLT133/T5A	183
IR42-21C/TR8	147	ITR8105	197	PLT133/T5P	183
IR533C	140	ITR8307	192	PLT133/T6	183
IR67-21C/TR8	147	ITR8307	192	PLT133/T6A	184
IR7373C	140	ITR8307/F43	192	PLT133/T7	184
IR7393C	140	ITR8307/L24	192	PLT133/T8	184
IR8353-14C	141	ITR8307/L24	192	PLT133/T9	185
IR908-7C-F	143	ITR8307/L24/F43	192	PLT137	181
IR91-21C	148	ITR8402-F-A	197	PLT232/L5	181
IR91-21C/TR10	148	ITR9606-F	197	PT11-21C/L41/TR8	158
IR91-21C/TR7	148	ITR9608-F	198	PT12-21B/TR8	158
IR928-6C-F	143	ITR9702-F	198	PT12-21C/TR8	158
IR95-21C/TR7	148	ITR9707	198	PT1504-6B	155
IR958-8C	143	ITR9803	199	PT15-21B/TR8	158
IR958-8P	143	ITR9809-F/T	199	PT15-21C/TR8	158
IRM-2638T	168	ITR9813	199	PT17-21B/L41/TR8	159
IRM-2640T	171	ITR9904	193	PT17-21C/L41/TR8	159
IRM-2656T	172	ITR9908	193	PT19-21B/L41/TR8	159
IRM-3636M	165	ITR9909	193	PT19-21C/L41/TR8	159
IRM-3636M3	165	MCT2E	208	PT204-6B	153
IRM-3636T	165	PD15-21B/TR8	151	PT204-6C	153
IRM-3638M	168	PD15-22B/TR8	151	PT2559B/L2/H2-F	157
IRM-3638M2	168	PD204-6B	149	PT2559B/L2-F	157
IRM-3638M3	168	PD204-6C/L3	149	PT2559B-F	157
IRM-3640M2	171	PD333-3B/H0/L2	149	PT26-21B/TR8	159
IRM-3640T	171	PD333-3C/H0/L2	149	PT26-21C/TR8	159
IRM-3656M3	172	PD42-21B/TR8	151	PT26-51B/TR8	160
IRM-3656T	172	PD42-21C/TR8	151	PT333-3B	154
IRM-3736M	166	PD438B	150	PT333-3C	153
IRM-3736M3	166	PD438B/L1	150	PT334-6B	154
IRM-3738M	169	PD438B/S46	150	PT334-6C	154
IRM-3738T	169	PD438C	150	PT42-21B/TR8	160
IRM-3756M3	172	PD438C/S46	150	PT534-6B	155
IRM-8601K-1	162	PD638B	150	PT5529B/L2/H2-F	157
IRM-8602K-1	162	PD70-01B/TR10	152	PT5529B/L2-F	157
IRM-8602K-5	173	PD70-01B/TR7	152	PT67-21B/C14/TR8	160
IRM-8608K-1	163	PD70-01C/TR10	152	PT67-21C/L41/TR8	161
IRM-8751K-1	163	PD70-01C/TR7	152	PT908-7B-F	156
IRM-8751K-2	167	PD95-21B/TR10	152	PT908-7C-F	156
IRM-8752K-1	164	PLR135	174	PT91-21B	161
IRM-8752K-2	167	PLR135/T	176	PT91-21B/TR10	161
IRM-8752K-5	173	PLR135/T1	176	PT91-21B/TR7	161
IRM-8753K-1	164	PLR135/T10	179	PT91-21B/TR9	161
IRM-8753K-2	167	PLR135/T2	176	PT91-21C	161
IRM-8755K-1	164	PLR135/T5A	177	PT91-21C/TR10	161
IRM-8755K-2	167	PLR135/T5P	177	PT91-21C/TR7	161
IRM-H238T/TR2	170	PLR135/T6	177	PT928-6B-F	156
IRM-H638T/TR2	170	PLR135/T7	178	PT928-6C-F	156
IRM-V538T/TR1	171	PLR135/T8	178	PT958-8C	156
ITR20001/T	194	PLR135/T9	179	RM-3638L	168
ITR20002	194	PLR137	174	SIR12-21C/TR8	144
ITR20004	194	PLR155	174	SIR19-21C/TR8	145
ITR20005-F	200	PLR233	175	SIR19-315/TR8	145
ITR20402	200	PLR253	175	SIR204-A	138

SIR204C	138
SIR234	138
SIR323-5	139
SIR333-A	139
SIR383C	139
SIR67-21C/TR8	147
SIR928-6C-F	143
TIL111	208
TIL113	201
TIL117	208

CONDITIONS OF RoHS

From July 1st, 2006, RoHS requires that all electrical equipment should not contain lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBBs) or poly brominated diphenyl ethers (PBDEs), and the elements are restricted to certain amount (such as mercury in a wound lighting tube <5 mg, lead in CRT glass, soldering tin, etc.). Before the date every member of European Union must obey of environment on chemical regulation.



- According to RoHS part, the norm of restrict and limit used substance adopted by EVERLIGHT.

Name	Description	Criteria
Cadmium	Cadmium and its compounds must not be present in parts, components, materials or products. Cadmium and its compounds must not used as stabilizers, coloring agent or as a surface coating treatment in parts, components, materials or products.	< 5 ppm (Plastics) < 75 ppm (Metals)
Lead restrictions	Lead and/or lead compounds shall not be present in hardware components or parts, however, except solder, electrical components and interconnect materials. Lead carbonates and sulfates must not be used in any paint applied to parts, component, or products.	< 100 ppm (Plastics) < 1000 ppm (Others)
Mercury restrictions	Mercury must not be contained in any part, material, components or product, including, but not limited to switches, relays or electrical contacts. This restriction does not apply to lamps with less than 10 mg if mercury.	< 5 ppm
Hexavalent chromium (chromium VI) and hexavalent chromium compounds	Hexavalent chromium (chromium VI) and hexavalent chromium compounds must not be present in parts, components, materials or products.	< 2 ppm
Polybrominated Biphenyls (PBBs)	Plastics parts, pomponents, materials and products must not contain Polybrominated Biphenyls as flame retardants, specific PBBs, but are not limited to those listed in attachment item.	< 5 ppm
Polybrominated Diphenyl Ethers (PBDEs)	Plastic parts, components, materials and products must not contain Polybrominated Biphenyl Ethers, known as flame retardants, specific PBBEs, including, but are not limited to, those listed in attachment item.	< 5 ppm



Compliant with the following condition :

- RoHS for SGS report.

Div	Product P/N & Type	Category	RoHS & SGS report file
Visible Product Group	High Power LED	High Power LED	ELSH, ELSW, ELYI Series
	SMD For Lead Frame Type	SMD A	SMD A TYPE
	SMD For PCB Type	SMD B	SMD B TYPE
	SMD For Reflector Type	SMD C	SMD C TYPE
	Lead Lamp Super Bright Lamp LED	Lamp	Lamp Lead Frame – Iron
	Super Bright Lamp LED Outdoor Application Super Oval Type	Lamp	Lamp Lead Frame – Copper
	Super Flux LED (Power LED)	Lamp	Super Flux LED (Power LED) Series
	LED Assembly Lamp Injection-Assembly	Array	Array Series
	Digit Display Dot Matrix Display	Display	Display Series
	SMD Display	SMD-Display	SMD-Display
Infrared Product Group	Lamp Infrared Emitting Diode Lamp Photo Transistor Lamp Photo Diode	IR, PT, PD, 2PT	Lamp Series
	Side Looking Phototransistor Side Looking Dual Phototransistor Side Looking Infrared Emitting Diode	IR, PT, PD, 2PT	Side Looking Series
	SMD For Lead Frame Type	IR/PT/PD	SMD A TYPE
	SMD For PCB Type	IR/PT/PD	SMD B TYPE
	SMD For Reflector Type	IR/PT/PD	SMD C TYPE
	Transmissive ITR without Line	ITR	Transmissive ITR without Line Series
	Reflective ITR	ITR	ITR8307
	IRM SMD Type	IRM	IRM-2XXX, 3XXX Series
Integrated Circuit Application	EL-81X Series	Photo Coupler	EL-817
	PLT Series	Photo Link	PLT Series
Communication Product Group	PLR Series	Photo Link	PLR Series
	Lamp Ambient Light Sensor SMD Ambient Light Sensor	ALS	ALS Lamp Series ALS SMD Series

APPLICATION NOTICE

Since we are continuously improving all of our products, the information listed in this Catalogue, which includes specifications, characteristics, data, materials used, structure, etc., are subject to change without prior notice. It is necessary that you request the newest specification sheet from Everlight when you place any inquiry or purchase order.

Please carefully read the specification sheet, and confirm your acceptance of the content. Everlight Electronics does not accept any liabilities for damages occurred due to the customer's lack of confirming the newest product specification.

It is important to strictly follow the maximum limit and other important instructions listed on the specifications sheet when using Everlight's products. The following is a list of special notes for products used in specific applications. It is recommended that customers read the instructions carefully before installing the products. Again, Everlight does not accept any liabilities for any improper use of Everlight's product or failure to follow the instructions listed herein:

Special Instruction:

1. Products listed in this Catalogue are designed primarily for the application listed below:
A : Calculators
B : Measurement equipment
C : AV machines
D : QA machines
E : Operating machines
F : Consumer electronics
G : Telecommunications

While products meet the application listed above, additional attention is required when products are to be utilized in the instruments listed under Special Instruction Notes 2 and 3.

2. When high reliability and safety concerns are required, it is very important that the design be made to focus on safety and long term reliability. Special care should be given to assure that Everlight's products integrate and function properly with all other parts of the instrument. Instruments fall into these categories include:

- A : Instruments attached to transportation tools
(aircraft, train, automobile)
- B : Traffic signs
- C : Gas leaking detectors and gas shutters
- D : Fire detectors
- E : Other safety detectors

3. When extremely high reliability and safety concerns are required, it is necessary that you contact Everlight for additional information before use. Instruments fall into these categories include:

- A : Aerospace instruments
- B : Telecommunication tools (main line)
- C : Nuclear weapon controls
- D : Medical instruments

4. Should you have any additional questions, please contact Everlight for details.

本資料所記載之製品的規格、特性、DATA、使用原料、構造...等，有時為了改良製品，無法事前通知，而逕行與予變更。因此請務必使用最新的規格書，並請針對內容加以確認。若因未確認規格書，導致使用次製品之機器或其他應用產品發生瑕疵時，敝公司將不負此責任。

使用本資料所記載之製品時，請遵守規格書所記載之絕對最大定格，使用上之注意事項，以及下列之注意點，若因不遵守規格書所記載之絕對最大定格，使用上之注意事項，以及下述之注意點，而導致發生損害問題時，敝公司將不負此責任。

注意項目：

1. 本資料所記載之製品，原則上是為了下述之用途而製造出來的產品
A: 電算機
B: QA機器
C: 通信機器
D: 計測機器
E: 工作機器
F: AV機器
G: 家電製品

若雖合乎上述用途，但是屬於下述2或3所記載之機器時，則需遵守個別產品之使用注意事項。

2. 若本資料所記載之製品用於下述講求高信賴性與安全性之用途時，因牽涉到機能與精度方面，為了維持這類機器的信賴性與安全性，請務必注重安全設計與長期性設計，並且需考慮整體機構間的關係，依機器整體之安全設計來使用。
A: 運送機器 (飛機、火車、汽車) 與控制安全性等相關之產品
B: 交通信號機
C: 瓦斯漏氣檢測關閉機
D: 防災裝置
E: 各種安全裝置
3. 若本資料所記載之製品用於下述講求高信賴性與安全性之用途時，因牽涉到機能與精度方面，請事先與敝公司聯絡。
A: 太空機器 (航太儀器)
B: 通信機器 (幹線)
C: 原子彈控制機器
D: 醫療機器
4. 涉及上述注意事項之任何一項時，如有疑問，請和敝公司業務人員聯絡。

TECHNICAL DATA

HIGH POWER LED (SHUEN 炫, SHWO 爍, YI 熠 SERIES) CIE BINNING RANKS

White Color

Cool-White Bin Coordinates

5000K				
Bin	50K-1	50K-2	50K-3	50K-4
Reference Range	4745~5000K	5000~5310K	4745~5000K	5000~5310K
CIE X	0.346	0.338	0.337	0.345
	0.345	0.337	0.337	0.344
	0.353	0.345	0.344	0.352
	0.355	0.346	0.345	0.353
CIE Y	0.369	0.362	0.349	0.356
	0.356	0.349	0.337	0.343
	0.362	0.356	0.343	0.349
	0.376	0.369	0.356	0.362

5700K				
Bin	57K-1	57K-2	57K-3	57K-4
Reference Range	5310~5700K	5700~6020K	5700~6020K	5310~5700K
CIE X	0.329	0.321	0.321	0.329
	0.329	0.321	0.322	0.329
	0.337	0.329	0.329	0.337
	0.338	0.329	0.329	0.337
CIE Y	0.354	0.346	0.335	0.342
	0.342	0.335	0.324	0.331
	0.349	0.342	0.331	0.337
	0.362	0.354	0.342	0.349

6500K				
Bin	65K-1	65K-2	65K-3	65K-4
Reference Range	6020~6500K	6500~7050K	6500~7050K	6020~6500K
CIE X	0.312	0.303	0.305	0.313
	0.313	0.305	0.307	0.314
	0.321	0.313	0.314	0.322
	0.321	0.312	0.313	0.321
CIE Y	0.339	0.330	0.321	0.329
	0.329	0.321	0.311	0.319
	0.337	0.329	0.319	0.326
	0.348	0.339	0.329	0.337

Natural-White Bin Coordinates

4000K				
Bin	40K-1	40K-2	40K-3	40K-4
Reference Range	3710~4000K	4000~4260K	4000~4260K	3710~4000K
CIE X	0.387	0.374	0.370	0.383
	0.383	0.370	0.367	0.378
	0.395	0.383	0.378	0.390
	0.401	0.387	0.383	0.395
CIE Y	0.396	0.387	0.373	0.380
	0.380	0.373	0.358	0.365
	0.388	0.380	0.365	0.372
	0.404	0.396	0.380	0.388

4500K				
Bin	45K-1	45K-2	45K-3	45K-4
Reference Range	4260~4500K	4500~4745K	4500~4745K	4260~4500K
CIE X	0.364	0.355	0.353	0.362
	0.362	0.353	0.351	0.359
	0.370	0.362	0.359	0.367
	0.374	0.364	0.362	0.370
CIE Y	0.381	0.374	0.360	0.366
	0.366	0.360	0.347	0.352
	0.373	0.366	0.352	0.358
	0.387	0.381	0.366	0.373

Warm-White Bin Coordinates


2700K				
Bin	27K-1	27K-2	27K-3	27K-4
Reference Range	2580~2700K	2700~2870K	2700~2870K	2580~2700K
CIE X	0.469	0.456	0.447	0.459
	0.459	0.447	0.437	0.448
	0.470	0.459	0.448	0.459
	0.481	0.469	0.459	0.470
CIE Y	0.429	0.426	0.408	0.410
	0.410	0.408	0.389	0.392
	0.413	0.410	0.392	0.394
	0.432	0.429	0.410	0.413

3000K				
Bin	30K-1	30K-2	30K-3	30K-4
Reference Range	2870~3000K	3000~3220K	3000~3220K	2870~3000K
CIE X	0.443	0.430	0.422	0.435
	0.435	0.422	0.415	0.426
	0.447	0.435	0.426	0.437
	0.456	0.443	0.435	0.447
CIE Y	0.421	0.417	0.399	0.403
	0.403	0.399	0.381	0.385
	0.408	0.403	0.385	0.389
	0.426	0.421	0.403	0.408

3500K				
Bin	35K-1	35K-2	35K-3	35K-4
Reference Range	3220~3500K	3500~3710K	3500~3710K	3220~3500K
CIE X	0.415	0.400	0.394	0.408
	0.408	0.394	0.389	0.402
	0.422	0.408	0.402	0.415
	0.430	0.415	0.408	0.422
CIE Y	0.409	0.402	0.385	0.392
	0.392	0.385	0.369	0.375
	0.399	0.392	0.375	0.381
	0.417	0.409	0.392	0.399

White Bin Structure

White Color SHUEN Series

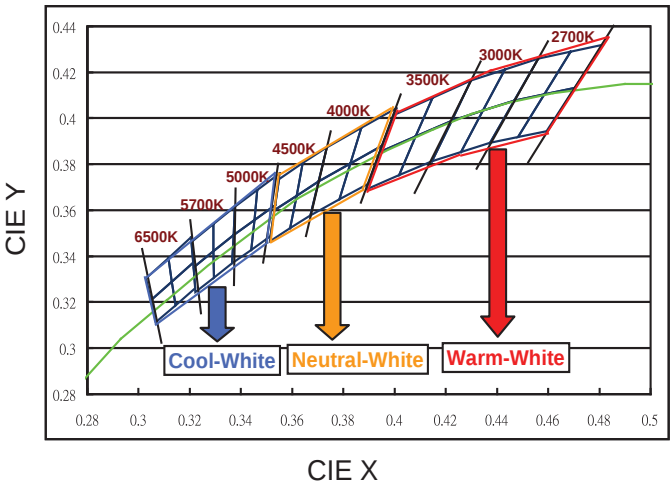

Chromaticity specification defined by ANSI

TECHNICAL DATA

HIGH POWER LED (SHUEN 炫, SHWO 爍, YI 熠 SERIES) BRIGHTNESS BINNING RANKS

Brightness (lm)
Luminous Flux Bins

Group	Binning	Minimum Photometric Flux (lm)	Maximum Photometric Flux (lm)
E	1	4	5
	2	5	6
	3	6	8
	4	8	10
	5	10	13
	6	13	17
	7	17	20
	8	20	23
	9	23	27
F	1	27	33
	2	33	39
	3	39	45
	4	45	52
	5	52	60
	6	60	70
	7	70	80
	8	80	90
	9	90	100
J	1	100	110
	2	110	120
	3	120	130
	4	130	140
	5	140	150
	6	150	160
	7	160	180
	8	180	200
	9	200	225
K	1	225	250
	2	250	275
	3	275	300
	4	300	325
	5	325	350
	6	350	375
	7	375	400
	8	400	425
	9	425	450
N	1	450	475
	2	475	500
	3	500	525
	4	525	550

Wavelength (nm)

Group	Binning	Minimum Dominant	Maximum Dominant
		Wavelength (nm)	Wavelength (nm)
B Blue/Royal-Blue	1	430	435
	2	435	440
	3	440	445
	4	445	450
	5	450	455
	6	455	460
	7	460	465
	8	465	470
G Green	1	520	525
	2	525	530
	3	530	535
	4	535	540
	5	540	545
	6	545	550
A Amber	1	580	582.5
	2	582	.5 585
	3	585	587.5
	4	587	.5 590
	5	590	592.5
	6	592	.5 595
R Red	3	610	615
	4	615	620
	5	620	625
	6	625	630
	7	630	635
D Deep-Red	1	635	640
	2	640	645
	3	645	650
	4	650	655
	5	655	660
	6	660	665
	7	665	670
	8	670	675
F Far-Red	1	700	710
	2	710	715
	3	715	720
	4	720	725
	5	725	730
	6	730	735
	7	735	740
	8	740	745

HIGH POWER LED (SHUEN 炫, SHWO 爍, YI 熠 SERIES) FORWARD VOLTAGE BINNING RANKS

Shuen & Shwo Forward Voltage Bins

Group Name	Bins
A	U1+U2+U3
B	U2+U3+U4
C	V1+V2+V3
D	V2+V3+V4
E	V3+V4+V5
F	V1+V2
G	V1

Group Name	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
U1	1.75	2.05
U2	2.05	2.35
U3	2.35	2.65
U4	2.65	2.95
V1	2.95	3.25
V2	3.25	3.55
V3	3.55	3.85
V4	3.85	4.15
V5	4.15	4.45

Yi (DC-5W)

Group Name	Bins
N	O4+O5+O6
O	O5+O6+O7
P	O4+O5+O6+O7
Q	O7+R1+R2
R	R1+R2+R3
S	R2+R3
T	R2+R3+R4

Bin	Minimum Forward Voltage (V)	Maximum Forward Voltage (V)
O1	4.5	5.0
O2	5.0	5.5
O3	5.5	6.0
O4	6.0	6.5
O5	6.5	7.0
O6	7.0	7.5
O7	7.5	8.0
R1	8.0	9.0
R2	9.0	10.0
R3	10.0	11.0
R4	11.0	12.0

TECHNICAL DATA

HIGH POWER LED (HV - HIGH VOLTAGE SERIES) FORWARD VOLTAGE BINNING RANKS

HV (1W)

Forward Voltage Bins For 110V

Group Name	Bins
A	A3+A4
B	A4+A5
C	A5+A6
D	A3+A4+A5
E	A4+A5+A6
F	A3+A4+A5+A6

Bin	Production Line	
	Minimum Voltage (V)	Maximum Voltage (V)
A1	43	45
A2	45	47
A3	47	49
A4	49	51
A5	51	53
A6	53	55
A7	55	57
A8	57	59
A9	59	61

HV (2W)

Forward Voltage Bins For 110V

Group Name	Bins
A	B3+B4
B	B4+B5
C	B5+B6
D	B3+B4+B5
E	B4+B5+B6
F	B3+B4+B5+B6

Bin	Production Line	
	Minimum Voltage (V)	Maximum Voltage (V)
B1	87	91
B2	91	95
B3	95	99
B4	99	103
B5	103	107
B6	107	111
B7	111	115
B8	115	119
B9	119	123

HV (4W)

Forward Voltage Bins For 110V

Group Name	Bins
A	B3+B4
B	B4+B5
C	B5+B6
D	B3+B4+B5
E	B4+B5+B6
F	B3+B4+B5+B6

Bin	Production Line	
	Minimum Voltage (V)	Maximum Voltage (V)
B1	87	91
B2	91	95
B3	95	99
B4	99	103
B5	103	107
B6	107	111
B7	111	115
B8	115	119
B9	119	123

Forward Voltage Bins For 220V

Group Name	Bins
H	C6+C7+C8
I	C7+C8+C9
J	C4+C5+C6+C7
K	C5+C6+C7+C8
L	C6+C7+C8+C9
M	C4+C5+C6+C7+C8
N	C5+C6+C7+C8+C9
O	C4+C5+C6+C7+C8+C9

Bin	Production Line	
	Minimum Voltage (V)	Maximum Voltage (V)
C1	175	180
C2	180	185
C3	185	190
C4	190	195
C5	195	200
C6	200	205
C7	205	210
C8	210	215
C9	215	220
D1	220	225
D2	225	230
D3	230	235
D4	235	240

HIGH POWER LED (EHP-A09K) BINNING RANKS

Color Bins

Group	Bin	Minimum Dominant Wavelength (nm)	Maximum Dominant Wavelength (nm)	Condition
Red	1	616	619	$I_F = 150\text{mA}$
	2	619	622	
	3	622	625	
	4	625	628	
Yellow	1	583	586	
	2	586	589	
	3	589	592	
	4	592	595	
Green	1	516	519	
	2	519	522	
	3	522	525	
	4	525	528	
Blue	1	448	451	
	2	451	454	
	3	454	457	
	4	457	460	
	5	460	464	
	6	464	467	

Bin Range of Forward Voltage

Group	Min.	Max.	Unit	Condition
1	1.70	1.85	V	$I_F = 150\text{mA}$
2	1.85	2.00		
3	2.00	2.15		
4	2.15	2.30		
5	2.30	2.45		
6	2.45	2.60		
7	2.60	2.75		
8	2.75	2.90		
9	2.90	3.05		
10	3.05	3.20		
11	3.20	3.35		
12	3.35	3.50		
13	3.50	3.65		
14	3.65	3.80		
15	3.80	3.95		
16	3.95	4.10		
17	4.10	4.25		

Bin Code of Luminous Intensity

Group	Min.	Max.	Unit	Condition
V2	900	1120	V	$I_F = 150\text{mA}$
AA	1120	1400		
AB	1400	1800		
BA	1800	2240		
BB	2240	2800		
CA	2800	3550		
CB	3550	4500		
DA	4500	5600		
DB	5600	7100		
EA	7100	9000		

Note:

1. The standard shipping format for serial types includes a family bin of 3 individual brightness bins. Individual brightness bins cannot be ordered.
2. Only one bin will be shipped on each reel (there will be no mixing of two bins on each reel).

Cool White & Warm White Bin Code of Luminous Intensity

Group	Min.	Max.	Unit	Condition
CB	3550	4500	mcd	$I_F = 150\text{mA}$
DA	4500	5600		
DB	5600	7100		
EA	7100	9000		

Note:

1. The standard shipping format for serial types includes a family bin of 3 individual brightness bins. Individual brightness bins cannot be ordered.
2. Only one bin will be shipped on each reel (there will be no mixing of two bin on each reel).

TECHNICAL DATA

HIGH POWER LED (EHP-A09K) CIE BINNING RANKS

Cool White (Production Spec)

4500~5000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
U4	0.364	0.383	U7	0.344	0.344	I _F = 150mA
	0.367	0.400		0.343	0.331	
	0.348	0.385		0.357	0.343	
	0.347	0.372		0.360	0.357	
U5	0.364	0.383	U8	0.342	0.320	
	0.362	0.372		0.343	0.331	
	0.346	0.359		0.357	0.343	
	0.347	0.372		0.355	0.330	
U6	0.362	0.372	U9	0.342	0.320	
	0.360	0.357		0.355	0.330	
	0.344	0.344		0.353	0.315	
	0.346	0.359		0.341	0.305	

4500~5000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
V4	0.329	0.357	V7	0.329	0.331	I _F = 150mA
	0.329	0.369		0.344	0.344	
	0.348	0.385		0.343	0.331	
	0.347	0.372		0.329	0.320	
V5	0.329	0.345	V8	0.343	0.331	
	0.329	0.357		0.329	0.320	
	0.347	0.372		0.329	0.310	
	0.346	0.359		0.342	0.320	
V6	0.329	0.331	V9	0.329	0.310	
	0.329	0.345		0.342	0.320	
	0.346	0.359		0.341	0.305	
	0.344	0.344		0.330	0.300	

5650~6300K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
W4	0.329	0.369	W7	0.329	0.331	I _F = 150mA
	0.329	0.357		0.329	0.320	
	0.315	0.344		0.318	0.310	
	0.314	0.355		0.317	0.320	
W5	0.329	0.345	W8	0.329	0.321	
	0.316	0.333		0.329	0.310	
	0.315	0.344		0.319	0.300	
	0.329	0.357		0.318	0.310	
W6	0.329	0.345	W9	0.321	0.290	
	0.329	0.331		0.330	0.300	
	0.317	0.320		0.329	0.310	
	0.316	0.333		0.319	0.300	

6300~7000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
X4	0.301	0.342	X7	0.308	0.311	I _F = 150mA
	0.314	0.355		0.317	0.320	
	0.315	0.344		0.319	0.300	
	0.303	0.333		0.311	0.293	
X5	0.305	0.322	X8	0.321	0.290	
	0.303	0.333		0.319	0.300	
	0.315	0.344		0.311	0.293	
	0.316	0.333		0.313	0.285	
X6	0.308	0.311				
	0.305	0.322				
	0.316	0.333				
	0.317	0.320				

7000~8000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Y3-3	0.290	0.318	Y9-3	0.308	0.311	I _F = 150mA
	0.303	0.333		0.311	0.293	
	0.301	0.342		0.290	0.270	
	0.286	0.333		0.283	0.284	
Y6-3	0.308	0.311	Y1-3	0.302	0.283	
	0.283	0.284		0.311	0.293	
	0.274	0.301		0.313	0.285	
	0.303	0.333		0.305	0.273	

8000~9000K


Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Y3-2	0.281	0.309	Y9-2	0.308	0.311	I _F = 150mA
	0.290	0.318		0.283	0.284	
	0.286	0.333		0.274	0.301	
	0.276	0.321		0.303	0.333	
Y6-2	0.302	0.283	Y1-2	0.299	0.265	
	0.311	0.293		0.295	0.276	
	0.313	0.285		0.302	0.283	
	0.305	0.273		0.305	0.273	

9000~10000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Y3-1	0.274	0.301	Y9-1	0.290	0.270	I _F = 150mA
	0.281	0.309		0.283	0.284	
	0.276	0.321		0.289	0.291	
	0.269	0.309		0.295	0.276	
Y6-1	0.283	0.284	Y1-1	0.295	0.276	
	0.274	0.301		0.299	0.265	
	0.281	0.309		0.295	0.259	
	0.289	0.291		0.290	0.270	

10000~14000K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
S3-1	0.259	0.270	S9-1	0.270	0.260	I _F = 150mA
	0.274	0.301		0.283	0.284	
	0.269	0.309		0.290	0.270	
	0.251	0.280		0.280	0.248	
S6-1	0.274	0.301	S1-1	0.280	0.248	
	0.283	0.284		0.290	0.270	
	0.270	0.260		0.295	0.259	
	0.259	0.270		0.286	0.240	

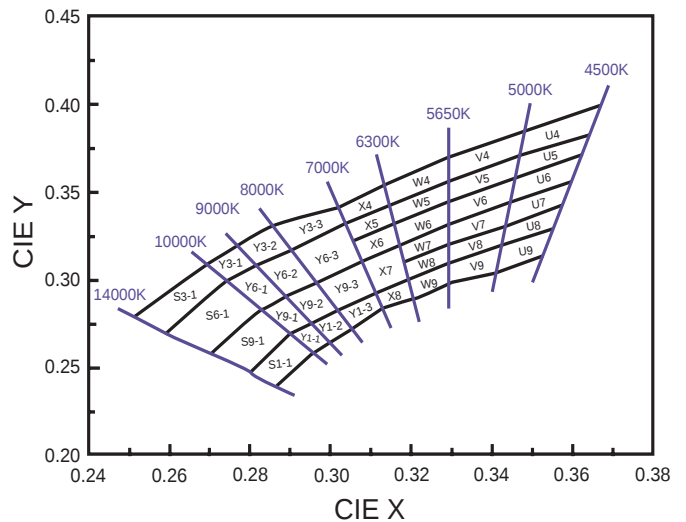

Warm White (Production Spec)

2760~2850K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
M4	0.471	0.451	M7	0.444	0.399	I _F = 150mA
	0.487	0.454		0.458	0.403	
	0.477	0.437		0.449	0.388	
	0.461	0.433		0.436	0.384	
M5	0.461	0.433	M8	0.423	0.358	
	0.477	0.437		0.435	0.383	
	0.467	0.420		0.449	0.388	
	0.453	0.416		0.434	0.359	
M6	0.453	0.416	M9	0.411	0.334	
	0.467	0.420		0.423	0.358	
	0.458	0.403		0.434	0.359	
	0.444	0.399		0.421	0.334	

2850~3050K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
N4	0.454	0.446	N7	0.429	0.394	I _F = 150mA
	0.471	0.451		0.444	0.399	
	0.461	0.433		0.436	0.384	
	0.446	0.429		0.422	0.379	
N5	0.446	0.429	N8	0.412	0.356	
	0.461	0.433		0.422	0.379	
	0.453	0.416		0.435	0.383	
	0.438	0.412		0.423	0.358	
N6	0.438	0.412	N9	0.402	0.334	
	0.453	0.416		0.412	0.356	
	0.444	0.399		0.423	0.358	
	0.429	0.394		0.411	0.334	

3050~3250K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
P4	0.438	0.440	P7	0.416	0.389	I _F = 150mA
	0.454	0.446		0.429	0.394	
	0.446	0.429		0.422	0.379	
	0.431	0.423		0.410	0.374	
P5	0.431	0.423	P8	0.401	0.353	
	0.446	0.429		0.410	0.373	
	0.438	0.412		0.422	0.379	
	0.424	0.406		0.412	0.356	
P6	0.424	0.406	P9	0.393	0.333	
	0.438	0.412		0.401	0.353	
	0.429	0.394		0.412	0.356	
	0.416	0.389		0.402	0.334	

3250~3500K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
Q4	0.421	0.433	Q7	0.402	0.382	I _F = 150mA
	0.438	0.440		0.416	0.389	
	0.431	0.423		0.410	0.374	
	0.415	0.416		0.397	0.367	
Q5	0.415	0.416	Q8	0.390	0.349	
	0.431	0.423		0.396	0.367	
	0.424	0.406		0.410	0.373	
	0.409	0.400		0.401	0.353	
Q6	0.409	0.400	Q9	0.384	0.331	
	0.424	0.406		0.390	0.349	
	0.416	0.389		0.401	0.353	
	0.402	0.382		0.393	0.333	

3500~3800K


Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
R4	0.402	0.423	R7	0.387	0.374	I _F = 150mA
	0.421	0.433		0.402	0.382	
	0.415	0.416		0.397	0.367	
	0.396	0.404		0.383	0.360	
R5	0.396	0.404	R8	0.378	0.343	
	0.415	0.416		0.382	0.359	
	0.409	0.400		0.396	0.367	
	0.392	0.391		0.390	0.349	
R6	0.392	0.391	R9	0.373	0.327	
	0.409	0.400		0.378	0.343	
	0.402	0.382		0.390	0.349	
	0.387	0.374		0.384	0.331	

3800~4100K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
S4	0.386	0.413	S7	0.374	0.366	I _F = 150mA
	0.402	0.423		0.387	0.374	
	0.396	0.404		0.383	0.360	
	0.381	0.394		0.371	0.352	
S5	0.381	0.394	S8	0.368	0.337	
	0.396	0.404		0.370	0.351	
	0.392	0.391		0.382	0.359	
	0.378	0.382		0.378	0.343	
S6	0.378	0.382	S9	0.364	0.322	
	0.392	0.391		0.368	0.337	
	0.387	0.374		0.378	0.343	
	0.374	0.366		0.373	0.327	

4100~4500K

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Condition
T4	0.367	0.400	T7	0.359	0.356	I _F = 150mA
	0.386	0.413		0.374	0.366	
	0.381	0.394		0.371	0.352	
	0.364	0.383		0.357	0.343	
T5	0.364	0.383	T8	0.355	0.330	
	0.381	0.394		0.357	0.343	
	0.378	0.382		0.370	0.351	
	0.362	0.372		0.368	0.337	
T6	0.362	0.372	T9	0.353	0.315	
	0.378	0.382		0.355	0.330	
	0.374	0.366		0.368	0.337	
	0.359	0.356		0.364	0.322	

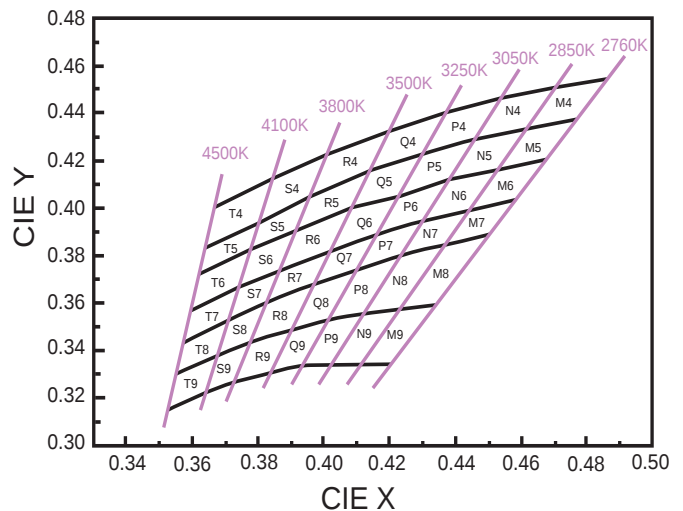

TECHNICAL DATA

SMD LED : SURFACE MOUNT CHIP LED (PCB TYPE) BRIGHTNESS BIN SELECTION

Luminous Intensity Groups

Unit : mcd

	C0: 0.28 ... 0.45	Q ▶	Q1: 72.0 ... 90.0
	D0: 0.45 ... 0.70		Q2: 90.0 ... 112
	E0: 0.70 ... 1.1	R ▶	R1: 112 ... 140
	F0: 1.1 ... 1.8		R2: 140 ... 180
	G0: 1.8 ... 2.8	S ▶	S1: 180 ... 225
	H0: 2.8 ... 4.5		S2: 225 ... 285
	J0: 4.5 ... 7.2	T ▶	T1: 285 ... 360
	K0: 7.2 ... 11.5		T2: 360 ... 450
L ▶	L1: 11.5 ... 14.5	U ▶	U1: 450 ... 565
	L2: 14.5 ... 18.0		U2: 565 ... 715
M ▶	M1: 18.0 ... 22.5		V0: 715 ... 1120
	M2: 22.5 ... 28.5		W0: 1120 ... 1800
N ▶	N1: 28.5 ... 36.0		X0: 1800 ... 2850
	N2: 36.0 ... 45.0		Y0: 2850 ... 4500
P ▶	P1: 45.0 ... 57.0		
	P2: 57.0 ... 72.0		

Note: The luminous intensity data did not include ±15% testing tolerance.

V_F (Forward Voltage Spec. Setup)

Unit : V

Forward Voltage Groups		Bin	Min.	Max.
	A	00	1.55	1.75
		0	1.75	1.95
		1	1.95	2.15
		2	2.15	2.35
	B	3	2.35	2.55
		4	2.55	2.75
	C	5	2.75	3.05
		6	3.05	3.35
		7	3.35	3.65
		8	3.65	3.95
	D	10	2.70	2.90
		11	2.90	3.10
		12	3.10	3.30
		13	3.30	3.50
	E	14	3.50	3.70
		15	2.70	2.85
		16	2.85	3.00
		17	3.00	3.15
	F	18	3.15	3.30

Note: The forward voltage data did not include ±0.1V testing tolerance.

For Lighting Application Only

SMD LED : SURFACE MOUNT PLCC LED (REFLECTOR) / LOW POWER LED BRIGHTNESS BIN SELECTION

Luminous Intensity Groups

Unit : mcd


Bin code	Range		Bin code	Range		Bin code	Range		Bin code	Range		Bin code	Range		Bin code	Range	
	Min.	Max.		Min.	Max.		Min.	Max.		Min.	Max.		Min.	Max.		Min.	Max.
2A	0	200	2C	2000	2200	2E	4000	4200	2G	6000	6200	2J	8000	8200	8K	9600	9800
4A	200	400	4C	2200	2400	4E	4200	4400	4G	6200	6400	4J	8200	8400	AL	9800	10000
6A	400	600	6C	2400	2600	6E	4400	4600	6G	6400	6600	2J	8000	8200	2L	10000	10200
8A	600	800	8C	2600	2800	8E	4600	4800	8G	6600	6800	4J	8200	8400	4L	10200	10400
AB	800	1000	AD	2800	3000	AF	4800	5000	AH	6800	7000	6J	8400	8600	6L	10400	10600
2B	1000	1200	2D	3000	3200	2F	5000	5200	2H	7000	7200	8J	8600	8800	8L	10600	10800
4B	1200	1400	4D	3200	3400	4F	5200	5400	4H	7200	7400	AK	8800	9000	AM	10800	11000
6B	1400	1600	6D	3400	3600	6F	5400	5600	6H	7400	7600	2K	9000	9200			
8B	1600	1800	8D	3600	3800	8F	5600	5800	8H	7600	7800	4K	9200	9400			
AC	1800	2000	AE	3800	4000	AG	5800	6000	AJ	7800	8000	6K	9400	9600			

V_F (Forward Voltage Spec. Setup)

Unit : V

Forward Voltage Groups	Bin	Min.	Max.
G	34	2.7	2.8
	35	2.8	2.9
	36	2.9	3
	37	3	3.1
	38	3.1	3.2
	39	3.2	3.3
	40	3.3	3.4
	41	3.4	3.5
	42	3.5	3.6
	43	3.6	3.7

Bin Structure

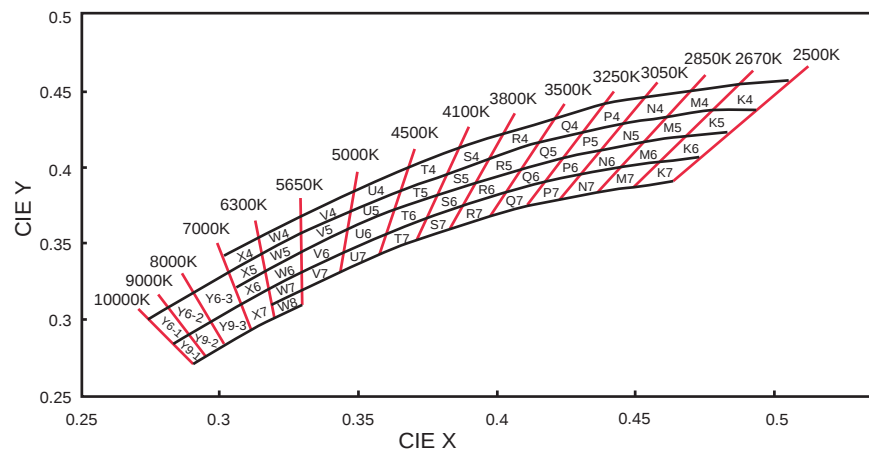

Bin Coordinate


10000K~9000K			9000K~8000K			8000K~7000K			7000K~6300K			6300K~5650K			5650K~5000K		
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
Y6-1	0.2740	0.3010	Y6-2	0.2810	0.3090	Y6-3	0.2900	0.3180	X4	0.3011	0.3422	W4	0.3136	0.3550	V4	0.3286	0.3690
	0.2810	0.3090		0.2900	0.3180		0.3031	0.3327		0.3136	0.3550		0.3286	0.3690		0.3481	0.3856
	0.2890	0.2910		0.2970	0.3000		0.3076	0.3108		0.3148	0.3444		0.3288	0.3569		0.3469	0.3717
	0.2830	0.2840		0.2890	0.2910		0.2970	0.3000		0.3031	0.3327		0.3148	0.3444		0.3288	0.3569
Y9-1	0.2830	0.2840	Y9-2	0.2890	0.2910	Y9-3	0.2970	0.3000	X5	0.3031	0.3327	W5	0.3148	0.3444	V5	0.3288	0.3569
	0.2890	0.2910		0.2970	0.3000		0.3076	0.3108		0.3148	0.3444		0.3288	0.3569		0.3469	0.3717
	0.2950	0.2760		0.3020	0.2830		0.3112	0.2932		0.3160	0.3332		0.3290	0.3451		0.3458	0.3592
	0.2900	0.2700		0.2950	0.2760		0.3020	0.2830		0.3052	0.3224		0.3160	0.3332		0.3290	0.3451
									X6	0.3052	0.3224	W6	0.3160	0.3332	V6	0.3290	0.3451
										0.3160	0.3332		0.3290	0.3451		0.3458	0.3592
										0.3175	0.3204		0.3292	0.3313		0.3444	0.3442
										0.3076	0.3108		0.3175	0.3204		0.3292	0.3313
									X7	0.3076	0.3108	W7	0.3175	0.3204	V7	0.3292	0.3313
										0.3175	0.3204		0.3292	0.3313		0.3444	0.3442
										0.3196	0.3013		0.3294	0.3202		0.3434	0.3320
										0.3112	0.2932		0.3186	0.3102		0.3294	0.3202
												W8	0.3186	0.3102			
													0.3294	0.3202			
													0.3295	0.3105			
													0.3196	0.3013			

TECHNICAL DATA

For Lighting Application Only

SMD LED : SURFACE MOUNT PLCC LED (REFLECTOR) / LOW POWER LED
BRIGHTNESS BIN SELECTION

Bin Structure

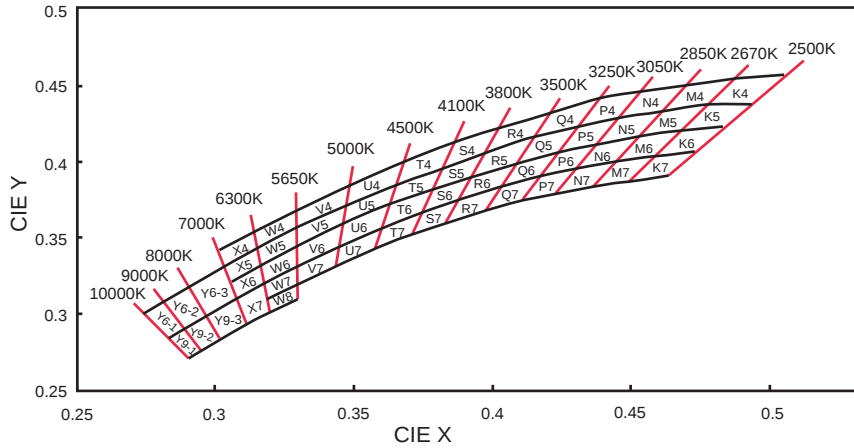

Bin Coordinate

5000K~4500K			4500K~4100K			4100K~3800K			3800K~3500K			3500K~3250K			3250K~3050K		
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
U4	0.3481	0.3856	T4	0.3673	0.4003	S4	0.3860	0.4130	R4	0.4023	0.4228	Q4	0.4209	0.4326	P4	0.4385	0.4404
	0.3673	0.4003		0.3860	0.4130		0.4023	0.4228		0.4209	0.4326		0.4385	0.4404			
	0.3642	0.3829		0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234			
	0.3469	0.3717		0.3642	0.3829		0.3811	0.3937		0.3963	0.4035		0.4148	0.4161			
U5	0.3469	0.3717	T5	0.3642	0.3829	S5	0.3811	0.3937	R5	0.3963	0.4035	Q5	0.4148	0.4161	P5	0.4312	0.4234
	0.3642	0.3829		0.3811	0.3937		0.3963	0.4035		0.4148	0.4161		0.4312	0.4234			
	0.3622	0.3716		0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065			
	0.3458	0.3592		0.3622	0.3716		0.3783	0.3825		0.3924	0.3909		0.4086	0.3995			
U6	0.3458	0.3592	T6	0.3622	0.3716	S6	0.3783	0.3825	R6	0.3924	0.3909	Q6	0.4086	0.3995	P6	0.4240	0.4065
	0.3622	0.3716		0.3783	0.3825		0.3924	0.3909		0.4086	0.3995		0.4240	0.4065			
	0.3594	0.3557		0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890			
	0.3444	0.3442		0.3594	0.3557		0.3741	0.3658		0.3871	0.3739		0.4021	0.3822			
U7	0.3444	0.3442	T7	0.3594	0.3557	S7	0.3741	0.3658	R7	0.3871	0.3739	Q7	0.4021	0.3822	P7	0.4165	0.3890
	0.3594	0.3557		0.3741	0.3658		0.3871	0.3739		0.4021	0.3822		0.4165	0.3890			
	0.3571	0.3426		0.3706	0.3520		0.3826	0.3595		0.3966	0.3673		0.4100	0.3738			
	0.3434	0.3320		0.3571	0.3426		0.3706	0.3520		0.3826	0.3595		0.3966	0.3673			
3050K~2850K			2850K~2670K			2670K~2500K											
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y									
N4	0.4538	0.4460	M4	0.4705	0.4508	K4	0.4866	0.4542									
	0.4705	0.4508		0.4866	0.4542		0.5060	0.4579									
	0.4614	0.4333		0.4767	0.4366		0.4945	0.4395									
	0.4456	0.4287		0.4614	0.4333		0.4767	0.4366									
N5	0.4456	0.4287	M5	0.4614	0.4333	K5	0.4767	0.4366									
	0.4614	0.4333		0.4767	0.4366		0.4945	0.4395									
	0.4525	0.4162		0.4671	0.4196		0.4840	0.4235									
	0.4376	0.4116		0.4525	0.4162		0.4671	0.4196									
N6	0.4376	0.4116	M6	0.4525	0.4162	K6	0.4671	0.4196									
	0.4525	0.4162		0.4671	0.4196		0.4840	0.4235									
	0.4436	0.3991		0.4577	0.4029		0.4740	0.4070									
	0.4294	0.3943		0.4436	0.3991		0.4577	0.4029									
N7	0.4294	0.3943	M7	0.4436	0.3991	K7	0.4577	0.4029									
	0.4436	0.3991		0.4577	0.4029		0.4740	0.4070									
	0.4356	0.3837		0.4490	0.3875		0.4640	0.3912									
	0.4221	0.3790		0.4356	0.3837		0.4490	0.3875									

SMD LED MID-POWER (62-227B SERIES) BRIGHTNESS BIN SELECTION

Luminous Flux Characteristics

Unit : lm


Group	Bin	Min	Max
F	F3	0.2	0.5
	F4	0.5	1
G	G3	1	2
	G4	2	3
H	H3	3	4
	H4	4	5
J	J3	5	6
	J4	6	8
K	K3	8	10
	K4	10	13
L	L3	13	16
	L4	16	19
M	M3	19	21
	M4	21	24
N	N3	24	27
	N4	27	33
P	P3	33	39
	P4	39	45
Q	Q3	45	52
	Q4	52	60
R	R3	60	70
	R4	70	80
S	S3	80	90
	S4	90	100

V_F Group Bin Code

Unit : V

Group	Bin	Min.	Max
G	34	2.70	2.80
	35	2.80	2.90
	36	2.90	3.00
	37	3.00	3.10
	38	3.10	3.20
	39	3.20	3.30
	40	3.30	3.40
	41	3.40	3.50
	42	3.50	3.60
	43	3.60	3.70
S2	5#8	5.80	5.90
	5#9	5.90	6.00
	6#0	6.00	6.10
	6#1	6.10	6.20
	6#2	6.20	6.30
	6#3	6.30	6.40
	6#4	6.40	6.50
	6#5	6.50	6.60
	6#6	6.60	6.70
	6#7	6.70	6.80
	6#8	6.80	6.90
	6#9	6.90	7.00

■ White Bin Structure

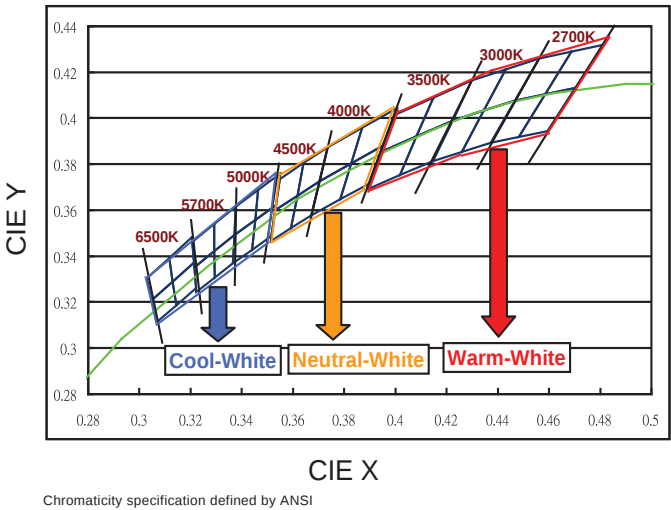

TECHNICAL DATA

SMD LED (45, 99 SERIES) BRIGHTNESS BIN SELECTION

Luminous Intensity Groups

Unit : mcd

Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.
01	500	600	12	900	930	23	1250	1300	34	1800	1850	45	2500	2600	H42	2200	2250
02	600	630	13	930	960	24	1300	1350	35	1850	1900	46	2600	2700	H43	2250	2300
03	630	660	14	960	990	25	1350	1400	36	1900	1950	47	2700	2800	H44	2300	2350
04	660	690	15	990	1020	26	1400	1450	37	1950	2000	48	2800	2900	H45	2350	2400
05	690	720	16	1020	1050	27	1450	1500	38	2000	2050	49	2900	3000	H46	2400	2450
06	720	750	17	1050	1080	28	1500	1550	39	2050	2100	50	3000	3100	H47	2450	2500
07	750	780	18	1080	1110	29	1550	1600	40	2100	2150	51	3100	3200	H48	2500	2550
08	780	810	19	1110	1140	30	1600	1650	41	2150	2200				H49	2550	2600
09	810	840	20	1140	1170	31	1650	1700	42	2200	2300				H50	2600	2650
10	840	870	21	1170	1200	32	1700	1750	43	2300	2400				H51	2650	2700
11	870	900	22	1200	1250	33	1750	1800	44	2400	2500						

Note: Tolerance of Luminous Intensity: $\pm 11\%$

V_F (Forward Voltage Spec. Setup)



Unit : V

Groups										Bin	Min.	Max.	Groups		Bin	Min.	Max.	Groups	Bin	Min.	Max.							
0	1					6	7		D	P	6-1	2.95	3.05	A	G	6-1-1	2.95	3.00	9	6-11	3.00	3.05						
				6-2	3.05						3.15	6-1-2	3.00			3.05	6-2	3.05		3.15								
		2	3	4	5						7-1	3.15	3.25			6-2-1	3.05	3.10		7-1	3.15	3.25						
												7-2	3.25			3.35	6-2-2	3.10		3.15	7-2	3.25	3.35					
													8-1			3.35	3.45	7-1-1		3.15	3.20	8-1	3.35	3.45				
							8-2	3.45			3.55	7-1-2	3.20			3.25	8-11	3.45		3.5								
											9-1	3.55	3.65			7-2-1	3.25	3.30										
											9-2	3.65	3.75			7-2-2	3.30	3.35										
																	8-1-1	3.35						3.40				
																	8-1-2	3.40						3.45				

Groups							Bin	Min.	Max.			
R	L	N					5-1-3	2.8	2.9			
							5-2-3	2.9	3.0			
			B	C	K	H	E	Q	F	6-1-3	3.0	3.1
										6-2-3	3.1	3.2
										7-1-3	3.2	3.3
					7-2-3	3.3	3.4					
					8-1-3	3.4	3.5					
							M	10	5.8	6.0		
								11	6.0	6.2		
								12	6.2	6.4		
						13		6.4	6.6			

Note: Tolerance of Forward Voltage: $\pm 0.05V$

Chromaticity Diagram

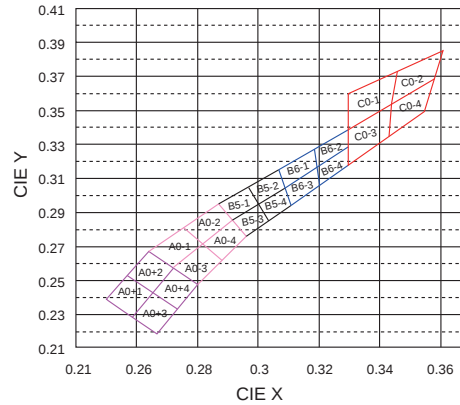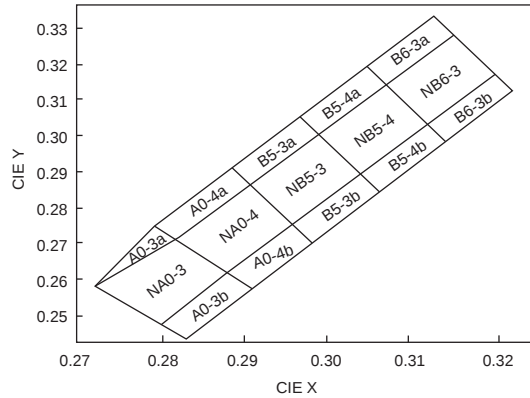

Bin Code of Chromaticity Coordinates

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
NA0-3	0.2800	0.2480	NB5-3	0.2960	0.2760	A0-3a	0.2720	0.2580	B5-3b	0.2980	0.2710
	0.2720	0.2580		0.2910	0.2870		0.2793	0.2755		0.2960	0.2760
	0.2820	0.2720		0.2990	0.3010		0.2820	0.2720		0.3040	0.2900
	0.2880	0.2620		0.3040	0.2900					0.3062	0.2853
NA0-4	0.2880	0.2620	NB5-4	0.3040	0.2900	A0-3b	0.2830	0.2440	B5-4a	0.2990	0.3010
	0.2820	0.2720		0.2990	0.3010		0.2800	0.2480		0.2968	0.3058
	0.2910	0.2870		0.3070	0.3150		0.2880	0.2620		0.3048	0.3198
	0.2960	0.2760		0.3120	0.3040		0.2910	0.2580		0.3070	0.3150
NB6-3	0.3120	0.3040				A0-4a	0.2820	0.2720	B5-4b	0.3062	0.2853
	0.3070	0.3150					0.2793	0.2755		0.3040	0.2900
	0.3150	0.3290					0.2887	0.2916		0.3120	0.3040
	0.3200	0.3180					0.2910	0.2870		0.3142	0.2993
						A0-4b	0.2910	0.2580	B6-3a	0.3070	0.3150
							0.2880	0.2620		0.3048	0.3198
							0.2960	0.2760		0.3128	0.3338
							0.2980	0.2710		0.3150	0.3290
						B5-3a	0.2910	0.2870	B6-3b	0.3142	0.2993
							0.2887	0.2916		0.3120	0.3040
							0.2968	0.3058		0.3200	0.3180
							0.2990	0.3010		0.3222	0.3133
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
A0+1	0.2569	0.2528	A0+3	0.2652	0.2429	B5-1	0.2915	0.2855	B5-3	0.2960	0.2760
	0.2498	0.2385		0.2584	0.2283		0.2870	0.2950		0.2915	0.2855
	0.2584	0.2283		0.2666	0.2185		0.2970	0.3050		0.3003	0.2950
	0.2652	0.2429		0.2733	0.2333		0.3003	0.2950		0.3035	0.2850
A0+2	0.2640	0.2670	A0+4	0.2720	0.2575	B5-2	0.3003	0.2950	B5-4	0.3035	0.2850
	0.2569	0.2528		0.2652	0.2429		0.2970	0.3050		0.3003	0.2950
	0.2652	0.2429		0.2733	0.2333		0.3070	0.3150		0.3090	0.3045
	0.2720	0.2575		0.2800	0.2480		0.3090	0.3045		0.3110	0.2940
A0-1	0.2720	0.2575	A0-3	0.2800	0.2480	B6-1	0.3090	0.3045	B6-3	0.3110	0.2940
	0.2640	0.2670		0.2720	0.2575		0.3070	0.3150		0.3090	0.3045
	0.2755	0.2810		0.2818	0.2715		0.3185	0.3270		0.3195	0.3165
	0.2818	0.2715		0.2879	0.2619		0.3195	0.3165		0.3205	0.3060
A0-2	0.2818	0.2715	A0-4	0.2879	0.2619	B6-2	0.3195	0.3165	B6-4	0.3205	0.3060
	0.2755	0.2810		0.2818	0.2715		0.3185	0.3270		0.3195	0.3165
	0.2870	0.2950		0.2915	0.2855		0.3300	0.3390		0.3300	0.3285
	0.2915	0.2855		0.2960	0.2760		0.3300	0.3285		0.3300	0.3180

Note: Tolerance of Chromaticity Coordinates: ± 0.01

TECHNICAL DATA

SMD LED (45-21S, 62-127 SERIES) BRIGHTNESS BIN SELECTION

Luminous Flux Groups

Unit : lm

Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.
11	11	12	23	23	24	35	35	36	47	47	48
12	12	13	24	24	25	36	36	37	48	48	49
13	13	14	25	25	26	37	37	38	49	49	50
14	14	15	26	26	27	38	38	39	50	50	51
15	15	16	27	27	28	39	39	40	51	51	52
16	16	17	28	28	29	40	40	41	52	52	53
17	17	18	29	29	30	41	41	42	53	53	54
18	18	19	30	30	31	42	42	43	54	54	55
19	19	20	31	31	32	43	43	44	55	55	56
20	20	21	32	32	33	44	44	45			
21	21	22	33	33	34	45	45	46			
22	22	23	34	34	35	46	46	47			

Note: Tolerance of Luminous Intensity: $\pm 7\%$

Bin Code of Chromaticity Coordinates

Condition : $I_F=60/120\text{mA}$


Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
K1	0.2247	0.2082	K2	0.2288	0.2166	M3	0.2503	0.2154	N3	0.2590	0.2106	K6	0.2451	0.2504	K7	0.2492	0.2588
	0.2206	0.1997		0.2247	0.2082		0.2462	0.2070		0.2549	0.2022		0.2410	0.2419		0.2451	0.2504
	0.2293	0.1949		0.2334	0.2034		0.2549	0.2022		0.2636	0.1974		0.2497	0.2371		0.2538	0.2456
	0.2334	0.2034		0.2375	0.2118		0.2590	0.2106		0.2677	0.2058		0.2538	0.2456		0.2579	0.2540
L1	0.2247	0.2082	L2	0.2288	0.2166	K4	0.2457	0.2287	K5	0.2410	0.2419	L6	0.2451	0.2504	L7	0.2492	0.2588
	0.2334	0.2034		0.2375	0.2118		0.2416	0.2202		0.2370	0.2335		0.2538	0.2456		0.2579	0.2540
	0.2293	0.1949		0.2334	0.2034		0.2329	0.2250		0.2457	0.2288		0.2497	0.2371		0.2538	0.2456
	0.2380	0.1901		0.2421	0.1986		0.2370	0.2335		0.2497	0.2371		0.2584	0.2323		0.2625	0.2408
M1	0.2421	0.1986	M2	0.2462	0.2070	L4	0.2457	0.2287	L5	0.2410	0.2419	M6	0.2625	0.2408	M7	0.2666	0.2492
	0.2334	0.2034		0.2375	0.2118		0.2544	0.2239		0.2497	0.2371		0.2538	0.2456		0.2579	0.2540
	0.2421	0.1986		0.2462	0.2070		0.2503	0.2154		0.2457	0.2287		0.2625	0.2408		0.2666	0.2492
	0.2380	0.1901		0.2421	0.1986		0.2416	0.2202		0.2544	0.2239		0.2584	0.2323		0.2625	0.2408
N1	0.2467	0.1853	N2	0.2508	0.1938	M4	0.2457	0.2287	M5	0.2584	0.2323	N6	0.2671	0.2275	N7	0.2712	0.2360
	0.2508	0.1938		0.2549	0.2022		0.2544	0.2239		0.2497	0.2371		0.2712	0.2360		0.2753	0.2444
	0.2421	0.1986		0.2462	0.2070		0.2631	0.2191		0.2584	0.2323		0.2625	0.2408		0.2666	0.2492
	0.2508	0.1938		0.2549	0.2022		0.2590	0.2106		0.2544	0.2239		0.2712	0.2360		0.2753	0.2444
K3	0.2329	0.2250	L3	0.2416	0.2202	N4	0.2503	0.2154	N5	0.2631	0.2191	K8	0.2533	0.2672	L8	0.2620	0.2624
	0.2288	0.2166		0.2375	0.2118		0.2544	0.2239		0.2671	0.2275		0.2492	0.2588		0.2579	0.2540
	0.2375	0.2118		0.2462	0.2070		0.2631	0.2191		0.2584	0.2323		0.2579	0.2540		0.2666	0.2492
	0.2416	0.2202		0.2503	0.2154		0.2718	0.2143		0.2671	0.2275		0.2620	0.2624		0.2707	0.2576
Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
M8	0.2707	0.2576	N8	0.2794	0.2528	KB	0.2656	0.2927	LB	0.2743	0.2879	NB	0.2743	0.2879	KB	0.2743	0.2879
	0.2666	0.2492		0.2753	0.2444		0.2615	0.2842		0.2702	0.2794		0.2702	0.2794		0.2702	0.2794
	0.2753	0.2444		0.2840	0.2396		0.2702	0.2794		0.2789	0.2746		0.2789	0.2746		0.2789	0.2746
	0.2794	0.2528		0.2881	0.2480		0.2743	0.2879		0.2830	0.2831		0.2830	0.2831		0.2830	0.2831
K9	0.2574	0.2757	KA	0.2615	0.2842	MB	0.2830	0.2831	NB	0.2917	0.2783	NB	0.2917	0.2783	KB	0.2917	0.2783
	0.2533	0.2672		0.2574	0.2757		0.2789	0.2746		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698
	0.2620	0.2624		0.2661	0.2709		0.2876	0.2698		0.2963	0.2650		0.2963	0.2650		0.2963	0.2650
	0.2661	0.2709		0.2702	0.2794		0.2917	0.2783		0.3004	0.2735		0.3004	0.2735		0.3004	0.2735
L9	0.2574	0.2757	LA	0.2615	0.2842	MB	0.2830	0.2831	NB	0.2917	0.2783	NB	0.2917	0.2783	KB	0.2917	0.2783
	0.2661	0.2709		0.2702	0.2794		0.2789	0.2746		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698
	0.2620	0.2624		0.2661	0.2709		0.2876	0.2698		0.2963	0.2650		0.2963	0.2650		0.2963	0.2650
	0.2707	0.2576		0.2748	0.2661		0.2917	0.2783		0.3004	0.2735		0.3004	0.2735		0.3004	0.2735
M9	0.2748	0.2661	MA	0.2789	0.2746	MB	0.2830	0.2831	NB	0.2917	0.2783	NB	0.2917	0.2783	KB	0.2917	0.2783
	0.2661	0.2709		0.2702	0.2794		0.2789	0.2746		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698
	0.2748	0.2661		0.2789	0.2746		0.2830	0.2831		0.2917	0.2783		0.2917	0.2783		0.2917	0.2783
	0.2707	0.2576		0.2748	0.2661		0.2917	0.2783		0.3004	0.2735		0.3004	0.2735		0.3004	0.2735
N9	0.2794	0.2528	NA	0.2835	0.2613	MB	0.2835	0.2613	NB	0.2835	0.2613	NB	0.2835	0.2613	KB	0.2835	0.2613
	0.2835	0.2613		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698
	0.2748	0.2661		0.2789	0.2746		0.2835	0.2613		0.2835	0.2613		0.2835	0.2613		0.2835	0.2613
	0.2835	0.2613		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698		0.2876	0.2698

Forward Voltage

Unit : V

Single Chip			Two Chips					
			Parallel			Serial		
Bin	Min.	Max.	Bin	Min.	Max.	Bin	Min.	Max.
A	2.9	3.0	PA	2.9	3.0	S8	5.8	6.0
B	3.0	3.1	PB	3.0	3.1	S9	6.0	6.2
C	3.1	3.2	PC	3.1	3.2	SA	6.2	6.4
D	3.2	3.3	PD	3.2	3.3	SB	6.4	6.6
E	3.3	3.4	PE	3.3	3.4	SC	6.6	6.8
F	3.4	3.5	PF	3.4	3.5	SD	6.8	7.0
G	3.5	3.6	PG	3.5	3.6	SE	7.0	7.2

Note: Tolerance of Forward Voltage: $\pm 0.05\text{V}$

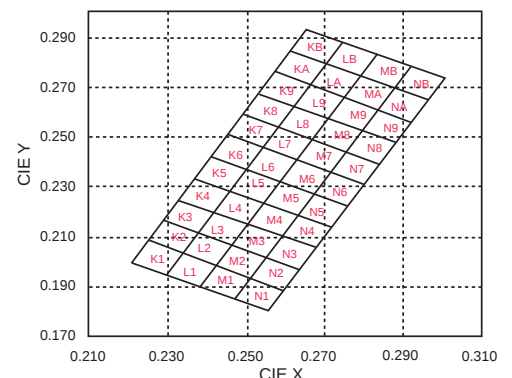


SMD LED (AUTOMOTIVE APPLICATION) BRIGHTNESS BIN SELECTION

Bin Range of Chromaticity Coordinates

($I_F=20\text{mA}$ / $T_a=25^\circ\text{C}$)

Color Ranks		CIE			
A1	X	0.255	0.264	0.280	0.270
	Y	0.245	0.267	0.248	0.230
A0	X	0.264	0.283	0.296	0.280
	Y	0.267	0.305	0.267	0.248
B3	X	0.283	0.304	0.307	0.287
	Y	0.305	0.330	0.315	0.295
B4	X	0.304	0.330	0.330	0.307
	Y	0.330	0.360	0.339	0.315
B5	X	0.287	0.307	0.311	0.296
	Y	0.295	0.315	0.294	0.276
B6	X	0.307	0.330	0.330	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.330	0.361	0.355	0.330
	Y	0.360	0.385	0.350	0.318

Note: Measurement uncertainty of the color coordinates ± 0.01

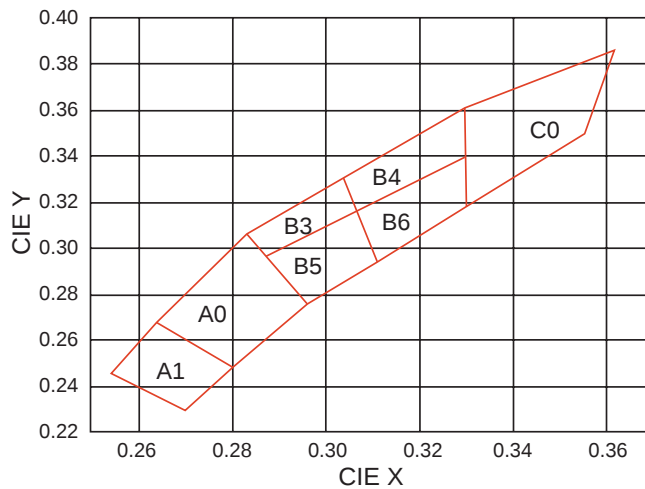

Bin Range of Luminous Intensity

Unit : mcd

Group	Bin	Min	Max
C	C1	0.28	0.36
	C2	0.36	0.45
D	D1	0.45	0.56
	D2	0.56	0.71
E	E1	0.71	0.9
	E2	0.9	1.12
F	F1	1.12	1.4
	F2	1.4	1.8
G	G1	1.8	2.24
	G2	2.24	2.8
H	H1	2.8	3.55
	H2	3.55	4.5
J	J1	4.5	5.6
	J2	5.6	7.1
K	K1	7.1	9
	K2	9	11.2
L	L1	11.2	14
	L2	14	18
M	M1	18	22.4
	M2	22.4	28
N	N1	28	35.5
	N2	35.5	45
P	P1	45	56
	P2	56	71
Q	Q1	71	90
	Q2	90	112
R	R1	112	140
	R2	140	180
S	S1	180	224
	S2	224	280
T	T1	280	355
	T2	355	450
U	U1	450	560
	U2	560	710
V	V1	710	900
	V2	900	1120
AW	AA	1120	1400
	AB	1400	1800
BW	BA	1800	2240
	BB	2240	2800
CW	CA	2800	3550
	CB	3550	4500
DW	DA	4500	5600
	DB	5600	7100
EW	EA	7100	9000
	EB	9000	11200
FW	FA	11200	14000
	FB	14000	18000
GW	GA	18000	22400
	GB	22400	28000
HW	HA	28000	35500
	HB	35500	45000
IW	IA	45000	56000
	IB	56000	71000

TECHNICAL DATA

SUPER FLUX LED BRIGHTNESS BIN SELECTION

Bin Range of Total Flux

Unit : lm

Group	Bin	Min	Max	Group	Bin	Min	Max
A	A1	6	8	N	N1	715	900
	A2	8	10		N2	900	1125
B	B1	10	12.5	P	P1	1125	1425
	B2	12.5	15		P2	1425	1800
C	C1	15	18	Q	Q1	1800	2250
	C2	18	22		Q2	2250	2850
D	D1	22	28	R	R1	2850	3600
	D2	28	35		R2	3600	4500
E	E1	35	42	S	S1	4500	5650
	E2	42	50		S2	5650	7150
F	F1	50	60	T	T1	7150	9000
	F2	60	70		T2	9000	11250
G	G1	70	85	U	U1	11250	14250
	G2	85	100		U2	14250	18000
H	H1	100	120	V	V1	18000	22500
	H2	120	140		V2	22500	28500
J	J1	140	170	W	W1	28500	36000
	J2	170	200		W2	36000	43200
K	K1	200	240	X	X1	43200	51840
	K2	240	285		X2	51840	62200
L	L1	285	360	Y	Y1	62200	74600
	L2	360	450		Y2	74600	87500
M	M1	450	565				
	M2	565	715				


Note: Tolerance of Forward Voltage: $\pm 0.05V$

Color Ranks

($I_f=20mA$ / $T_a=25^\circ C$)

Color Ranks		CIE			
A1	X	0.255	0.264	0.280	0.270
	Y	0.245	0.267	0.248	0.230
A0	X	0.264	0.283	0.296	0.280
	Y	0.267	0.305	0.267	0.248
B3	X	0.283	0.304	0.307	0.287
	Y	0.305	0.330	0.315	0.295
B4	X	0.304	0.330	0.330	0.307
	Y	0.330	0.360	0.339	0.315
B5	X	0.287	0.307	0.311	0.296
	Y	0.295	0.315	0.294	0.276
B6	X	0.307	0.330	0.330	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.330	0.361	0.355	0.330
	Y	0.360	0.385	0.350	0.318

Note: Measurement uncertainty of the color coordinates ± 0.01

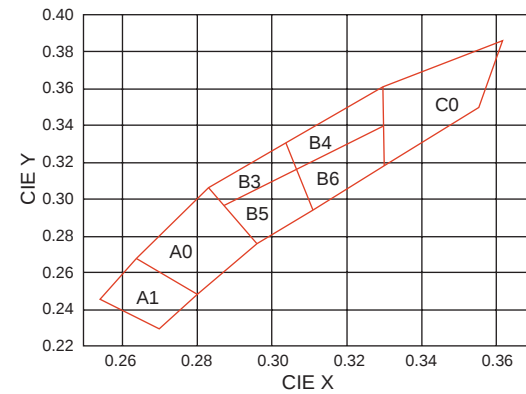

Forward Voltage

Unit : V

Groups										Code	Min.	Max.	Groups			Code	Min.	Max.						
A							J	I	N	K	M	U	0	1.7	1.9	1			9	1.8	2.0			
													1	1.9	2.1				A	2.0	2.2			
													2	2.1	2.3				B	2.2	2.4			
B	C	L	F	D	G	H	J	I	N	K	M	U	3	2.3	2.5				C	2.4	2.6			
													4	2.5	2.7				D	2.6	2.8			
													5	2.7	2.9	2	3		4	5	6	E	2.8	3.0
													6	2.9	3.1							F	3.0	3.2
													7	3.1	3.3			G	3.2	3.4				
													8	3.3	3.5			H	3.4	3.6				
																	6	J	3.6	3.8				
																		K	3.8	4.0				
																		L	4.0	4.2				

LED LAMPS BRIGHTNESS BIN SELECTION

Brightness Bin Selection

Unit : mcd


Item	Intensity Iv (mcd)	
Bin Code	Min.	Max.
a7	6.0	8.0
a6	8.0	10.0
a5	10.0	12.0
a4	12.0	15.0
a3	15.0	18.0
a2	18.0	22.0
a1	22.0	28.0
0	28.0	35.0
1	35.0	42.0
2	42.0	50.0
3	50.0	60.0
4	60.0	70.0
5	70.0	85.0
6	85.0	100
7	100	120
8	120	140
9	140	170
A	170	200
B	200	240
C	240	285
D	285	360
E	360	450
F	450	565
G	565	715
H	715	900
J	900	1,125
K	1,125	1,425
L	1,425	1,800
M	1,800	2,250
N	2,250	2,850
P	2,850	3,600
Q	3,600	4,500
R	4,500	5,650
S	5,650	7,150
T	7,150	9,000
U	9,000	11,250
V	11,250	14,250
W	14,250	18,000
X	18,000	22,500
Y	22,500	28,500
Z	28,500	36,000

Cool White / CIE Chromaticity Diagram

($I_f=20\text{mA}$ / $T_a=25^\circ\text{C}$)

Color Ranks		CIE			
A1	X	0.255	0.264	0.280	0.270
	Y	0.245	0.267	0.248	0.230
A0	X	0.264	0.283	0.296	0.280
	Y	0.267	0.305	0.267	0.248
B3	X	0.283	0.304	0.307	0.287
	Y	0.305	0.330	0.315	0.295
B4	X	0.304	0.330	0.330	0.307
	Y	0.330	0.360	0.339	0.315
B5	X	0.287	0.307	0.311	0.296
	Y	0.295	0.315	0.294	0.276
B6	X	0.307	0.330	0.330	0.311
	Y	0.315	0.339	0.318	0.294
C0	X	0.330	0.361	0.355	0.330
	Y	0.360	0.385	0.350	0.318

Note: Measurement uncertainty of the color coordinates ± 0.01

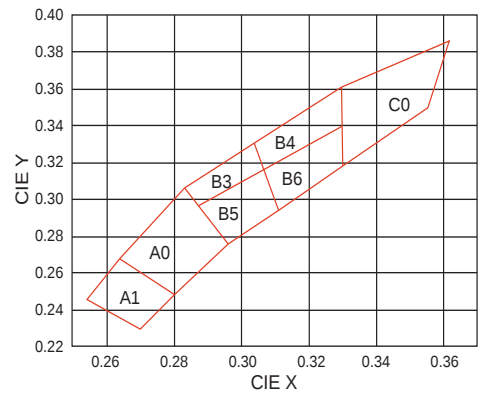


Warm White / CIE Chromaticity Diagram

($I_f=20\text{mA}$ / $T_a=25^\circ\text{C}$)

Color Ranks		CIE			
D1	X	0.357	0.361	0.398	0.389
	Y	0.361	0.385	0.411	0.382
D2	X	0.354	0.357	0.389	0.382
	Y	0.340	0.361	0.382	0.358
E1	X	0.389	0.398	0.439	0.425
	Y	0.382	0.411	0.431	0.400
E2	X	0.382	0.389	0.425	0.412
	Y	0.358	0.382	0.400	0.372
F1	X	0.425	0.439	0.497	0.477
	Y	0.400	0.431	0.466	0.413
F2	X	0.412	0.425	0.477	0.458
	Y	0.372	0.400	0.413	0.383


Note: Measurement uncertainty of the color coordinates ± 0.01

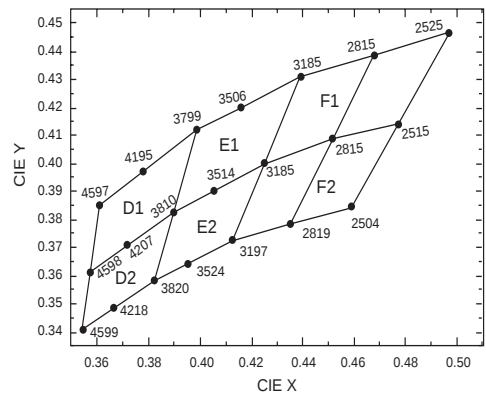

TECHNICAL DATA

LED LAMPs (AUTOMOTIVE APPLICATION) BRIGHTNESS BIN SELECTION

Cool White / CIE

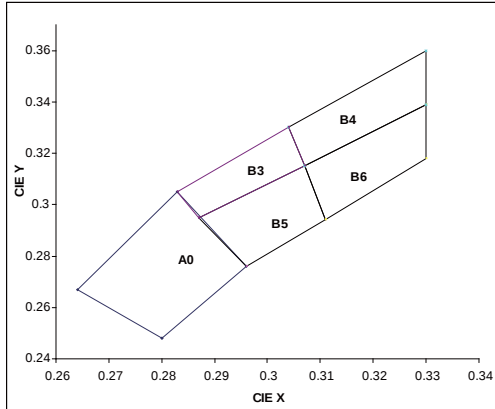


Bin Code of Chromaticity Coordinates

Rank	CIE_x	CIE_y	Rank	CIE_x	CIE_y
A0	0.280	0.248	A1	0.255	0.245
	0.264	0.267		0.264	0.267
	0.283	0.305		0.28	0.248
	0.296	0.276		0.27	0.23
B3	0.287	0.295	B4	0.307	0.315
	0.283	0.305		0.304	0.330
	0.304	0.330		0.330	0.360
	0.307	0.315		0.330	0.339
B5	0.296	0.276	B6	0.311	0.294
	0.287	0.295		0.307	0.315
	0.307	0.315		0.330	0.339
	0.311	0.294		0.330	0.318
C0	0.330	0.318			
	0.330	0.360			
	0.361	0.385			
	0.356	0.351			

Brightness Bin Selection




Item	Intensity Iv (mcd)	
Bin Code	Min.	Max.
a7	6.0	8.0
a6	8.0	10.0
a5	10.0	12.5
a4	12.5	15.0
a3	15.0	18.0
a2	18.0	22.0
a1	22.0	28.0
0	28.0	35.0
1	35.0	42.0
2	42.0	50.0
3	50.0	60.0
4	60.0	70.0
5	70.0	85.0
6	85.0	100
7	100	120
8	120	140
9	140	170
A	170	200
B	200	240
C	240	285
D	285	360
E	360	450
F	450	565
G	565	715
H	715	900
J	900	1,125
K	1,125	1,425
L	1,425	1,800
M	1,800	2,250
N	2,250	2,850
P	2,850	3,600
Q	3,600	4,500
R	4,500	5,650
S	5,650	7,150
T	7,150	9,000
U	9,000	11,250
V	11,250	14,250
W	14,250	18,000
X	18,000	22,500
Y	22,500	28,500
Z	28,500	36,000
Z1	36,000	43,200

Warm White / CIE

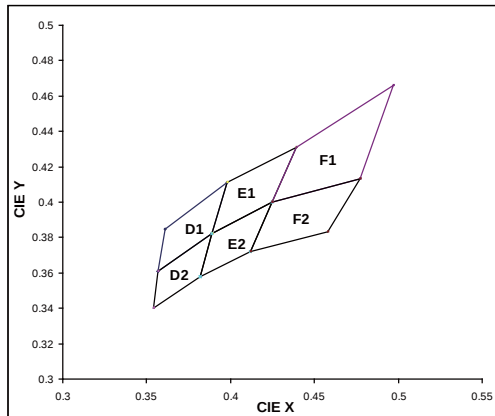

Bin Code of Chromaticity Coordinates

Rough Rank	Detailed Rank	CIE			
D1	D1-1	X	0.3575	0.3610	0.3780
		Y	0.3612	0.3850	0.3970
	D1-2	X	0.3720	0.3780	0.3988
		Y	0.3714	0.3970	0.4116
D2	D2-1	X	0.3545	0.3575	0.3720
		Y	0.3408	0.3612	0.3714
	D2-2	X	0.3667	0.3720	0.3897
		Y	0.3484	0.3714	0.3823
E1	E1-1	X	0.3897	0.3988	0.4162
		Y	0.3823	0.4116	0.4200
	E1-2	X	0.4053	0.4162	0.4390
		Y	0.3907	0.4200	0.4310
E2	E2-1	X	0.3822	0.3897	0.4053
		Y	0.3580	0.3823	0.3907
	E2-2	X	0.3954	0.4053	0.4255
		Y	0.3642	0.3907	0.4000
F1	F1-1	X	0.4250	0.4390	0.4550
		Y	0.4000	0.4310	0.4350
	F1-2	X	0.4400	0.4550	0.4770
		Y	0.4050	0.4350	0.4400
	F1-3	X	0.4600	0.4770	0.4970
		Y	0.4100	0.4400	0.4470
F2	F2-1	X	0.4130	0.4260	0.4400
		Y	0.3730	0.4000	0.4050
	F2-2	X	0.4260	0.4400	0.4600
		Y	0.3770	0.4050	0.4100
	F2-3	X	0.4430	0.4600	0.4770
		Y	0.3800	0.4100	0.4140

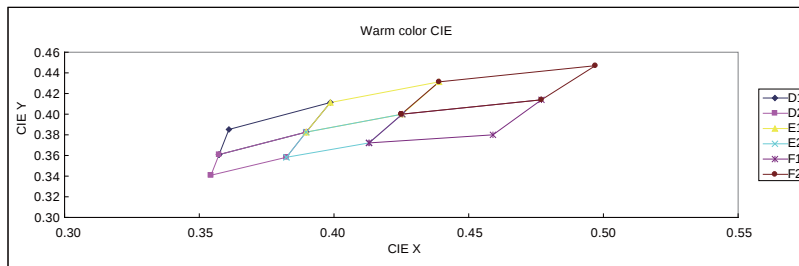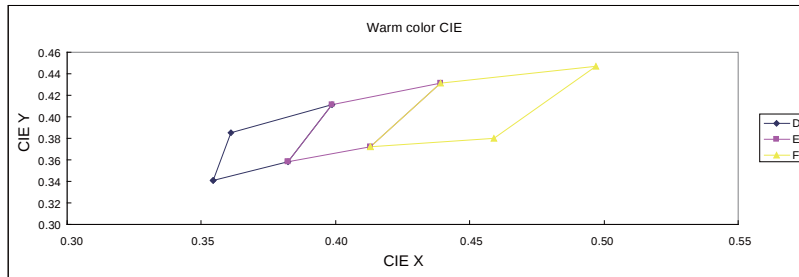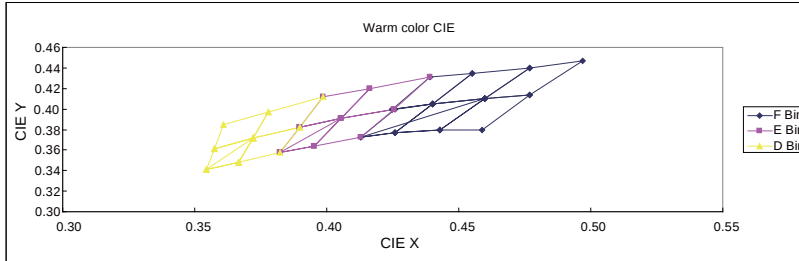

Rank	CIE_x	CIE_y
D	1 0.3545	0.3408
	2 0.3610	0.3850
	3 0.3988	0.4116
	4 0.3822	0.3580
E	1 0.3822	0.3580
	2 0.3988	0.4116
	3 0.4390	0.4310
	4 0.4129	0.3725
F	1 0.4129	0.3725
	2 0.4390	0.4310
	3 0.4970	0.4470
	4 0.4590	0.3800

Rank	CIE_x	CIE_y
D1	1 0.3575	0.3612
	2 0.3610	0.3850
	3 0.3988	0.4116
	4 0.3897	0.3823
D2	1 0.3545	0.3408
	2 0.3575	0.3612
	3 0.3897	0.3823
	4 0.3822	0.3580
E1	1 0.3897	0.3823
	2 0.3988	0.4116
	3 0.4390	0.4310
	4 0.4255	0.4000
E2	1 0.3822	0.3580
	2 0.3897	0.3823
	3 0.4255	0.4000
	4 0.4129	0.3725
F1	1 0.4129	0.3725
	2 0.4255	0.4000
	3 0.4770	0.4140
	4 0.4590	0.3800
F2	1 0.4250	0.4000
	2 0.4390	0.4310
	3 0.4970	0.4470
	4 0.4770	0.4140

TECHNICAL DATA

DIGITAL DISPLAY BRIGHTNESS BIN SELECTION

Bin Code	Brightness Range (μcd)	
	Min.	Max.
C	70	140
D	110	220
E	180	360
F	280	560
G	450	900
H	750	1200
J	1050	1680
K	1400	2300
L	2000	3200
M	2800	4500
N	4000	6400
P	5600	8900
Q	7800	12500
R	11000	17600
S	15000	24000
T	21000	34000
U	30000	48000
V	42000	67000
W	59000	94000
X	83000	133000
Y	116000	186000
Z	158800	254000



VISIBLE LED

38 HIGH POWER LED

44 LOW POWER LED

47 FLASH LED

50 SMD LED


93 SUPER FLUX LED

95 LED LAMPs


117 LED DIGITAL DISPLAYs

High Power LED ■ HV (1W, 2W, 4W) PRELIMINARY

1W



UNIT : mm

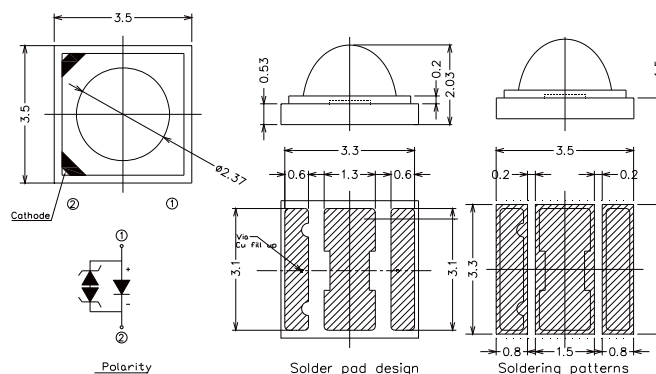


Category	Color	CCT (K)	Minimum Luminous Flux (lm)	CRI_Min	Forward Current (mA)	Forward Voltage	Efficacy (lm/W)	Viewing Angle (°)
1W LED	○ Cool White	5700	80	70	20	47-55 VDC	>90	120
1W LED	● Warm White	3000	70	80	20	47-55 VDC	>70	120

2W, 4W



UNIT : mm

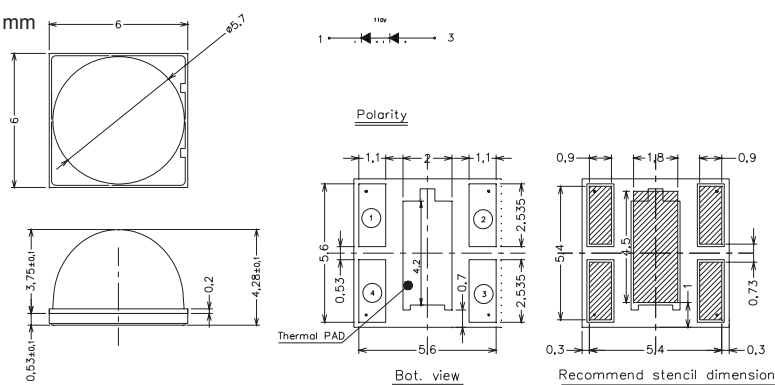


Category	Color	CCT (K)	Minimum Luminous Flux (lm)	CRI_Min	Forward Current (mA)	Forward Voltage	Efficacy (lm/W)	Viewing Angle (°)
2W LED	● Warm White	2700	120	80	20	95-111 VDC	>67	120
4W LED	○ Cool White	5700	325	70	20	190-220 VDC	>85	120
4W LED	● Warm White	3000	250	80	20	190-220 VDC	>60	120
4W LED	○ Cool White	5700	325	70	40	95-111 VDC	>85	120
4W LED	● Warm White	3000	250	80	40	95-111 VDC	>60	120

• Product Availability : Please visit Everlight website for more updated information (www.everlight.com) or contact Everlight sales for regional options.

High Power LED ■ Shuen (1W, 3W)



UNIT : mm

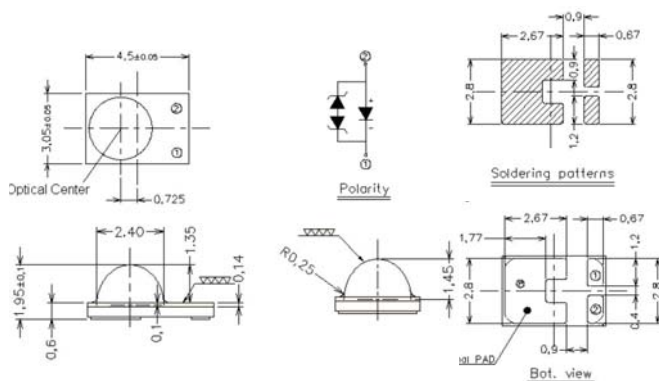

1W / 350mA

Product	Size (LXWXHmm)	Color	CCT (K)	Min.Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSH-F81C1-0LPGS-C6500	3.05x4.5x1.95	○ Cool White	6500	80	70	2.95~3.85
ELSH-F91C1-0LPGS-C6500	3.05x4.5x1.95	○ Cool White	6500	90	70	2.95~3.85
ELSH-J11C1-0CPGS-C6500	3.05x4.5x1.95	○ Cool White	6500	100	70	2.95~3.85
ELSH-J21C1-0VPGS-C6500	3.05x4.5x1.95	○ Cool White	6500	110	70	2.95~3.85
*ELSH-J31C1-****-C6500	3.05x4.5x1.95	○ Cool White	6500	120	70	2.95~3.85
ELSH-F81C1-0LPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	80	70	2.95~3.85
ELSH-F91C1-0LPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	90	70	2.95~3.85
ELSH-J11C1-0CPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	100	70	2.95~3.85
ELSH-J21C1-0VPGS-C5700	3.05x4.5x1.95	○ Cool White	5700	110	70	2.95~3.85
*ELSH-J31C1-****-C5700	3.05x4.5x1.95	○ Cool White	5700	120	70	2.95~3.85
ELSH-F81C1-0LPGS-C5000	3.05x4.5x1.95	○ Cool White	5000	80	70	2.95~3.85
ELSH-F91C1-0CPGS-C5000	3.05x4.5x1.95	○ Cool White	5000	90	70	2.95~3.85
ELSH-J11C1-0VPGS-C5000	3.05x4.5x1.95	○ Cool White	5000	100	70	2.95~3.85
ELSH-F81N1-0LPGS-C4500	3.05x4.5x1.95	○ Cool White	4500	80	75	2.95~3.85
ELSH-F91N1-0CPGS-C4500	3.05x4.5x1.95	○ Cool White	4500	90	75	2.95~3.85
ELSH-J11N1-0VPGS-C4500	3.05x4.5x1.95	○ Cool White	4500	100	75	2.95~3.85
ELSH-F71N1-0LPGS-C4000	3.05x4.5x1.95	○ Neutral White	4000	70	75	2.95~3.85
ELSH-F81N1-0LPGS-C4000	3.05x4.5x1.95	○ Neutral White	4000	80	75	2.95~3.85
ELSH-F91N1-0CPGS-C4000	3.05x4.5x1.95	○ Neutral White	4000	90	75	2.95~3.85
ELSH-J11N1-0VPGS-C4000	3.05x4.5x1.95	○ Neutral White	4000	100	75	2.95~3.85
ELSH-F81N1-0VPHS-C4000	3.05x4.5x1.95	○ Neutral White	4000	80	80	2.95~3.85
*ELSH-F91N1-****-C4000	3.05x4.5x1.95	○ Neutral White	4000	90	80	2.95~3.85
ELSH-F81M1-0CPGS-C3500	3.05x4.5x1.95	● Warm White	3500	80	75	2.95~3.85
ELSH-F91M1-0VPGS-C3500	3.05x4.5x1.95	● Warm White	3500	90	75	2.95~3.85
ELSH-F71M1-0CPHS-C3500	3.05x4.5x1.95	● Warm White	3500	70	80	2.95~3.85
ELSH-F61M1-0LPGS-C3000	3.05x4.5x1.95	● Warm White	3000	60	75	2.95~3.85
ELSH-F71M1-0LPGS-C3000	3.05x4.5x1.95	● Warm White	3000	70	75	2.95~3.85
ELSH-F81M1-0CPGS-C3000	3.05x4.5x1.95	● Warm White	3000	80	75	2.95~3.85
ELSH-F91M1-0VPGS-C3000	3.05x4.5x1.95	● Warm White	3000	90	75	2.95~3.85
ELSH-F71M1-0CPHS-C3000	3.05x4.5x1.95	● Warm White	3000	70	80	2.95~3.85
ELSH-F81M1-0VPHS-C3000	3.05x4.5x1.95	● Warm White	3000	80	80	2.95~3.85
*ELSH-F91M1-****-C3000	3.05x4.5x1.95	● Warm White	3000	90	80	2.95~3.85
ELSH-F61M1-0LPGS-C2700	3.05x4.5x1.95	● Warm White	2700	60	75	2.95~3.85
ELSH-F71M1-0CPGS-C2700	3.05x4.5x1.95	● Warm White	2700	70	75	2.95~3.85
*ELSH-F81M1-****-C2700	3.05x4.5x1.95	● Warm White	2700	80	75	2.95~3.85
ELSH-F91M1-0VPGS-C2700	3.05x4.5x1.95	● Warm White	2700	90	75	2.95~3.85
ELSH-F61M1-0CPHS-C2700	3.05x4.5x1.95	● Warm White	2700	60	80	2.95~3.85
ELSH-F81M1-0VPHS-C2700	3.05x4.5x1.95	● Warm White	2700	80	80	2.95~3.85
*ELSH-F91M1-****-C2700	3.05x4.5x1.95	● Warm White	2700	90	80	2.95~3.85

High Power LED | Shuen (1W, 3W)

1W / 350mA


Product	Size (LXWXHmm)	Color	Wavelength (nm)	Min.Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSH-F41R1-0LPNM-AR5R6	3.05x4.5x1.95	● Red	620~630	45	--	1.75~2.95
ELSH-F51R1-0LPNM-AR5R6	3.05x4.5x1.95	● Red	620~630	52	--	1.75~2.95
ELSH-F61R1-0LPNM-AR5R6	3.05x4.5x1.95	● Red	620~630	60	--	1.75~2.95
ELSH-F41O1-0LPNM-AR3R4	3.05x4.5x1.95	● Orange	610~620	45	--	1.75~2.95
ELSH-F51O1-0LPNM-AR3R4	3.05x4.5x1.95	● Orange	610~620	52	--	1.75~2.95
ELSH-F61O1-0LPNM-AR3R4	3.05x4.5x1.95	● Orange	610~620	60	--	1.75~2.95
ELSH-F31Y1-0LPNM-AA3A5	3.05x4.5x1.95	● Amber	585~592.5	39	--	1.75~2.95
ELSH-F41Y1-0LPNM-AA3A5	3.05x4.5x1.95	● Amber	585~592.5	45	--	1.75~2.95
*ELSH-F51Y1-****-AA3A5	3.05x4.5x1.95	● Amber	585~592.5	52	--	1.75~2.95
ELSH-F31Y1-0LPNM-AA4A6	3.05x4.5x1.95	● Amber	587.5~595	39	--	1.75~2.95
ELSH-F41Y1-0LPNM-AA4A6	3.05x4.5x1.95	● Amber	587.5~595	45	--	1.75~2.95
*ELSH-F51Y1-****-AA4A6	3.05x4.5x1.95	● Amber	587.5~595	52	--	1.75~2.95
ELSH-F71G1-0LPNM-CG1G2	3.05x4.5x1.95	● Green	520~530	70	--	2.95~3.85
ELSH-F71G1-0LPNM-CG2G3	3.05x4.5x1.95	● Green	525~535	70	--	2.95~3.85
ELSH-E61B1-0LPNM-CB7B8	3.05x4.5x1.95	● Blue	460~470	13	--	2.95~3.85
ELSH-E71B1-0LPNM-CB7B8	3.05x4.5x1.95	● Blue	460~470	17	--	2.95~3.85
ELSH-Q91L1-0LPNM-CB5B6	3.05x4.5x1.95	● Royal Blue	Wp 450~460	275 mW	--	2.95~3.85
ELSH-Q91E1-0LPNM-JD3D8	3.05x4.5x1.95	● Deep Red	Wp 645-675	275 mW	--	2.05~2.95
ELSH-Q61F1-0LPNM-JF3F8	3.05x4.5x1.95	● Far Red	Wp 715~745	125 mW	--	2.05~2.95

3W / 700mA

Product	Size (LXWXHmm)	Color	Wavelength (nm) / CCT (K)	Min.Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSH-J61C3-0LPGS-D6500	3.05x4.5x1.95	○ Cool White	6500 K	150	70	3.25~4.15
ELSH-J71C3-0CPGS-D6500	3.05x4.5x1.95	○ Cool White	6500 K	160	70	3.25~4.15
ELSH-J61C3-0LPGS-D5700	3.05x4.5x1.95	○ Cool White	5700 K	150	70	3.25~4.15
ELSH-J71C3-0CPGS-D5700	3.05x4.5x1.95	○ Cool White	5700 K	160	70	3.25~4.15
ELSH-J51C3-0LPGS-D5000	3.05x4.5x1.95	○ Cool White	5000 K	140	70	3.25~4.15
ELSH-J61C3-0CPGS-D5000	3.05x4.5x1.95	○ Cool White	5000 K	150	70	3.25~4.15
ELSH-J41N3-0LPGS-D4500	3.05x4.5x1.95	○ Cool White	4500 K	130	75	3.25~4.15
ELSH-J51N3-0CPGS-D4500	3.05x4.5x1.95	○ Cool White	4500 K	140	75	3.25~4.15
ELSH-J31N3-0LPGS-D4000	3.05x4.5x1.95	○ Cool White	4000 K	120	75	3.25~4.15
ELSH-J41N3-0CPGS-D4000	3.05x4.5x1.95	○ Cool White	4000 K	130	75	3.25~4.15
ELSH-J21M3-0LPGS-D3500	3.05x4.5x1.95	● Warm White	3500 K	110	75	3.25~4.15
ELSH-J31M3-0CPGS-D3500	3.05x4.5x1.95	● Warm White	3500 K	120	75	3.25~4.15
ELSH-J21M3-0LPGS-D3000	3.05x4.5x1.95	● Warm White	3000 K	110	75	3.25~4.15
ELSH-J31M3-0CPGS-D3000	3.05x4.5x1.95	● Warm White	3000 K	120	75	3.25~4.15
ELSH-J21M3-0CPHS-D3000	3.05x4.5x1.95	● Warm White	3000 K	110	80	3.25~4.15
ELSH-J21M3-0LPGS-D2700	3.05x4.5x1.95	● Warm White	2700 K	110	75	3.25~4.15
ELSH-J31M3-0CPGS-D2700	3.05x4.5x1.95	● Warm White	2700 K	120	75	3.25~4.15
ELSH-J21M3-0CPHS-D2700	3.05x4.5x1.95	● Warm White	2700 K	110	80	3.25~4.15
ELSH-F81R3-0LPNM-BR4R6	3.05x4.5x1.95	● Red	615-630 nm	80	--	2.05~2.95
ELSH-F91R3-0LPNM-BR4R6	3.05x4.5x1.95	● Red	615-630 nm	90	--	2.05~2.95
ELSH-F81Y3-0LPNM-BA3A5	3.05x4.5x1.95	● Amber	585-592.5 nm	80	--	2.05~2.95
*ELSH-F91Y3-****-BA3A5	3.05x4.5x1.95	● Amber	585-592.5 nm	90	--	2.05~2.95
ELSH-F91G3-0LPNM-DG1G3	3.05x4.5x1.95	● Green	520-535 nm	90	--	3.25~4.15
ELSH-J11G3-0LPNM-DG1G3	3.05x4.5x1.95	● Green	520-535 nm	100	--	3.25~4.15
ELSH-E81B3-0LPNM-DB6B8	3.05x4.5x1.95	● Blue	455-470 nm	20	--	3.25~4.15
ELSH-E91B3-0LPNM-DB6B8	3.05x4.5x1.95	● Blue	455-470 nm	23	--	3.25~4.15

Star mark * : Engineering samples only

High Power LED ■ Shwo (1W, 3W)

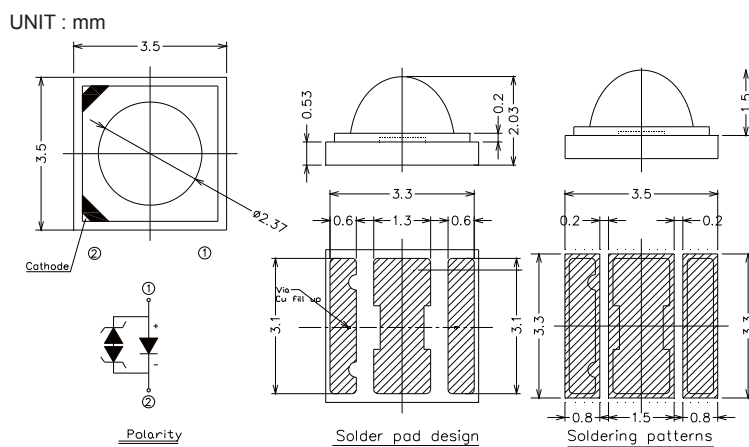

1W / 350mA

Product	Size (LXWXHmm)	Color	CCT (K)	Min.Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSW-F81C1-0LPGS-C6500	3.5x3.5x2.03	○ Cool White	6500	80	70	2.95~3.85
ELSW-F91C1-0LPGS-C6500	3.5x3.5x2.03	○ Cool White	6500	90	70	2.95~3.85
ELSW-J11C1-0CPGS-C6500	3.5x3.5x2.03	○ Cool White	6500	100	70	2.95~3.85
ELSW-J21C1-0VPGS-C6500	3.5x3.5x2.03	○ Cool White	6500	110	70	2.95~3.85
*ELSW-J31C1-*****-C6500	3.5x3.5x2.03	○ Cool White	6500	120	70	2.95~3.85
ELSW-F81C1-0LPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	80	70	2.95~3.85
ELSW-F91C1-0LPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	90	70	2.95~3.85
ELSW-J11C1-0CPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	100	70	2.95~3.85
ELSW-J21C1-0VPGS-C5700	3.5x3.5x2.03	○ Cool White	5700	110	70	2.95~3.85
*ELSW-J31C1-*****-C5700	3.5x3.5x2.03	○ Cool White	5700	120	70	2.95~3.85
ELSW-F91C1-0CPGS-C5000	3.5x3.5x2.03	○ Cool White	5000	90	70	2.95~3.85
ELSW-J11C1-0VPGS-C5000	3.5x3.5x2.03	○ Cool White	5000	100	70	2.95~3.85
ELSW-F91N1-0CPGS-C4500	3.5x3.5x2.03	○ Neutral White	4500	90	75	2.95~3.85
ELSW-J11N1-0VPGS-C4500	3.5x3.5x2.03	○ Neutral White	4500	100	75	2.95~3.85
ELSW-F71N1-0LPGS-C4000	3.5x3.5x2.03	○ Neutral White	4000	70	75	2.95~3.85
ELSW-F81N1-0LPGS-C4000	3.5x3.5x2.03	○ Neutral White	4000	80	75	2.95~3.85
ELSW-F91N1-0CPGS-C4000	3.5x3.5x2.03	○ Neutral White	4000	90	75	2.95~3.85
ELSW-J11N1-0VPGS-C4000	3.5x3.5x2.03	○ Neutral White	4000	100	75	2.95~3.85
ELSW-F81N1-0VPHS-C4000	3.5x3.5x2.03	○ Neutral White	4000	80	80	2.95~3.85
*ELSW-F91N1-*****-C4000	3.5x3.5x2.03	○ Neutral White	4000	90	80	2.95~3.85
ELSW-F81M1-0CPGS-C3500	3.5x3.5x2.03	● Warm White	3500	80	75	2.95~3.85
ELSW-F91M1-0VPGS-C3500	3.5x3.5x2.03	● Warm White	3500	90	75	2.95~3.85
ELSW-F71M1-0CPHS-C3500	3.5x3.5x2.03	● Warm White	3500	70	80	2.95~3.85
ELSW-F61M1-0LPGS-C3000	3.5x3.5x2.03	● Warm White	3000	60	75	2.95~3.85
ELSW-F71M1-0LPGS-C3000	3.5x3.5x2.03	● Warm White	3000	70	75	2.95~3.85
ELSW-F81M1-0CPGS-C3000	3.5x3.5x2.03	● Warm White	3000	80	75	2.95~3.85
ELSW-F91M1-0VPGS-C3000	3.5x3.5x2.03	● Warm White	3000	90	75	2.95~3.85
ELSW-F71M1-0CPHS-C3000	3.5x3.5x2.03	● Warm White	3000	70	80	2.95~3.85
ELSW-F81M1-0VPHS-C3000	3.5x3.5x2.03	● Warm White	3000	80	80	2.95~3.85
*ELSW-F91M1-*****-C3000	3.5x3.5x2.03	● Warm White	3000	90	80	2.95~3.85
ELSW-F61M1-0LPGS-C2700	3.5x3.5x2.03	● Warm White	2700	60	75	2.95~3.85
ELSW-F71M1-0CPGS-C2700	3.5x3.5x2.03	● Warm White	2700	70	75	2.95~3.85
*ELSW-F81M1-*****-C2700	3.5x3.5x2.03	● Warm White	2700	80	75	2.95~3.85
ELSW-F91M1-0VPGS-C2700	3.5x3.5x2.03	● Warm White	2700	90	75	2.95~3.85
ELSW-F61M1-0CPHS-C2700	3.5x3.5x2.03	● Warm White	2700	60	80	2.95~3.85
ELSW-F81M1-0VPHS-C2700	3.5x3.5x2.03	● Warm White	2700	80	80	2.95~3.85
*ELSW-F91M1-*****-C2700	3.5x3.5x2.03	● Warm White	2700	90	80	2.95~3.85

Star mark * : Engineering samples only

High Power LED | Shwo (1W, 3W)

1W / 350mA

Product	Size (LXWXHmm)	Color	Wavelength (nm)	Min.Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSW-F51R1-0LPNM-AR5R6	3.5x3.5x2.03	● Red	620-630	52	--	1.75-2.65
ELSW-F61R1-0LPNM-AR5R6	3.5x3.5x2.03	● Red	620-630	60	--	1.75-2.65
ELSW-F51O1-0LPNM-AR3R4	3.5x3.5x2.03	● Orange	610-620	52	--	1.75-2.65
ELSW-F61O1-0LPNM-AR3R4	3.5x3.5x2.03	● Orange	610-620	60	--	1.75-2.65
ELSW-F41Y1-0LPNM-AA3A5	3.5x3.5x2.03	● Amber	585-592.5	45	--	1.75-2.65
*ELSW-F51Y1-*****-AA3A5	3.5x3.5x2.03	● Amber	585-592.5	52	--	1.75-2.65
ELSW-F71G1-0LPNM-CG1G2	3.5x3.5x2.03	● Green	520-530	70	--	2.95~3.85
ELSW-F71G1-0LPNM-CG2G	3.5x3.5x2.03	● Green	525-535	70	--	2.95~3.85
ELSW-E61B1-0LPNM-CB7B8	3.5x3.5x2.03	● Blue	460-470	13	--	2.95~3.85
ELSW-E71B1-0LPNM-CB7B8	3.5x3.5x2.03	● Blue	460-470	17	--	2.95~3.85

3W / 700mA


Product	Size (LXWXHmm)	Color	Wavelength (nm) / CCT (K)	Min.Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELSW-J61C3-0LPGS-D6500	3.5x3.5x2.03	○ Cool White	6500 K	150	70	3.25~4.15
ELSW-J71C3-0CPGS-D6500	3.5x3.5x2.03	○ Cool White	6500 K	160	70	3.25~4.15
ELSW-J61C3-0LPGS-D5700	3.5x3.5x2.03	○ Cool White	5700 K	150	70	3.25~4.15
ELSW-J71C3-0CPGS-D5700	3.5x3.5x2.03	○ Cool White	5700 K	160	70	3.25~4.15
ELSW-J51C3-0LPGS-D5000	3.5x3.5x2.03	○ Cool White	5000 K	140	70	3.25~4.15
ELSW-J61C3-0CPGS-D5000	3.5x3.5x2.03	○ Cool White	5000 K	150	70	3.25~4.15
ELSW-J41N3-0LPGS-D4500	3.5x3.5x2.03	○ Neutral White	4500 K	130	75	3.25~4.15
ELSW-J51N3-0CPGS-D4500	3.5x3.5x2.03	○ Neutral White	4500 K	140	75	3.25~4.15
ELSW-J31N3-0LPGS-D4000	3.5x3.5x2.03	○ Neutral White	4000 K	120	75	3.25~4.15
ELSW-J41N3-0CPGS-D4000	3.5x3.5x2.03	○ Neutral White	4000 K	130	75	3.25~4.15
ELSW-J21M3-0LPGS-D3500	3.5x3.5x2.03	● Warm White	3500 K	110	75	3.25~4.15
ELSW-J31M3-0CPGS-D3500	3.5x3.5x2.03	● Warm White	3500 K	120	75	3.25~4.15
ELSW-J21M3-0LPGS-D3000	3.5x3.5x2.03	● Warm White	3000 K	110	75	3.25~4.15
ELSW-J31M3-0CPGS-D3000	3.5x3.5x2.03	● Warm White	3000 K	120	75	3.25~4.15
ELSW-J21M3-0CPHS-D3000	3.5x3.5x2.03	● Warm White	3000 K	110	80	3.25~4.15
ELSW-J21M3-0LPGS-D2700	3.5x3.5x2.03	● Warm White	2700 K	110	75	3.25~4.15
ELSW-J31M3-0CPGS-D2700	3.5x3.5x2.03	● Warm White	2700 K	120	75	3.25~4.15
ELSW-J21M3-0CPHS-D2700	3.5x3.5x2.03	● Warm White	2700 K	110	80	3.25~4.15
ELSW-F81R3-0LPNM-BR4R6	3.5x3.5x2.03	● Red	615-630 nm	80	--	2.05-2.95
ELSW-F91R3-0LPNM-BR4R6	3.5x3.5x2.03	● Red	615-630 nm	90	--	2.05-2.95
ELSW-F81Y3-0LPNM-BA3A5	3.5x3.5x2.03	● Amber	585-592.5 nm	80	--	2.05-2.95
*ELSW-F91Y3-*****-BA3A5	3.5x3.5x2.03	● Amber	585-592.5 nm	90	--	2.05-2.95
ELSW-F91G3-0LPNM-DG1G3	3.5x3.5x2.03	● Green	520-535 nm	90	--	3.25~4.15
ELSW-J11G3-0LPNM-DG1G3	3.5x3.5x2.03	● Green	520-535 nm	100	--	3.25~4.15
ELSW-E81B3-0LPNM-DB6B8	3.5x3.5x2.03	● Blue	455-470	20	--	3.25~4.15
ELSW-E91B3-0LPNM-DB6B8	3.5x3.5x2.03	● Blue	455-470	23	--	3.25~4.15

Star mark * : Engineering samples only

High Power LED ■ Yi (5W)



UNIT : mm

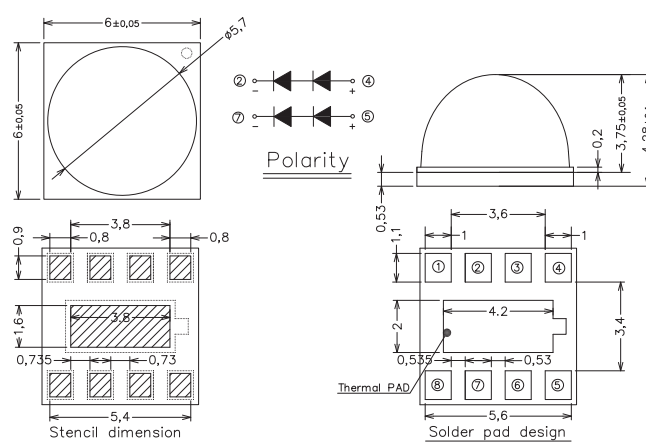


Product	Size (LXWXHmm)	Color	CCT (K)	Typ.Luminous Flux (lm)	CRI (min.)	Forward Voltage (V)
ELYI-K72C5-0LPGS-P6500	6.0x6.0x4.28	○ Cool White	6500	375	75ra	Vf: 6.0~8.0
ELYI-K72C5-0LPGS-P5700	6.0x6.0x4.28	○ Cool White	5700	375	75ra	Vf: 6.0~8.0
ELYI-K42M5-0LPGS-P3000	6.0x6.0x4.28	● Warm White	3000	300	80ra	Vf: 6.0~8.0

High Power LED ■ A09K (0.5W)



UNIT : mm

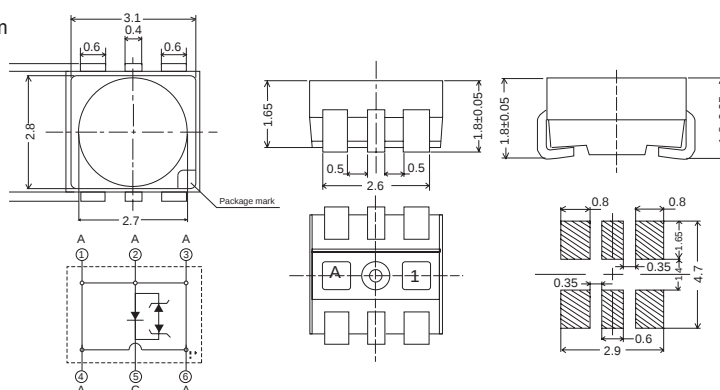


Product	Size (LXWXHmm)	Color	Iv (mcd)	Wavelength (nm) / CCT (K)	V _F (V)	Viewing Angle (°)
EHP-A09K-S5TC-S3000CADA1K-1T8-AM	3.4x3.3x1.75	● Red	2800~5600	616~625 nm	1.7~3.2	120
EHP-A09K-Y8TC-E9000BBDAE1K-1T8-AM	3.4x3.3x1.75	● Yellow	2240~5600	586~595 nm	1.7~3.2	120
EHP-A09K-BRTT-5670HDBEBD9K-1T8-AM	3.4x3.3x1.75	○ Cool White	5600~11200	5650~7000 K	2.75~4.25	120

Low Power LED ■ 45-21 Series (0.06W)



UNIT : mm

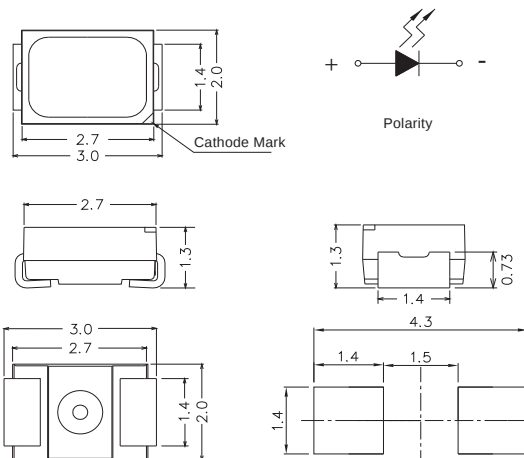

Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$


Recommended soldering pad design

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 20mA	CRI (min.)	Forward Voltage (V)
45-21/LK2C-B56702C4CB2/2T	3.0x2.0x1.3	○ Cool White	5650~7000	6.8	70	2.9~3.6
45-21/LK2C-B50634C6CB2/2T	3.0x2.0x1.3	○ Cool White	5000~6300	7.4	70	2.9~3.6
45-21/LK2C-B45562C4CB2/2T	3.0x2.0x1.3	○ Cool White	4500~5650	6.8	70	2.9~3.6
45-21/LK2C-B38452C4CB2/2T	3.0x2.0x1.3	● Warm White	3800~4500	6.8	70	2.9~3.6
45-21/LK2C-B2832AC2CB2/2T	3.0x2.0x1.3	● Warm White	2850~3250	6.2	70	2.9~3.6
45-21/QK2C-B56702C4CB41/2T	3.0x2.0x1.3	○ Cool White	5650~7000	6.8	75	2.9~3.4
45-21/QK2C-B50632C4CB2/2T	3.0x2.0x1.3	○ Cool White	5000~6300	6.8	75	2.9~3.6
45-21/QK2C-B45562C4CB2/2T	3.0x2.0x1.3	○ Cool White	4500~5650	6.8	75	2.9~3.6
45-21/QK2C-B3845AC2CB2/2T	3.0x2.0x1.3	● Warm White	3800~4500	6.2	75	2.9~3.6
45-21/QK2C-B2832AC2CB2/2T	3.0x2.0x1.3	● Warm White	2850~3250	6.2	75	2.9~3.6
45-21/KK2C-S30308BACB41/2T	3.0x2.0x1.3	● Warm White	3000	5.6	80	2.9~3.6
45-21/KK2C-S4040AC4CB41/2T	3.0x2.0x1.3	● Warm White	4000	6.2	80	2.9~3.6

Low Power LED ■ 67-21 Series (0.06W)



UNIT : mm

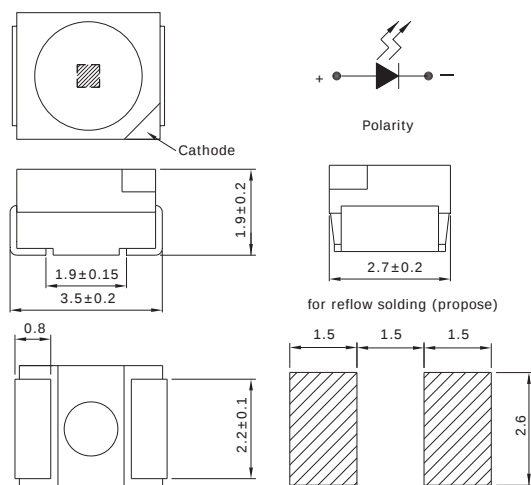


Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 20mA	CRI (min.)	Forward Voltage (V)
67-21/LK2C-B56704C6CB2/2T	3.5x2.8x1.9	○ Cool White	5650~7000	7.4	70	2.9~3.6
67-21/LK2C-B50634C6CB2/2T	3.5x2.8x1.9	○ Cool White	5000~6300	7.4	70	2.9~3.6
67-21/LK2C-B45564C6CB2/2T	3.5x2.8x1.9	○ Cool White	4500~5650	7.4	70	2.9~3.6
67-21/LK2C-B38454C6CB2/2T	3.5x2.8x1.9	● Warm White	3800~4500	7.4	70	2.9~3.6
67-21/LK2C-B28322C4CB2/2T	3.5x2.8x1.9	● Warm White	2850~3250	6.8	70	2.9~3.6
67-21/QK2C-B56702C4CB2/2T	3.5x2.8x1.9	○ Cool White	5650~7000	6.8	75	2.9~3.6
67-21/QK2C-B50632C4CB2/2T	3.5x2.8x1.9	○ Cool White	5000~6300	6.8	75	2.9~3.6
67-21/QK2C-B45562C4CB2/2T	3.5x2.8x1.9	○ Cool White	4500~5650	6.8	75	2.9~3.6
67-21/QK2C-B38452C4CB2/2T	3.5x2.8x1.9	● Warm White	3800~4500	6.8	75	2.9~3.6
67-21/QK2C-B28322C4CB2/2T	3.5x2.8x1.9	● Warm White	2850~3250	6.8	75	2.9~3.6
67-21/KK2C-S3030AC2CB2/2T	3.5x2.8x1.9	● Warm White	3000	6.2	80	2.9~3.6
67-21/KK2C-S4040AC2CB2/2T	3.5x2.8x1.9	● Warm White	4000	6.2	80	2.9~3.6

Low Power LED ■ 61-238 Series (0.2W)



UNIT : mm

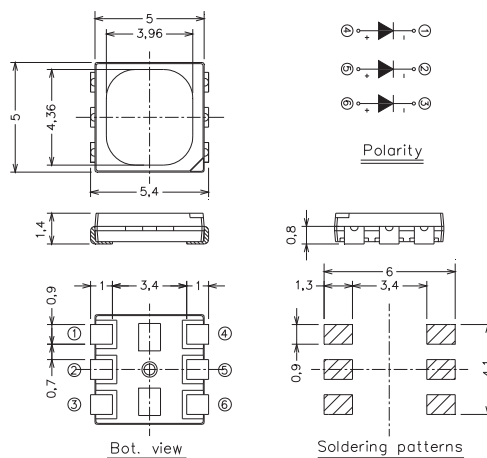


Note: The tolerances unless mentioned is $\pm 0.1\text{mm}$

Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 60mA	CRI (min.)	Forward Voltage (V)
61-238/LK2C-B56706F4GB2/ET	5.0x5.0x1.5	○ Cool White	5650~7000	18.6	70	2.9~3.6
61-238/LK2C-B50638F6GB2/ET	5.0x5.0x1.5	○ Cool White	5000~6300	19.2	70	2.9~3.6
61-238/LK2C-B45568F6GB2/ET	5.0x5.0x1.5	○ Cool White	4500~5650	19.2	70	2.9~3.6
61-238/LK2C-B28322FAGB2/ET	5.0x5.0x1.5	● Warm White	2850~3250	17.0	70	2.9~3.6
61-238/QK2C-B50632FAGB2/ET	5.0x5.0x1.5	○ Cool White	5000~6300	17.0	75	2.9~3.6
61-238/QK2C-B45562FAGB2/ET	5.0x5.0x1.5	○ Cool White	4500~5650	17.0	75	2.9~3.6
61-238/QK2C-B28322FAGB2/ET	5.0x5.0x1.5	● Warm White	2850~3250	17.0	75	2.9~3.6
61-238/KK2C-S30306F4GB2/ET	5.0x5.0x1.5	○ Cool White	3000	18.6	80	2.9~3.6
61-238/KK2C-S40408F6GB2/ET	5.0x5.0x1.5	○ Cool White	4000	19.2	80	2.9~3.6

Low Power LED ■ 62-227B Series (0.4W)



UNIT : mm

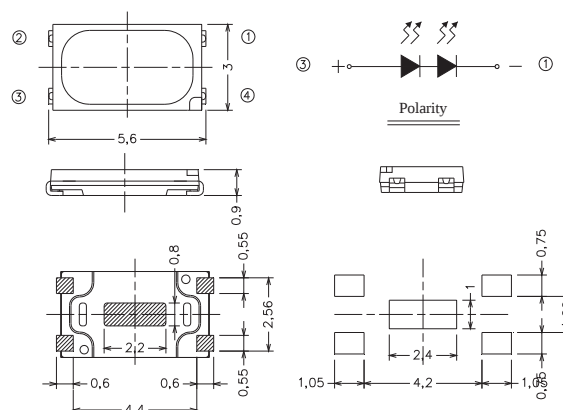


Product	Size (LXWXHmm)	Color	CCT (K)	Typ. Luminous Flux (lm) @ 60mA	CRI (min.)	Forward Voltage (V)
62-227B/LK2C-N3030N4P3S2Z6/2T	5.6x3.0x0.9	● Warm White	3000	33	70	5.8~7.0
62-227B/LK2C-N4040N4P3S2Z6/2T	5.6x3.0x0.9	● Warm White	4000	35	70	5.8~7.0
62-227B/KK2C-N3030N4P3S2Z6/2T	5.6x3.0x0.9	● Warm White	3000	31	80	5.8~7.0
62-227B/KK2C-N4040N4P3S2Z6/2T	5.6x3.0x0.9	● Warm White	4000	33	80	5.8~7.0

Flash LED ■ High Power Flash LED ■ 2016 Package




UNIT : mm

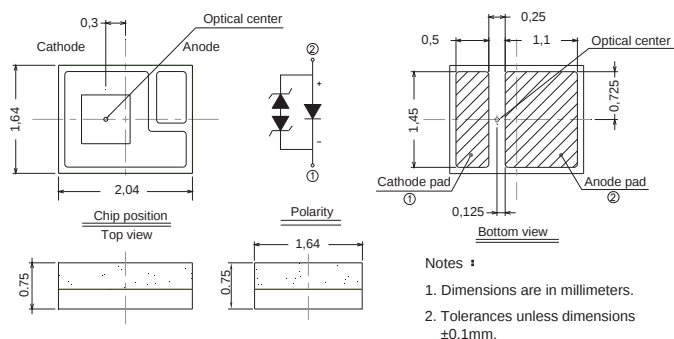

Product	Size (LXWXHmm)	Color	CCT (K)	Typ.Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
EHP-C04/NT01A-P01/TR	2.04x1.64x0.75	○ White	4500~7000	160	2.95~4.35	1000



UNIT : mm

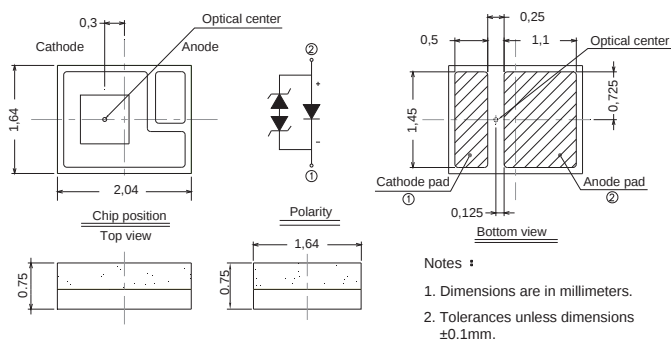


Product	Size (LXWXHmm)	Color	CCT (K)	Typ.Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
EHP-C04/NT01H-P01/TR	2.04x1.64x0.75	○ White	4500~7000	80	2.95~4.35	500

Flash LED ■ High Power Flash LED ■ 2016 Package




UNIT : mm

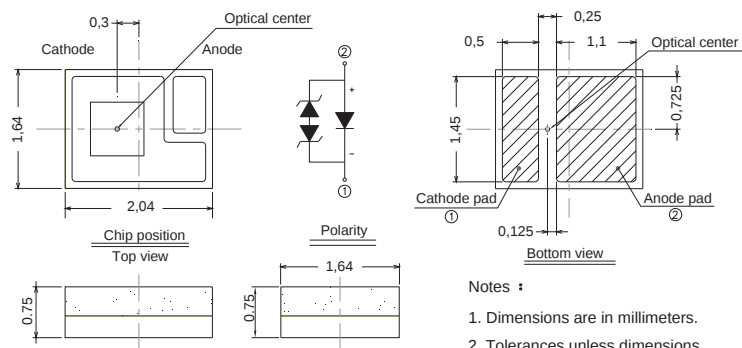


Product	Size (LXWXHmm)	Color	CCT (K)	Typ.Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
ELCH06/BJ4J6Z10-N0	2.04x1.64x0.75	○ White	4500~7000	200	2.95~4.35	1000

Flash LED ■ High Power Flash LED ■ 3333 Package

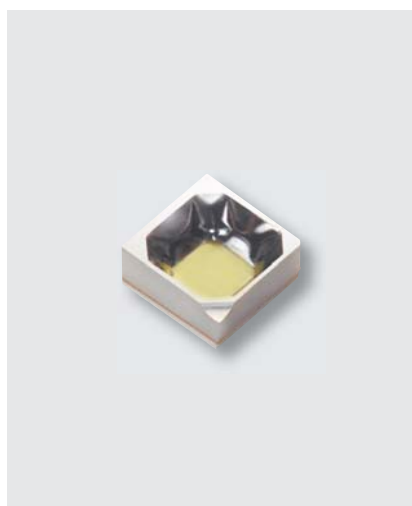

UNIT : mm

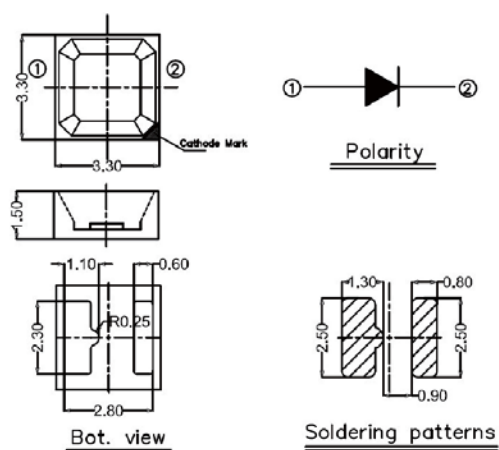


Product	Size (LXWXHmm)	Color	CCT (K)	Typ.Luminous Flux (lm)	Forward Voltage (V)	I _F (mA)
EHP-69/GT01C-P01/TR	3.3x3.3x1.5	○ White	4500~7000	100	2.95~4.15	500

Flash LED ■ Low Power Flash LED ■ Triple Dice



UNIT : mm

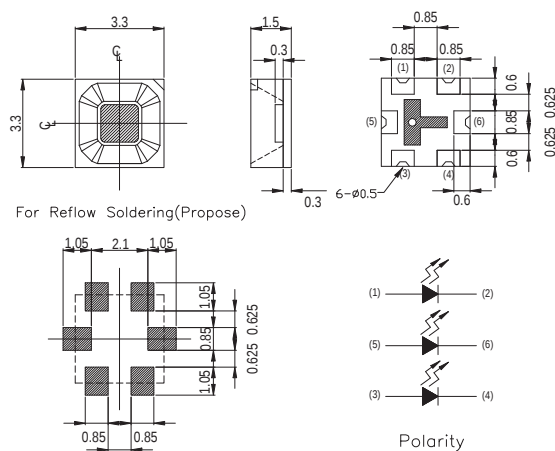


Product	Size (LXWXH)mm	Color	CCT (K)	Typ. Luminous Intensity (cd)	Forward Voltage (V)	I _F (mA)
69-23BUMD/TR8	3.3x3.3x1.5	○White	5000~7000	11	2.7~3.7	20 for each die

Flash LED ■ Low Power Flash LED ■ Four Dice



UNIT : mm

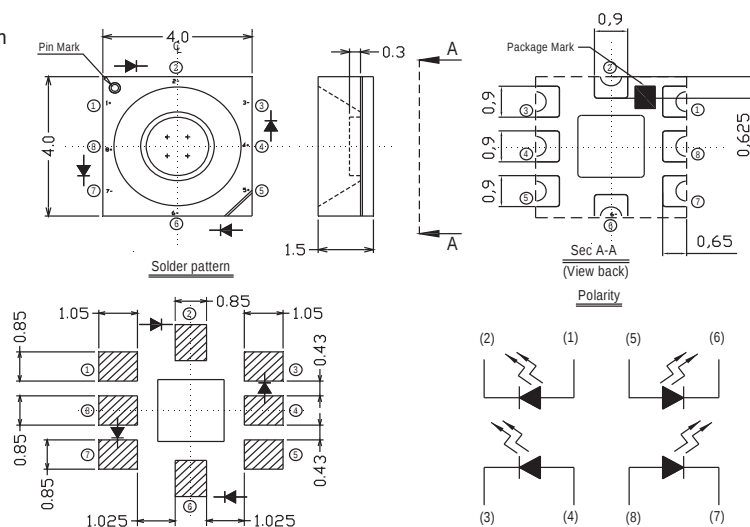


Product	Size (LXWXH)mm	Color	CCT (K)	Typ. Luminous Intensity (cd)	Forward Voltage (V)	I _F (mA)
59-146UTD/TR8	4x4x1.5	○White	4500~7000	8.5~11~15	2.8~3.7	20mA for each die

SMD LED ■ Subminiature LED Lamps (Leadframe)




UNIT : mm

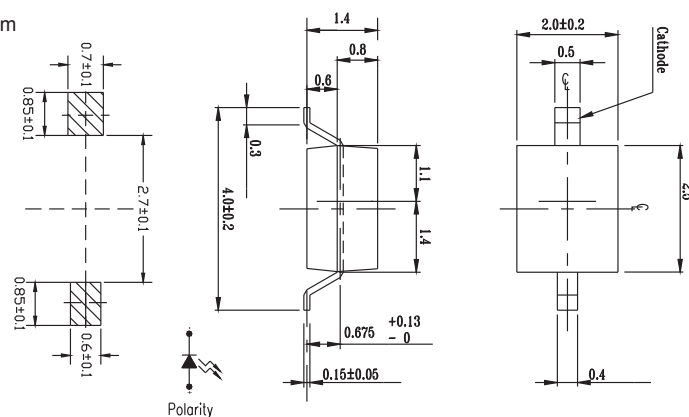

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
28-21SDRC/S530-A3/TR8	2.5x2.0x1.4	● Deep Red	639	20 / 27	N	1.7	2	2.4	20
28-21SURC/S530-A2/TR8	2.5x2.0x1.4	● Hyper Red	624	11 / 26	N	N	2	2.4	20
28-21UYC/S530-A3/TR8	2.5x2.0x1.4	● Super Yellow	589	21 / 33	N	N	2	2.4	20



UNIT : mm

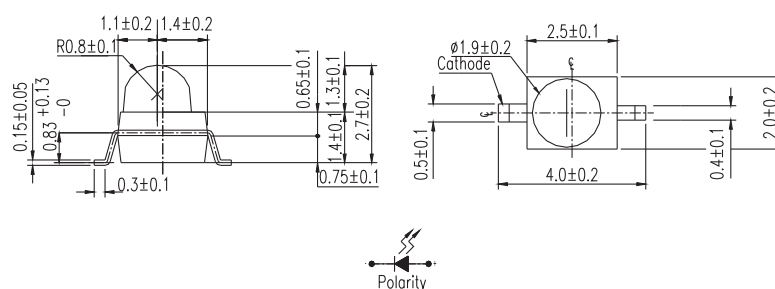


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
91-21SUBC/S400-A4/TR7	2.0x2.5x2.7	● Super Blue	470	400 / 500	N	N	3.5	4.3	20
91-21SUGC/S400-A4/TR7	2.0x2.5x2.7	● Super Green	525	2000 / 2300	N	N	3.5	4.3	20
91-21SURC/S530-A6/TR7	2.0x2.5x2.7	● Hyper Red	624	802 / 1232	N	N	2	2.4	20
91-21SYGC/S530-E4/TR7	2.0x2.5x2.7	● Super Yellow Green	573	528 / 594	N	N	2	2.4	20
91-21UBC/C430/TR7	2.0x2.5x2.7	● Blue	466	160 / 203	N	N	3.8	4.5	20
91-21USRC/S530-A4/TR7	2.0x2.5x2.7	● Dark Red	631	344 / 578	N	N	2	2.4	20

SMD LED ■ Subminiature LED Lamps (Leadframe)




UNIT : mm

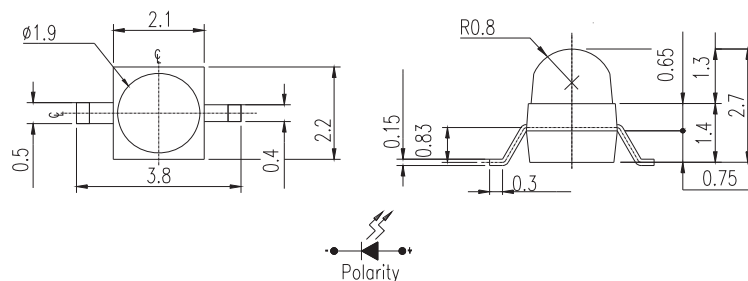

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
95-21SUGC/S400-A4/TR7	2.1x 2.2x2.7	● Super Green	525	2000 / 2300	N	N	3.5	4.3	20
95-21SYGC/S530-E2/TR7	2.1x 2.0x2.7	● Brilliant Yellow Green	573	264 / 330	N	1.7	2	2.4	20
95-21USRD/S357/TR7	2.1x 2.2x2.7	● Dark Red	631	45 / 100	N	N	2	2.4	20
95-21UYC/S530-A5/TR7	2.1x 2.2x2.7	● Super Yellow	589	793 / 1156	N	N	2	2.4	20



UNIT : mm

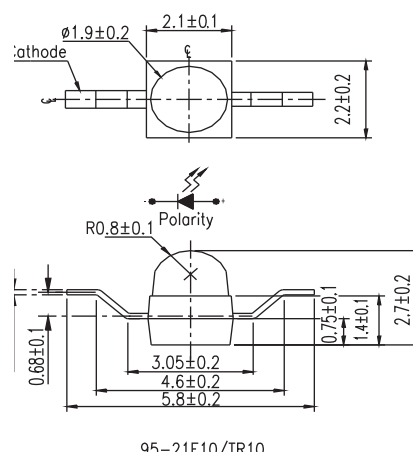


95-21F10/TR10

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min. (V)	V_F Typ. (V)	V_F Max. (V)	I_F (mA)
95-21SDRC/S530-A3/TR10	2.1x 2.2x2.7	● Brilliant Red	639	330 / 495	N	1.7	2	2.4	20
95-21SUBC/S400-A5/TR10	2.1x 2.2x2.7	● Super Blue	470	500 / 800	N	N	3.5	4.3	20

SMD LED | Surface Mount Chip LED (PCB) | Top View LED




UNIT : mm

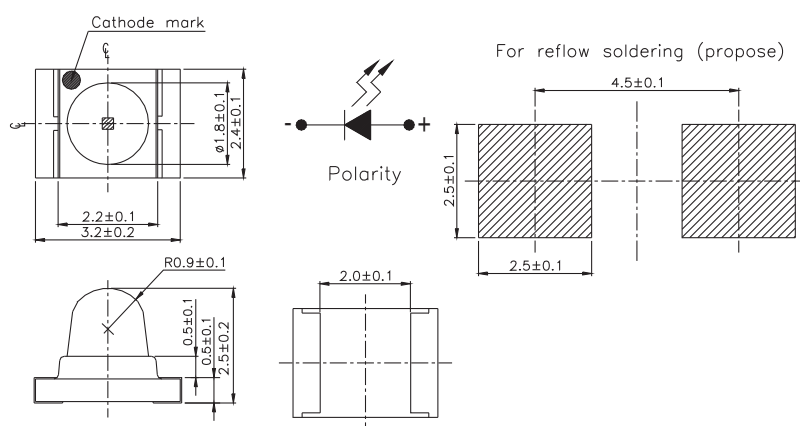

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
42-21/BHC-AUW/1T	3.2x2.4x2.5	Blue	470	450	1800	2.7 / 3.3	3.7	20



UNIT : mm

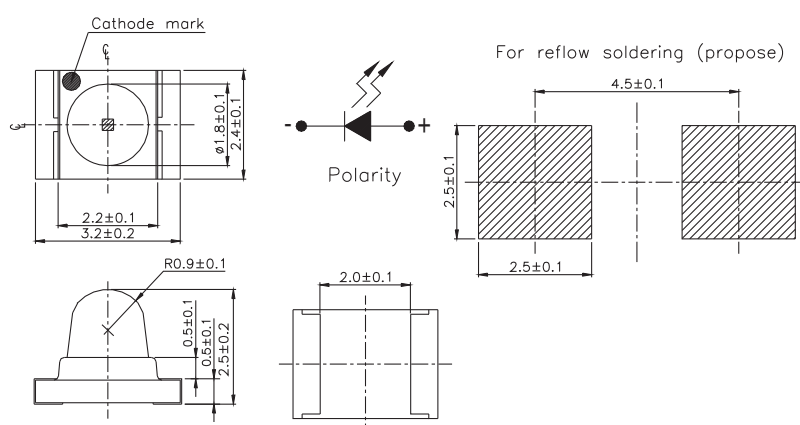


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
42-21A/BHC-ZV1W2N/1T	3.2x2.4x2.5	Blue	470	715	1800	2.65	3.75	20
42-21A/GHC-YX1Y2N/1T	3.2x2.4x2.5	Brilliant Green	525	1800	4500	2.7	3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0402 (0.2T~0.5T)




UNIT : mm

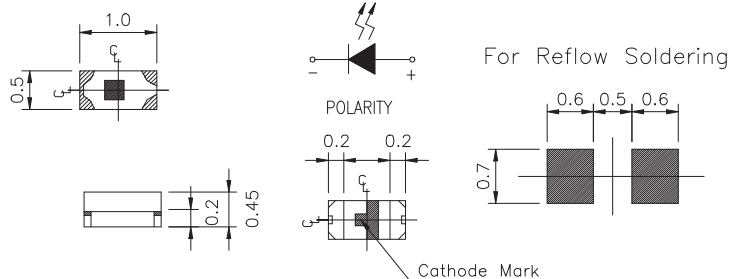


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-213/BHC-AN1P2/3T	1.0x0.5x0.45	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
16-213/BHC-ZL1M2QY/3T	1.0x0.5x0.45	● Blue	470	11.5	28.5	2.7	3.2	5
16-213/GHC-YR1S1/3T	1.0x0.5x0.45	● Brilliant Green	525	112	225	2.7 / 3.3	3.7	20
16-213/R6C-A2225VZ/3T	1.0x0.5x0.45	● Brilliant Red	624	20	40.5	1.7	2.2	10
16-213/T3D-AP1Q2QY/3T	1.0x0.5x0.45	○ Pure White	x=0.29 y=0.30	45	112	2.7	3.2	5
16-213/T7D-AQ1R1QY/3T	1.0x0.5x0.45	○ Pure White	x=0.29 y=0.30	72	140	2.7	3.2	5




UNIT : mm

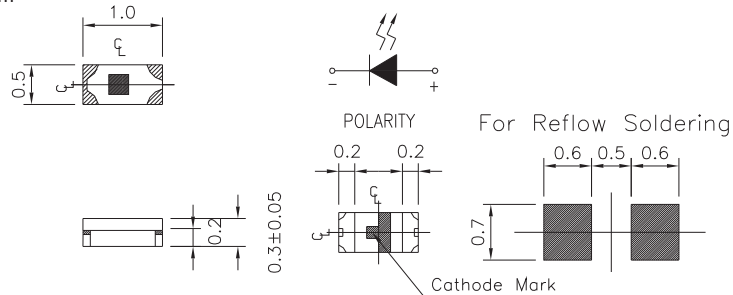

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-216/T3D-AQ1R2TY/3T	1.0x0.5x0.3	○ Pure White	x=0.29 y=0.30	72	180	2.6	3	5

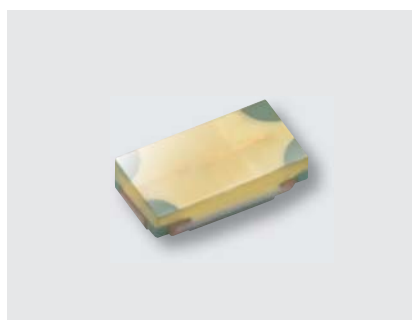


UNIT : mm

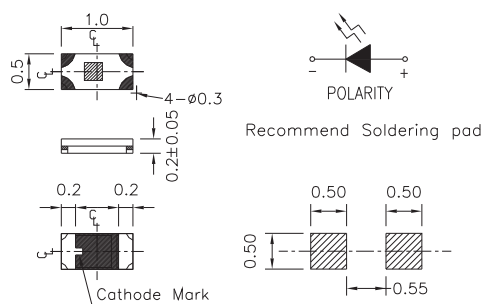


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-219A/T2D-AR2T1QY/3T	1.0x0.5x0.2	○ Pure White	x=0.29 y=0.30	140	360	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)

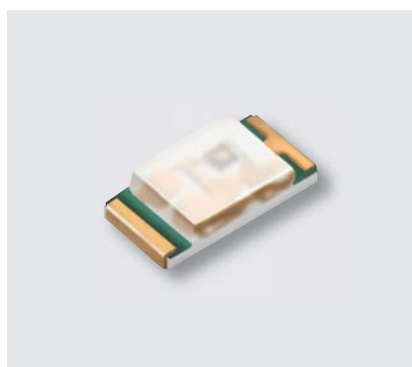


UNIT : mm

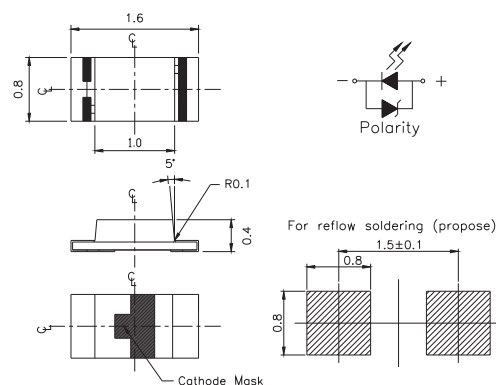

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-117/BHC-YJ2K2TX/3T	1.6x0.8x0.4	● Blue	470	5.8	11.5	2.6	3	2
19-117/BHC-ZL1M2RY/3T	1.6x0.8x0.4	● Blue	470	11.5	28.5	2.5	3.1	5
19-117/T1D-AP2Q2QY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	57	112	2.7	3.2	5



UNIT : mm

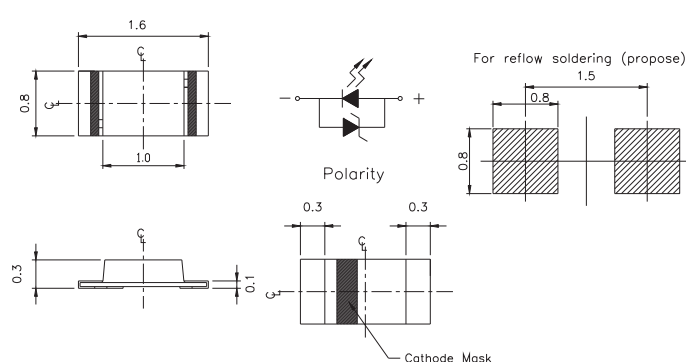


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-118/BHC-ZL1M2QY/3T	1.6x0.8x0.3	● Blue	470	11.5	28.5	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)



UNIT : mm

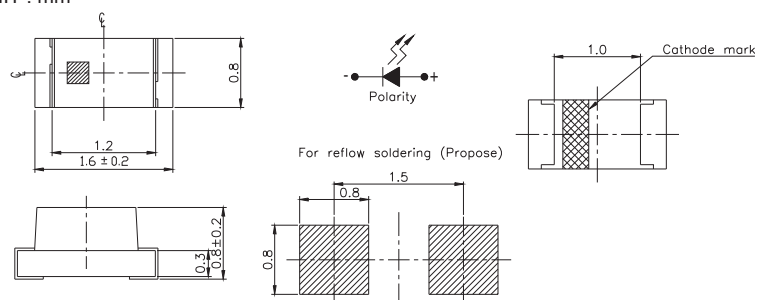


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-21/B6C-AP2Q2M/3T	1.6x0.8x0.8	● Blue	470	57	112	2.75	3.95	20
19-21/BHC-AP1Q2/3T	1.6x0.8x0.8	● Blue	470	45	112	2.7 / 3.3	3.7	20
19-21/BHC-YL1M1RY/3T	1.6x0.8x0.8	● Blue	470	11.5	22.5	2.5	3.1	5
19-21/BHC-ZQ1R2N/3T	1.6x0.8x0.8	● Blue	470	72	180	2.7	3.7	20
19-21/G6C-AL1M2LY/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	11.5	28.5	1.7	2.3	5
19-21/G6C-FM1N2B/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	18	45	1.75	2.35	20
19-21/G6C-FP1Q1L/3T	1.6x0.8x0.8	● Brilliant Yellow Green	573	45	90	1.7	2.3	20
19-21/GHC-YN1P2QY/3T	1.6x0.8x0.8	● Brilliant Green	525	28.5	72	2.7	3.2	5
19-21/GPC-FL1M2B/3T	1.6x0.8x0.8	● Green	562	11.5	28.5	1.75	2.35	20
19-21/R6C-AL2N1VY/3T	1.6x0.8x0.8	● Brilliant Red	624	14.5	36	1.7	2.2	5
19-21/R6C-FP1Q2L/3T	1.6x0.8x0.8	● Brilliant Red	624	45	112	1.7	2.3	20
19-21/R7C-AK1L2BY/3T	1.6x0.8x0.8	● Deep Red	631	7.2	18	1.75	2.35	5
19-21/R7C-AN2Q1B/3T	1.6x0.8x0.8	● Deep Red	631	36	90	1.75	2.35	20
19-21/R8C-FN2Q1L/3T	1.6x0.8x0.8	● Deep Red	639	36	90	1.7	2.3	20
19-21/S2C-AL2M2VY/3T	1.6x0.8x0.8	● BrilliantOrange	605	14.5	28.5	1.7	2.2	5
19-21/S2C-AQ1R2B/3T	1.6x0.8x0.8	● BrilliantOrange	605	72	180	1.75	2.35	20
19-21/T1D-ANPHY/3T	1.6x0.8x0.8	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-21/T1D-CPQTY/3T	1.6x0.8x0.8	○ Pure White	x=0.274 y=0.226	45	112	2.6	3	5
19-21/W1D-ANPHY/3T	1.6x0.8x0.8	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-21/Y2C-AL1M2VY/3T	1.6x0.8x0.8	● Brilliant Yellow	589	11.5	28.5	1.7	2.2	5
19-21/Y2C-CP1Q2B/3T	1.6x0.8x0.8	● Brilliant Yellow	589	45	112	1.75	2.35	20


SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)




UNIT : mm

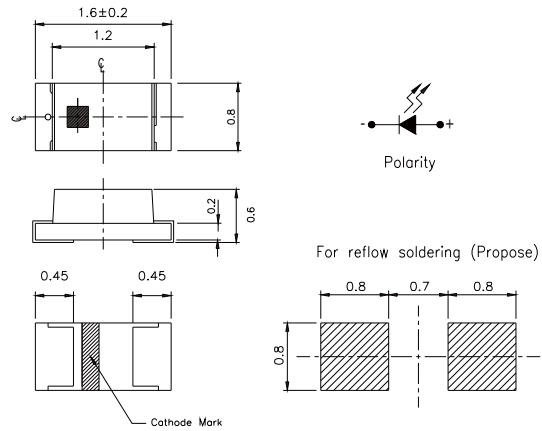

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-213A/T1D-CP2Q2HY/3T	1.6x0.8x0.6	○ Pure White	x=0.274 y=0.226	57	112	2.7	3.15	5

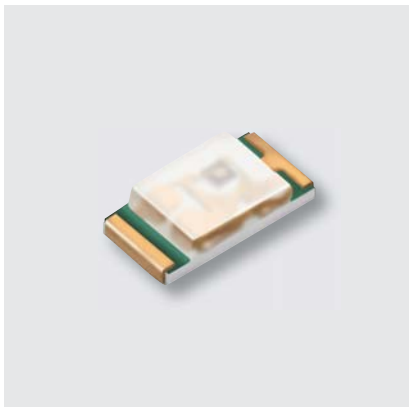

UNIT : mm

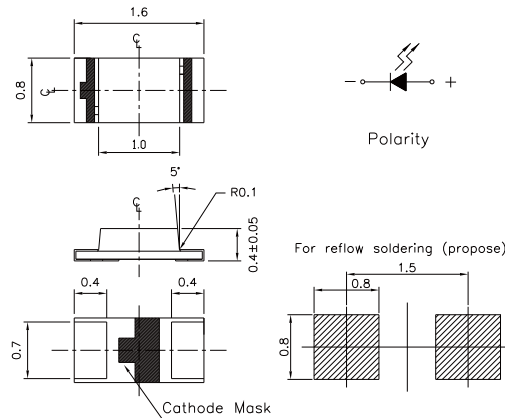


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-217/B9C-ANQE/3T	1.6x0.8x0.4	● Blue	470	28.5	112	2.75	3.65	20
19-217/BHC-AN1P2/3T	1.6x0.8x0.4	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
19-217/BHC-XK1L2B11X/3T	1.6x0.8x0.4	● Blue	470	7.2	18	2.6	2.9	2
19-217/BHC-YL2M2TY/3T	1.6x0.8x0.4	● Blue	470	14.5	28.5	2.6	3	5
19-217/G7C-AL1M2B/3T	1.6x0.8x0.4	● Brilliant Yellow Green	573	11.5	28.5	1.75	2.35	20
19-217/GHC-YR1S2/3T	1.6x0.8x0.4	● Brilliant Green	525	112	285	2.7 / 3.3	3.7	20
19-217/R6C-P1Q2/3T	1.6x0.8x0.4	● Brilliant Red	624	45	112	1.7/2	2.4	20
19-217/S2C-AL1M2VY/3T	1.6x0.8x0.4	● Brilliant Orange	605	11.5	28.5	1.7	2.2	5
19-217/S3C-AL2N1VY/3T	1.6x0.8x0.4	● Reddish Orange	615	14.5	36	1.7	2.2	5
19-217/T1D-ANPHY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-217/T1D-JP1Q2QY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.2	5
19-217/T7D-CS2T2B2/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	225	450	2.9	3.6	20
19-217/W1D-CPQTY/3T	1.6x0.8x0.4	○ Pure White	x=0.274 y=0.226	45	112	2.6	3	5
19-217/Y5C-AM1N1VY/3T	1.6x0.8x0.4	● Brilliant Yellow	589	16	40	1.65	2.25	5
19-217/Y5C-APQB/3T	1.6x0.8x0.4	● Brilliant Yellow	589	45	112	1.75	2.35	20
19-217/Y5C-AQ2R2/3T	1.6x0.8x0.4	● Brilliant Yellow	589	90	180	1.7/2	2.4	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)




UNIT : mm

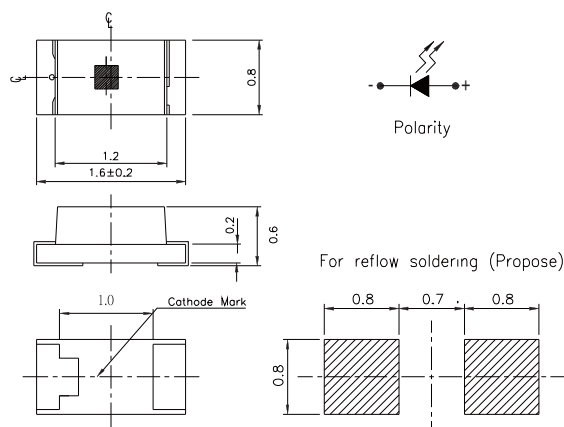


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-213 /Y2C-CQ1R2/3T	1.6x0.8x0.6	● Brilliant Yellow	589	72	180	1.7 / 2	2.4	20
19-213/B7C-AQ2S1B2/3T	1.6x0.8x0.6	● Blue	470	90	225	2.9	3.6	20
19-213/BHC-AN1P2/3T	1.6x0.8x0.6	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
19-213/G6C-AP1Q2/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	45	112	2	2.4	20
19-213/G6C-BM1N2B/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	18	45	1.75	2.35	20
19-213/G6C-FN2Q1L/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	36	90	1.7	2.3	20
19-213/G6W-FN1P1B/3T	1.6x0.8x0.6	● Brilliant Yellow Green	573	28.5	57	1.75	2.35	20
19-213/GHC-XS1T1N/3T	1.6x0.8x0.6	● Brilliant Green	525	180	360	2.7	3.7	20
19-213/GHC-YP1Q2QY/3T	1.6x0.8x0.6	● Brilliant Green	525	45	112	2.7	3.2	5
19-213/GHC-YR1S2/3T	1.6x0.8x0.6	● Brilliant Green	525	112	285	3.5	4	20
19-213/R6C-AM2P1VY/3T	1.6x0.8x0.6	● Brilliant Red	624	22.5	57	1.7	2.2	5
19-213/R6C-AN1P2/3T	1.6x0.8x0.6	● Brilliant Red	624	28.5	72	1.7/2	2.4	20
19-213/R6C-AN2Q1B/3T	1.6x0.8x0.6	● Brilliant Red	624	36	90	1.75	2.35	20
19-213/R6C-AP1Q2B/3T	1.6x0.8x0.6	● Brilliant Red	624	45	112	1.75	2.35	20
19-213/R6C-AQ1R2B/3T	1.6x0.8x0.6	● Brilliant Red	624	72	180	1.75	2.35	20
19-213/R8C-FN1P2/3T	1.6x0.8x0.6	● Deep Red	639	28.5	72	1.7 / 2	2.4	20
19-213/S2C-AN1P2B/3T	1.6x0.8x0.6	● Brilliant Orange	605	28.5	72	1.75	2.35	20
19-213/S3C-AN2P2B/3T	1.6x0.8x0.6	● Reddish Orange	615	36	72	1.75	2.35	20
19-213/T1D-ANPHY/3T	1.6x0.8x0.6	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
19-213/Y2C-AP1Q2B/3T	1.6x0.8x0.6	● Brilliant Yellow	589	45	112	1.75	2.35	20
19-213/Y2C-CN1P2/3T	1.6x0.8x0.6	● Brilliant Yellow	589	28.5	72	1.7 / 2	2.4	20
19-213/Y2C-CP1Q2L/3T	1.6x0.8x0.6	● Brilliant Yellow	589	45	112	1.7	2.3	20
19-213/Y2C-CQ2R2L/3T	1.6x0.8x0.6	● Brilliant Yellow	589	90	180	1.7	2.3	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 0603 (0.2T~0.8T)

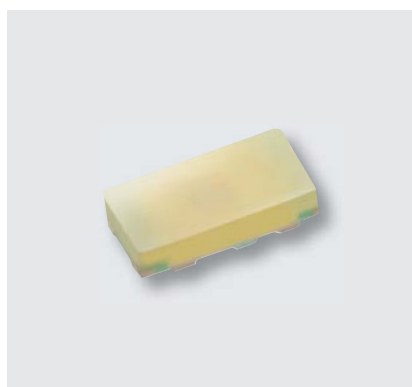


UNIT : mm

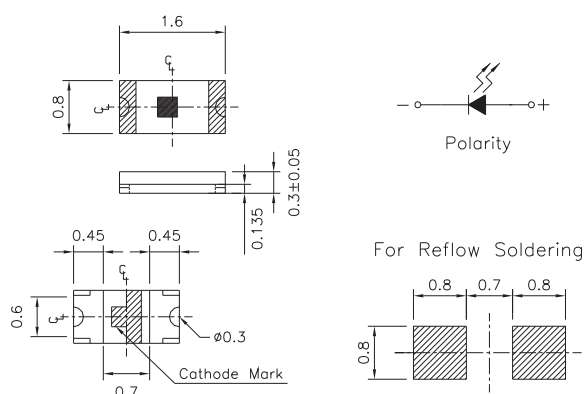

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-218/BHC-ZL1M2QY/3T	1.6x0.8x0.3	● Blue	470	11.5	28.5	2.7	3.2	5
19-218/GHC-YR1S2M/3T	1.6x0.8x0.3	● Brilliant Green	525	112	285	2.75	3.95	20
19-218/R6C-AL1M2VY/3T	1.6x0.8x0.3	● Brilliant Red	624	11.5	28.5	1.7	2.2	5
19-218/R6C-FM2P1B7Y/3T	1.6x0.8x0.3	● Brilliant Red	624	22.5	57	1.7	2	5
19-218/T1D-CQ2R2TY/3T	1.6x0.8x0.3	○ Pure White	x=0.274 y=0.226	90	180	2.6	3	5



UNIT : mm

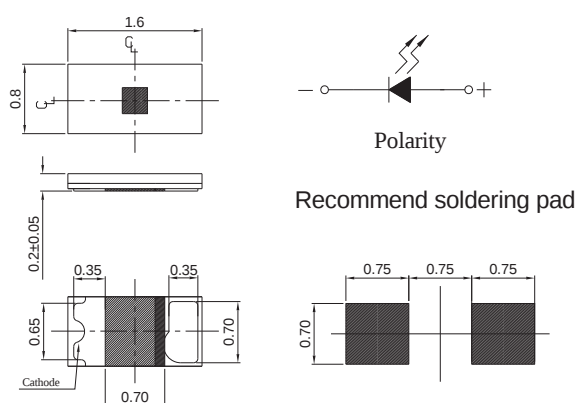


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-219/T3D-AQ2R2TY/3T	1.6x0.8x0.2	○ Pure White	x=0.274 y=0.226	90	180	2.6	3	5
19-219/T7D-AV1W1E/3T	1.6x0.8x0.2	○ Pure White	x=0.274 y=0.226	715	1420	2.75	3.65	20
19-219/Y5C-AM1N2VY/3T	1.6x0.8x0.2	● Brilliant Yellow	589	18	45	1.7	2.2	5

SMD LED | Surface Mount Chip LED (PCB) | Top View 0805




UNIT : mm

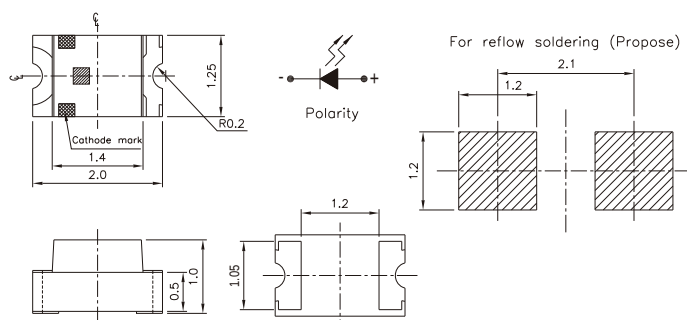

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
17-11/BHC-AN1P2/3T	2.0x1.25x1.0	Blue	470	28.5	72	2.7 / 3.3	3.7	20



UNIT : mm

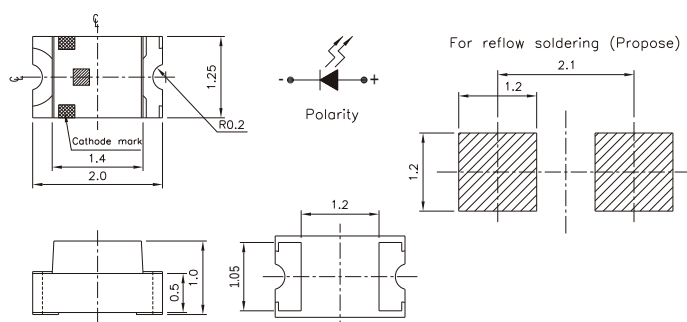


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
17-21/BHC-AN1P2/3T	2.0x1.25x1.0	Blue	470	28.5	72	3.5	4	20
17-21/BHC-AP1Q2/3T	2.0x1.25x1.0	Blue	470	45	112	2.7 / 3.3	3.7	20
17-21/BHC-XLMJY/3T	2.0x1.25x1.0	Blue	470	11.5	28.5	2.7	3.1	5
17-21/G6C-AN1P1B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	28.5	57	1.75	2.35	20
17-21/G6C-AP1Q1B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	45	90	1.75	2.35	20
17-21/G6C-FM1N2B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	18	45	1.75	2.35	20
17-21/G6C-FN1P2B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	28.5	72	1.75	2.35	20
17-21/G6C-FP1Q1B/3T	2.0x1.25x1.0	Brilliant Yellow Green	573	45	90	1.75	2.35	20
17-21/GHC-XS1T2M/3T	2.0x1.25x1.0	Brilliant Green	525	180	450	2.75	3.95	20
17-21/GHC-YR1S2/3T	2.0x1.25x1.0	Brilliant Green	525	112	285	3.5	4	20
17-21/GPC-AK0M1B/3T	2.0x1.25x1.0	Green	562	7.2	22.5	1.75	2.35	20
17-21/GVC-AMPB/3T	2.0x1.25x1.0	Green	565	18	72	1.75	2.35	20
17-21/R6C-AN2Q1B/3T	2.0x1.25x1.0	Brilliant Red	624	36	90	1.75	2.35	20
17-21/R6C-AP1Q2L/3T	2.0x1.25x1.0	Brilliant Red	624	45	112	1.7	2.3	20
17-21/R7C-AN2Q1B/3T	2.0x1.25x1.0	Deep Red	631	36	90	1.75	2.35	20
17-21/S2C-AN1P2B/3T	2.0x1.25x1.0	Brilliant Orange	605	28.5	72	1.75	2.35	20
17-21/S2C-AP1Q2B/3T	2.0x1.25x1.0	Brilliant Orange	605	45	112	1.75	2.35	20
17-21/T1D-ANPHY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
17-21/T1D-CP2R1TY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	57	140	2.6	3	5
17-21/T1D-KN2P2HY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	36	72	2.7	3.15	5
17-21/W1D-APQHY/3T	2.0x1.25x1.0	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5
17-21/Y2C-AN1P2/3T	2.0x1.25x1.0	Brilliant Yellow	589	28.5	72	1.7 / 2	2.4	20
17-21/Y2C-CN1P2B/3T	2.0x1.25x1.0	Brilliant Yellow	589	28.5	72	1.75	2.35	20
17-21/Y2C-CP2Q2B/3T	2.0x1.25x1.0	Brilliant Yellow	589	57	112	1.75	2.35	20

SMD LED | Surface Mount Chip LED (PCB) | Top View 0805




UNIT : mm

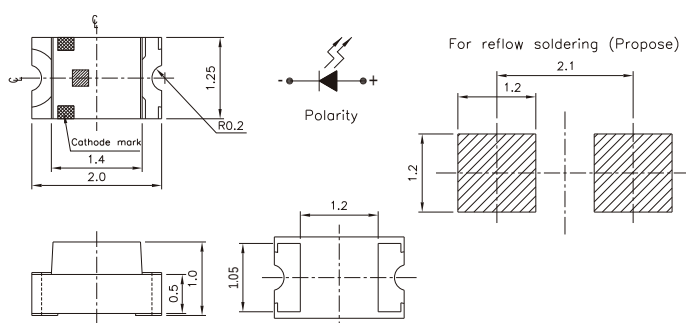

Product	Size (LXWXHmm)	Color	Drive current	I _v (mcd)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
17-21-S3C-6FQ2R2L0E-3T-AM	2x1.25x1	Orange	20 mA	90~180	613~622	1.7~2.3	140
17-21-GPC-A0L1M2B0E-3T-AM	2x1.25x1	Green	20 mA	11.2~28	557.5~567.5	1.75~2.35	140
17-21-Y2C-A0L1M2V0B-3T-AM	2x1.25x1	Yellow	5 mA	11.2~28	585.5~594.5	1.7~2.2	140
17-21-R7C-A0N1P2B0C-3T-AM	2x1.25x1	Red	10 mA	28~71	625.5~637.5	1.75~2.35	140




UNIT : mm

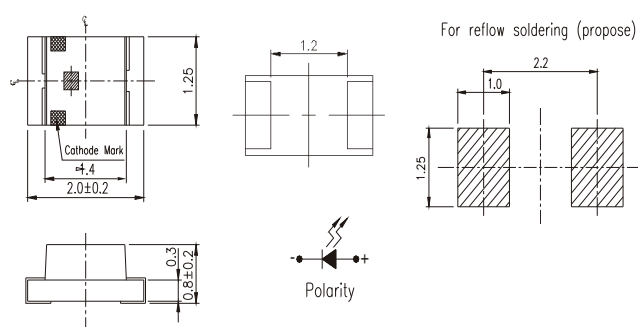


Product	Size (LXWXHmm)	Color	λ _d (nm)/ CIE(x,y)	I _v Min./Typ. (mcd)	I _v Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
17-215/B6C-YP2R2/3T	2.0x1.25x0.8	Blue	470	57	180	2.7 / 3.0	3.7	20
17-215/BHC-AN1P2/3T	2.0x1.25x0.8	Blue	470	28.5	72	2.7 / 3.3	3.7	20
17-215/BHC-BP2Q2M/3T	2.0x1.25x0.8	Blue	470	57	112	2.75	3.95	20
17-215/G6C-BM1N2L/3T	2.0x1.25x0.8	Brilliant Yellow Green	573	18	45	1.7	2.3	20
17-215/G6C-FN2P2B/3T	2.0x1.25x0.8	Brilliant Yellow Green	573	36	72	1.75	2.35	20
17-215/R6C-AQ1R2B/3T	2.0x1.25x0.8	Brilliant Red	624	72	180	1.75	2.35	20
17-215/S2C-AQ1R2B/3T	2.0x1.25x0.8	Brilliant Orange	605	72	180	1.75	2.35	20
17-215/S2C-CP2R1B/3T	2.0x1.25x0.8	Brilliant Orange	605	57	180	1.75	2.35	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 1206

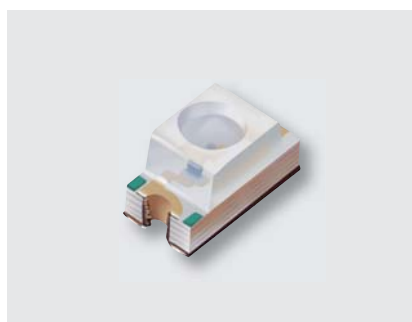


UNIT : mm

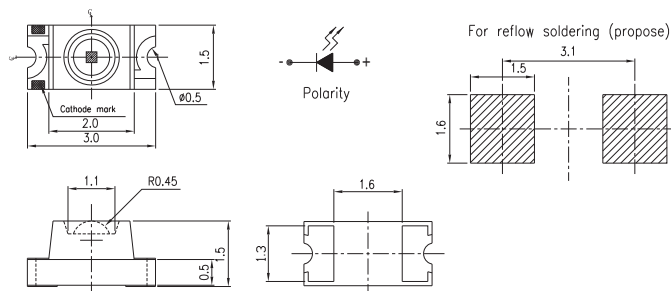

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
11-21/BHC-AP2R1/2T	3.0x1.5x1.5	● Blue	470	57	140	3.5	4.3	20
11-21/BHC-YR1S1/2T	3.0x1.5x1.5	● Blue	470	112	225	2.7 / 3.3	3.7	20
11-21/G6C-BQ1R2B/2T	3.0x1.5x1.5	● Brilliant Yellow Green	573	72	180	1.75	2.35	20
11-21/G6C-FN2P2B/2T	3.0x1.5x1.5	● Brilliant Yellow Green	573	36	72	1.75	2.35	20
11-21/GHC-YT1U2/2T	3.0x1.5x1.5	● Brilliant Green	525	285	715	3.5 / 4.3	--	20
11-21/R6C-AP1Q2LZ/2T	3.0x1.5x1.5	● Brilliant Red	624	45	112	1.7	2.3	10
11-21/R6C-AR2S2B/2T	3.0x1.5x1.5	● Brilliant Red	624	140	285	1.75	2.35	20
11-21/Y2C-CP2Q2B/2T	3.0x1.5x1.5	● Brilliant Yellow	589	57	112	1.75	2.35	20



UNIT : mm

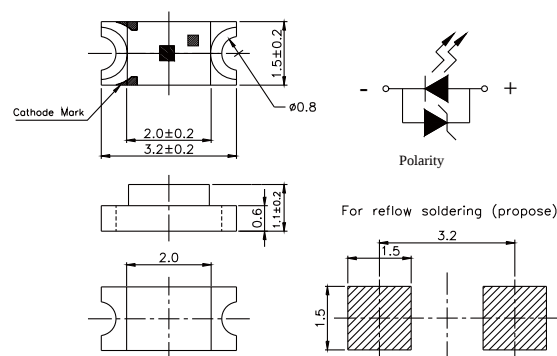


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-11/BHC-AN1P2/2T	3.2x1.5x1.0	● Blue	470	28.5	72	2.7 / 3.3	3.7	20
15-11/BHC-ZL2N1QY/2T	3.2x1.5x1.0	● Blue	470	14.5	36	2.7	3.2	5
15-11/W1D-APQHY/2T	3.2x1.5x1.0	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5

SMD LED | Surface Mount Chip LED (PCB) | Top View 1206




UNIT : mm

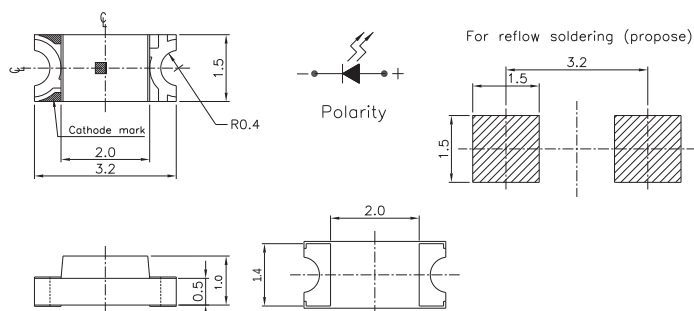

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-21/B6C-YR1S2B2/2T	3.2x1.5x1.0	Blue	470	112	285	2.9	3.6	20
15-21/B6C-ZQ1R1N/2T	3.2x1.5x1.0	Blue	470	72	140	2.7	3.7	20
15-21/BHC-AN1P2/2T	3.2x1.5x1.0	Blue	470	28.5	72	2.7 / 3.3	3.7	20
15-21/G6C-BK1L2VY/2T	3.2x1.5x1.0	Brilliant Yellow Green	573	7.2	18	1.7	2.2	5
15-21/G6C-FM1N2B/2T	3.2x1.5x1.0	Brilliant Yellow Green	573	18	45	1.75	2.35	20
15-21/G6C-FP1Q1L/2T	3.2x1.5x1.0	Brilliant Yellow Green	573	45	90	1.7	2.3	20
15-21/GHC-R2S2/2T	3.2x1.5x1.0	Brilliant Green	525	140	285	2.7 / 3.3	3.7	20
15-21/GHC-YR1S1/2T	3.2x1.5x1.0	Brilliant Green	525	112	225	3.5	3.7	20
15-21/R6C-AN1P2/2T	3.2x1.5x1.0	Brilliant Red	624	28.5	72	1.7/2	2.4	20
15-21/R6C-FQ1R1B/2T	3.2x1.5x1.0	Brilliant Red	624	72	140	1.75	2.35	20
15-21/S2C-AL2M2VY/2T	3.2x1.5x1.0	Brilliant Orange	605	14.5	28.5	1.7	2.2	5
15-21/S2C-AQ2R2B/2T	3.2x1.5x1.0	Brilliant Orange	605	90	180	1.75	2.35	20
15-21/S3C-AP1Q2/2T	3.2x1.5x1.0	Reddish Orange	615	45	112	1.7 / 2.0	2.4	20
15-21/T1D-CP1Q2TY/2T	3.2x1.5x1.0	Pure White	x=0.274 y=0.226	45	112	2.6	3	5
15-21/T7D-JQ2S1PY/2T	3.2x1.5x1.0	Pure White	x=0.274 y=0.226	90	225	2.7	3.3	5
15-21/W1D-APQHY/2T	3.2x1.5x1.0	Pure White	x=0.274 y=0.226	45/72	112	2.7 / 2.9	3.15	5
15-21/Y2C-AN1P2/2T	3.2x1.5x1.0	Brilliant Yellow	589	28.5	72	1.7/2	2.4	20
15-21/Y2C-CP1Q2B/2T	3.2x1.5x1.0	Brilliant Yellow	589	45	112	1.75	2.35	20



UNIT : mm

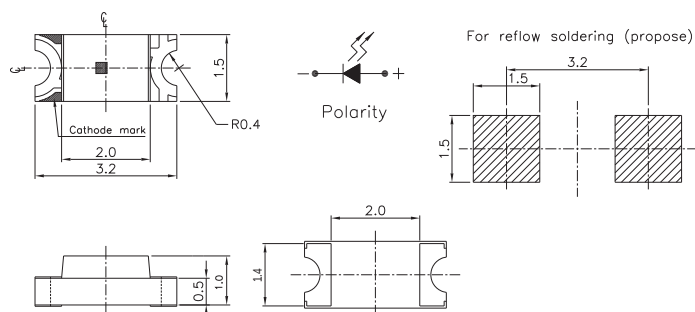


Product	Size (LXWXHmm)	Color	Drive current (mA)	I_v (mcd)	Wavelength (nm)	V_F (V)	Viewing Angle (°)
15-21-Y2C-A0P1Q2B0E-2T-AM	3.2x1.5x1	Yellow	20	45~112	585.5~594.5	1.75~2.35	130
15-21-G6C-A0N1P2B0E-2T-AM	3.2x1.5x1	Brilliant Yellow Green	20	28~71	569.5~577.5	1.75~2.35	130
15-21-R6C-B0Q1R2B0E-2T-AM	3.2x1.5x1	Red	20	71~180	617.5~629.5	1.75~2.35	130
15-21-S2C-A0N2P2L0B-2T-AM	3.2x1.5x1	Orange	5	35.5~71	600.5~612.5	1.7~2.3	130

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View 1206



UNIT : mm

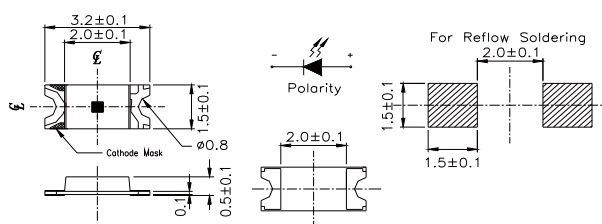


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-215/G7C-BN1P2B/2T	3.2x1.5x0.5	● Brilliant Yellow Green	573	28.5	72	1.75	2.35	20
15-215/R6C-AM2P1VY/2T	3.2x1.5x0.5	● Brilliant Red	624	22.5	57	1.7	2.2	5
15-215/R6C-AP1Q1L/2T	3.2x1.5x0.5	● Brilliant Red	624	45	90	1.7	2.3	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color




UNIT : mm

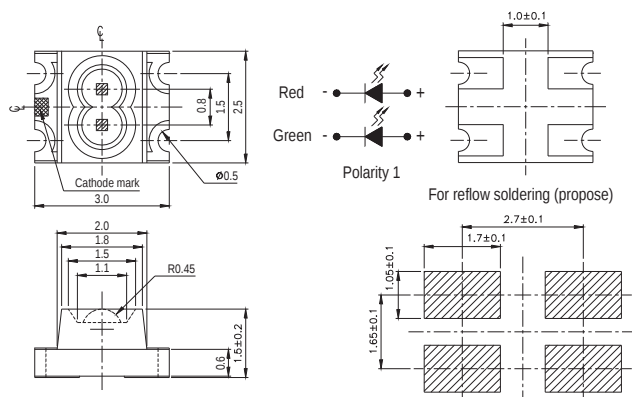

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
11-22/R6G6C-A01/2T	3.0x2.5x1.5	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:140 G6:45	R6:225 G6:72	1.7/2	2.4	20
11-22/R6G6C-QSANP/2T	3.0x2.5x1.5	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:72 G6:28.5	R6:285 G6:72	2	2.4	20
11-22/R6SGAC-A30/2T	3.0x2.5x1.5	● Brilliant Red + ● Brilliant Yellow Green	R6S:624 SG:565	R6S:450 SG:715	R6S:1120 SG:1800	R6S:1.7 / 2 SG:2.7 / 3.3	R6S:2.4 SG:3.7	20



UNIT : mm

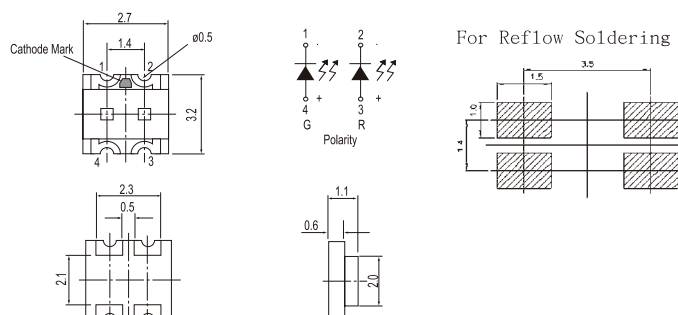


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-22/R6G6C-A32/2T	3.2x2.7x1.1	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:28.5 G6:28.5	R6:72 G6:72	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
15-22/R6GHC-A01/2T	3.2x2.7x1.1	● Brilliant Red + ● Brilliant Yellow Green	R6:624 GH:525	R6:90 / 130 GH:112 / 165	—	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color




UNIT : mm

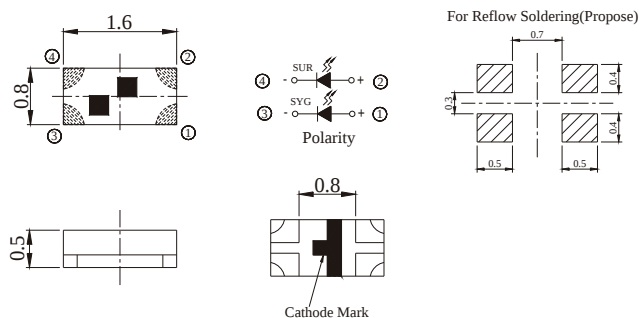

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
18-225/B6R6C-C01/3T	1.6x0.8x0.5	Blue + Brilliant Red	B6:470 R6:624	B6:18/28.5 R6:18/28.5	-	B6:2.7/3.3 R6:1.7/2.0	B6:3.7 R6:2.4	5
18-225/R6G6C-A01/3T	1.6x0.8x0.5	Brilliant Red + Brilliant Yellow Green	R6:624 G6:573	R6:45 G6:28.5	R6:112 G6:72	R6:1.7/2 G6:1.7/2	R6:2.4 G6:2.4	20
18-225/S2G6C-A01/3T	1.6x0.8x0.5	Brilliant Orange + Brilliant Yellow Green	S2:605 G6:573	S2:32/48 G6:16/24	-	S2:1.7/2 G6:1.7/2	S2:2.4 G6:2.4	20




UNIT : mm

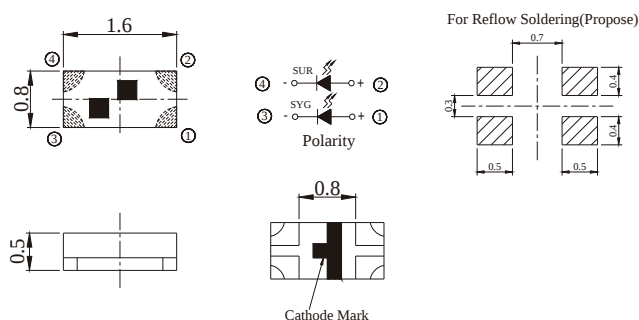

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
18-225A/R6GHW-B01/3T	1.6x0.8x0.5	Brilliant Red + Brilliant Green	R6:624 GH:525	R6:28.5 GH:72	R6:72 GH:180	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	10



UNIT : mm

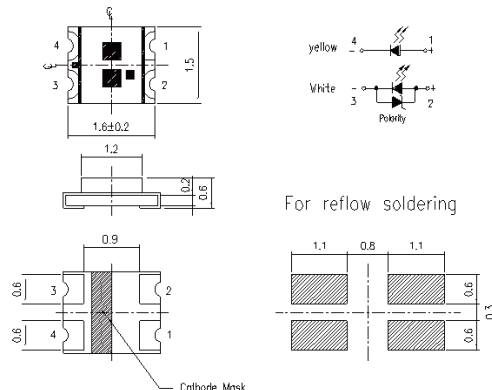


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-123/Y2ST1D-C30/2T	1.6x1.5x0.6	Brilliant Yellow + Pure White	Y2S:589+ x=0.274 y=0.226	Y2S:28.5 T1:45	Y2S:72 T1:112	Y2S:1.7 / 2 T1:2.7 / 3.3	Y2S:2.4 T1:3.7	5


SMD LED | Surface Mount Chip LED (PCB) | Top View Bi-Color




UNIT : mm

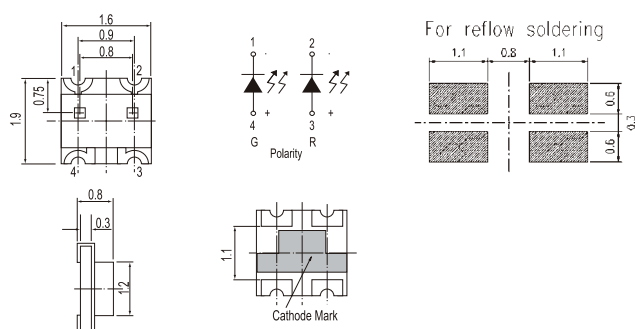

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_f Min./Typ. (V)	V_f Max. (V)	I_f (mA)
19-22/G6R6C-A31/2T	1.9x1.6x0.8	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:45 G6:22.5	R6:90 G6:57	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
19-22/R6BHC-B01/2T	1.9x1.6x0.8	● Brilliant Red + ● Blue	R6:624 BH:470	R6:14.5 / 20 BH:14.5 / 20	--	R6:1.9 BH:2.9	R6:2.3 BH:3.3	5
19-22/R6G6C-A01/2T	1.9x1.6x0.8	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G6:573	R6:45 G6:45	R6:72 G6:72	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
19-22/R6GHC-C02/2T	1.9x1.6x0.8	● Brilliant Red + ● Brilliant Green	R6:624 GH:525	R6:14.5 / 20 GH:45 / 65	--	R6:1.9 GH:2.9	R6:2.3 GH:3.4	5
19-22/Y2G6C-A14/2T	1.9x1.6x0.8	● Brilliant Yellow Green + ● Brilliant Yellow	G6:573 Y2:589	G6:28.5 Y2:45	G6:72 Y2:112	G6:1.7 / 2 Y2:1.7 / 2	G6:2.4 Y2:2.4	20

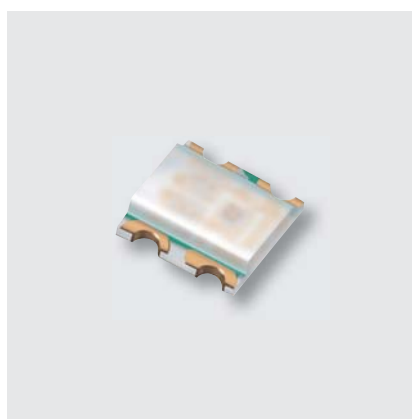

UNIT : mm

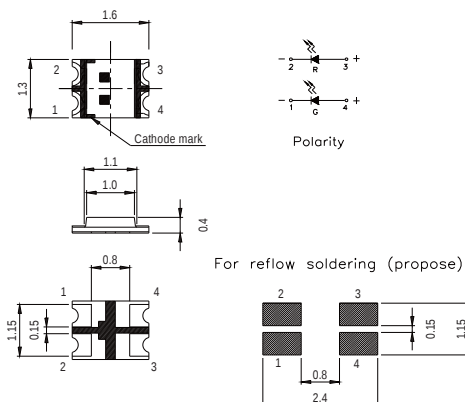


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max./Typ. (mcd)	V_f Min./Typ. (V)	V_f Max. (V)	I_f (mA)
19-226/R6BHC-B01/2T	1.6x1.3x0.4	● Brilliant Red + ● Blue	R6:624 BH:470	R6:72 BH:45	Tye: R6:100 BH:80	R6:1.7 / 2 BH:2.7 / 3.3	R6:2.4 BH:3.7	20
19-226/R6G7C-B02/2T	1.6x1.3x0.4	● Brilliant Red + ● Brilliant Yellow Green	R6:624 G7:573	R6:22.5 G7:7.2	Max: R6:57 G7:18	R6:1.7 / 2 G7:1.7 / 2	R6:2.4 G7:2.4	10
19-226/R6GHC-A03/2T	1.6x1.3x0.4	● Brilliant Red + ● Brilliant Green	R6:624 GH:525	R6:72 GH:112	Max: R6:140 GH:225	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Top View Bi-Color




UNIT : mm



Polarity


For reflow soldering




Cathode Mask

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-223/G6S2C-A01/2T	1.6x1.5x0.6	● Brilliant Orange + ● Brilliant Yellow Green	S2:605 G6:573	S2:112 G6:28.5	S2:140 G6:45	S2:2 G6:2	S2:2.4 G6:2.4	20
19-223/R6BHC-A05/2T	1.6x1.5x0.6	● Brilliant Red + ● Blue	R6:624 BH:470	R6:72 BH:36	R6:180 BH:72	R6:1.7 / 2 BH:2.7 / 3.3	R6:2.4 BH:3.7	20
19-223/R6G6C-A01/2T	1.6x1.5x0.6	● Brilliant Red+ ● Brilliant Yellow Green	R6:624 G6:573	R6:72 G6:22.5	R6:180 G6:57	R6:1.7 / 2 G6:1.7 / 2	R6:2.4 G6:2.4	20
19-223/R7BHC-A30/2T	1.6x1.5x0.6	● Dark Red + ● Blue	R7:631 BH:470	R7:45 BH:36	R7:112 BH:90	R7:1.7 / 2 BH:2.7 / 3.3	R7:2.4 BH:2.7 / 3.7	20
19-223/R7G6C-A01/2T	1.6x1.5x0.6	● Dark Red + ● Brilliant Yellow Green	R7:631 G6:573	R7:18 G6:18	R7:72 G6:72	R7:2 G6:2	R7:2.4 G6:2.4	20
19-223/S2BHC-A01/2T	1.6x1.5x0.6	● Brilliant Orange + ● Blue	S2:605 BH:470	S2:72 BH:36	S2:140 BH:72	S2:1.7 / 2 BH:3	S2:2.4 BH:3.5	20
19-223/S2T1D-C30/2T	1.6x1.5x0.6	● Brilliant Orange + ○ Pure White	S2:605+ x=0.274 y=0.226	S2:18 T1:45	S2:45 T1:112	S2:1.55 T1:2.7	S2:2.15 T1:3.3	5
19-223/Y2G6C-A01/2T	1.6x1.5x0.6	● Brilliant Yellow Green + ● Brilliant Yellow	G6:573 Y2:589	G6:28.5 Y2:36	G6:57 Y2:72	G6:1.7 / 2 Y2:1.7 / 2	G6:2.4 Y2:2.4	20



SMD LED | Surface Mount Chip LED (PCB) | Top View Full Color

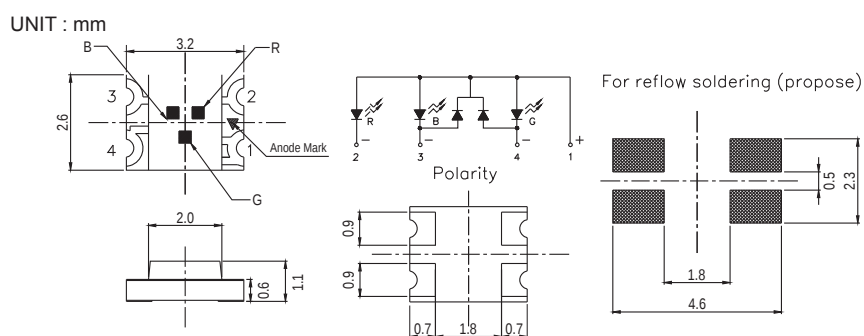

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
15-13D/R6GHBHC-A01/2T	3.2x2.6x1.1	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:45 / 70 R6:90 / 140 GH:112 / 180	—	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20

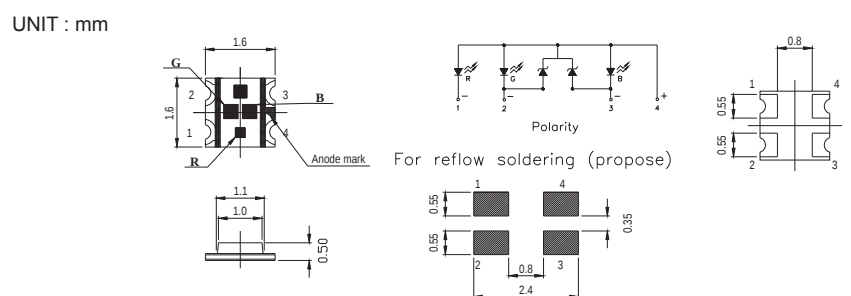

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-137/R6GHBHC-A01/2T	1.6x1.6x0.5	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 50 R6:72 / 100 GH:112 / 180	—	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20

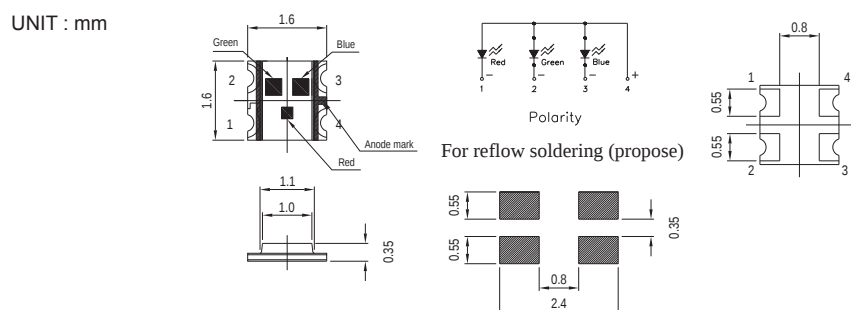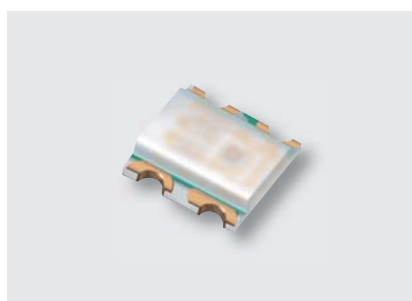


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-237/R6GHBHC-A04/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:11.5 / 18 R6:18 / 30 GH:28.5 / 60	—	BH:2.6 R6:1.9 GH:2.6	BH:3 R6:2.2 GH:3	5


SMD LED | Surface Mount Chip LED (PCB) | Top View Full Color




UNIT : mm

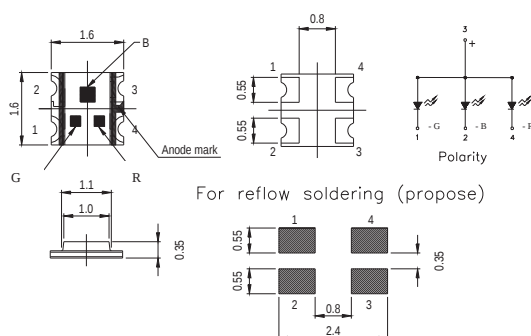

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-237A/BHR6GHC-A01/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 50 R6:72 / 100 GH:112 / 180	-	BH:3.3 R6:2 GH:3.3	BH:3.9 R6:2.4 GH:3.9	20

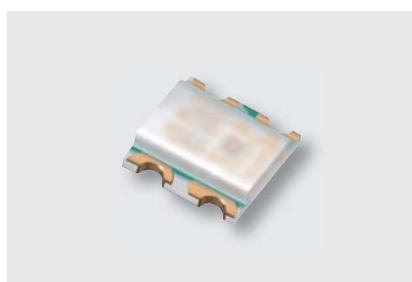


UNIT : mm

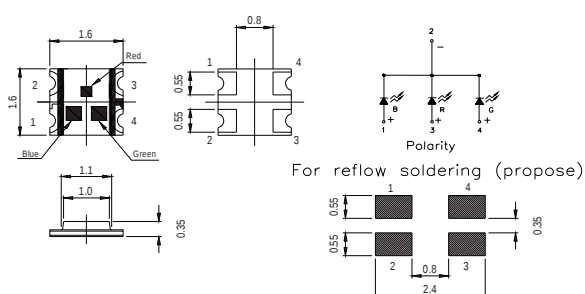

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-237B/R6GHBHC-C01/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:11.5 / 18 R6:18 / 30 GH:28.5 / 60	BH:28.5 R6:57 GH:112	BH:2.6 / 3 R6:1.7 / 2 GH:2.6 / 3	BH:3.3 R6:2.2 GH:3.3	5




UNIT : mm

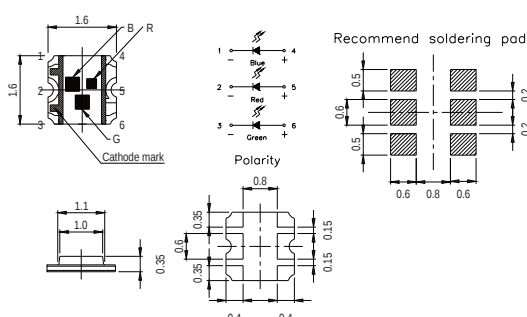


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
19-337/R6GHBHC-A01/2T	1.6x1.6x0.35	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 50 R6:72 / 100 GH:112 / 180	-	BH:3.3 R6:2.0 GH:3.3	BH:3.9 R6:2.4 GH:3.9	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)

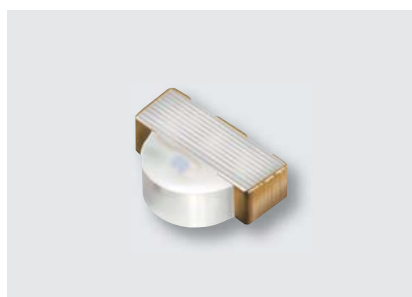


UNIT : mm

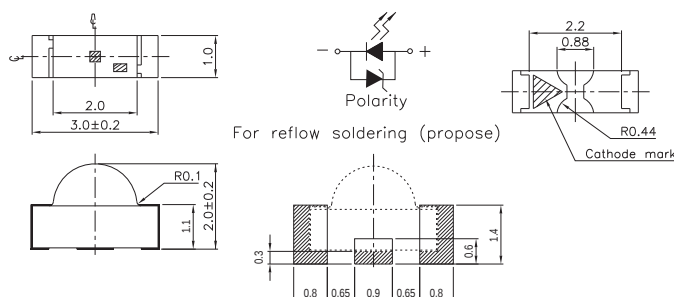

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-11/BHC-ZL1M2QY/2C	3.0x2.0x1.0	●Blue	470	11.5	28.5	2.7	3.2	5




UNIT : mm

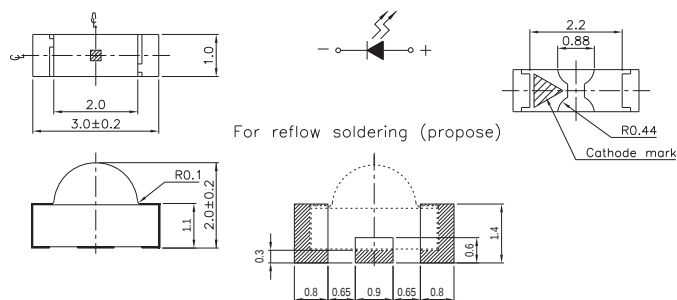

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-21/BHC-AN1P2/2C	3.0x2.0x1.0	●Blue	470	28.5	72	2.7 / 3.3	3.7	20
12-21/BHC-ZL1M2RY/2C	3.0x2.0x1.0	●Blue	470	11.5	28.5	2.5	3.1	5
12-21/GHC-YR2S2/2C	3.0x2.0x1.0	●Brilliant Green	525	140	285	3.5	4.3	20
12-21/R8C-AN1P2B/2D	3.0x2.0x1.0	●Deep Red	639	28.5	72	1.75	2.35	20
12-21/T3D-AQ2S2M/2C	3.0x2.0x1.0	○Pure White	x=0.274 y=0.226	90	285	2.75	3.95	20



UNIT : mm

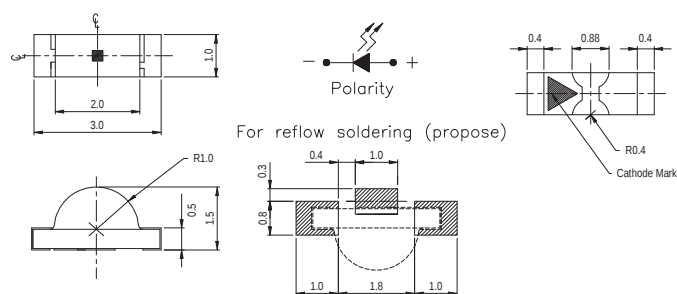


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-21C/BHC-AN1P2/2C	3.0x1.5x1.0	●Blue	470	28.5	72	2.7 / 3.3	3.7	20
12-21C/BHC-YL1M2HY/2C	3.0x1.5x1.0	●Blue	470	11.5	28.5	2.7	3.15	5
12-21C/T3D-CP1Q2B12Y/2C	3.0x1.5x1.0	○Pure White	x=0.274 y=0.226	45	112	2.7	3.4	5
12-21C/W1D-AR1S2/2C	3.0x1.5x1.0	○Pure White	x=0.274 y=0.226	112	285	3.3	3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)




UNIT : mm

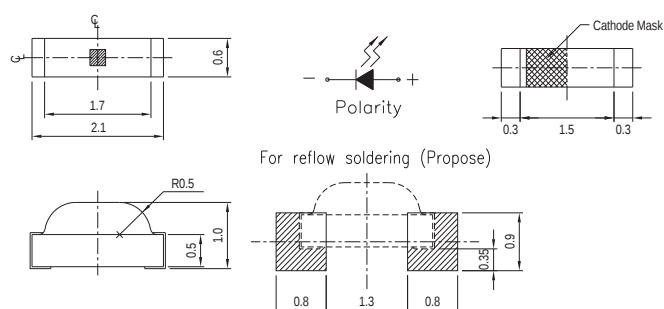

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-215/BHC-AN1P2/3C	2.1x1.0x0.6	● Blue	470	28.5	72	3.5	4	20
12-215/BHC-XL1M2HY/3C	2.1x1.0x0.6	● Blue	470	11.5	28.5	2.7	3.15	5
12-215/G6C-AL2M2B/3C	2.1x1.0x0.6	● Brilliant Yellow Green	573	14.5	28.5	1.75	2.35	20
12-215/G6C-BP1Q2L/3C	2.1x1.0x0.6	● Brilliant Yellow Green	573	45	112	1.7	2.3	20
12-215/R6C-AR1S1B/3C	2.1x1.0x0.6	● Brilliant Red	624	112	225	1.75	2.35	20
12-215/T1D-ANPHY/3C	2.1x1.0x0.6	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
12-215/W1D-ANPHY/3C	2.1x1.0x0.6	○ Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
12-215/Y2C-BR1S1L/3C	2.1x1.0x0.6	● Brilliant Yellow	589	112	225	1.7	2.3	20
12-215/Y2C-CP1Q2B/3C	2.1x1.0x0.6	● Brilliant Yellow	589	45	112	1.75	2.35	20
12-215/Y2C-CQ1R1B/3C	2.1x1.0x0.6	● Brilliant Yellow	589	72	140	1.75	2.35	20



UNIT : mm

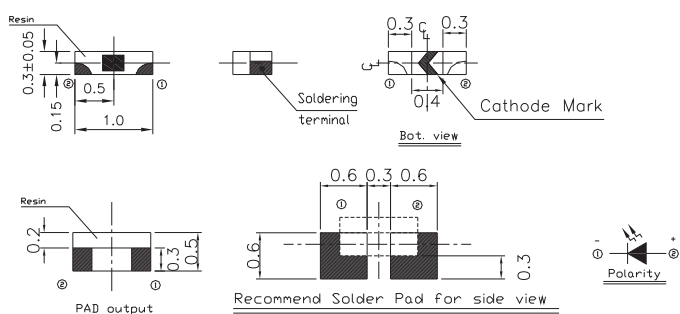


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
16-916/T1D-AP1Q2QY/3T	1.0x0.5x0.3	○ Pure White	x=0.274 y=0.226	45	112	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)




UNIT : mm

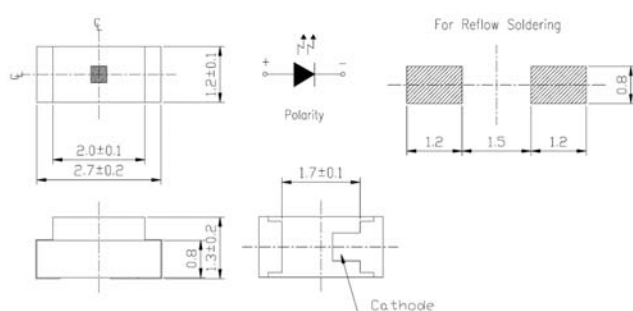

Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
22-21/BHC-AN1P2/2C	2.7x1.3x1.2	Blue	470	28.5	72	3.8	4.5	20
22-21/GHC-YR1S2/2C	2.7x1.3x1.2	Brilliant Green	525	112	285	2.7 / 3.3	3.7	20




UNIT : mm

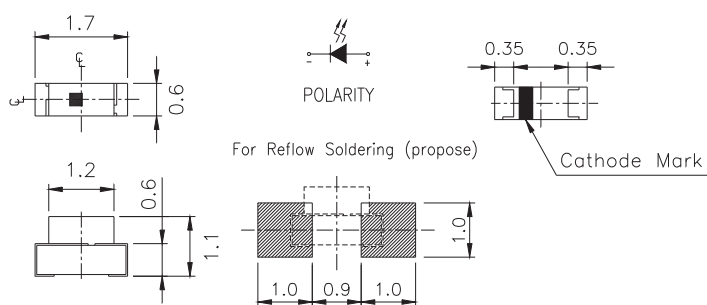


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
27-21/BHC-AN1P2/3C	1.7x1.1x0.6	Blue	470	28.5	72	2.7 / 3.3	3.7	20
27-21/BHC-AP1Q2/3C	1.7x1.1x0.6	Blue	470	45	112	2.7 / 3.3	3.7	20
27-21/GHC-YR1S2M/3C	1.7x1.1x0.6	Brilliant Green	525	112	285	2.75	3.95	20
27-21/R6C-AP1Q2B/3C	1.7x1.1x0.6	Brilliant Red	624	45	112	1.75	2.35	20
27-21/S2C-FP1Q1L/3C	1.7x1.1x0.6	Brilliant Orange	605	45	90	1.7	2.3	20
27-21/T1D-ANPHY/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	28.5	72	2.7	3.15	5
27-21/T1D-CQ1R2NW/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	72	180	2.7	3.7	15
27-21/T3D-AP2Q2HY/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	57	112	2.7	3.15	5
27-21/W1D-APQHY/3C	1.7x1.1x0.6	Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5
27-21/Y2C-CPQB/3D	1.7x1.1x0.6	Brilliant Yellow	589	45	112	1.75	2.35	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View (0.2T~1.0T)

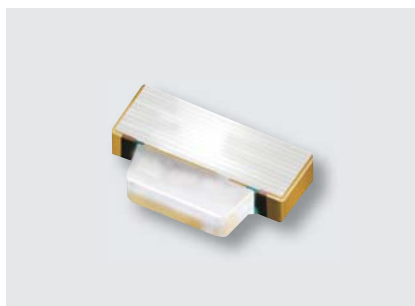

UNIT : mm





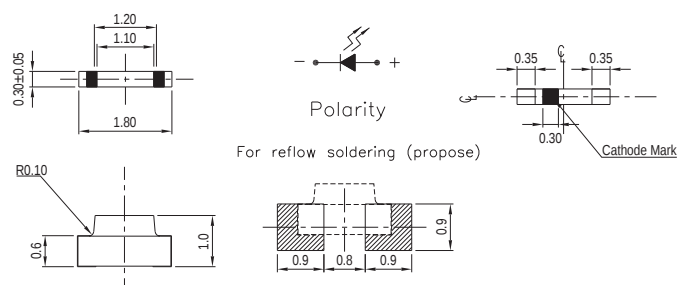


Product	Size (LXWXH mm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
48-213/BHC-ZM2P1QY/3C	1.8x1.0x0.3	● Blue	470	22.5	57	2.7	3.2	5
48-213/R6C-AM1N2VY/3C	1.8x1.0x0.3	● Brilliant Red	624	18	45	1.7	2.2	5
48-213/T2D-AQ2R2QY/3C	1.8x1.0x0.3	○ Pure White	x=0.274 y=0.226	90	180	2.7	3.2	5
48-213/T3D-AP1Q2TY/3C	1.8x1.0x0.3	○ Pure White	x=0.274 y=0.226	45	112	2.6	3	5
48-213/T7D-AQ1R2QY/3C	1.8x1.0x0.3	○ Pure White	x=0.274 y=0.226	72	180	2.7	3.2	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Bi-Color







UNIT : mm




Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-22/BHR6C-A01/2C	3.0x2.0x1.0	● Blue + ● Brilliant Red	BH:470 R6:624	BH:18 / 28 R6:22.5 / 30	—	BH:2.7 R6:1.7	BH:3.1 R6:2.2	5
12-22/G6R8C-A30/2C	3.0x2.0x1.0	● Brilliant Yellow Green + ● Deep Red	G6:573 R8:639	G6:28.5 R8:28.5	G6:72 R8:72	G6:1.7 / 2 R8:1.7 / 2	G6:2.4 R8:2.4	20
12-22/R6GHC-A30/2C	3.0x2.0x1.0	● Brilliant Red + ● Brilliant Green	R6:624 GH:525	R6:72 GH:112	R6:180 GH:285	R6:1.7 / 2 GH:2.7 / 3.3	R6:2.4 GH:3.7	20
12-22/Y2G6C-A30/2C	3.0x2.0x1.0	● Brilliant Yellow + ● Brilliant Yellow Green	Y2:589 G6:573	Y2:45 G6:28.5	Y2:112 G6:72	Y2:1.7 / 2 G6:1.7 / 2	Y2:2.4 G6:2.4	20



UNIT : mm



For reflow soldering (propose)




Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
17-223/BHR7C-C30/3C	2.0x1.05x0.6	● Blue + ● Dark Red	BH:470 R7:631	BH:22.5 R7:14.5	BH:57 R7:36	BH:2.7 R7:1.55	BH:3.2 R7:2.15	5

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Full Color




UNIT : mm

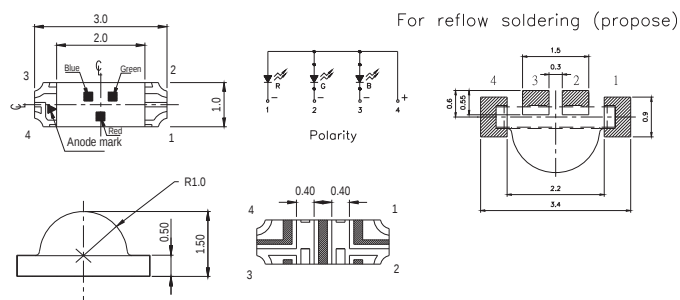

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
12-23C/R6GHBHC-A01/2C	3.0x1.5x1.0	- Blue+ - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:32 / 50 R6:63 / 90 GH:125 / 180	--	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20
12-23C/S2GHBHC-A01/2C	3.0x1.5x1.0	- Brilliant Orange + - Blue+ - Brilliant Green	BH:470 S2:605 GH:525	BH:36 / 65 S2:72 / 140 GH:140 / 210	--	BH:3.3 S2:2 GH:3.3	BH:3.9 S2:2.4 GH:3.9	20



UNIT : mm


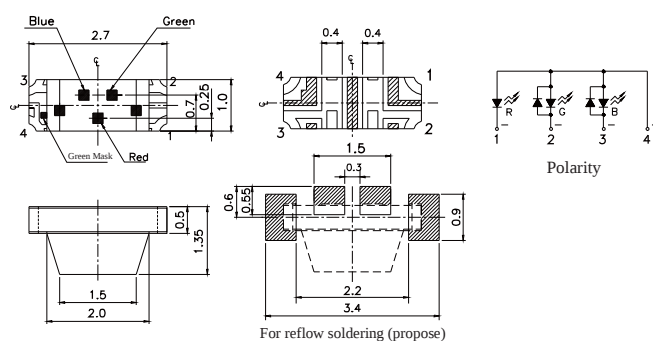


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
22-23/R6GHBHC-A01/2C	2.7x1.35x1.0	- Blue+ - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:28.5 / 45 R6:45 / 72 GH:112 / 180	--	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20

SMD LED ■ Surface Mount Chip LED (PCB) ■ Side View Full Color




UNIT : mm




Polarity

Recommend Soldering Pad




Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
22-23C/R6GHBHW-C01/2C	2.7x1.35x0.5	● Blue+ ● Brilliant Red + ● Brilliant Green	BH:470 R6:624 GH:525	BH:10 R6:14.5 GH:35	BH:24.5 R6:36 GH:110	BH:2.7 / 2.9 R6:1.7 / 1.85 GH:2.7 / 2.9	BH:3.1 R6:2 GH:3.2	5



SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount

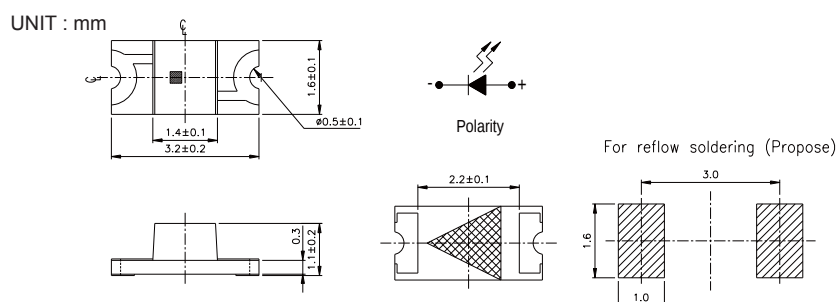

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-21/G6C-AL2N1/2T	3.2x1.6x1.1	Brilliant Yellow Green	573	14.5	36	1.7 / 2	2.4	20
23-21/GHC-YR2T1/2A	3.2x1.6x1.1	Brilliant Green	525	140	360	3.5	3.9	20
23-21/R6C-AM1N2AY/2A	3.2x1.6x1.1	Brilliant Red	624	18	45	1.55	2.15	5
23-21/R8C-AN2Q1B/2T	3.2x1.6x1.1	Deep Red	639	36	90	1.75	2.35	20

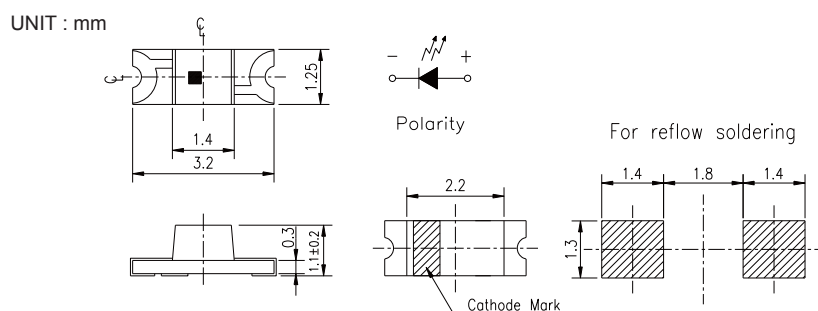

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-21B/BHC-AN1P2/2A	3.2x1.25x1.1	Blue	470	28.5	72	3.5	4	20
23-21B/BHC-ZL1M1Y/2A	3.2x1.25x1.1	Blue	470	11.5	22.5	2.7 / 3.3	3.7	5
23-21B/G6C-AM2P1/2A	3.2x1.25x1.1	Brilliant Yellow Green	573	22.5	57	1.7 / 2	2.4	20
23-21B/S2C-AN1P2/2A	3.2x1.25x1.1	Brilliant Orange	605	28.5	72	1.7 / 2.0	2.4	20
23-21B/T1D-ANQHY/2A	3.2x1.25x1.1	Pure White	x=0.274 y=0.226	28.5	112	2.7	3.15	5
23-21B/T1D-CP2Q2TY/2A	3.2x1.25x1.1	Pure White	x=0.274 y=0.226	57	112	2.6	3	5
23-21B/W1D-ANQHY/2A	3.2x1.25x1.1	Pure White	x=0.274 y=0.226	28.5	112	2.7	3.15	5

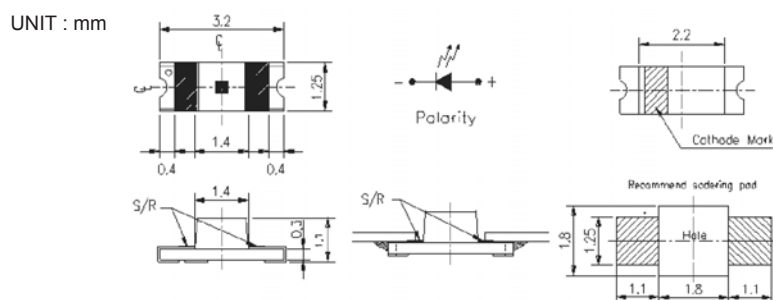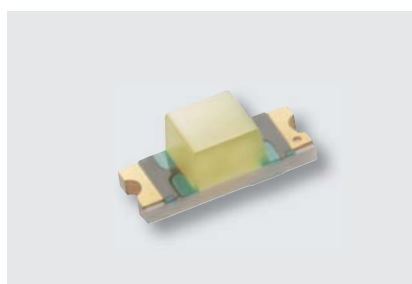


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-21C/T1D-CP2Q2TY/2A	3.2x1.25x1.1	White	x=0.274 y=0.226	57	112	Min: 2.6	3	5


SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount



UNIT : mm





Recommend soldering pad design

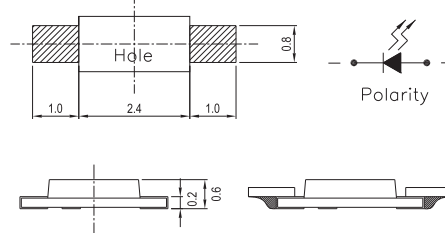


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-215A/BHC-DN2P2E/5A	3.2x0.8x0.6	Blue	470	36	72	2.75	3.65	20



UNIT : mm





For Reflow Soldering (Proposal)




Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
24-21/BHC-AN1P2/2A	3.2x1.6x1.1	Blue	470	28.5	72	3.5	4	20
24-21/GHC-YR2T1/2A	3.2x1.6x1.1	Brilliant Green	525	140	360	3.5	4	20



UNIT : mm




For Reflow Soldering




Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
25-21/BHC-APR/2T	3.2x1.6x1.1	Blue	470	45	180	2.7 / 3.3	3.7	20
25-21/GHC-YSU/2A	3.2x1.6x1.1	Brilliant Green	525	180	715	3.5	4.3	20
25-21/T1D-ANQHY/2A	3.2x1.6x1.1	Pure White	x=0.274 y=0.226	28.5	112	2.7	3.15	5
25-21/W1D-APQHY/2A	3.2x1.6x1.1	Pure White	x=0.274 y=0.226	45	112	2.7	3.15	5

SMD LED | Surface Mount Chip LED (PCB) | Reverse Mount Bi-color

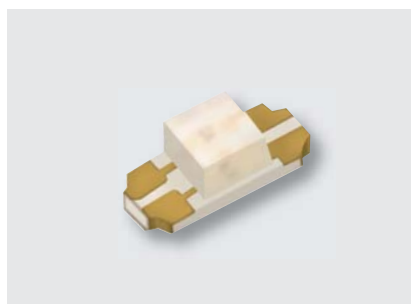


UNIT : mm



Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-22B/R7G6C-A30/2T	3.2x1.25x1.1	- Dark Red + - Brilliant Yellow Green	R7:631 G6:573	R7:18 G6:14.5	R7:72 G6:45	R7:1.7 / 2 G6:1.7 / 2	R7:2.4 G6:2.4	20
23-22B/S2BHC-C30/2A	3.2x1.25x1.1	- Brilliant Orange + - Blue	S2:605 BH:470	S2:11.5 BH:11.5	S2:28.5 BH:28.5	S2:1.55 / 1.85 BH:2.5 / 3.1	S2:2.25 BH:3.5	5




UNIT : mm

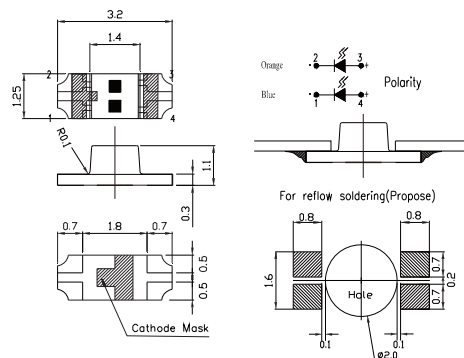


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-22C/S2BHC-B30/2A	3.2x1.25x1.1	- Brilliant Orange + - Blue	S2:605 BH:470	S2:22.5 BH:22.5	S2:57 BH:57	S2:1.7 / 2 BH:2.7 / 3.3	S2:2.4 BH:3.7	10

SMD LED ■ Surface Mount Chip LED (PCB) ■ Reverse Mount Full color

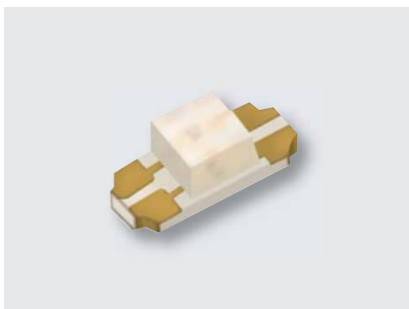

UNIT : mm

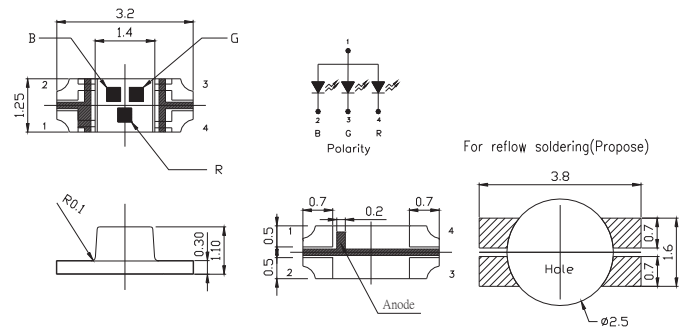


Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
23-23B/R6GHBHC-A01/2A	3.2x1.25x1.1	- Blue + - Brilliant Red + - Brilliant Green	BH:470 R6:624 GH:525	BH:45 / 65 R6:72 / 100 GH:140 / 200	--	BH:2.7 / 3.3 R6:1.7 / 2 GH:2.7 / 3.3	BH:3.7 R6:2.4 GH:3.7	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View LED




UNIT : mm

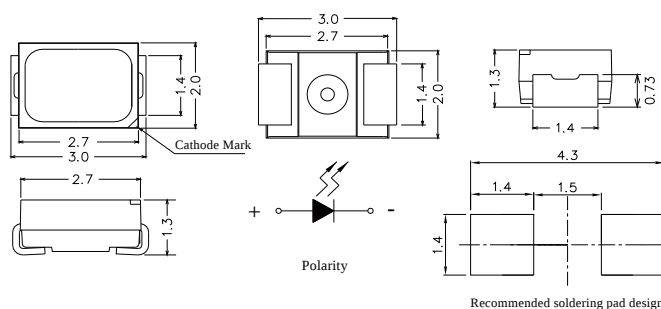

Product	Size (LXWXHmm)	Color	I _V (mcd)	CIE	V _F	Viewing Angle (°)
45-21UMC/3235A54/TR8	3.0x2.0x1.3	○ White	1700~1900	x=0.2755~0.3110 y=0.2619~0.3150	3.05~3.35	120




UNIT : mm

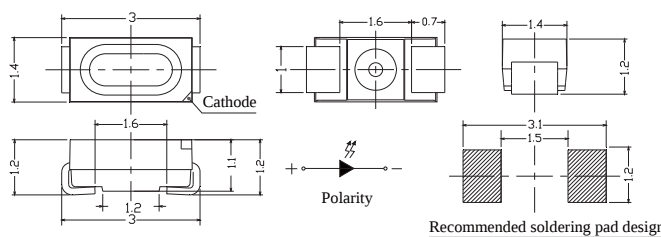

Product	Size (LXWXHmm)	Color	I _V (mcd)	CIE	V _F	Viewing Angle (°)
50-215BUMC/3437425/TR8	3.0x1.4x1.2	○ White	1800~2000	x=0.2818~0.3035 y=0.2619~0.2950	3.05~3.45	120



UNIT : mm

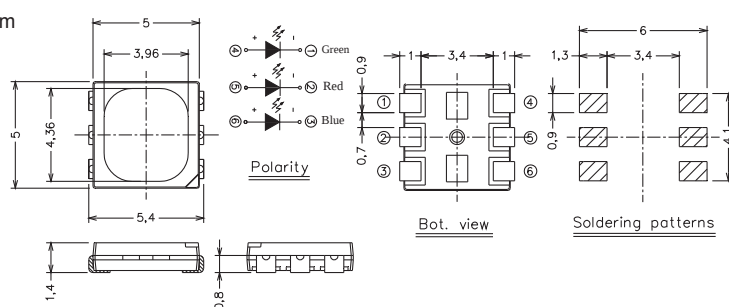


Product	Size (LXWXHmm)	Color	λ _d (nm)/CIE(x,y)	I _V Min./Typ. (mcd)	I _V Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
61-238/LK2C-B50638F6GB2/ET	5.0x5.0x1.4	○ White	x=0.3031~0.4614 y=0.3108~0.4333	3200	6600	2.7	3.7	20
61-238/RSGBB7C-B02/ET	5.0x5.0x1.4	● Brilliant Red ● Brilliant Green ● Blue	RS: Brilliant Red GB: Brilliant Green B7: Blue	RS: 450 GB: 715 B7: 225	RS: 900 GB: 1420 B7: 450	RS: 1.75 GB: 2.75 B7: 2.75	RS: 2.35 GB: 3.65 B7: 3.65	20
61-238UMC/S3085/TR8/LT	5.0x5.0x1.4	○ White	x=0.290~0.311 y=0.283~0.333	4000	6000	2.7	3.6	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View Bi-Color




UNIT : mm

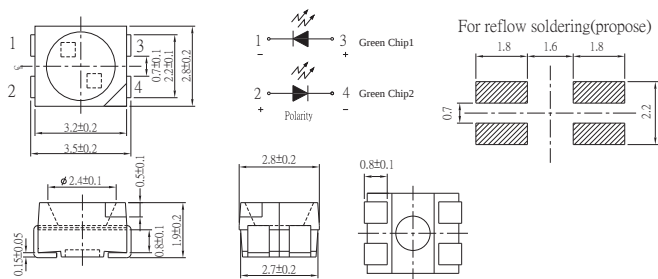

Product	Size (LXWXHmm)	Color	λ_d (nm)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)
67-22/G3G3C-B45/2T	3.5x2.8x1.9	G3: ○ Pale Green G3: ○ Pale Green	563.5-571.5	4.0 / 10 (10mA)	36 (10mA)	1.7 / 2.0 (10mA)	2.4 (10mA)
67-22/R6BHC-B07/2T	3.5x2.8x1.9	R6: ● Brilliant Red BH: ● Blue	R6: 621-63 BH: 466.5-471.5	R6: 90 BH: 90	R6: 225 BH: 225	R6: 1.75 BH: 2.9	R6: 2.35 BH: 3.7
67-22/R6G6C-B09/2T	3.5x2.8x1.9	R6: ● Brilliant Red G6: ● Brilliant Yellow Green	R6: 621-627 G6: 570-574	R6: 57 G6: 36	R6: 140 G6: 90	R6: 1.75 G6: 1.75	R6: 2.35 G6: 2.35
67-22/R6Y2C-B31/2T	3.5x2.8x1.9	R6: ● Brilliant Red Y2: ● Brilliant Yellow	R6: 621-631 Y2: 586-594	72	285	1.75	2.35
67-22SURSYGC/S530-A2/TR8	3.5x2.8x1.9	SUR: ● Deep Red SYG: ● Brilliant Yellow Green	SUR: 624 SYG: 573	SUR: 16 / 24 SYG: 29 / 59	--	SUR: 1.7 / 2.0 SYG: 1.7 / 2.0	SUR: 2.4 SYG: 2.4
67-22UYSYGC/S530-A5/TR8	3.5x2.8x1.9	UY: ● Brilliant Yellow SYG: ● Brilliant Yellow Green	UY: 589 SYG: 573	UY: 80 / 120 SYG: 50 / 80	--	UY: 2.0 SYG: 2.0	UY: 2.4 SYG: 2.4



UNIT : mm

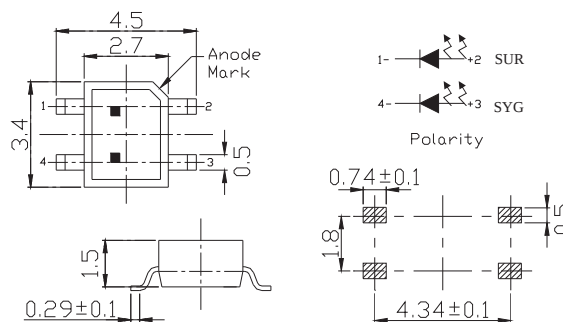


Product	Size (LXWXHmm)	Color	λ_d (nm)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
93-22SURSYGC/S530-A3/TR8	3.4x2.7x1.5	SUR: ● Brilliant Red SYG: ● Brilliant Yellow Green	SUR: 624 SYG: 573	SUR: 17 SYG: 11	SUR: 41 SYG: 17	SUR: 2.0 SYG: 2.0	SUR: 2.4 SYG: 2.4	SUR: 20 SYG: 20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View White LED




UNIT : mm

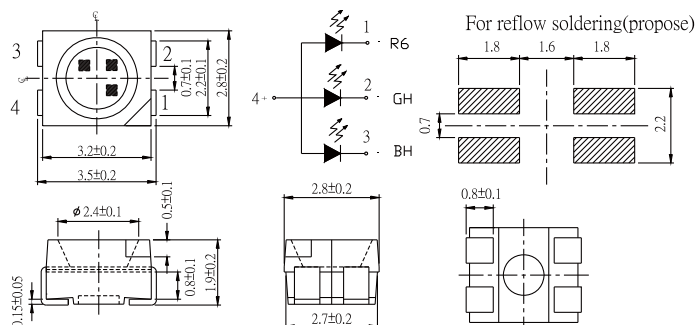

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_f Min./Typ. (V)	V_f Max. (V)	I_F (mA)
67-23/R6GHBHC-B05/2T	3.5x2.8x1.9	R6: ● Brilliant Red GH: ● Brilliant Green BH: ● Blue	R6: 621~631 GH: 520~530 BH: 465~475	R6: 112 GH: 180 BH: 72	R6: 285 GH: 715 BH: 180	R6: 2.0 GH: 3.4 BH: 3.4	R6: 2.4 GH: 3.95 BH: 3.95	20
67-23/T2C-EY2Z0/2T	3.5x2.8x1.9	○ White	$x=0.264\sim0.33$ $y=0.248\sim0.36$	3600	7200	2.7	3.5	20
67-23SDRSYGUBC/TR8	3.5x2.8x1.8	SDR: ● Deep Red SYG: ● Brilliant Yellow Green UB: ● Blue	SDR: 639 SYG: 573 UB: 470	SDR: 63/112 SYG: 13 /20 UB: 11/ 18	--	SDR: 2.0 SYG: 2.0 UB: 3.5	SDR: 2.4 SYG: 2.4 UB: 4.0	20



UNIT : mm

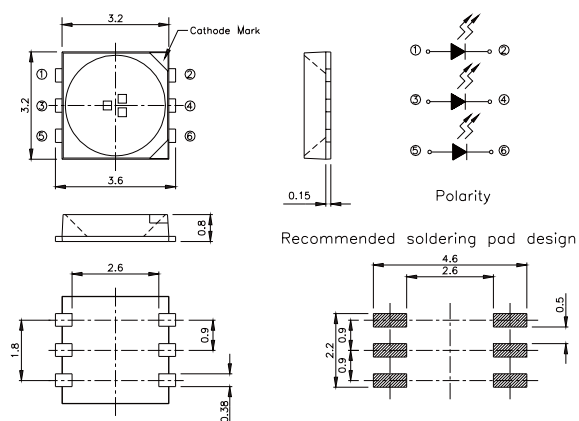


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_f Min./Typ. (V)	V_f Max. (V)	I_F (mA)
67-235UWC/TR8	3.2x3.2x0.8	○ White	$x=0.264\sim0.361$ $y=0.248\sim0.385$	2000	2500	3.5	4	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2




UNIT : mm

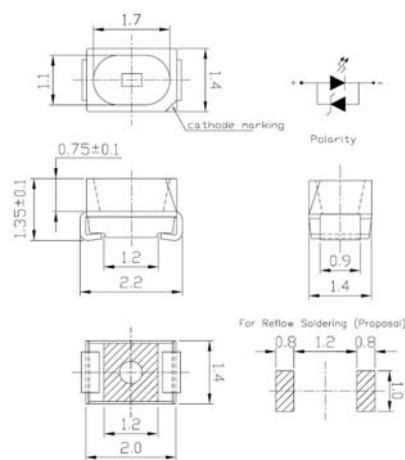

Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
65-11/BHC-AR1S2B2/2T	2.2x1.4x1.35	● Blue	464.5~476.5	112	285	2.9	3.6	20
65-11/T2C-FV1W2E/2T	2.2x1.4x1.35	○ Pure White	x=0.2870~0.3110 y=0.2955~0.3390	715	1800	2.75	3.65	20
65-11UTC/S933/TR8	2.2x1.4x1.35	○ Pure White	x=0.3300~0.3500 y=0.3180~0.3600	1000	1800	2.7	3.5	20



UNIT : mm

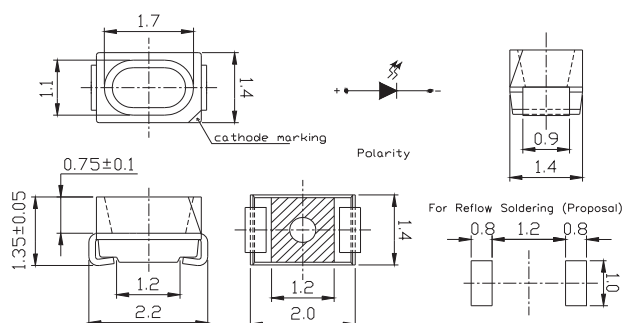


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
65-21/G6C-AN2Q1/3T	2.2x1.4x1.35	● Brilliant Yellow Green	569.5~577.5	36	90	--	2.35	20
65-21/Y2C-CJ2L2X/3T	2.2x1.4x1.35	● Brilliant Yellow	586~592	5.8 (2mA)	18 (2mA)	2	2.4	2
65-21/Y2SC-AR1S2B/2T	2.2x1.4x1.35	● Brilliant Yellow	585.5~594.5	112	285	1.75	2.35	20
65-21/Y2SC-FR2S1B/2T	2.2x1.4x1.35	● Brilliant Yellow	586~594	140	225	1.75	2.35	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2




UNIT : mm

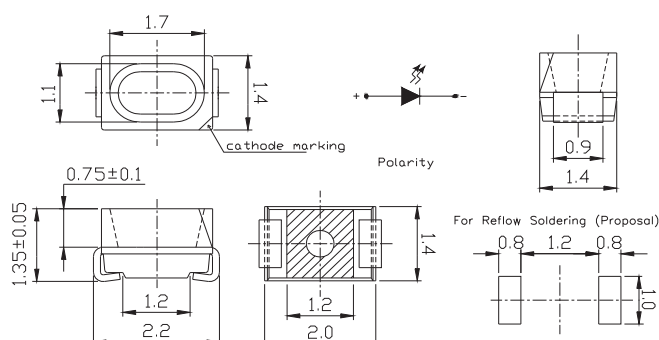

Product	Size (LXWXHmm)	Color	I _v (mcd)	λ _d (nm)	V _F (V)	Viewing Angle (°)
65-21-G6C-Y2P2R1B7E-2T8-AM	2.2x1.4x1.35	● Green	56~140	569.5~575.5	1.7~2.4	120
65-21-B1C-A1H2K1A1C-2T8-AM	2.2x1.4x1.35	● Blue	3.55~9	462~468	2.9~4.1	120
65-21-B3T-A0S1T1A7E-2T8-AM	2.2x1.4x1.35	○ White	180~355	x=0.28 y=0.27	2.7~3.8	120
65-21-S2SC-B2S1T1B7E-2T8-AM	2.2x1.4x1.35	● Orange	180~355	603~609	1.7~2.4	120
65-21-R7C-A6Q2S1B0E-2T8-AM	2.2x1.4x1.35	● Red	90~224	627~639	1.75~2.35	120



UNIT : mm

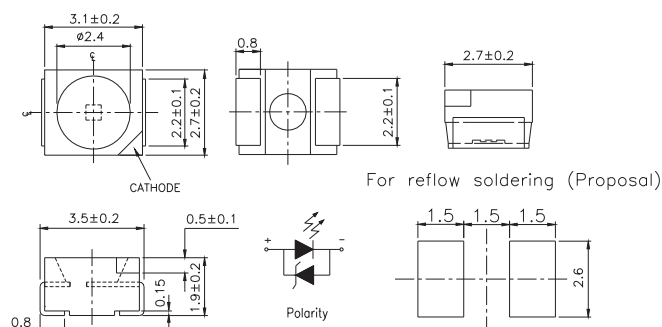


Product	Size (LXWXHmm)	Color	λ _d (nm)/CIE(x,y)	I _v Min./Typ. (mcd)	I _v Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
67-11/BHC-FQ2S1F/2T	3.5 x 2.7 x 1.9	● Blue	464~472	90	225	2.7	3.5	20
67-11/GHC-AT2V1/2T	3.5 x 2.7 x 1.9	● Brilliant Green	520~535	180	450	2.7	3.7	20
67-11/W1C-ES1T2N/2T	3.5 x 2.7 x 1.9	● Warm White	x=0.264~0.330 y=0.248~0.360	180	450	2.7	3.7	20
67-11/W1C-FV1W2F/2T	3.5 x 2.7 x 1.9	○ White	x=0.283~0.330 y=0.276~0.360	715	1800	2.7	3.5	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2



UNIT : mm

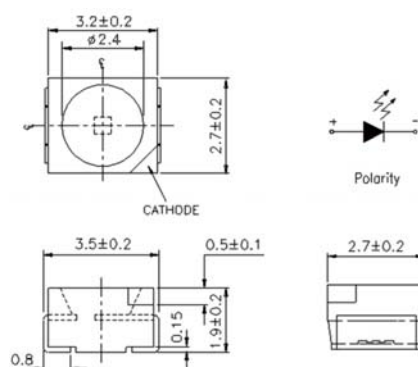


Product	Size (LXWXHmm)	Color	I _v (mcd)	λ _d (nm)	V _F (V)	Viewing Angle (°)
67-21-GHC-Z1T2U2A6C-2T8-AM	3.5x2.7x1.9	● Green	374~575	523~531	2.6~3.8	120
67-21-B1C-R3K1M1C6C-2T8-AM	3.5x2.7x1.9	● Blue	7.1~22.4	461~467	2.9~4.4	120
67-21-B3T-Q8R1S2M0E-2T8-AM	3.5x2.7x1.9	○ White	112~280	x=0.315~0.335 y=0.290~0.353	2.75~3.95	120
67-21-S2C-B2K2L2B7A-2T8-AM	3.5x2.7x1.9	● Sunset Orange	9~18	603~609	1.7~2.4	120
67-21-R7C-F3K1L1B6A-2T8-AM	3.5x2.7x1.9	● Red	7.1~14	625~638	1.7~2.4	120

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC2



UNIT : mm

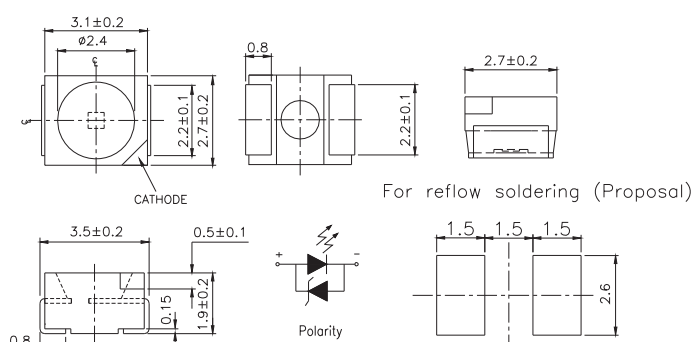


Product	Size (LXWXHmm)	Color	λ_d (nm)/CIE(x,y)	I_V Min./Typ. (mcd)	I_V Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-21/B3C-BN1Q2N/2T	3.5x2.7x1.9	Blue	464.5~473.5	28.5	112	2.7	3.7	20
67-21/B7C-AS2U1N/2T	3.5x2.7x1.9	Blue	464.5~476.5	225	565	2.7	3.7	20
67-21/BHC-FP1Q2F/2T	3.5x2.7x1.9	Blue	464~472	45	112	2.7	3.5	20
67-21/G4C-BQ1T2N/2T	3.5x2.7x1.9	Brilliant Green	523.5~535.5	72	450	2.7	3.7	20
67-21/G6C-FN2P2B/2T	3.5x2.7x1.9	Brilliant Yellow Green	569.5~577.5	45	112	1.75	2.35	20
67-21/GBC-YV2W2N/2T	3.5x2.7x1.9	Brilliant Green	520~535	900	1800	2.7	3.7	20
67-21/GHC-AS2U1B17Z/2T	3.5x2.7x1.9	Brilliant Green	517.5~535.5	225	565	2.5	3.5	10
67-21/GHC-BV1/2T	3.5x2.7x1.9	Brilliant Green	523.5~533.5	715	900	2.7	4.3	20
67-21/R6C-AP2R1B/2T	3.5x2.7x1.9	Brilliant Red	617.5~633.5	57	140	1.75	2.35	20
67-21/R6C-FN2Q1BZ/2T	3.5x2.7x1.9	Brilliant Red	621~631	36	90	1.75	2.35	10
67-21/R6C-FR2T1B/2T	3.5x2.7x1.9	Brilliant Red	621~631	140	360	1.75	2.35	20
67-21/R6C-FS1U1B/2T	3.5x2.7x1.9	Brilliant Red	620.5~631	180	565	1.75 / 2.0	2.35	20
67-21/RSC-FT2V1B/2T	3.5x2.7x1.9	Brilliant Red	621~631	360	900	1.75	2.35	20
67-21/RSC-T1V1/2T	3.5x2.7x1.9	Brilliant Red	624	285	900	1.7 / 2.0	2.4	20
67-21/S2C-FQ2R2B/2T	3.5x2.7x1.9	Brilliant Orange	603~609	90	180	1.75 / 2.0	2.35	20
67-21/S3C-AS1T1/2T	3.5x2.7x1.9	Reddish Orange	605.5~621.5	180	360	2	2.4	20
67-21/T2C-YV2W2B22/2A0	3.5x2.7x1.9	White	x=0.3070~0.3300 y=0.3045~0.3390	900	1800	3	3.6	20
67-21/T2C-ZV1W2E/2T	3.5x2.7x1.9	White	x=0.2569~0.2960 y=0.2283~0.2950	715	1800	2.75	3.65	20
67-21/T3C-EU1V2M/2A0	3.5x2.7x1.9	White	x=0.2640~0.3300 y=0.2480~0.3600	450	1120	2.75	3.95	20
67-21/Y2C-AP1Q1B/2T	3.5x2.7x1.9	Brilliant Yellow	585.5~594.5	45	90	1.75	2.35	20
67-21/Y2C-AS1T1/2T	3.5x2.7x1.9	Brilliant Yellow	585.5~594.5	180	360	2	2.4	20
67-21/Y2C-BR2T1B/2T	3.5x2.7x1.9	Brilliant Yellow	588.5~594.5	140	360	1.75	2.35	20
67-21/YSC-FU1U2B/2T	3.5x2.7x1.9	Brilliant Yellow	586~594	495	715	1.75	2.35	20
67-21/YSC-FU1V2B/2T	3.5x2.7x1.9	Brilliant Yellow	586~594	450	1120	1.75	2.35	20
67-21SUBC/S400-X9/TR8	3.5x2.7x1.9	Blue	470	32	135	3.5	4.3	20
67-21SURC/S530-A7/TR8	3.5x2.7x1.9	Hyper Red	624	23	251	2	2.4	20
67-21UBC/C430/TR8	3.5x2.7x1.9	Blue	466	35/55	NA	3.8	4.5	20
67-21UYC/S530-A6/TR8	3.5x2.7x1.9	Brilliant Yellow	589	40	154	1.7 / 2.0	2.4	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC3




UNIT : mm

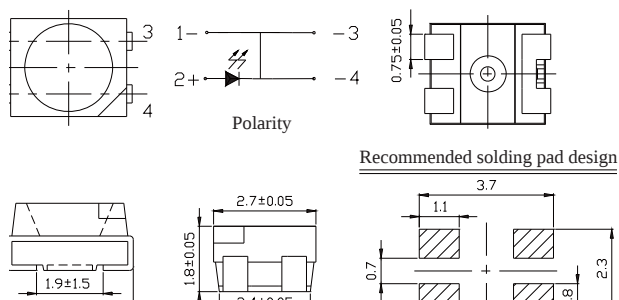

Product	Size (LXWXHmm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./ Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-31A/B7C-AT1U2MZ3/2T	3.5x2.7x1.8	Blue	464.5~476.5	285	715	2.75	3.95	30
67-31A/GHC-YV1W2EZ3/2T	3.5x2.7x1.8	Green	520~535	715	1800	2.75	3.65	30
67-31A/SAC-AW1X2B9Z5/2T	3.5x2.7x1.8	Reddish Orange	605.5~625.5	1120	2850	2.15	2.75	50



UNIT : mm






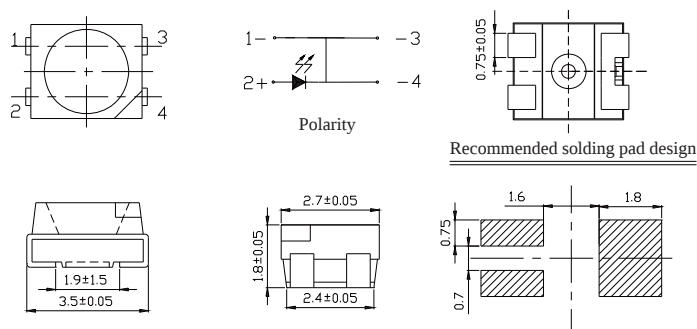


Product	Size (LXWXH mm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./ Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-31E/RSC-AV1W2B9Z5/2T	3.5x2.7x1.8	Brilliant Red	617.5~633.5	715	1800	2.15	2.75	50

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC3



UNIT : mm




Product	Size (LXWXHmm)	Color	I _v (mcd)	λ _d (nm)/CIE(x,y)	V _f (V)	Viewing Angle (°)
67-31E-Y9NC-E9V1AAC1G-2T8-AM	3.5x2.7x1.8	● Yellow	710~1400	586~595	1.7~2.6	120
67-31E-GPSC-U8P2R1B7G-2T8-AM	3.5x2.7x1.8	● Green	56~140	559~568	1.7~2.4	120
67-31EZ-BLT-2AV2ABC2F-2T8-AM	3.5x2.7x1.8	○ White	900~1800	x=0.315~0.335 y=0.300~0.360	2.7~3.9	120
67-31E-S3SC-M1U2V2C1G-2T8-AM	3.5x2.7x1.8	● Orange	560~1120	609.5~621.5	1.7~2.6	120

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Top View PLCC4



UNIT : mm

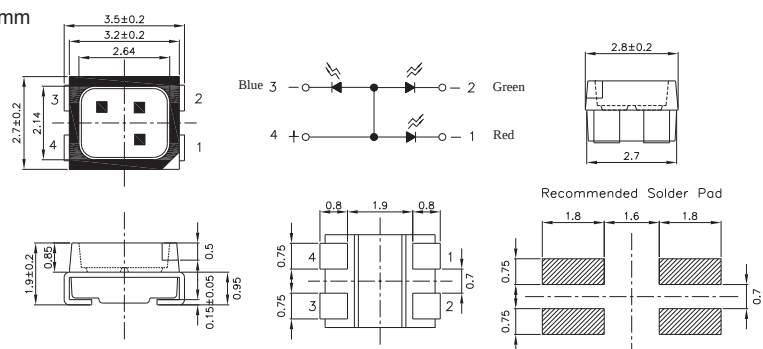


Product	Size (LXWXH mm)	Color	λ_d (nm)/ CIE(x,y)	I_v Min./Typ. (mcd)	I_v Max. (mcd)	V_F Min./Typ. (V)	V_F Max. (V)	I_F (mA)
67-03/BHGHR6W-B11/2T	3.5x2.7x1.9	RS: ● Brilliant Red GH: ● Brilliant Green BH: ● Blue	R6: 632 GH: 518 BH: 468	R6: 210 GH: 575 BH: 210	R6: 300 GH: 825 BH: 300	R6: 1.75 GH: 2.9 BH: 2.9	R6: 2.35 GH: 3.5 BH: 3.5	20
67-03/RSGHBHC-B06/1T	3.5x2.7x1.9	RS: ● Brilliant Red GH: ● Brilliant Green BH: ● Blue	RS: 50 GH: 30 BH: 30	RS: 450 GH: 900 BH: 226	RS: 715 GH: 1420 BH: 450	RS: 2.0 GH: 3.5 BH: 3.5	RS: 2.4 GH: 4.0 BH: 4.0	20

SMD LED ■ Surface Mount PLCC LEDs (Reflector) ■ Side View LED




UNIT : mm

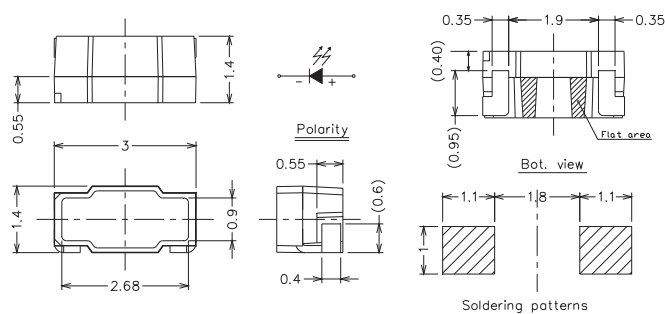

Product	Size (LXWXHmm)	Color	I _V (mcd)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
50-215UMC/3437555/TR8	3.0x1.4x1.4	○ White	1800~2000	x=0.2970~0.3205 y=0.2850~0.3270	3.05~3.45	120




UNIT : mm

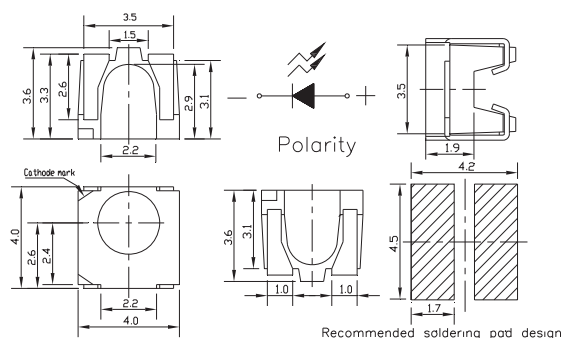

Product	Size (LXWXH mm)	Color	λ _d (nm)/CIE(x,y)	I _V Min./Typ. (mcd)	I _V Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)
57-11UTC/S827-1/TR8	4.0x4.0x3.6	○ White	x=0.3130~0.3450 y=0.2840~0.3520	900	1800	2.75	3.95



UNIT : mm

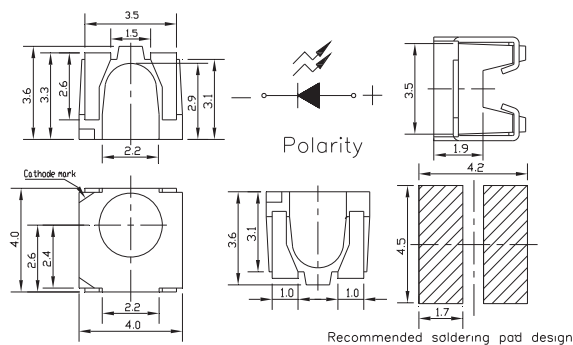


Product	Size (LXWXH mm)	Color	λ _d (nm)/CIE(x,y)	I _V Min./Typ. (mcd)	I _V Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
57-21R6C-AP1Q2B/BF	4.0x4.0x3.6	● Brilliant Red	617.5~633.5	45	112	1.75	2.35	20
57-21SYGC/S530-E3/TR8	4.0x4.0x3.6	● Brilliant Yellow Green	573	32	—	1.7 / 2.0	2.4	20

SMD LED | Surface Mount PLCC LEDs (Reflector) | Side View LED




UNIT : mm

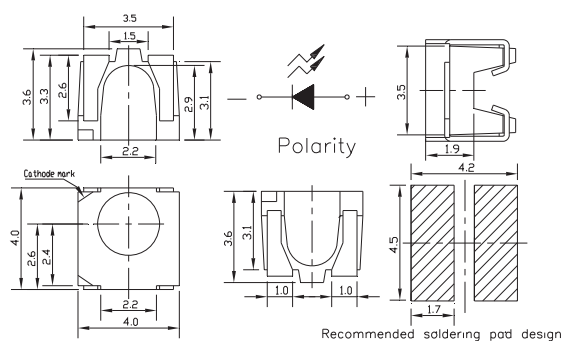

Product	Size (LXWXHmm)	Color	I _V (mcd)	λ _d (nm)/CIE(x,y)	V _F (V)	Viewing Angle (°)
57-21-Y2C-H5S1T1B0E-BT8-AM	4.0x4.0x3.6	● Yellow	180~355	590~596	1.75~2.35	120
57-21-B1C-A1J1K2A1C-BT8-AM	4.0x4.0x3.6	● Blue	4.5~11.2	462~468	2.9~4.4	120
57-21-GPSC-U8M1N2A5E-BT8-AM	4.0x4.0x3.6	● Green	18~45	559~568	1.8~2.4	120
57-21-B5P-A9V1ABBHE-BT8-AM	4.0x4.0x3.6	● Ice Bue	710~1800	x=0.2 y=0.3	2.55~3.95	120



UNIT : mm

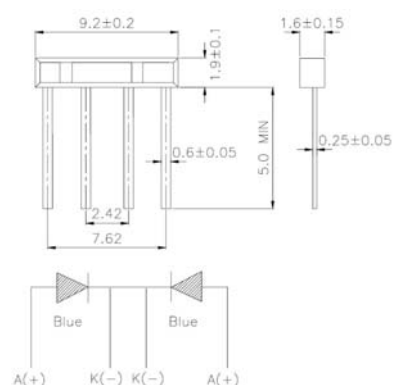


Product	Size (LXWXH mm)	Color	λ _d (nm)	I _V Min./Typ. (mcd)	I _V Max. (mcd)	V _F Min./Typ. (V)	V _F Max. (V)	I _F (mA)
94-22SUBC/S400-A4/S2	9.2x1.6x1.9	● Blue	470	50	70	3.5	4.3	20

Super Flux LED ■ 3 mm



UNIT : mm

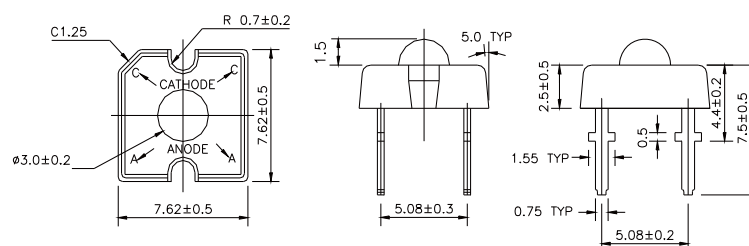


Product	Size (LXWXHmm)	Color	I _v (mlm)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
30-01-B84-RFC-D4T1U1DH-AM	7.62x7.62x9	Red	7150~14250	620~632	1.9~2.9	85
30-01-B84-YSC-A1T1U1DH-AM	7.62x7.62x9	Yellow	7150~14250	587~596	1.9~2.9	85
30-01-B74-S3NC-C6T1U1DH-AM	7.62x7.62x9	Orange	7150~14250	611~620	1.9~2.9	80
30-01/B4C-AKNB	7.62x7.62x9	Blue	1125~2850	464~476	2.8~3.8	80
30-01/G4C-ARTB	7.62x7.62x9	Green	4500~9000	520~532	3.0~4.0	80
31-01-B14-S3NC-C6T1U1DH-AM	7.62x7.62x9	Orange	7150~14250	611~620	1.9~2.9	50
31-01/T4C-4PRB	7.62x7.62x9	White	2850~5650	x=0.30 y=0.29	2.8~3.8	45
31-01/B4C-AKNB	7.62x7.62x9	Blue	1125~2850	464~476	2.8~3.8	50
33-01-C44-RRFC-D1T1U1CH-AM	7.62x7.62x9	Red	7150~14250	620~628	1.9~2.9	110
33-01-C34-YYSC-A5T1U1CH-AM	7.62x7.62x9	Yellow	7150~14250	590~598	1.9~2.9	105
33-01/G4C-ARTB	7.62x7.62x9	Green	4500~9000	520~532	3.0~4.0	90
33-01/B4C-AHKB	7.62x7.62x9	Blue	715~1425	464~472	2.8~4.0	80
38-01-A84-S3NC-C1S2T2CH-AM	7.62x7.62x9	Orange	5650~11250	610~620	1.9~2.9	40
38-01-A84-RAC-D4T1U1DH-AM	7.62x7.62x9	Red	7150~14250	620~632	1.9~2.9	40
38-01-A74-YSC-A2T1U1DH-AM	7.62x7.62x9	Yellow	7150~14250	586~594	1.9~2.9	35

Super Flux LED ■ 5 mm



UNIT : mm

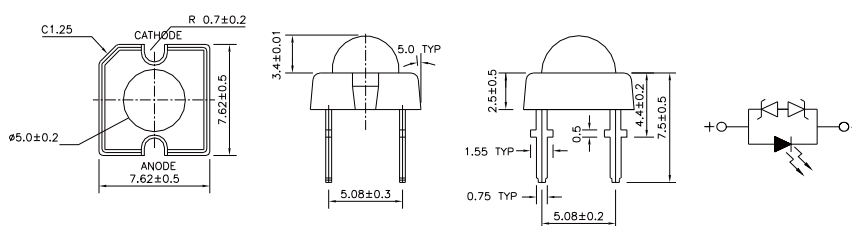


Product	Size (LXWXHmm)	Color	I _V (mlm)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
35-01/T4C-4PRB	7.62x7.62x9	○ White	2850~5650	x=0.30 y=0.29	3.0~4.0	25
35-01/B4C-AKNB	7.62x7.62x9	● Blue	1125~2850	464~476	2.8~3.8	25

Super Flux LED ■ Flat




UNIT : mm

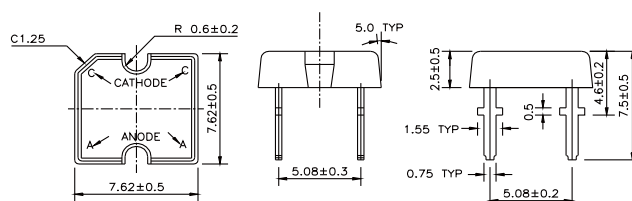


Product	Size (LXWXHmm)	Color	I _V (mlm)	Wavelength (nm)	V _F (V)	Viewing Angle (°)
10-01-C84-YSC-AAS2T2DH-AM	7.62x7.62x7.5	● Yellow	5650~11250	589~598	1.9~2.9	130
32-01/B4C-AJMB	7.62x7.62x7.5	● Blue	900~2250	464~476	2.8~3.8	130
32-01/G4C-AQSB	7.62x7.62x7.5	● Green	3600~7150	520~532	2.8~3.8	130
32-01/T4C-4PRB	7.62x7.62x7.5	○ White	2850~5650	x=0.30 y=0.29	2.8~3.8	130

LED Lamps | 2mm Tower Type

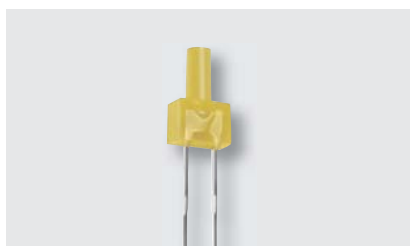

UNIT : mm

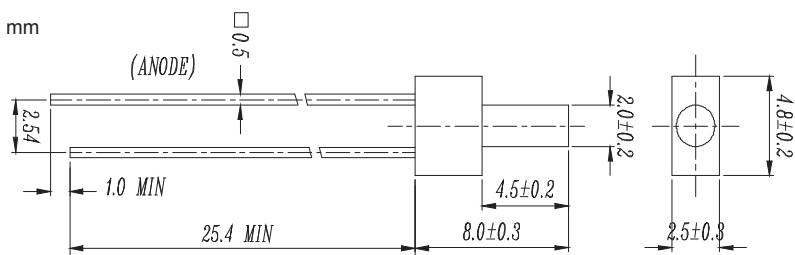


Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
103SUBD/S400-A4	2.0	● Super Blue	Tower	470	Color Diffused	40 / 80	3.4 / 4.0	100
103SURD/S530-A3	2.0	● Hyper Red	Tower	624	Color Diffused	25 / 40	2.0 / 2.4	130
103SYGD/S530-E2	2.0	● Super Yellow Green	Tower	573	Color Diffused	6.3 / 12.5	2.0 / 2.4	130

LED Lamps | 3mm Round Type



UNIT : mm

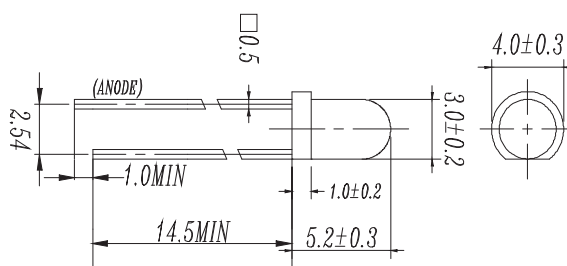


Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
204-10SDRD/S530-A3	3	● Super Deep Red	Round	639	Color Diffused	40 / 80	2.0 / 2.4	50
204-10SUBC/S400-A4	3	● Super Blue	Round	468	Water Clear	400 / 800	3.4 / 4.0	20
204-10SUGC/S400-A5	3	● Super Green	Round	530	Water Clear	1600 / 3200	3.4 / 4.0	30
204-10SURC/S400-A8	3	● Brilliant Red	Round	632	Water Clear	1000 / 2000	2.0 / 2.4	20
204-10SURC/S530-A3	3	● Hyper Red	Round	624	Water Clear	250 / 500	2.0 / 2.4	25
204-10SURC/S530-A3-L	3	● Brilliant Red	Round	624	Water Clear	250 / 400	2.0 / 2.4	30
204-10SURD/S530-A3	3	● Brilliant Red	Round	624	Color Diffused	40 / 80	2.0 / 2.4	45
204-10SURD/S530-A3-L	3	● Brilliant Red	Round	624	Color Diffused	10 / 20	2.0 / 2.4	45
204-10SURT/S530-A3	3	● Hyper Red	Round	624	Trans	250 / 500	1.7/2.0/2.4	20
204-10SYGC/S530-E2	3	● Super Yellow Green	Round	573	Water Clear	125 / 250	2.0 / 2.4	20
204-10SYGD/S530-E3	3	● Super Yellow Green	Round	573	Color Diffused	63 / 100	2.0 / 2.4	45
204-10SYGT/S530-E2	3	● Super Yellow Green	Round	573	Trans	100 / 200	2.0 / 2.4	20
204-10USOC/S400-A9	3	● Super Sunset Orange	Round	615	Water Clear	1600 / 3200	2.0 / 2.4	20
204-10UYC/S400-A9	3	● Super Yellow	Round	589	Water Clear	1000 / 3200	2.0 / 2.4	20
204-10UYC/S530-A3	3	● Super Yellow	Round	589	Water Clear	310 / 540	2.0 / 2.4	20
204-10UYC/S530-A3-L	3	● Brilliant Yellow	Round	589	Water Clear	320 / 400	2.0 / 2.4	20
204-10UYD/S530-A3	3	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	40
204-10UYD/S530-A3-L	3	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	60
204-10UYOC/S530-A3	3	● Yellow Orange	Round	605	Water Clear	320 / 500	2.0 / 2.4	30
204-10UYT/S530-A3	3	● Super Yellow	Round	589	Trans	250 / 500	2.0 / 2.4	20

LED Lamps | 3mm Round Type




UNIT : mm

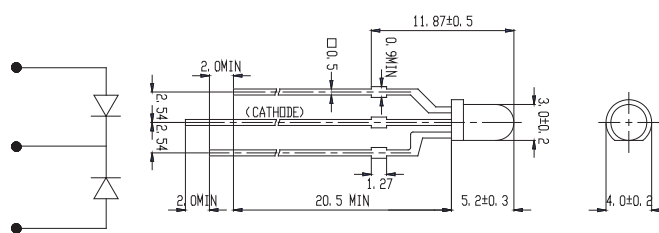

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
209SURSYGW/S530-A3	3	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 20 / 40	2.0 / 2.4 2.0 / 2.4	80
209SDRSYGW/S530-A3	3	● Super Deep Red / ● Super Yellow Green	Round	639 / 573	White Diffused	25 / 50 16 / 32	2.0 / 2.4 2.0 / 2.4	80
209SURSYGC/S530-A3	3	● Hyper Red / ● Super Yellow Green	Round	624 / 573	Water Clear	63 / 125 40 / 80	2.0 / 2.4 2.0 / 2.4	80
209SURSYGW/S530-A3	3	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 20 / 40	2.0 / 2.4 2.0 / 2.4	80
209UYOSUGC/S530-A3	3	● Super Yellow Orange / ● Brilliant Green	Round	611 / 518	Water Clear	100 / 200 160 / 320	2.0 / 2.4 3.5 / 4.3	50



UNIT : mm

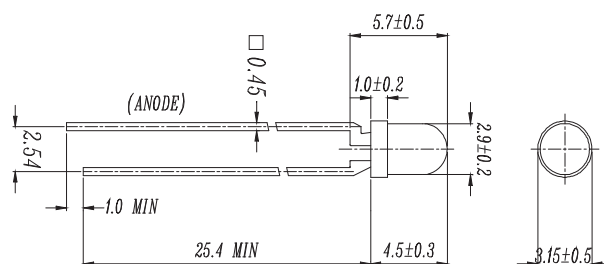


Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
264-7SDRC/S530-A3	2.9	● Super Deep Red	Round	639	Water Clear	40 / 100	1.7 / 2.0 / 2.4	40
264-7SDRD/S530-A3	2.9	● Super Deep Red	Round	639	Color Diffused	50 / 100	2.0 / 2.4	60
264-7SUGC/C525	2.9	● Brilliant Green	Round	525	Water Clear	400 / 800	3.5 / 4.3	30
264-7SURC/S400-A8	2.9	● Hyper Red	Round	624	Water Clear	400 / 800	2.0 / 2.4	40
264-7SURD/S530-A3	2.9	● Brilliant Red	Round	624	Color Diffused	63 / 125	2.0 / 2.4	60
264-7SURT/S530-A3	2.9	● Hyper Red	Round	624	Trans	160 / 320	2.0 / 2.4	40
264-7SYGC/S530-E3	2.9	● Super Yellow Green	Round	573	Water Clear	100 / 320	2.0 / 2.4	35
264-7SYGD/S530-E2	2.9	● Super Yellow Green	Round	573	Color Diffused	20 / 32	2.0 / 2.4	60
264-7SYGT/S530-E2	2.9	● Super Yellow Green	Round	573	Trans	63 / 125	2.0 / 2.4	40
264-7UYC/S400-A9	2.9	● Super Yellow	Round	589	Water Clear	400 / 800	2.0 / 2.4	40


LED Lamps ■ 3mm Round Type




UNIT : mm

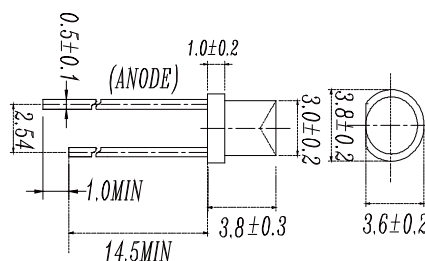


Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
484-10SURT/S530-A3	3	● Hyper Red	Round	624	Trans	10 / 20	2.0 / 2.4	130
484-10UTC/S400-A6	3	● Warm White	Round	x=0.29 y=0.28	Water Clear	39 / 332	2.75 / 3.85	120
484-10UYT/S530-A3	3	● Super Yellow	Round	589	Trans	16 / 32	2.0 / 2.4	110

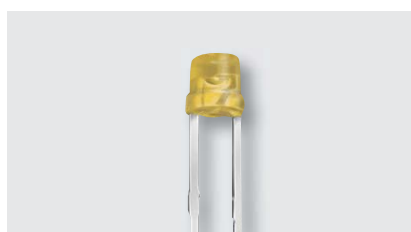


UNIT : mm

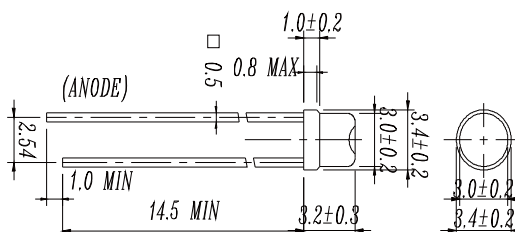

Product	Size (mm)	Color	Lens Type	λ_d (nm)/CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
494-10SURT/S530-A3	3	● Hyper Red	Round	624	Trans	16 / 32	2.0 / 2.4	100
494-10SYGT/S530-E2	3	● Brilliant Yellow Green	Round	573	Trans	10 / 20	2.0 / 2.4	100

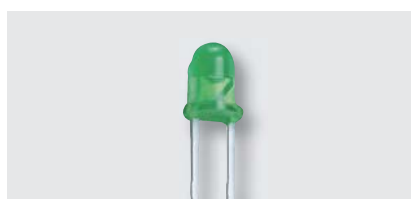

UNIT : mm

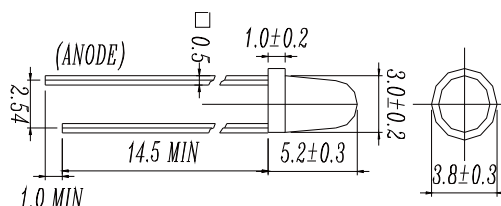


Product	Size (mm)	Color	Lens Type	λ_d (nm)/CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
1224SYGC/S530-E2	3	● Super Yellow Green	Round	573	Water Clear	63 / 100	1.7 / 2.0 / 2.4	25
1224USOC/S530-A3	3	● Super Sunset Orange	Round	615	Water Clear	188 / 295	1.7 / 2.0 / 2.4	25
1224UTC/S400-A6	3	○ White	Round	x=0.29 y=0.28	Water Clear	715 / 2850	3.0 / 4.0	25


LED Lamps | 3mm Round Type




UNIT : mm

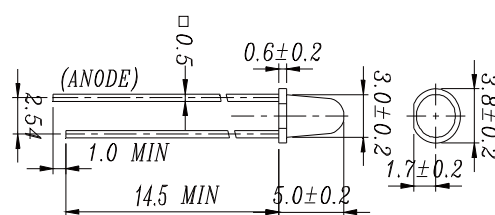

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
1254-10SDRD/S530-A3	3	Super Deep Red	Round	639	Color Diffused	100 / 160	2.0 / 2.4	30
1254-10SURD/S530-A3	3	Hyper Red	Round	624	Color Diffused	250/400	2.0 / 2.4	30
1254-10SURT/S530-A3	3	Hyper Red	Round	624	Trans	160 / 320	2.0 / 2.4	30
1254-10SYGD/S530-E2	3	Super Yellow Green	Round	573	Color Diffused	40 / 63	2.0 / 2.4	40
1254-10SYGT/S530-E2	3	Super Yellow Green	Round	573	Trans	160 / 320	2.0 / 2.4	30
1254-10UYD/S530-A3	3	Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	30

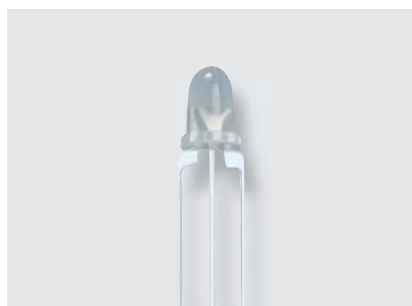

UNIT : mm

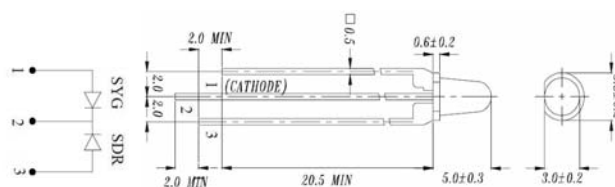


Product	Size (mm)	Color	Lens Type	λ_d (nm)/CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
1259-7SDRSYGW/S530-A3	3	Super Deep Red Super Yellow Green	Round	639 / 573	White Diffused	16 / 32 25 / 50	2.0 / 2.4 2.0 / 2.4	50
1259-7SURLSYGW/S530-A3	3	Hyper Red Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 16 / 32	2.0 / 2.4 2.0 / 2.4	60
1259-7UYSYGW/S530-A3	3	Super Yellow Super Yellow Green	Round	589 / 573	White Diffused	63 / 125 40 / 80	2.0 / 2.4 2.0 / 2.4	40


LED Lamps ■ 3mm Round Type




UNIT : mm

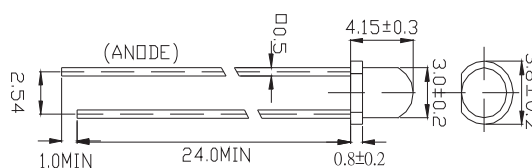

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
3294-15SUBC/S400-A6	3	● Super Blue	Round	470	Water Clear	160 / 320	3.4 / 4.0	90
3294-15SUGC/S400-A6	3	● Super Green	Round	530	Water Clear	500 / 1250	3.4 / 4.0	45
3294-15SURC/S400-A7	3	● Hyper Red	Round	624	Water Clear	100 / 200	2.0 / 2.4	90
3294-15UBGC/S400-A6	3	● Super Yellow Green	Round	505	Water Clear	400 / 800	3.5 / 4.3	90

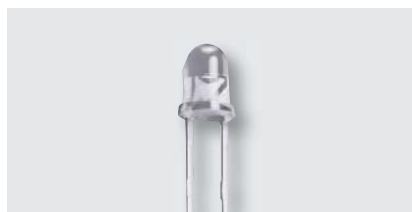


UNIT : mm

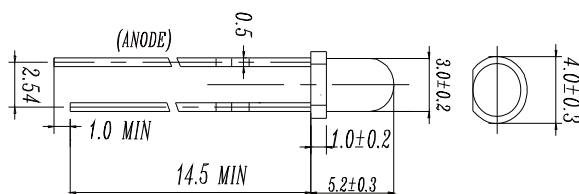


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
4204-10SYGC/S530-E4	3	● Super Yellow Green	Round	573	Water Clear	250 / 500	2.0 / 2.4	20


LED Lamps | 5mm Round Type

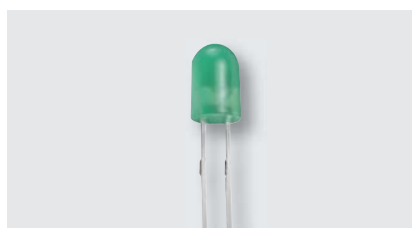


UNIT : mm

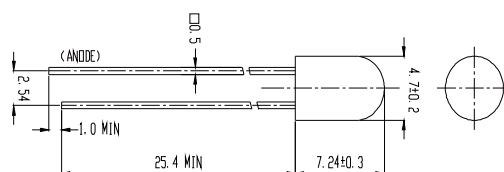

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
313-2SYGC/S530-E2	4.7	● Super Yellow Green	Round	573	Water Clear	250 / 500	2.0 / 2.4	20
313-2SYGD/S530-E2	4.7	● Brilliant Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	45
313-2UYD/S530-A3	4.7	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	50

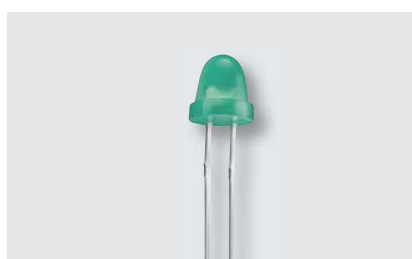


UNIT : mm

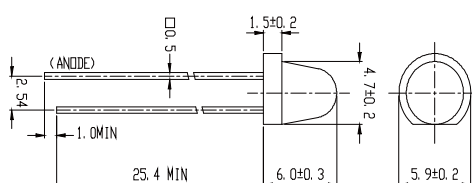

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
323-2SURD/S530-A3	4.7	● Hyper Red	Round	624	Color Diffused	63 / 100	2.0 / 2.4	40
323-2SYGD/S530-E2	4.7	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	60



UNIT : mm

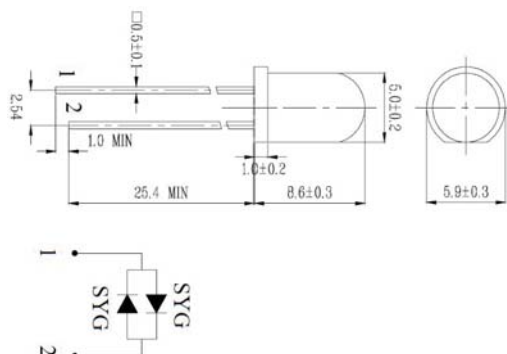


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
336SURSYGW/S530-A3	5	● Hyper Red/ ● Super Yellow Green	Round	624 / 573	White Diffused	16 / 32 16 / 32	2.0 / 2.4 2.0 / 2.4	90
336SYGSYGD/S530-E2	5	● Super Yellow Green ● Super Yellow Green	Round	573 / 573	Color Diffused	8 / 16 8 / 16	2.0 / 2.4 2.0 / 2.4	90

LED Lamps | 5mm Round Type



UNIT : mm

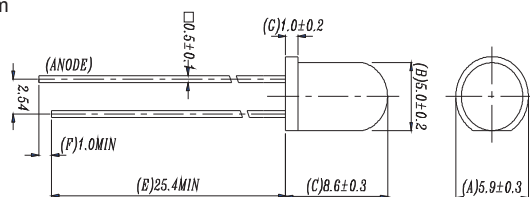


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
333-2SDRC/S530-A4	5	● Super Deep Red	Round	639	Water Clear	400/1000	1.7/2.0/2.4	10
333-2SDRD/S530-A3	5	● Super Deep Red	Round	639	Color Diffused	100/160	2.0 / 2.4	30
333-2SDRT/S530-A3	5	● Hyper Red	Round	624	Trans	500/1250	2.0 / 2.4	10
333-2SUBC/C470/S400-A6	5	● Blue	Round	470	Water Clear	1000/2000	3.4 / 4.0	10
333-2SUBD/S400-A4	5	● Super Blue	Round	470	Color Diffused	400/800	3.4 / 4.0	20
333-2SUBW/C470/S400-A4	5	● Super Blue	Round	470	White Diffused	100/200	3.4 / 4.0	40
333-2SUGC/C525	5	● Super Green	Round	525	Water Clear	1600/3200	3.5 / 4.3	10
333-2SUGC/S400-A5	5	● Super Green	Round	530	Water Clear	4000/8000	3.4 / 4.0	15
333-2SURC/S400-A8	5	● Hyper Red	Round	624	Water Clear	3200/5000	2.0 / 2.4	10
333-2SURC/S530-A2	5	● Hyper Red	Round	631	Water Clear	344/837	1.7/2.0/2.4	10
333-2SURD/S530-A3	5	● Hyper Red	Round	624	Color Diffused	100/200	1.7/2.0/2.4	30
333-2SURT/S530-A3	5	● Hyper Red	Round	624	Trans	400/800	2.0 / 2.4	10
333-2SYGC/S530-E2	5	● Super Yellow Green	Round	573	Water Clear	400/800	1.7/2.0/2.4	10
333-2SYGD/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40/80	2.0 / 2.4	30
333-2SYGT/S530-E2	5	● Brilliant Yellow Green	Round	573	Trans	250/400	2.0 / 2.4	10
333-2SYGW/S530-E2	5	● Super Yellow Green	Round	573	White Diffused	63/125	2.0 / 2.4	35
333-2UBC/C430	5	● Blue	Round	466	Water Clear	160/320	3.8 / 4.5	10
333-2UTC/S400-A6	5	○ White	Round	x=0.29 y=0.30	Water Clear	3600 / 9000	2.8 / 3.6	15
333-2UYC/S400-A4	5	● Super Yellow	Round	589	Water Clear	1432/2148	1.7/2.0/2.4	10
333-2UYC/S400-A7	5	● Super Yellow	Round	589	Water Clear	2500/4000	2.0 / 2.4	10
333-2UYC/S530-A3	5	● Super Yellow	Round	589	Water Clear	630/1600	2.0 / 2.4	10
333-2UYC/S530-A6	5	● Super Yellow	Round	589	Water Clear	2000/3200	2.0 / 2.4	10
333-2UYD/S530-A3	5	● Super Yellow	Round	589	Color Diffused	160/320	2.0 / 2.4	35

LED Lamps | 5mm Round Type




UNIT : mm

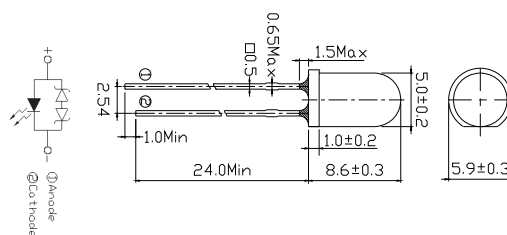


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
334-15/T1C1-1VXA	5	○ White	Round	X:0.29 y:0.28	Water Clear	11250 / 22500	2.8 / 3.6	15
334-15/T1C1-4VXC	5	○ White	Round	X:0.30 y:0.29	Water Clear	11250 / 22500	2.8 / 3.6	15
334-15/T1C1-7VXC	5	○ White	Round	X:0.30 y:0.29	Water Clear	11250 / 22500	2.8 / 3.6	15
334-15/T1C3-7TVA	5	○ White	Round	X:0.30 y:0.29	Water Clear	7150 / 14250	2.8 / 3.6	30
334-15/T1C5-4PRA	5	○ White	Round	X:0.30 y:0.29	Water Clear	2850 / 5650	2.8 / 3.6	50
334-15/T2C1-1SUB	5	○ White	Round	X:0.29 y:0.28	Water Clear	5650 / 11250	2.8 / 3.6	15
334-15/T2C1-1UWA	5	○ White	Round	X:0.29 y:0.28	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-1UWB	5	○ White	Round	X:0.29 y:0.28	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-2UWC	5	○ White	Round	X:0.26 y:0.27	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-4UWC	5	○ White	Round	X:0.30 y:0.29	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-4UWC/R10	5	○ White	Round	X:0.30 y:0.29	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C1-7UWC	5	○ White	Round	X:0.30 y:0.29	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/T2C2-1TVB	5	○ White	Round	X:0.29 y:0.28	Water Clear	7150 / 14250	2.8 / 3.6	20
334-15/T2C2-6TVB	5	○ White	Round	X:0.29 y:0.28	Water Clear	7150 / 14250	2.8 / 3.6	20
334-15/T2C2-6TWB	5	○ White	Round	X:0.33 y:0.34	Water Clear	7150 / 18000	2.8 / 3.6	20
334-15/T2C2-7TVA	5	○ White	Round	X:0.29 y:0.28	Water Clear	7150 / 14250	2.8 / 3.6	20
334-15/T2C3-1RTB	5	○ White	Round	X:0.29 y:0.28	Water Clear	4500 / 9000	2.8 / 3.6	30
334-15/T2C3-2RTC	5	○ White	Round	X:0.26 y:0.27	Water Clear	4500 / 9000	3.0 / 3.6	30
334-15/T2C3-4RTB	5	○ White	Round	X:0.30 y:0.29	Water Clear	4500 / 9000	2.8 / 3.6	30
334-15/T2C5-1MQB	5	○ White	Round	X:0.29 y:0.28	Water Clear	1800 / 4500	2.8 / 3.6	50
334-15/X1C2-1UWA	5	● Warm White	Round	X:0.40 y:0.39	Water Clear	9000 / 18000	2.8 / 3.6	20
334-15/X1C5-6QSA	5	● Warm White	Round	X:0.40 y:0.39	Water Clear	3600 / 7150	2.8 / 3.6	50
334-15/X2C1-1UWB	5	● Warm White	Round	X:0.40 y:0.39	Water Clear	9000 / 18000	2.8 / 3.6	15
334-15/X2C1-4UWA	5	● Warm White	Round	X:0.42 y:0.39	Water Clear	9000 / 18000	2.8 / 3.6	15


LED Lamps | 5mm Round Type

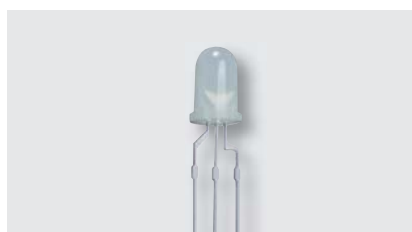


UNIT : mm

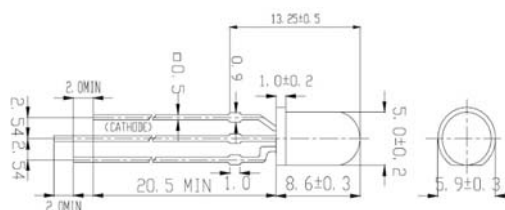

Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
339-1SURSYGC/S530-A3	5	● Hyper Red / ● Super Yellow Green	Round	624 / 573	Water Clear	160 / 250 40 / 63	2.0 / 2.4 2.0 / 2.4	25
339-1SURSYGW/S530-A3	5	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	40 / 80 25 / 50	2.0 / 2.4 2.0 / 2.4	70
339-1UYSYGW/S530-A3	5	● Super Yellow / ● Super Yellow Green	Round	589 / 573	White Diffused	63 / 100 32 / 50	2.0 / 2.4 2.0 / 2.4	70
339-1UYUBW/S530-A4	5	● Super Yellow / ● Blue	Round	589 / 470	White Diffused	25 / 50 16 / 32	2.0 / 2.4 3.5 / 4.3	100

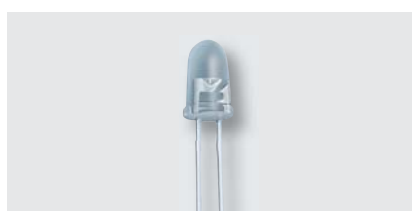

UNIT : mm

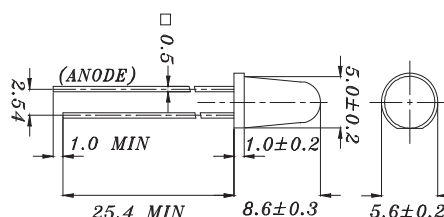


Product	Size (mm)	Color	Lens Type	λ_d (nm) / CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
383-2SUBC/C470/S400-A6	5	● Super Blue	Round	470	Water Clear	1600 / 3200	3.4 / 4.0	20
383-2SURC/S400-A6	5	● Hyper Red	Round	624	Water Clear	4000 / 6300	2.0 / 2.4	6
383-2SURC/S400-A8	5	● Hyper Red	Round	624	Water Clear	6300 / 12500	2.0 / 2.4	6
383-2SURC/S530-A3	5	● Hyper Red	Round	624	Water Clear	1000 / 2500	2.0 / 2.4	6
383-2SURC/S530-A6	5	● Hyper Red	Round	624	Water Clear	4000 / 6300	2.0 / 2.4	6
383-2SYGC/S530-E2	5	● Brilliant Yellow Green	Round	573	Water Clear	160 / 320	2.0 / 2.4	10
383-2SYGD/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	25
383-2UBC/C470	5	● Blue	Round	470	Water Clear	400 / 800	3.5 / 4.3	6
383-2USOC/S530-A6	5	● Super Sunset Orange	Round	615	Water Clear	6300 / 8000	2.0 / 2.4	6
383-2UYC/S400-A6	5	● Super Yellow	Round	589	Water Clear	4000 / 8000	2.0 / 2.4	6
383-2UYC/S530-A3	5	● Super Yellow	Round	589	Water Clear	2713 / 4263	2.0 / 2.4	6


LED Lamps | 5mm Round Type




UNIT : mm

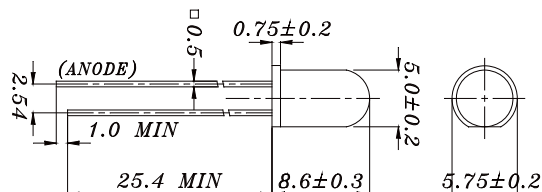


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1383-2SDRD/S530-A3	5	● Super Deep Red	Round	639	Color Diffused	160 / 320	2.0 / 2.4	30
1383-2SURD/S530-A3	5	● Brilliant Red	Round	624	Color Diffused	250 / 500	2.0 / 2.4	40
1383SDRD/S530-A3	5	● Deep Red	Round	639	Color Diffused	160 / 320	2.0 / 2.4	30
1383SURT/S530-A3	5	● Hyper Red	Round	624	Trans	400 / 800	2.0 / 2.4	25
1383SYGD/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	100 / 200	2.0 / 2.4	25
1383SYGT/S530-E2	5	● Super Yellow Green	Round	573	Trans	630 / 1250	2.0 / 2.4	20
1383UYD/S530-A3	5	● Super Yellow	Round	589	Color Diffused	400 / 800	2.0 / 2.4	25

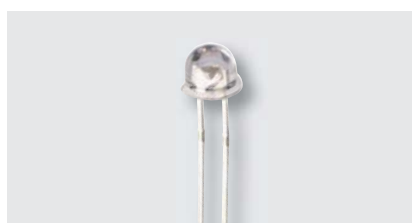


UNIT : mm

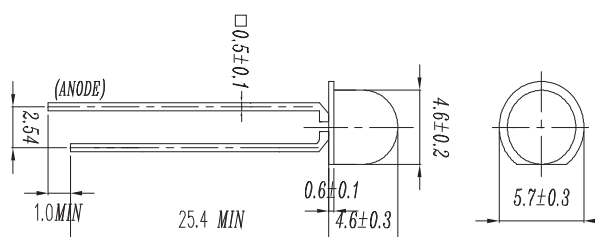

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
6324-15SUBC/S400-X10	4.6	● Super Blue	Round	470	Water Clear	250 / 500	3.4 / 4.0	60
6324-15SURC/S400-A9	4.6	● Hyper Red	Round	624	Water Clear	160 / 320	2.0 / 2.4	100

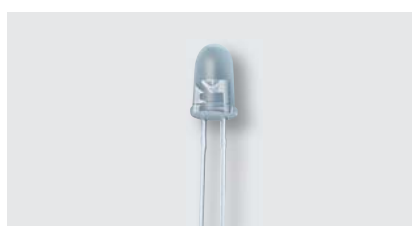


UNIT : mm

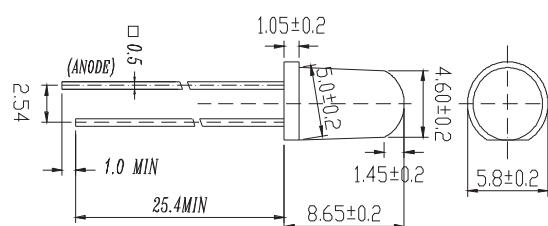


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
7343-2SURC/S400-A9	4.6	● Hyper Red	Round	624	Water Clear	2500 / 3200	2.0 / 2.4	20
7343-2SURD/S530-A3	4.6	● Hyper Red	Round	624	Color Diffused	160 / 320	2.0 / 2.4	40
7343-2SYGD/S530-E3	4.6	● Brilliant Yellow Green	Round	573	Color Diffused	63 / 125	2.0 / 2.4	40
7343-2USRC/S1060	4.6	● Super Red	Round	631	Water Clear	2500 / 4000	2.0 / 2.6	30
7343-2UYC/H2/S400-A9	4.6	● Brilliant Yellow	Round	589	Water Clear	1600 / 2500	2.0 / 2.4	30
7343-2UYC/S1060	4.6	● Super Yellow	Round	589	Water Clear	1600 / 2500	2.0 / 2.6	30
7343-2UYC/S400-A9	4.6	● Brilliant Yellow	Round	589	Water Clear	1600 / 3200	2.0 / 2.4	30
7343-2UYC/S530-A3	4.6	● Super Yellow	Round	589	Water Clear	1000 / 2000	2.0 / 2.4	15

LED Lamps | 5mm Round Type

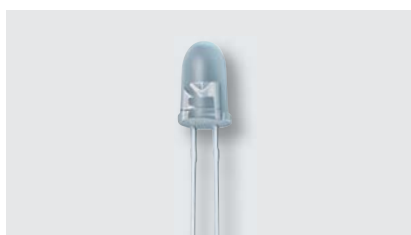


UNIT : mm

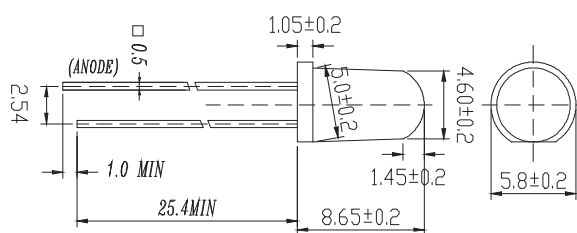

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
7344-15SUBC/C470/S400-A6	4.6	● Super Blue	Round	470	Water Clear	1000 / 2000	3.4 / 4.0	30
7344-15SUGC/S400-A5	4.6	● Super Green	Round	530	Water Clear	5000 / 8000	3.4 / 4.0	30
7344-15SUGC/S400-X6	4.6	● Super Green	Round	530	Water Clear	8000 / 11000	3.4 / 4.0	20




UNIT : mm

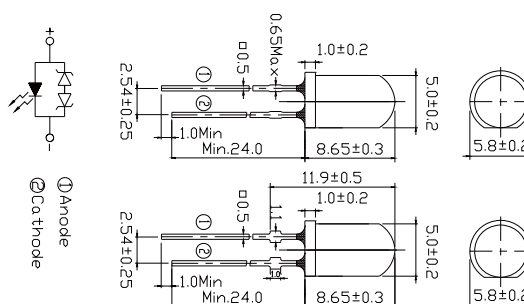


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_V (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
7383/R2C3-AMQB/P	5	● Brilliant Red	Round	618~628	Water Clear	2850 / 4500 / 7150	1.8 / 2.0 / 2.6	30
7383USRW/S1089-2	5	● Super Red	Round	628	White Diffused	--	1.7 / 2.0 / 2.6	30

LED Lamps | 8mm Round Type

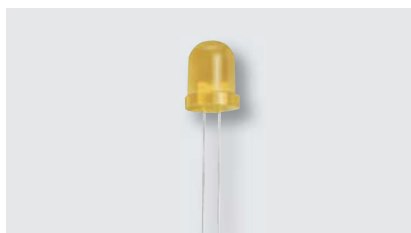

UNIT : mm

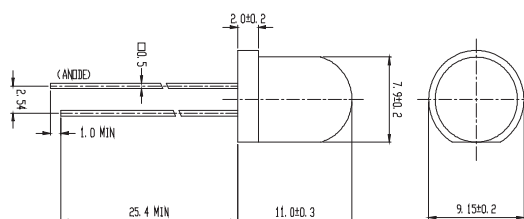


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
393-2SURD/S530-A3	7.9	● Hyper Red	Round	624	Color Diffused	63 / 125	2.0 / 2.4	60
393UYD/S530-A3	7.9	● Super Yellow	Round	589	Color Diffused	80 / 125	2.0 / 2.4	60

LED Lamps | 10mm Round Type



UNIT : mm

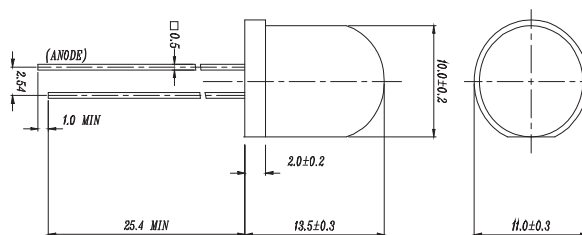


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
363-2SURD/S530-A3	10	● Brilliant Red	Round	624	Color Diffused	63 / 125	2.0 / 2.4	40
363-2SYGD/S530-E2	10	● Super Yellow Green	Round	573	Color Diffused	16 / 32	2.0 / 2.4	30
363SYGD/S530-E2	10	● Super Yellow Green	Round	573	Color Diffused	16 / 32	2.0 / 2.4	40

LED Lamps | 3mm Cylindrical



UNIT : mm

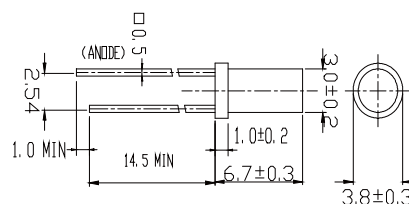


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
414-10UYD/S530-A3	3	● Super Yellow	Cylindrical	589	Color Diffused	25 / 40	2.0 / 2.4	120

LED Lamps | 5mm Cylindrical



UNIT : mm

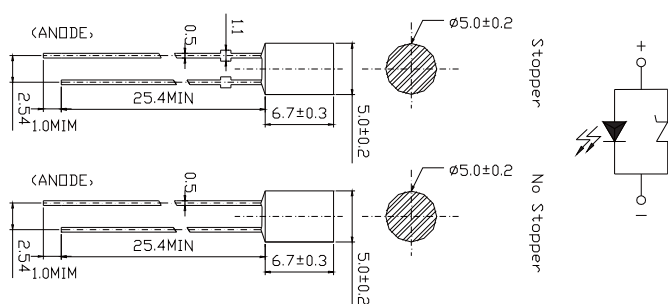


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
423-2ASUGC/S400-A6-P/TR1(A)	5	● Super Green	Cylindrical	525	Water Clear	450 / 565	3.5/3.9	90
423-2UYC/S530-A6	5	● Super Yellow	Cylindrical	589	Water Clear	100 / 200	2.0 / 2.4	90

LED Lamps | 5mm Square



UNIT : mm

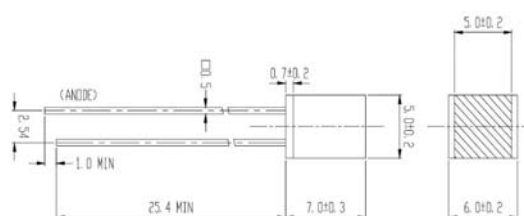


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
583SURD/S530-A3	5.0 x 5.0	● Hyper Red	Square	624	Color Diffused	12.5 / 20	2.0 / 2.4	130
583SYGD/S530-E2	5.0 x 5.0	● Super Yellow Green	square	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	170
583UYD/S530-A3	5.0 x 5.0	● Super Yellow	Square	589	Color Diffused	10 / 20	2.0 / 2.4	170

LED Lamps | Rectangular




UNIT : mm

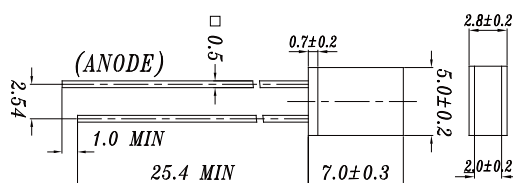

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
513SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	10 / 20	2.0 / 2.4	180
513SYGD/S530-E2	2.0 x 5.0	● Super Yellow Green	Rectangle	573	Color Diffused	6.3 / 12.5	2.0 / 2.4	140




UNIT : mm

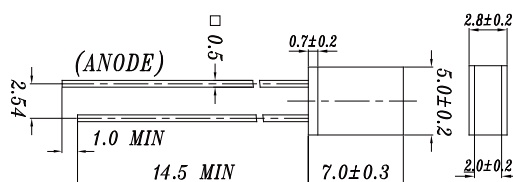

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
514SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	10 / 20	2.0 / 2.4	180
514SYGD/S530-E2	2.0 x 5.0	● Super Yellow Green	Rectangle	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	180
514UYD/S530-A3	2.0 x 5.0	● Super Yellow	Rectangle	589	Color Diffused	10 / 20	2.0 / 2.4	180



UNIT : mm

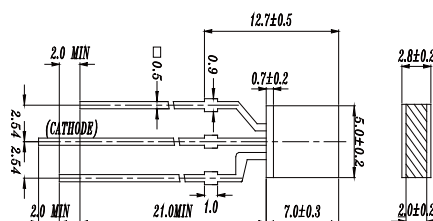


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
519-1SURSYGW/S530-A3	2.0 x 5.0	● Hyper Red / ● Super Yellow Green	Rectangle	624 / 573	White Diffused	6.3 / 12.5 2.5 / 5.0	2.0 / 2.4 2.0 / 2.4	180

LED Lamps | Rectangular




UNIT : mm

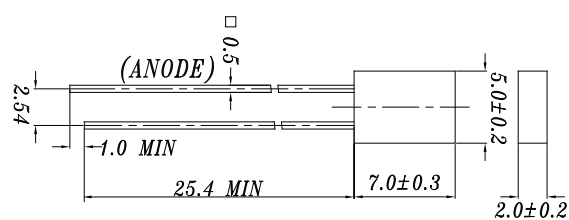

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
523-2SDRD/S530-A3	2.0 x 5.0	● Super Deep Red	Rectangle	639	Color Diffused	10 / 16	2.0 / 2.4	120
523-2SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	16 / 32	2.0 / 2.4	120
523-2UYD/S530-A3	2.0 x 5.0	● Super Yellow	Rectangle	589	Color Diffused	6.3 / 12.5	2.0 / 2.4	180
523SURD/S530-A3	2.0 x 5.0	● Hyper Red	Rectangle	624	Color Diffused	16 / 25	2.0 / 2.4	170
523SYGD/S530-E2	2.0 x 5.0	● Super Yellow Green	Rectangle	573	Color Diffused	4 / 8	2.0 / 2.4	150
523UYD/S530-A3	2.0 x 5.0	● Super Yellow	Rectangle	589	Color Diffused	16 / 32	2.0 / 2.4	180




UNIT : mm

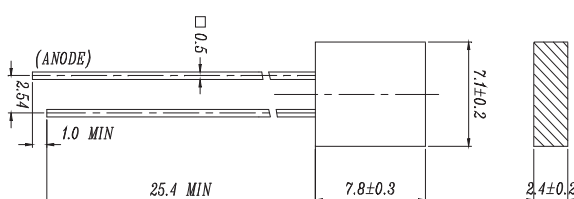

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
573SURD/S530-A3	2.4 x 7.1	● Hyper Red	Rectangular	624	Color Diffused	16 / 25	1.7 / 2.0 / 2.4	120
573SYGD/S530-E2	2.4 x 7.1	● Super Yellow Green	Rectangular	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	180



UNIT : mm

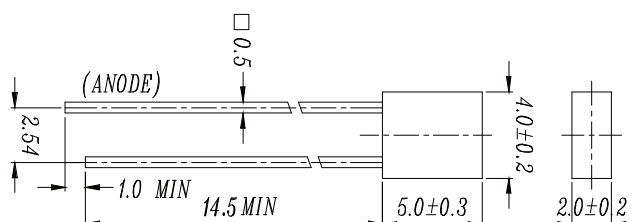


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
594SUBC/C470/S400-A4	2.0 x 4.0	● Super Blue	Rectangular	470	Water Clear	40 / 63	3.4 / 4.0	100
594SURD/S530-A3	2.0 x 4.0	● Hyper Red	Rectangular	624	Color Diffused	10 / 16	2.0 / 2.4	170
594SYGD/S530-E2	2.0 x 4.0	● Super Yellow Green	Rectangular	573	Color Diffused	4.0 / 8.0	2.0 / 2.4	180
594UYD/S530-A3	2.0 x 4.0	● Super Yellow	Rectangular	589	Color Diffused	10 / 20	2.0 / 2.4	180

LED Lamps | Rectangular




UNIT : mm

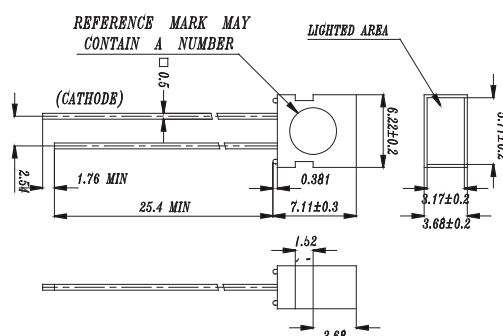

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1003SURD/S530-A3	3.68x6.22	● Hyper Red	Rectangular	624	Color Diffused	25 / 50	2.0 / 2.4	110
1003SYGD/S530-E2	3.68x6.22	● Super Yellow Green	Rectangular	573	Color Diffused	6.3 / 12.5	2.0 / 2.4	110
1003UYD/S530-A3	3.68x6.22	● Super Yellow	Rectangular	589	Color Diffused	25 / 50	2.0 / 2.4	110




UNIT : mm

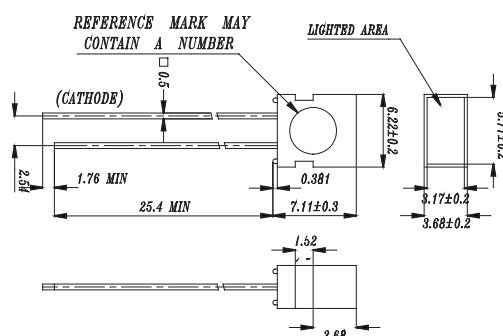

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1006SYGSURW/S530-A3	3.68x6.22	● Super Yellow Green / ● Hyper Red	Rectangular	573 / 624	White Diffused	10 / 20 25 / 50	2.0 / 2.4 2.0 / 2.4	120



UNIT : mm

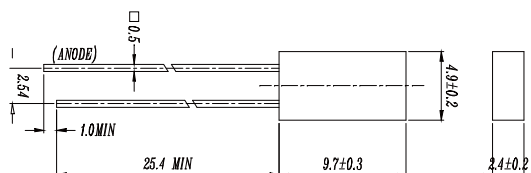


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/ Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
1533SYGD/S530-E2/O	2.4 x 4.9	● Super Yellow Green	Round	573	Color Diffused	2.5 / 5.0	2.0 / 2.4	180

LED Lamps | 3mm Assembly LED




UNIT : mm

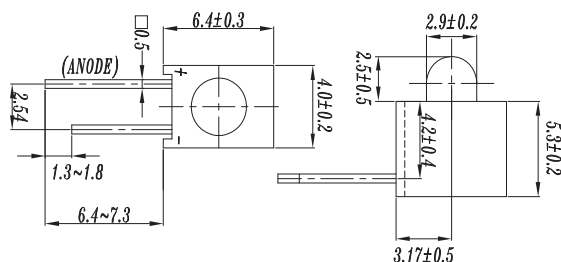


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A214B/SUR/S530-A3	3	● Hyper Red	Round	624	Color Diffused	63 / 120	2.0 / 2.4	60
A214B/SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	16 / 32	2.0 / 2.4	60
A214B/UY/S530-A3	3	● Super Yellow	Round	589	Color Diffused	50 / 100	2.0 / 2.4	60




UNIT : mm

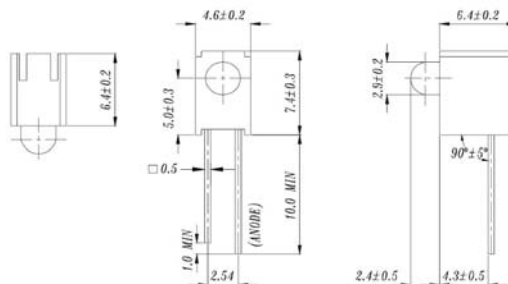

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A264B/SUB/S400-A4	3	● Super Blue	Round	470	Color Diffused	160 / 250	3.4 / 4.0	35
A264B/SUR/S530-A3	3	● Hyper Red	Round	624	Color Diffused	63 / 120	2.0 / 2.4	60
A264B/SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60
A264B/UY/S530-A3	3	● Super Yellow	Round	589	Color Diffused	50 / 100	2.0 / 2.4	60

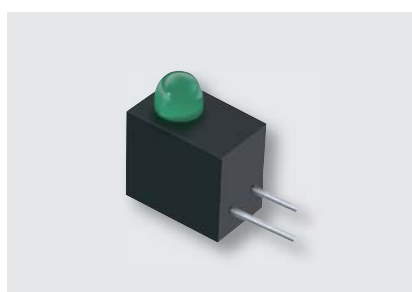


UNIT : mm

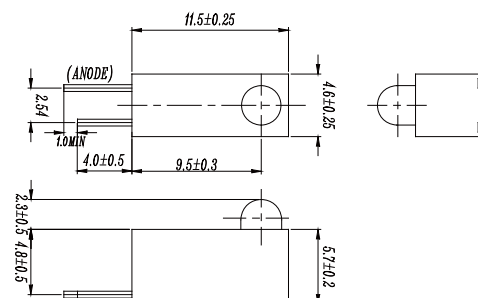


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A274B/SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60


LED Lamps | 3mm Assembly LED

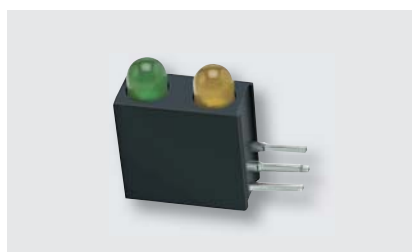


UNIT : mm

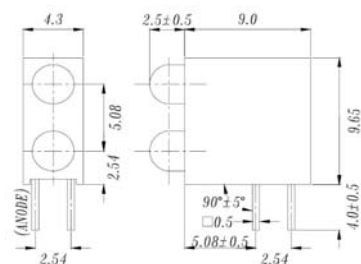

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
A694B/2SUR/S530-A3	3	● Hyper Red	Round	624	Color Diffused	10 / 25	2.0 / 2.4	60
A694B/2SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60
A694B/2UY/S530-A3	3	● Super Yellow	Round	589	Color Diffused	16 / 32	2.0 / 2.4	60
A694B/SURSYG/S530-A3	3	● Hyper Red/ ● Super Yellow Green	Round	624 / 573	Color Diffused	40 / 80 25 / 50	2.0 / 2.4 2.0 / 2.4	60 / 60
A694B/SYGUY/S530-A3	3	● Super Yellow Green / ● Super Yellow	Round	573 / 589	Color Diffused	25 / 50 40 / 80	2.0 / 2.4 2.0 / 2.4	60 / 60

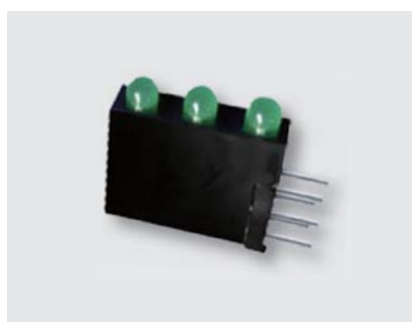

UNIT : mm

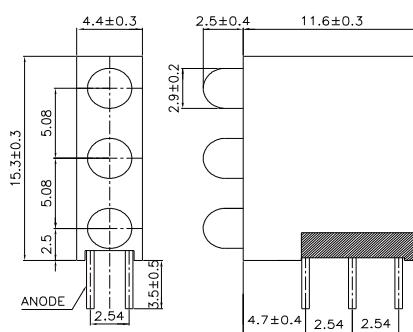


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ / Max)	Viewing Angle (°)
A1394B/3SYG/S530-E2	3	● Super Yellow Green	Round	573	Color Diffused	25 / 50	2.0 / 2.4	60


LED Lamps | 5mm Assembly LED




UNIT : mm

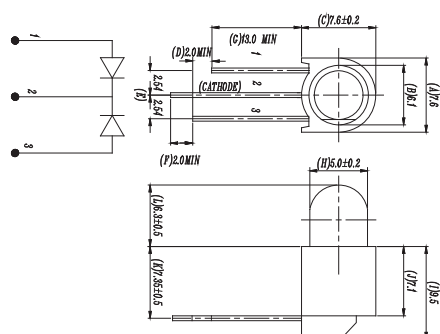

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A1479-1B/SURSYGW/ S530-A3	5	● Hyper Red / ● Super Yellow Green	Round	624 / 573	White Diffused	25 / 50 16 / 32	2.0 / 2.4 2.0 / 2.4	100

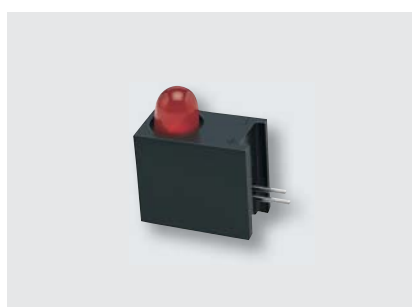

UNIT : mm

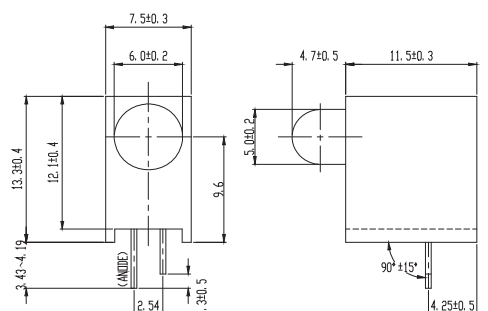


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A203B/SUR/S530-A3	5	● Hyper Red	Round	624	Color Diffused	100 / 200	2.0 / 2.4	30
A203B/SYG/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	45
A203B/UY/S530-A3	5	● Super Yellow	Round	589	Color Diffused	100 / 200	2.0 / 2.4	30


LED Lamps | 5mm Assembly LED




UNIT : mm

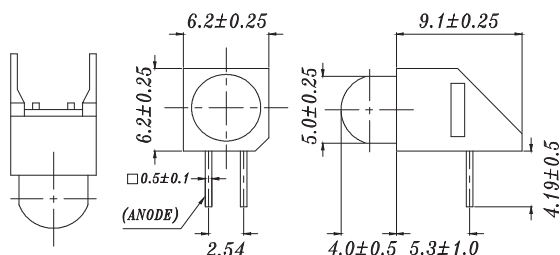

Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A253B/SUR/S530-A3	5	● Hyper Red	Round	624	Color Diffused	100 / 200	2.0 / 2.4	30
A253B/SYG/S530-E2	5	● Super Yellow Green	Round	573	Color Diffused	40 / 80	2.0 / 2.4	45

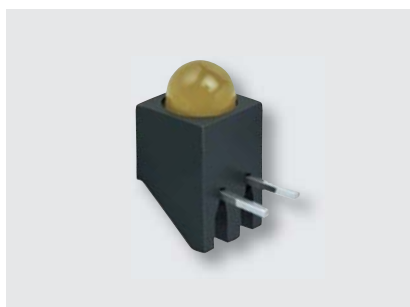

UNIT : mm

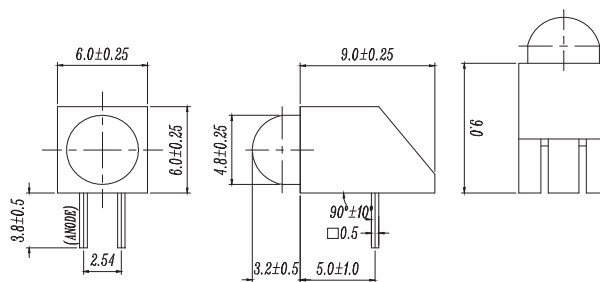


Product	Size (mm)	Color	Lens Type	λ_d (nm)/ CIE(x,y)	Resin Color	I_v (Min/Typ/Max)	V_F (Min/Typ/Max)	Viewing Angle (°)
A93B/SUR/S530-A3	4.7	● Hyper Red	Round	624	Color Diffused	100 / 250	2.0 / 2.4	40

LED Digital Displays | Chip On Board Display | Single Digit Display




UNIT : mm

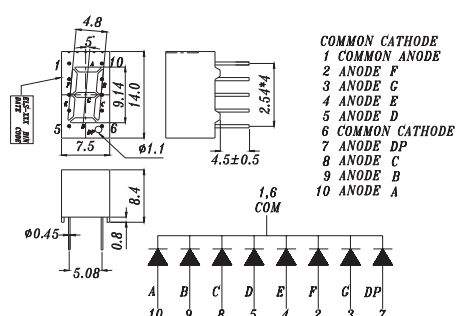

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S315SURWA/S530-A3	9.14 (0.3)	Red	4.8	CC	624	White	Gray	4.0/8.0
S315SYGWA/S530-E2	9.14 (0.3)	Green	4.8	CC	573	White	Gray	2.0/3.2




UNIT : mm

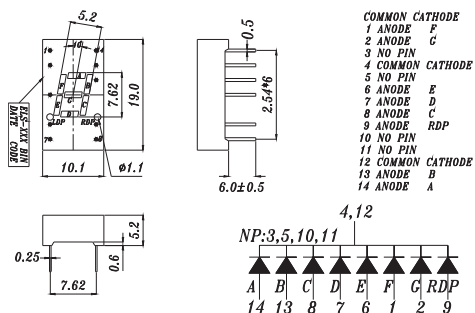

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S321SURWA/S530-A3	7.62 (0.3)	Red	5.2	CC	624	White	Gray	4.0/8.9
S321USOWA/S530-A4	7.62 (0.3)	Orange	5.2	CC	615	White	Gray	7.8/17.6
S321SYGWA/S530-E2	7.62 (0.3)	Green	5.2	CC	573	White	Gray	2.8/6.4



UNIT : mm

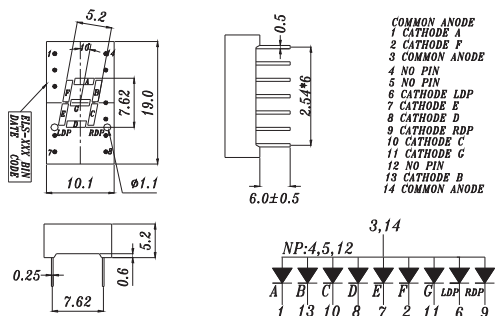


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S322SURWA/S530-A3	7.62 (0.3)	Red	5.2	CA	624	White	Gray	5.6/11.0
S322USOWA/S530-A4	7.62 (0.3)	Orange	5.2	CA	615	White	Gray	7.8/17.6
S322SYGWA/S530-E2	7.62 (0.3)	Green	5.2	CA	573	White	Gray	2.0/4.5
S322UBWA/C470	7.62 (0.3)	Blue	5.2	CA	468	White	Gray	7.8/17.6


LED Digital Displays | Chip On Board Display | Single Digit Display




UNIT : mm

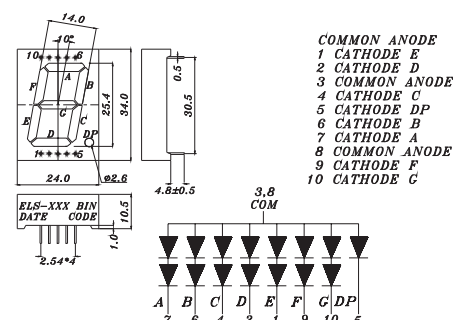


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S1006SURWA/S530-A3	25.4 (1)	Red	14	CA	624	White	Gray	15/24

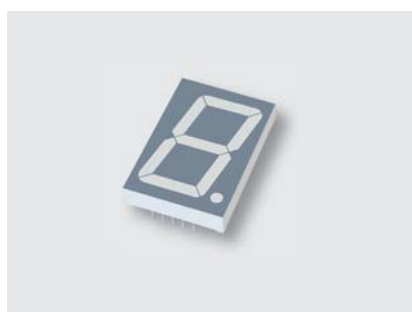


UNIT : mm

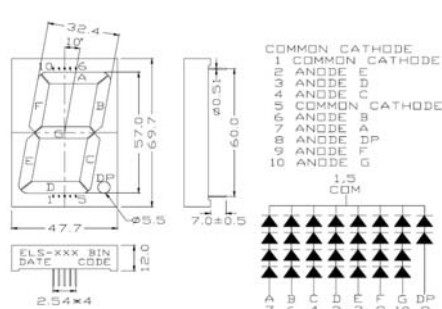

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S2325SURWA/S530-A3	57 (2)	Red	32.4	CC	624	White	Gray	15/34

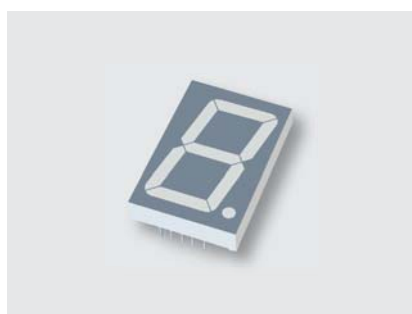

UNIT : mm

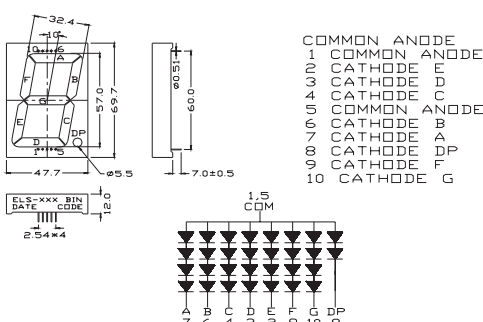


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S2326SURWA/S530-A3	57 (2)	Red	32.4	CA	624	White	Gray	15/34
S2326USOWA/S530-A4	57 (2)	Orange	32.4	CA	615	White	Gray	30/67
S2326SYGWA/S530-E2	57 (2)	Green	32.4	CA	573	White	Gray	5.6/ 12.5
S2326UBWA/C470	57 (2)	Blue	32.4	CA	468	White	Gray	15/34

LED Digital Displays | Chip On Board Display | Single Digit Display




UNIT : mm

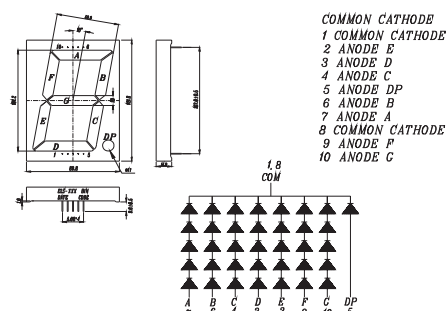

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S4005USOWA/S530-A3	101.2 (4)	Orange	59.9	CC	615	White	Gray	15 / 34
S4005SYGWA/S530-E2	101.2 (4)	Green	59.9	CC	573	White	Gray	4.0 / 6.4



UNIT : mm

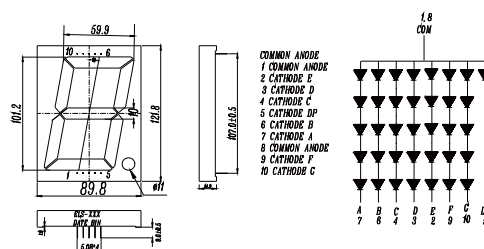


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S4006SURWA/S530-A3	101.2 (4)	Red	59.9	CA	624	White	Gray	15 / 34
S4006USOWA/S530-A4	101.2 (4)	Orange	59.9	CA	615	White	Gray	15 / 34

LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

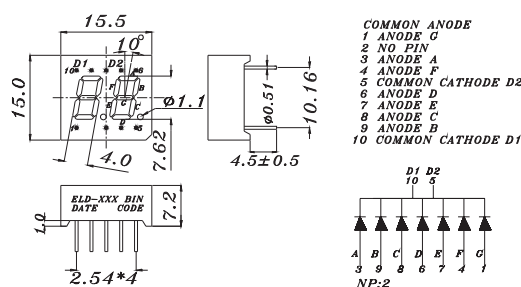

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D305SURWA/S530-A3	7.62 (0.3)	Red	4	CC	624	White	Gray	4.0/6.4




UNIT : mm

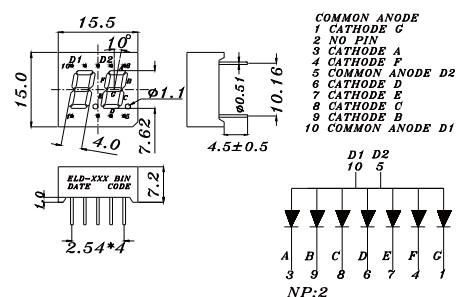

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D306SURWA/S530-A3	7.62 (0.3)	Red	4	CA	624	White	Gray	4.0/6.4



UNIT : mm

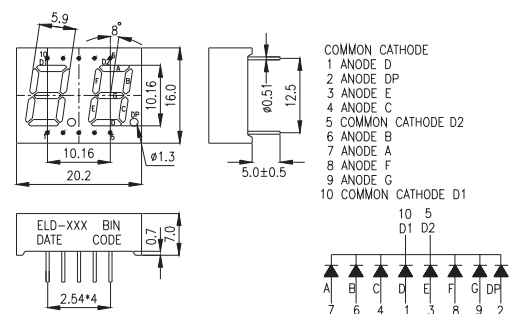


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D425SURWA/S530-A3	10.16 (0.4)	Red	5.9	CC	624	White	Gray	7.8/15.0
D425USOWA/S530-A4	10.16 (0.4)	Orange	5.9	CC	615	White	Gray	11.0/24.0
D425SYGWA/S530-E2	10.16 (0.4)	Green	5.9	CC	573	White	Gray	2.0/3.2

LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

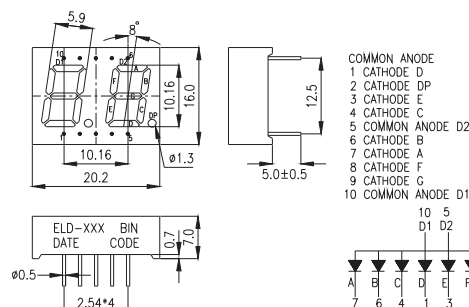

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D426SURWB/S530-A3	10.16 (0.4)	Red	5.9	CA	624	White	Black	7.8/15
D426USOWA/S530-A3	10.16 (0.4)	Orange	5.9	CA	615	White	Gray	11.0/24.0
D426UYOWB/S530-A3	10.16 (0.4)	Brilliant Orange	5.9	CA	589	White	Black	5.6/12.5
D426SYGWA/S530-E2	10.16 (0.4)	Green	5.9	CA	573	White	Gray	2.0/3.2




UNIT : mm

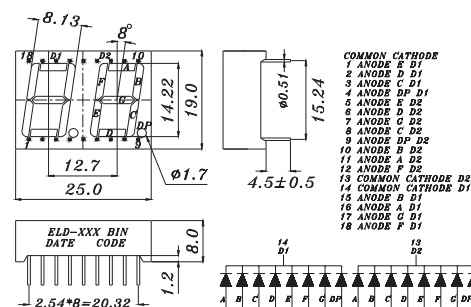

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D511SURWB/S530-A3	14.22 (0.5)	Red	8.13	CC	624	White	Black	7.8/15.0



UNIT : mm

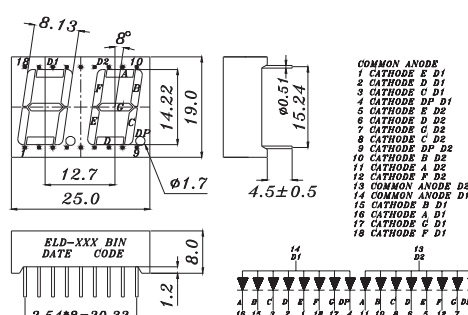


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D512SURWB/S530-A3	14.22 (0.5)	Red	8.13	CA	624	White	Black	7.8/15.0
D512UBWA/C470	14.22 (0.5)	Blue	8.13	CA	470	White	Gray	4.0/6.4

LED Digital Displays | Chip On Board Display | Dual Digit Display




UNIT : mm

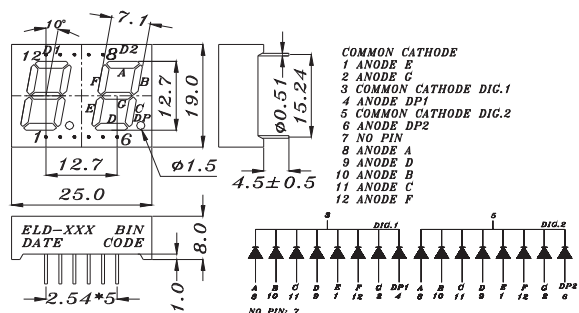

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D515SURWA/S530-A3	12.7 (0.5)	Red	7.1	CC	624	White	Gray	7.8/15.0




UNIT : mm

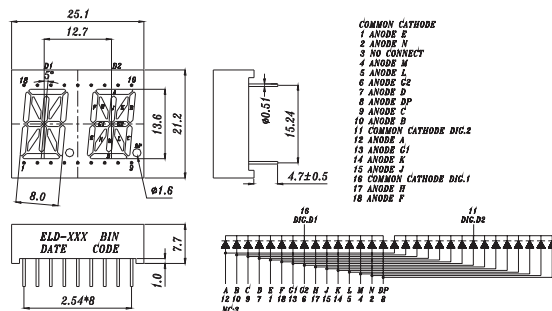

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D525SURWA/S530-A3	13.6 (0.5)	Red	8	CC	624	White	Gray	7.8/12.5
D525SYGWA/S530-E2	13.6 (0.5)	Green	8	CC	573	White	Gray	2.8/4.5
D525USOWA/S530-A3	13.6 (0.5)	Orange	8	CC	615	White	Gray	5.6/12.5



UNIT : mm



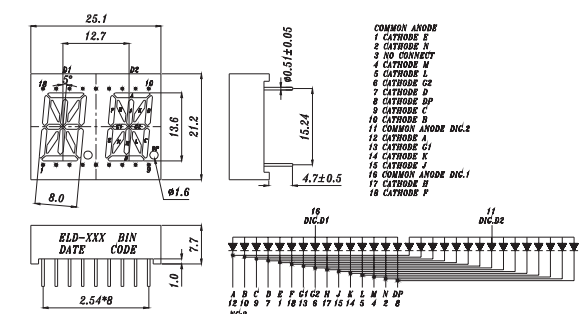


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
D526SURWA/S530-A3	13.6 (0.5)	Red	8	CA	624	White	Gray	7.8/12.5


LED Digital Displays | Chip On Board Display | Three Digit Display



UNIT : mm






COMMON CATHODE
1 ANODE E
2 ANODE D
3 ANODE DP
4 ANODE C
5 ANODE G
6 NO PIN
7 ANODE B
8 COMMON CATHODE DIG.3
9 COMMON CATHODE DIG.2
10 ANODE F
11 ANODE A
12 COMMON CATHODE DIG.1




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T315SYGWA/S530-E2	9.2 (0.3)	● Green	4.8	CC	573	White	Gray	1.4 / 3.2



UNIT : mm






COMMON ANODE
1 CATHODE E
2 CATHODE D
3 CATHODE DP
4 CATHODE C
5 CATHODE G
6 NO PIN
7 CATHODE B
8 COMMON ANODE D3
9 COMMON ANODE D2
10 CATHODE F
11 CATHODE A
12 COMMON ANODE D1




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T316SURWA/S530-A3	9.2 (0.3)	● Red	4.8	CA	624	White	Gray	5.6 / 11.0
T316SYGWA/S530-E2	9.2 (0.3)	● Green	4.8	CA	573	White	Gray	1.4 / 3.2



UNIT : mm



COMMON CATHODE
1 ANODE E
2 ANODE D
3 ANODE DP
4 ANODE C
5 ANODE G
6 NO CONNECT
7 ANODE B
8 COMMON CATHODE D3
9 COMMON CATHODE D2
10 ANODE F
11 ANODE A
12 COMMON CATHODE D1





Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T511SURWA/S530-A3	14.22 (0.5)	● Red	8.13	CC	624	White	Gray	7.8 / 17.6
T511SYGWA/S530-E2	14.22 (0.5)	● Green	8.13	CC	573	White	Gray	2.8 / 4.5
T511UYOWA/S530-A3	14.22 (0.5)	● Brilliant Orange	8.13	CC	589	White	Gray	5.6 / 12.5


LED Digital Displays | Chip On Board Display | Three Digit Display



UNIT : mm



COMMON ANODE
 1 CATHODE E
 2 CATHODE D
 3 CATHODE DP
 4 CATHODE C
 5 CATHODE G
 6 NO CONNECT
 7 CATHODE B
 8 COMMON ANODE D3
 9 COMMON ANODE D2
 10 CATHODE F
 11 CATHODE A
 12 COMMON ANODE D1




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
T512SURWA/S530-A3	14.22 (0.5)	Red	8.13	CA	624	White	Gray	7.8 / 17.6
T512SYGWA/S530-E2	14.22 (0.5)	Green	8.13	CA	573	White	Gray	2.8 / 4.5
T512UYOWA/S530-A3	14.22 (0.5)	Brilliant Orange	8.13	CA	589	White	Gray	5.6 / 12.5


LED Digital Display | Chip On Board Display | Four Digit Display



UNIT : mm



COMMON CATHODE
 1 COMMON CATHODE D1
 2 COMMON CATHODE D2
 3 ANODE D
 4 COMMON CATHODE L1,L2
 5 ANODE E
 6 COMMON CATHODE D3
 7 ANODE DP
 8 COMMON CATHODE D4
 9 ANODE L3
 10 CATHODE L3
 11 ANODE F
 12 ANODE L1,L2
 13 ANODE C
 14 ANODE A
 15 ANODE G
 16 ANODE B




Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F415SURWA/S530-A3	10 (0.4)	Red	6	CC	624	White	Gray	5.6 / 8.9

LED Digital Displays | Chip On Board Display | Four Digit Display




UNIT : mm

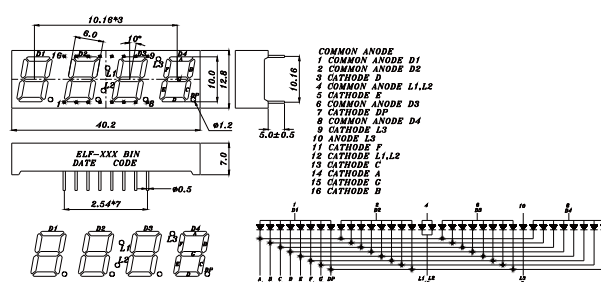

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F416SYGWA/S530-E3	10 (0.4)	● Green	6	CA	573	White	Gray	4.0/8.9
F416SURWA/S530-A3/S685	10 (0.4)	● Red	6	CA	635	White	Gray	5.6/8.9




UNIT : mm

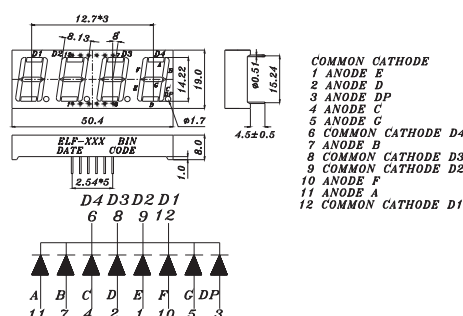

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F511SURWA/S530-A3	14.22 (0.5)	● Red	8.13	CC	624	White	Gray	7.8/15.0
F511SYGWA/S530-E2	14.22 (0.5)	● Green	8.13	CC	573	White	Gray	4.0/4.5




UNIT : mm

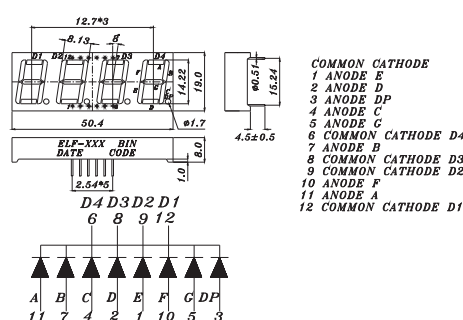


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
F512SURWA/S530-A3	14.22 (0.5)	● Red	8.13	CA	624	White	Gray	7.8/15.0
F512SYGWA/S530-E2	14.22 (0.5)	● Green	8.13	CA	573	White	Gray	2.8 4.5


LED Digital Displays | SMD Display | Single Digit Display

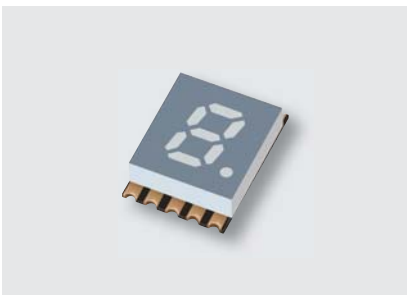


UNIT : mm

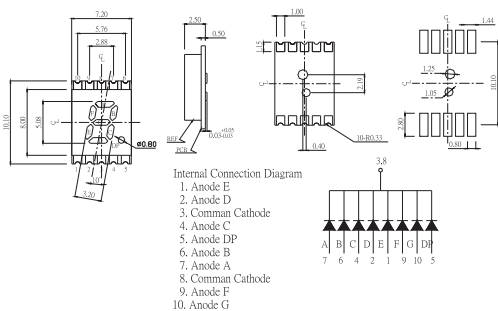


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS205SURWA/S530-A3/S290	5.08 (0.2)	Red	3.2	CC	624	White	Gray	5.6 / 13.7
SS205UYOWA/S530-A3/S290	5.08 (0.2)	Orange	3.2	CC	605	White	Gray	7.8 / 13.3
SS205UYWA/S530-A3/S290	5.08 (0.2)	Yellow	3.2	CC	588	White	Gray	7.8 / 16.3
SS205SYGWA/S530-E2/S290	5.08 (0.2)	Green	3.2	CC	573	White	Gray	4.0 / 11.5

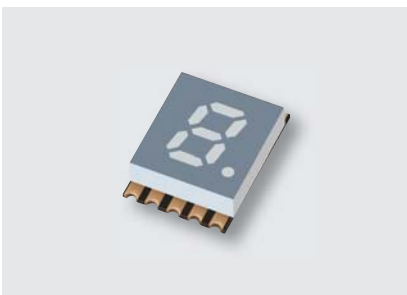


UNIT : mm

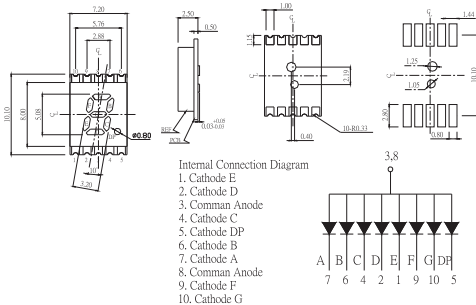

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS206SURWA/S530-A3/S290	5.08 (0.2)	● Red	3.2	CA	624	White	Gray	5.6 / 13.7
SS206UYWA/S530-A3/S290	5.08 (0.2)	● Yellow	3.2	CA	588	White	Gray	7.8 / 16.3

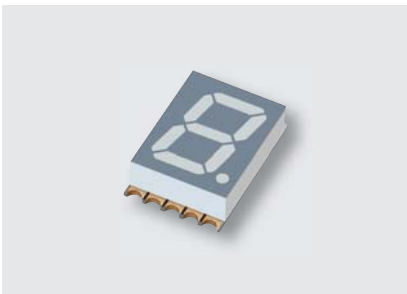


UNIT : mm

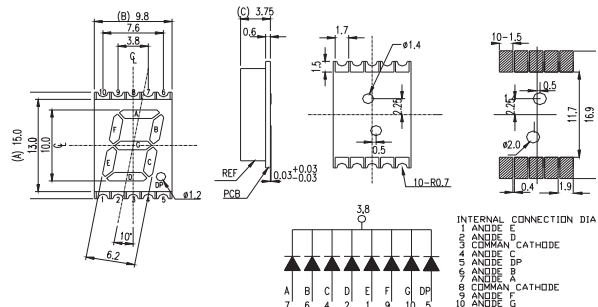


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS405SURWB/S530-A3/S290	10 (0.4)	● Red	6.2	CC	624	White	Black	7.8 / 16.5


LED Digital Displays | SMD Display | Single Digit Display

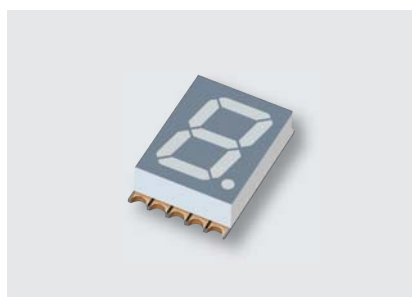


UNIT : mm

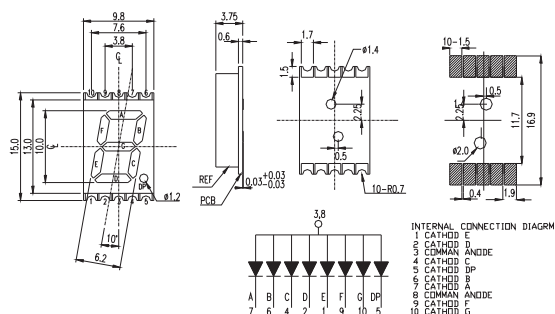


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS406SURWA/S530-A3/S290	10 (0.4)	● Red	6.2	CA	624	White	Gray	7.8 / 6.5

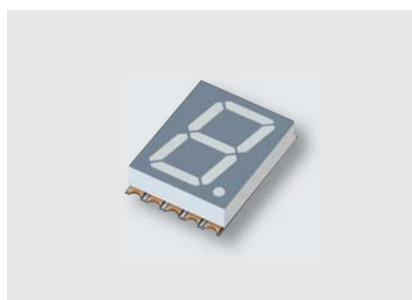


UNIT : mm

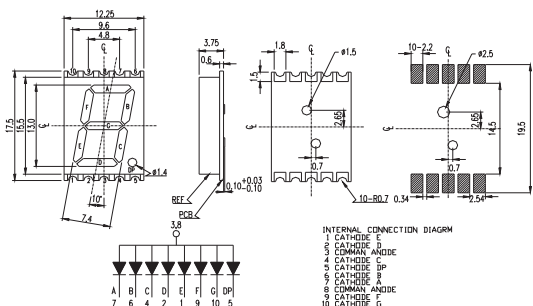

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
S506SYGWA/S530-E2	13.0 (0.5)	● Green	7.4	CA	573	White	Gray	5.6 / 9.1

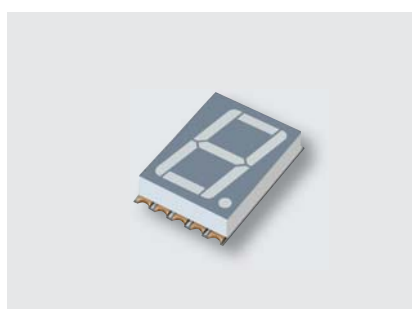


UNIT : mm

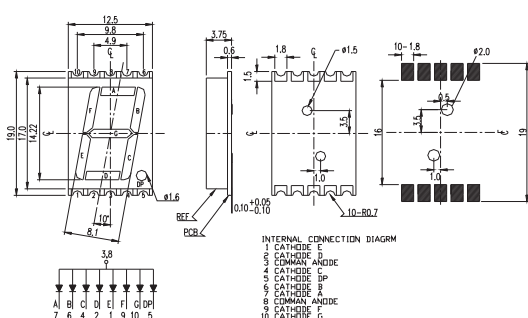


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS511SURWA/S530-A3/S290	14.22 (0.5)	● Red	8.1	CC	624	White	Gray	15 / 23
SS511SYGWA/S530-E2/S290	14.22 (0.5)	● Green	8.1	CC	573	White	Gray	4.0 / 10.8

LED Digital Displays | SMD Display | Single Digit Display

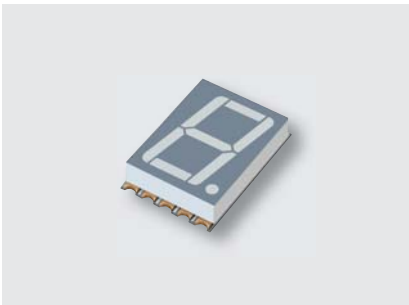


UNIT : mm

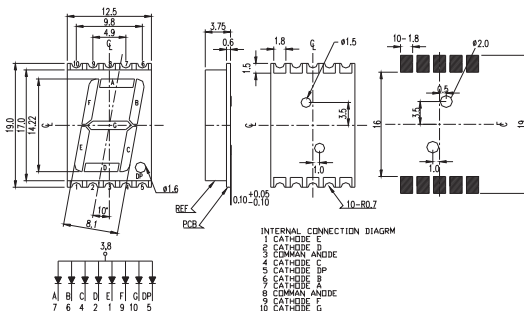


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SS512SURWA/S530-A3/S290	14.22 (0.5)	● Red	8.1	CA	624	White	Gray	15 / 23
SS512UBWA/C470/S290	14.22 (0.5)	● Blue	8.1	CA	468	White	Gray	3.0 / 3.7


LED Digital Display | SMD Display | Dual Digit Display

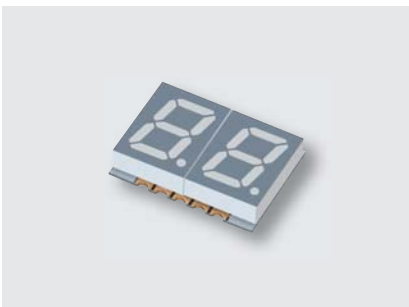


UNIT : mm

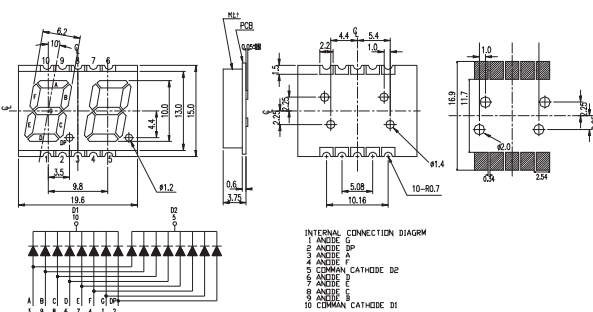

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD405SURWA/S530-A3/S290	10 (0.4)	● Red	6.2	CC	624	White	Gray	7.8 / 17.10

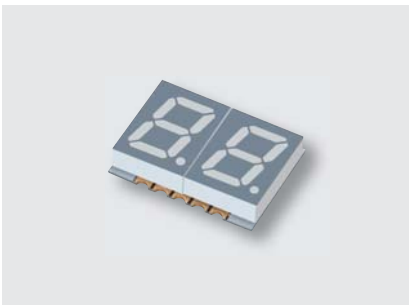

UNIT : mm

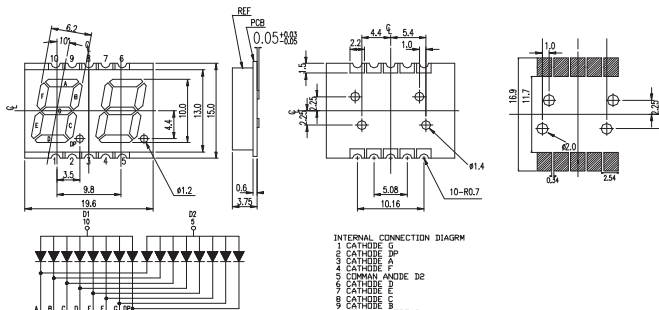


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD406SURWA/S530-A4/S290	10 (0.4)	Red	6.2	CA	624	White	Gray	7.8 16.2
SD406SYGWA/S530-E2/S290	10 (0.4)	Green	6.2	CA	573	White	Gray	5.60 / 10.2


LED Digital Displays | SMD Display | Dual Digit Display




UNIT : mm

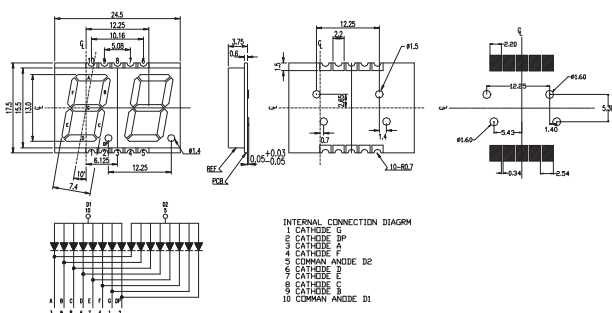


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD506SURWA/S530-A4/S290	13 (0.5)	● Red	7.4	CA	624	White	Gray	7.8 / 15.0

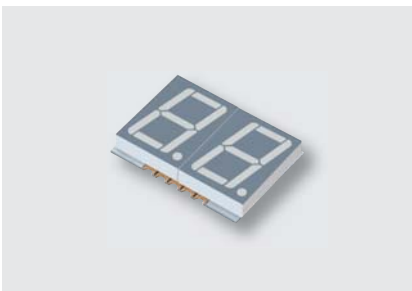


UNIT : mm

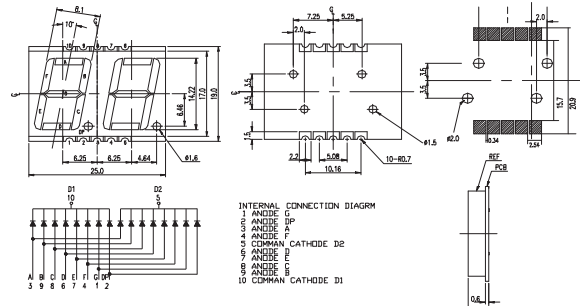

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD511SYGWA/S530-E2/S290	14.22 (0.5)	● Green	8.1	CC	573	White	Gray	5.6 / 11.12

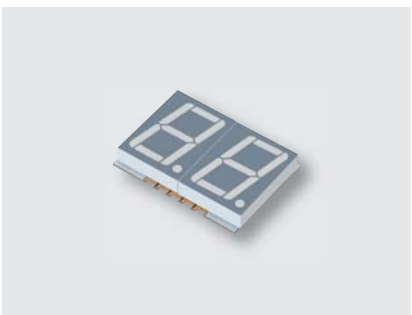

UNIT : mm

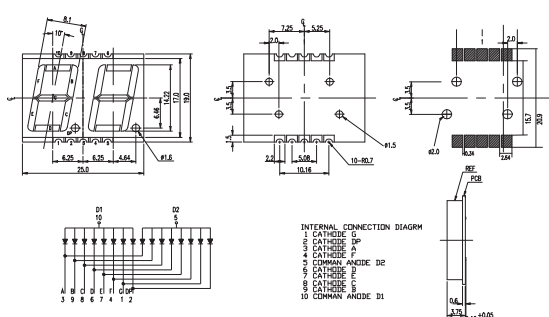


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SD512SYGWA/S530-E2/S290	14.22 (0.5)	● Green	8.1	CA	573	White	Gray	4.0 / 13.35

LED Digital Displays | SMD Display | Three Digit Display




UNIT : mm

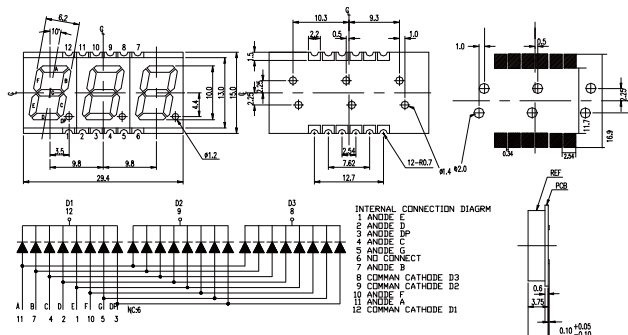

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST405SURWA/S530-A3/S290	10 (0.4)	●Red	6.2	CC	624	White	Gray	7.8 / 16.40




UNIT : mm

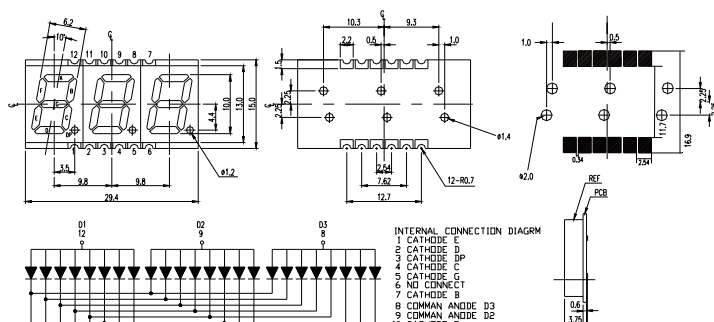

Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST406SURWA/S530-A3/S290	10 (0.4)	●Red	6.2	CA	624	White	Gray	7.8 / 16.40




UNIT : mm

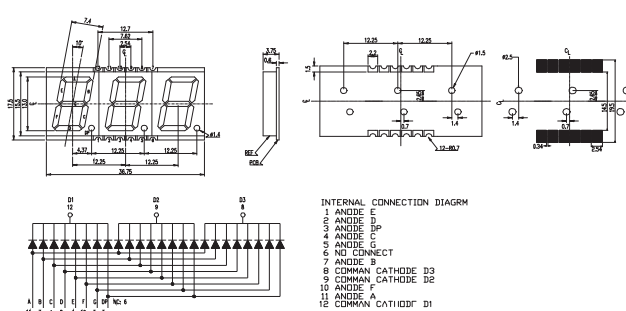


Product	Segement Height mm (inch)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST505SYGWA/S530-E2/S290	13 (0.5)	● Green	7.4	CC	573	White	Gray	4.0 / 9.6

LED Digital Displays | SMD Display | Three Digit Display

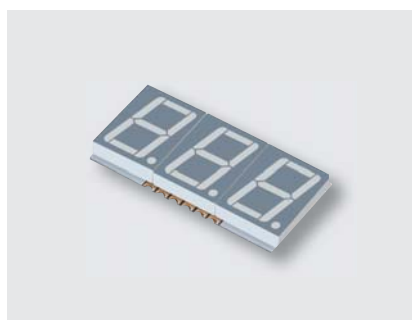


UNIT : mm

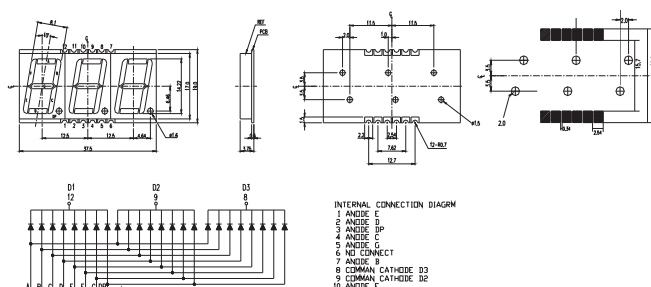

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST511SYGWA/S530-E2/S290	14.22 (0.5)	● Green	7.4	CC	573	White	Gray	4.0 / 9.6



UNIT : mm

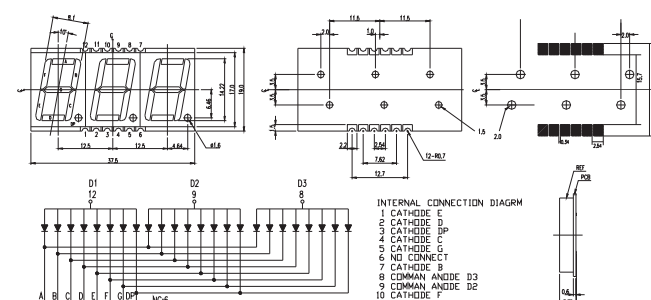


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
ST512SURWA/S530-A3/S290	14.22 (0.5)	● Red	7.4	CA	624	White	Gray	11.0 / 21.6
ST512SYGWA/S530-E2/S290	14.22 (0.5)	● Green	7.4	CA	573	White	Gray	7.8 / 16.4

LED Digital Displays | SMD Display | Four Digit Display




UNIT : mm

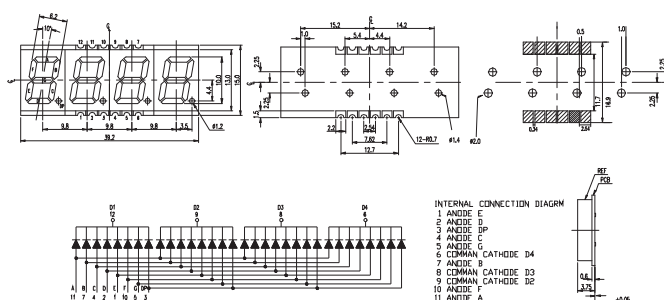

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SF405SURWA/S530-A3/S290	10 (0.4)	Red	6.2	CC	624	White	Gray	7.8 / 16.40
SF405SYGWA/S530-E2/S290	10 (0.4)	Green	6.2	CC	573	White	Gray	5.6 / 12.52




UNIT : mm

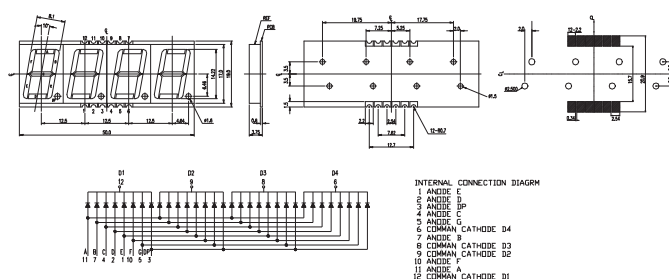

Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SF511SURWA/S530-A3/S290	14.22 (0.5)	Red	8.1	CC	624	White	Gray	11.0 / 23.4



UNIT : mm

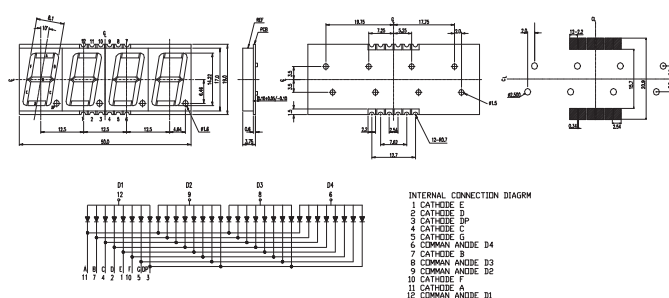


Product	Segment Height mm (inch)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
SF512SURWA/S530-A3/S290	14.22 (0.5)	Red	8.1	CA	624	White	Gray	11.0 / 27.8
SF512SYGWA/S530-E2/S290	14.22 (0.5)	Green	8.1	CA	573	White	Gray	4.0 / 10.8

LED Digital Displays | Dot Matrix Display




UNIT : mm

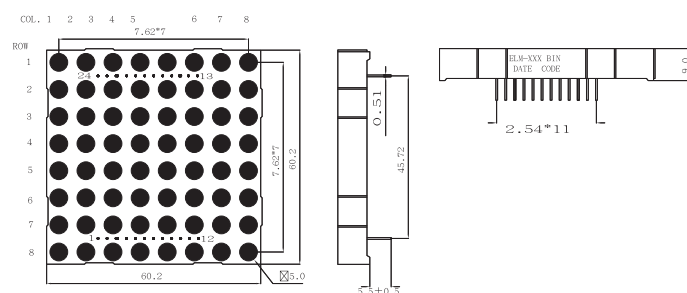

Product	Size (LXWmm)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
M2881SURWA/S530-A3	60.2x60.2	Red	--	CC	624	White	Gray	7.8/21.0
M2881SYGWA/S530-E2	60.2x60.2	Green	--	CC	573	White	Gray	7.8/17.6
M2881UYWA/S530-A3	60.2x60.2	Yellow	--	CC	589	White	Gray	11/17.6




UNIT : mm

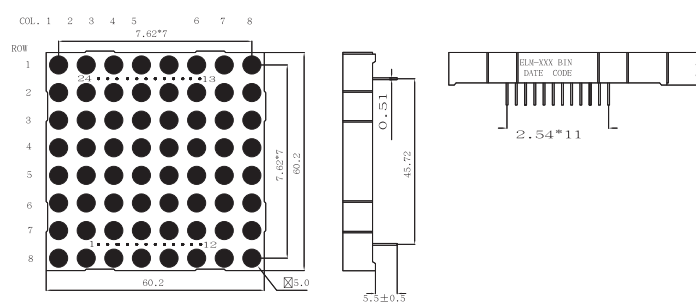


Product	Size (LXWmm)	Color	Segment Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
M2882SYGWA/S530-E2	60.2x60.2	Green	--	CA	573	White	Gray	7.8/17.6


LED Digital Displays | Light Bar Display

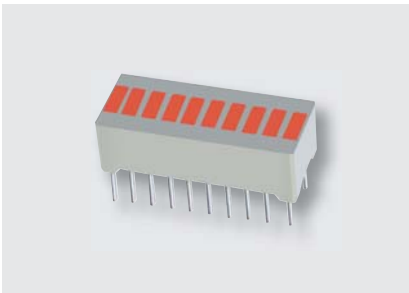


UNIT : mm

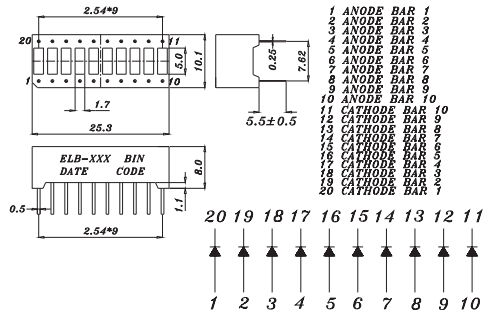

Product	Size (LXWmm)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
B1001SDRWB/S530-A3	25.3x10.1	Deep Red	--	CC	639	White	Black	4.0 / 8.9
B1001SURWB/S530-A3	25.3x10.1	Red	--	CC	624	White	Black	5.6 / 12.5
B1001USOWA/S530-A4	25.3x10.1	Orange	--	CC	615	White	Gray	7.8 / 7.6
B1001SYGWA/S530-E2	25.3x10.1	Green	--	CC	573	White	Gray	2.8 / 4.5

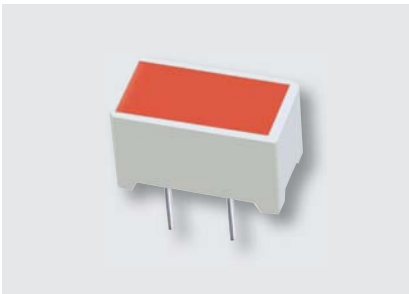

UNIT : mm

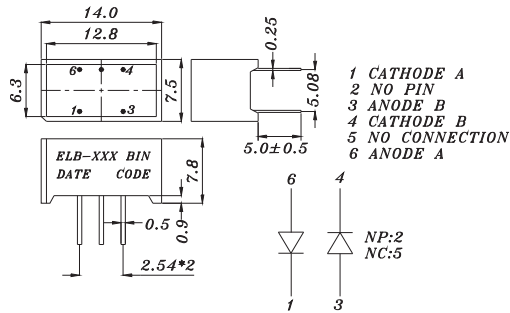

Product	Size (LXWmm)	Color	Segement Width	CC/CA	λ_d (nm)	Resin Color	Face Color	I_v (Min/Typ) (mcd)
B1010SURD/S530-A3	14.0x7.5	Red	--	CA	624	Red	Red	11 / 24
B1010SYGD/S530-E2	14.0x7.5	Green	--	CA	573	Red	Red	2.8 / 4.5




INFRARED LED, SENSORS, COUPLERS

- 138** INFRARED LED AND SILICON DETECTOR
- 162** INFRARED RECEIVER MODULE
- 174** OPTIC-FIBER DEVICE (PHOTO LINK)
- 186** OPTICAL SENSOR
- 201** PHOTO COUPLER

Infrared LED and Silicon Detector ■ Emitter ■ Lamp 3mm




UNIT : mm

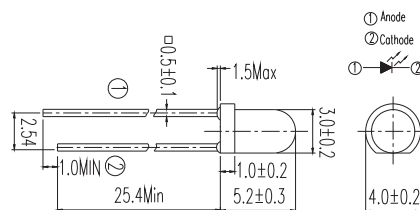

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR204	3	850	1.45	1.65	7.8	17.6	25
HIR204/H0	3	850	1.45	1.65	4	8.9	40
HIR204C	3	850	1.45	1.65	7.8	17.6	25
HIR204C/H0	3	850	1.45	1.65	4	8.9	40
HIR234C	3	850	1.46	1.65	7.8	15	30
IR204-A	3	940	1.2	1.5	4	5.6	35
IR204/H16/L10	3	940	1.2	1.5	2.8	4	50
IR204/H60	3	940	1.2	1.5	4	7	50
IR204C-A	3	940	1.2	1.5	4	5.6	35
IR204C/H16/L10	3	940	1.2	1.5	2.8	4	50
SIR204-A	3	875	1.3	1.6	4	6.4	30
SIR204C	3	875	1.3	1.6	4	6.4	30




UNIT : mm

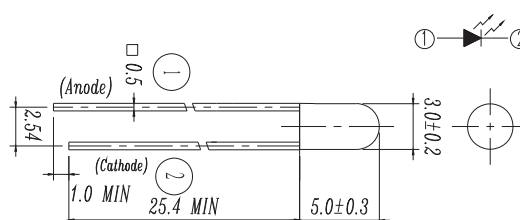


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
SIR234	3	875	1.3	1.6	5.6	9.3	30


Infrared LED and Silicon Detector | Emitter | Lamp 5mm

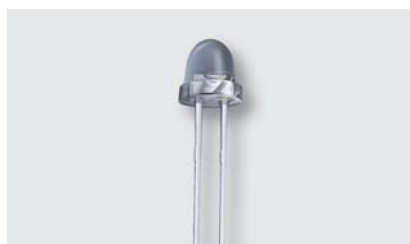


UNIT : mm

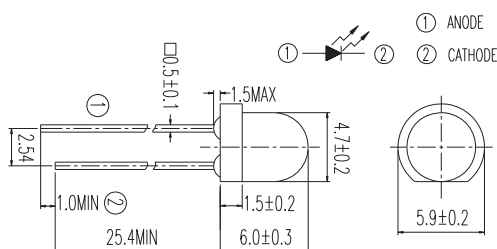


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR323C	5	850	1.45	1.65	15	30	25
HIR323C/H0	5	850	1.45	1.65	7.8	11	30
IR323	5	940	1.2	1.5	4	6.4	30
IR323/H0-A	5	940	1.2	1.5	2	3.5	60
SIR323-5	5	875	1.3	1.6	4	7.8	35

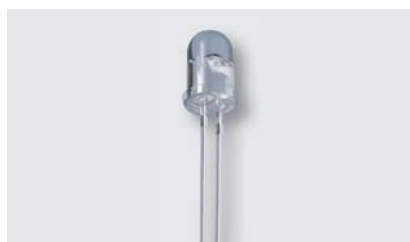


UNIT : mm

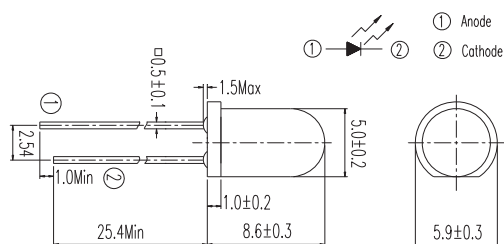

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR333/H0	5	850	1.45	1.65	7.8	15	30
HIR333C/H0	5	850	1.45	1.65	7.8	15	30
IR333-A	5	940	1.2	1.5	7.8	20	20
IR333/H0	5	940	1.2	1.5	5.6	7.8	40
IR333/H0/L10	5	940	1.2	1.5	11	12	40
IR333C	5	940	1.2	1.5	7.8	15	20
IR333C/H0/L10	5	940	1.2	1.5	5.6	7.8	40
IR333C/H2	5	940	1.2	1.5	7.8	15	30
SIR333-A	5	875	1.3	1.6	7.8	20	20

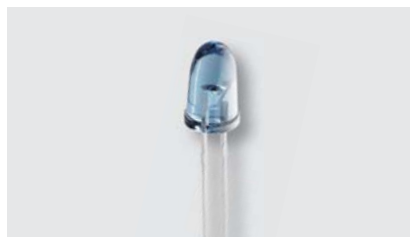

UNIT : mm

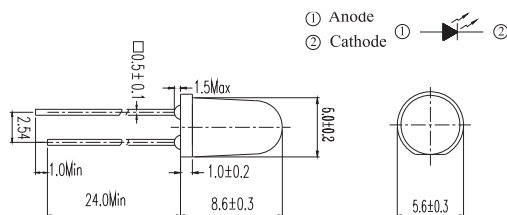


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR383	5	940	1.2	1.5	7.8	20	20
SIR383C	5	875	1.3	1.6	11	20	20

Infrared LED and Silicon Detector | Emitter | Lamp 5mm




UNIT : mm

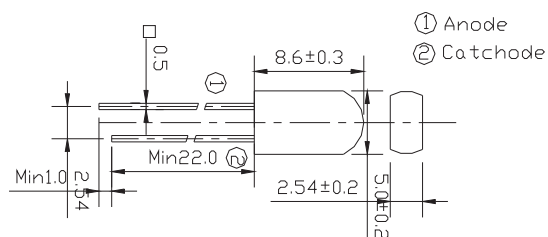

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR533C	5	940	1.2	1.5	4	7.8	25




UNIT : mm

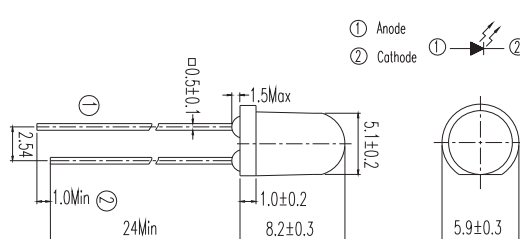

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR7373C	5	850	1.45	1.65	7.8	15	40
IR7373C	5	940	1.2	1.5	5.6	8	50



UNIT : mm

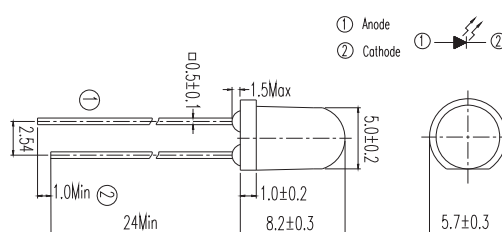


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR7393C	5	850	1.45	1.65	7.8	15	50
IR7393C	5	940	1.2	1.5	4	6.5	60


Infrared LED and Silicon Detector ■ Emitter ■ Lamp 5mm




UNIT : mm

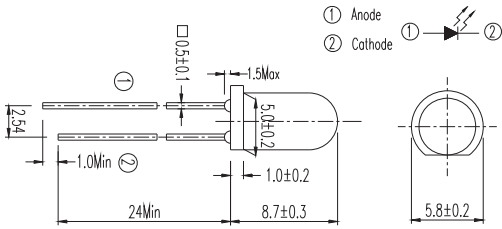

Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR8323/C16	5	850	1.45	1.65	20	30	30

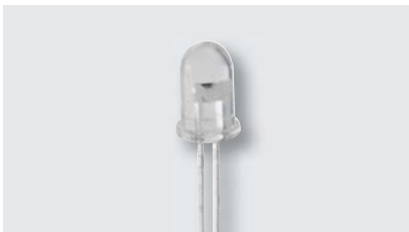

UNIT : mm

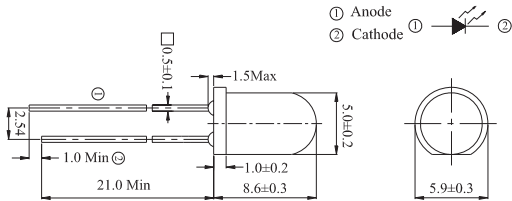


Product	Size (mm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR8353-14C	5	940	1.2	1.3	7.8	11	35

Infrared LED and Silicon Detector ■ Emitter ■ Piranha



UNIT : mm

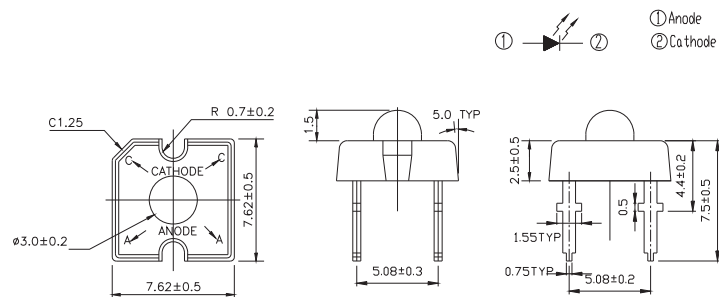


① Anode
② Cathode

Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR30-01C/S16	7.62x7.62x4.0	850	1.45	1.65	5.6	1	35




UNIT : mm

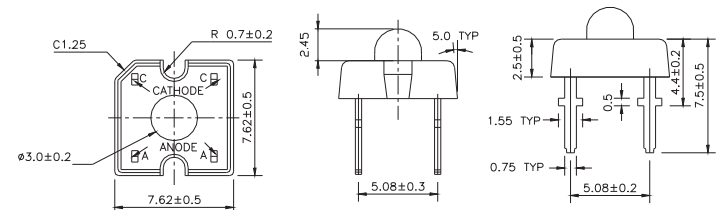

Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR36-01C/S32	7.62x7.62x5.0	850	1.45	1.65	15	29	20



UNIT : mm

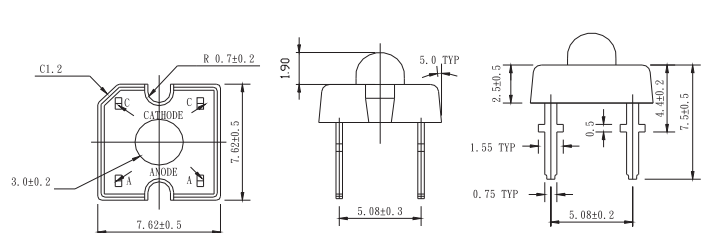


Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR38-01C	7.62x7.62x4.4	850	1.45	1.65	7.8	17	30

Infrared LED and Silicon Detector ■ Emitter ■ Side Look




UNIT : mm

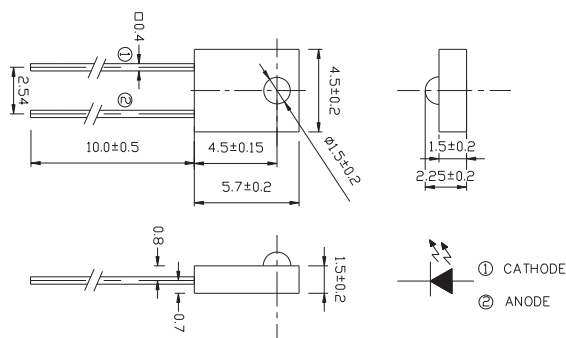

Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR908-7C-F	4.5x2.25x5.7	940	1.2	1.5	--	--	60




UNIT : mm

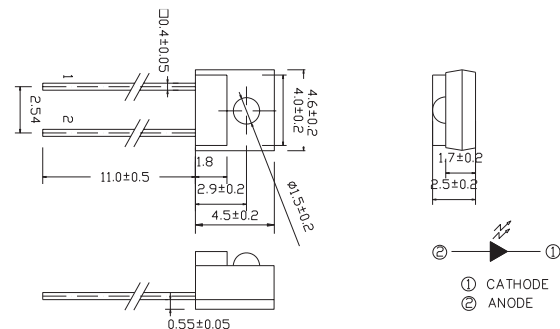

Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
HIR928-6C-F	4.6x2.5x4.5	850	1.45	1.65	--	--	25
SIR928-6C-F	4.6x2.5x4.5	875	1.3	1.6	--	--	40
IR928-6C-F	4.6x2.5x4.5	940	1.2	1.5	--	--	40



UNIT : mm

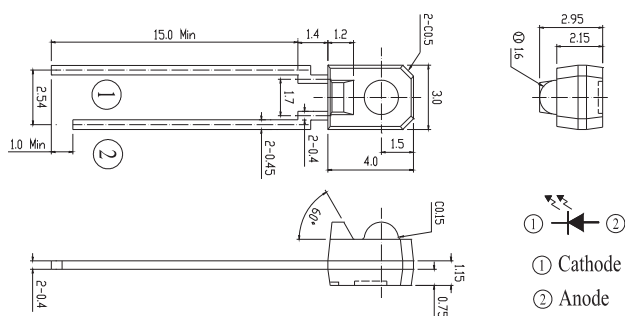


Product	Size (LXWXHmm)	λ_P (nm)	V_F Typ (V)	V_F Max (V)	I_{E_Min} (mW/sr)	I_{E_Typ} (mW/sr)	Viewing Angle (°)
IR958-8C	3.0x2.95x4.0	940	1.2	1.5	--	--	25
IR958-8P	3.0x2.95x4.0	950	1.2	1.5	--	--	22

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

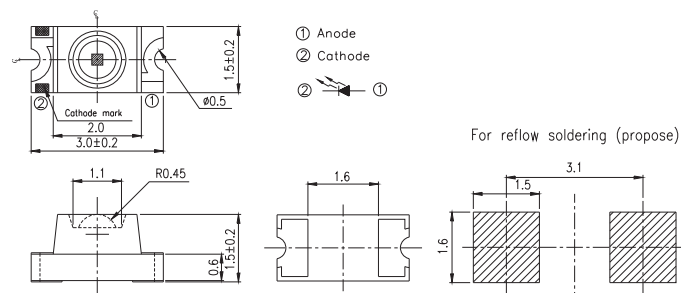

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR11-21C/L11/TR8	3.0x1.5x1.5	850	1.45	1.65	1	2	75
IR11-21C/TR8	3.0x1.5x1.5	940	1.2	1.5	0.5	1.6	100




UNIT : mm

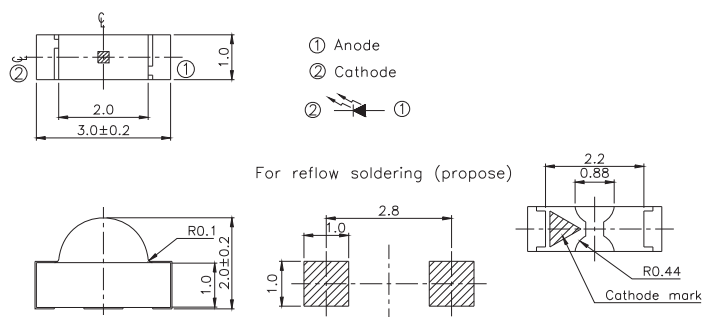

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR12-21C/TR8	3.0x1.0x2.0	940	1.2	1.5	0.5	0.8	160
SIR12-21C/TR8	3.0x1.0x2.0	875	1.3	1.6	0.5	0.9	160



UNIT : mm

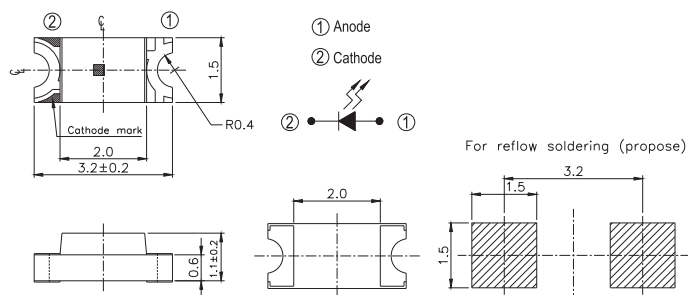


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR15-21C/TR8	3.2x1.5x1.1	940	1.2	1.5	0.2	0.8	160

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

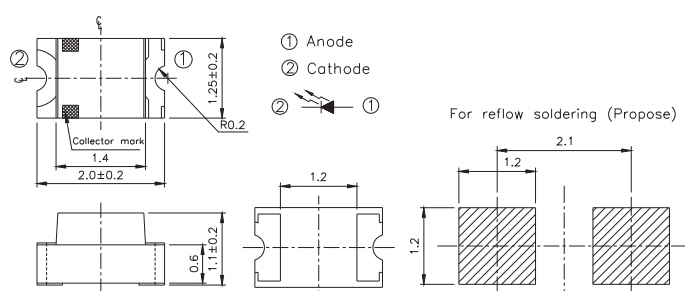

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR17-21C/TR8	2.0x1.25x1.1	940	1.2	1.5	0.2	0.8	120




UNIT : mm

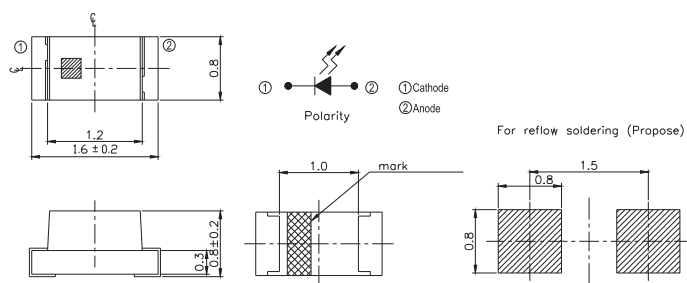

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR19-21C/L11/TR8	1.6x0.8x0.8	850	1.45	1.65	0.2	0.8	145
IR19-21C/TR8	1.6x0.8x0.8	940	1.2	1.5	0.2	0.7	150
SIR19-21C/TR8	1.6x0.8x0.8	875	1.3	1.6	0.2	0.5	145



UNIT : mm

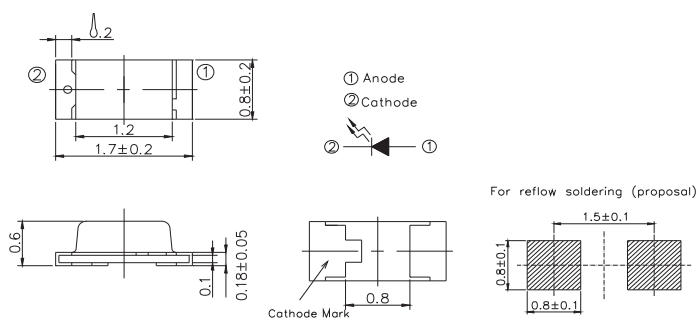


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR19-315C/TR8	1.7x0.8x0.6	940	1.2	1.5	0.2	0.6	140
SIR19-315/TR8	1.7x0.8x0.6	870	1.35	1.7	1	1.3	140


Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

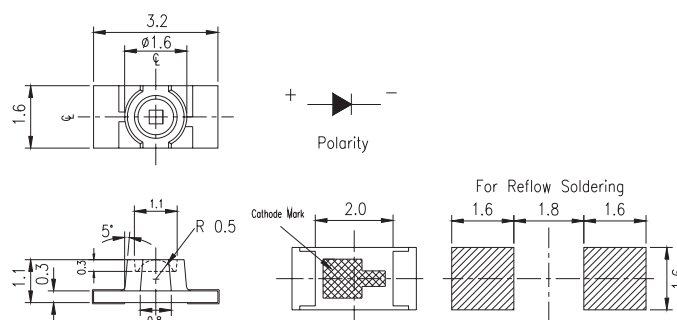


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR25-21C/TR8	3.2x1.6x1.1	940	1.2	1.5	0.5	1.5	160

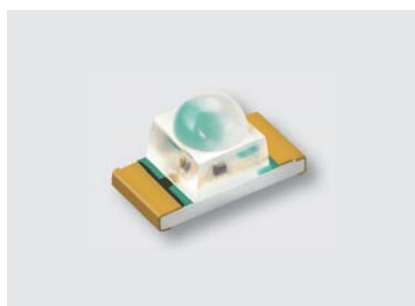


UNIT : mm

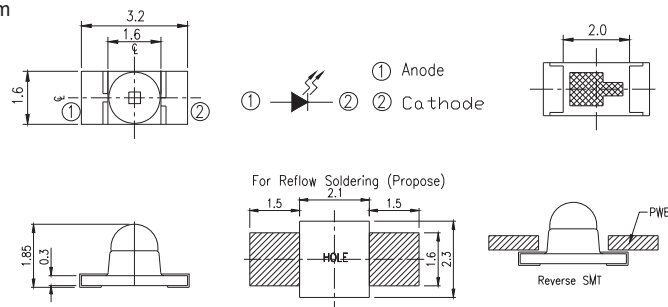

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR26-21C/L110/TR8	3.2x1.6x1.85	940	1.2	1.5	1	3.5	10

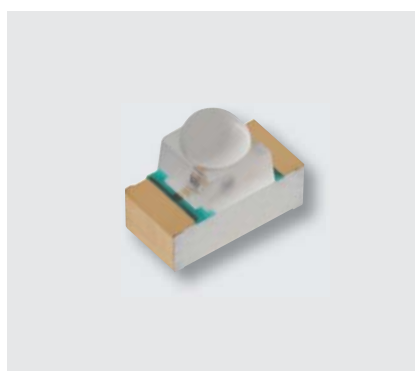

UNIT : mm

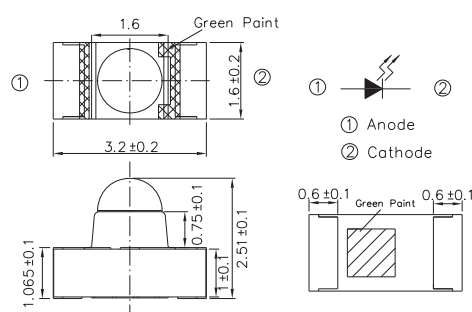


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR26-51C/L110/TR8	3.2x1.6x2.5	940	1.2	1.5	1	3.5	20

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

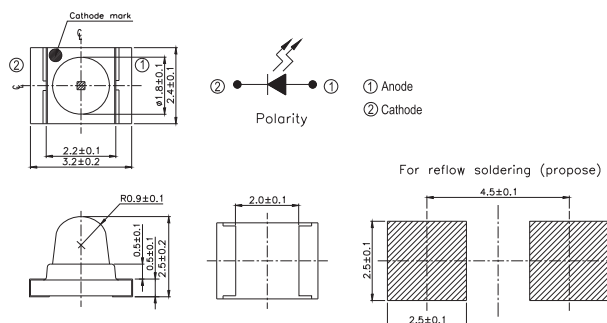

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR42-21C/TR8	3.2x2.4x2.5	940	1.2	1.5	1	3	30




UNIT : mm

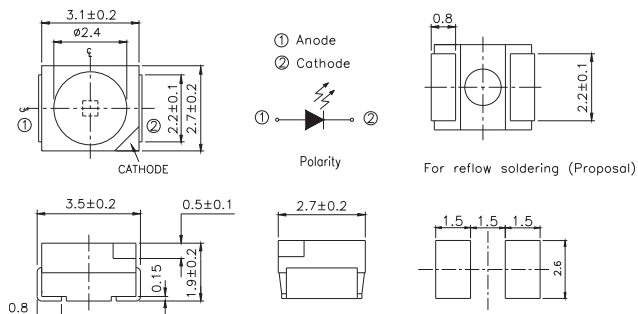

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR67-21C/L11/TR8	3.5x2.7x1.9	850	1.45	1.65	1	2	120
IR67-21C/TR8	3.5x2.7x1.9	940	1.2	1.5	1	1.5	120
SIR67-21C/TR8	3.5x2.7x1.9	875	1.3	1.6	0.5	1.1	120



UNIT : mm

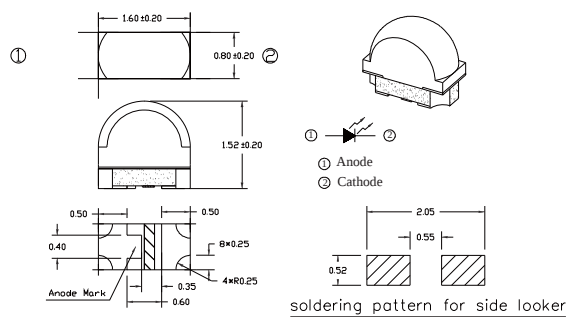


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR83-01B/TR8	1.6x0.8x1.52	850	1.4	1.4	2	5	100(X) 40(Y)

Infrared LED and Silicon Detector | Emitter | SMD




UNIT : mm

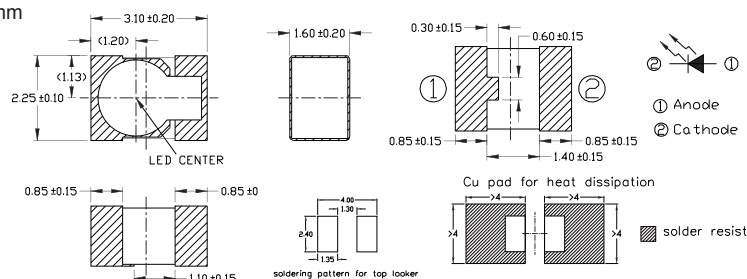

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
HIR89-01C/1R	3.1x2.25x1.6	850	1.4	1.7	25	55	30




UNIT : mm

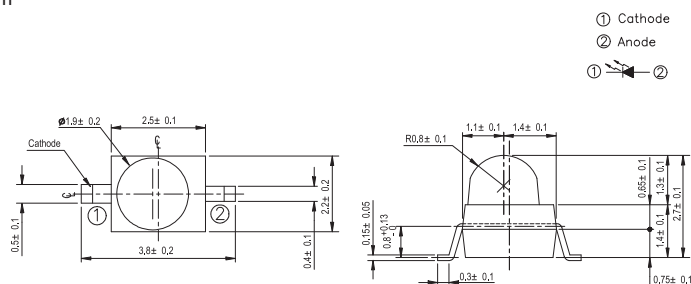

Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR91-21C	2.5x2.2x2.7	940	1.2	1.5	3	5	25
IR91-21C/TR7	2.5x2.2x2.7	940	1.2	1.5	3	5	25
IR91-21C/TR10	2.5x2.2x2.7	940	1.2	1.5	3	5	25



UNIT : mm

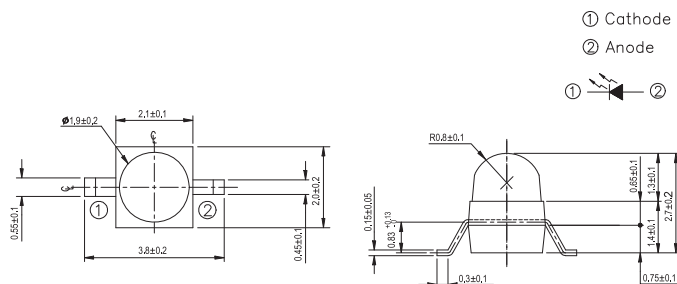


Product	Size (LXWXHmm)	λ_p (nm)	V_F Typ (V)	V_F Max (V)	I_{e_Min} (mW/sr)	I_{e_Typ} (mW/sr)	Viewing Angle (°)
IR95-21C/TR7	2.1x2.0x2.7	940	1.2	1.5	3	5	25

Infrared LED and Silicon Detector ■ Photo Diode ■ DIP




UNIT : mm

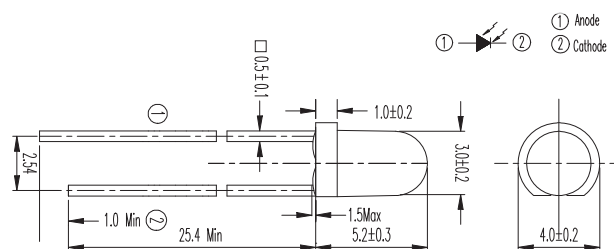


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD204-6C/L3	3	940	--	10	10 / 10	32	10




UNIT : mm

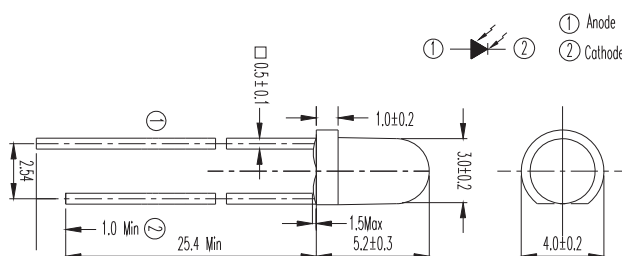

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD204-6B	3	940	1	3	6 / 6	32	10

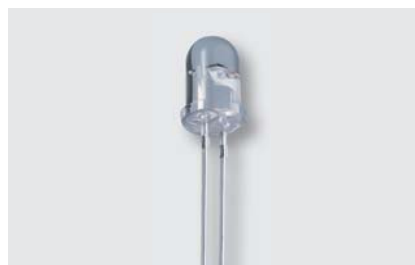


UNIT : mm

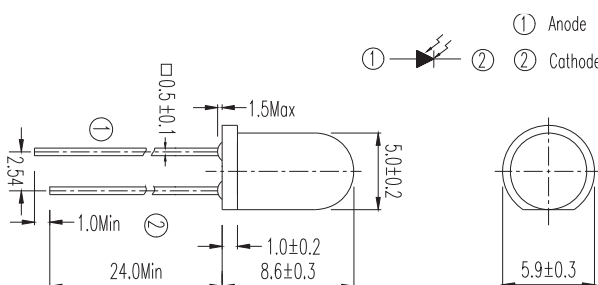

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD333-3C/H0/L2	5	940	36	40	45 / 45	32	30



UNIT : mm

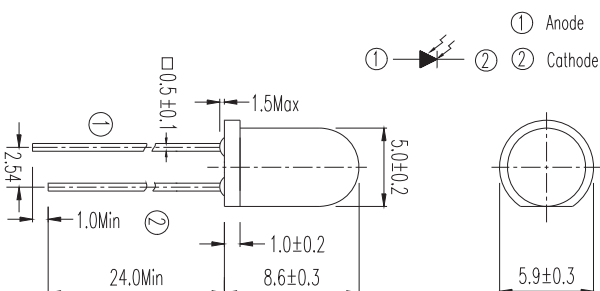


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min (V)	ID_Max (nA)
PD333-3B/H0/L2	5	940	25	35	45 / 45	32	30

Infrared LED and Silicon Detector | Photo Diode | Side Look




UNIT : mm

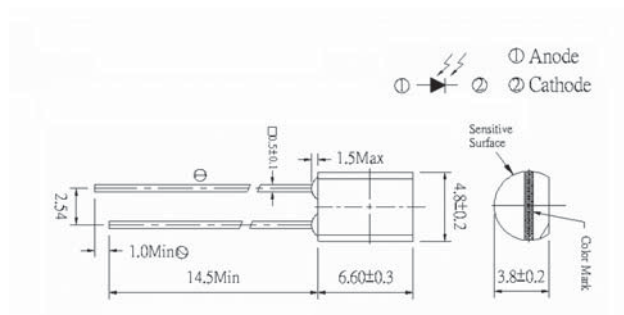

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD438C	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30
PD438C/S46	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30




UNIT : mm

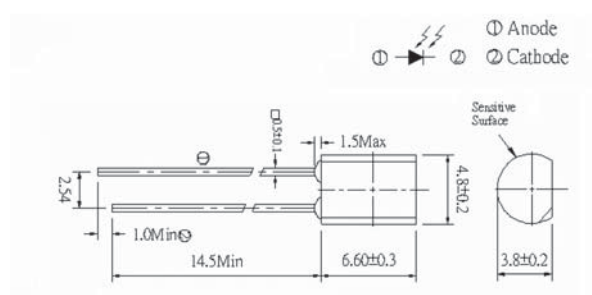

Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD438B	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30
PD438B/L1	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30
PD438B/S46	4.8x3.8x6.6	940	10.2	18	50 / 50	32	30



UNIT : mm

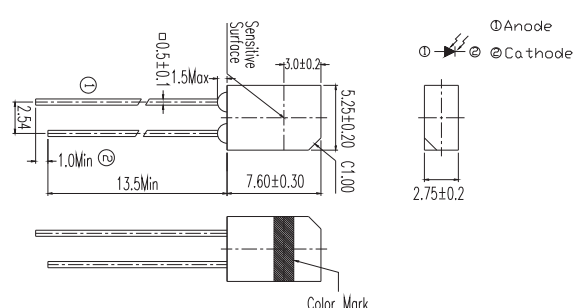


Product	Size (LXWXHmm)	λ_P (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD638B	5.2x2.75x7.6	940	10.2	18	50 / 50	32	30


Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm

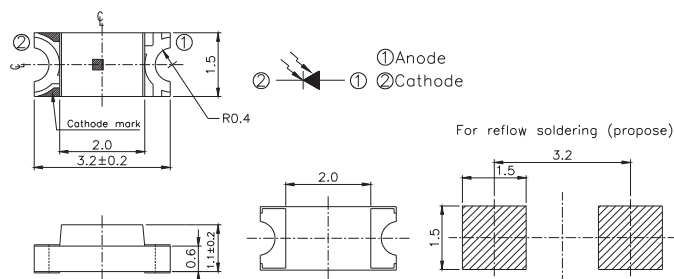

Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD15-21B/TR8	3.2x1.5x1.1	940	0.2	0.8	6 / 6	32	10

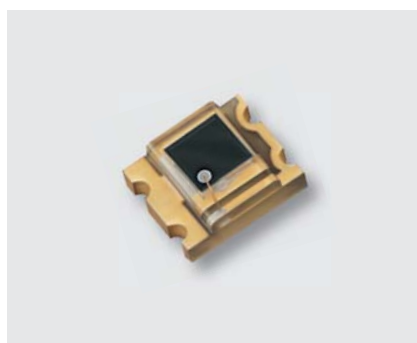


UNIT : mm

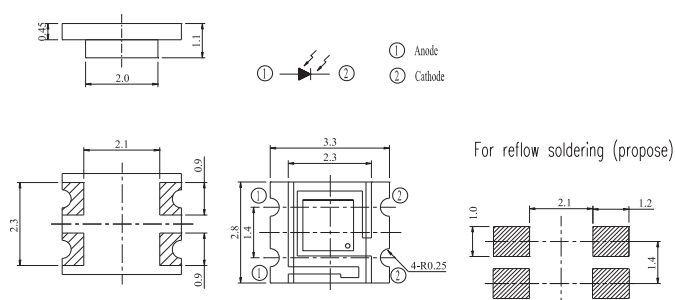

Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD15-22B/TR8	3.3x2.8x1.1	940	4.2	6.5	10 / 10	32	10



UNIT : mm

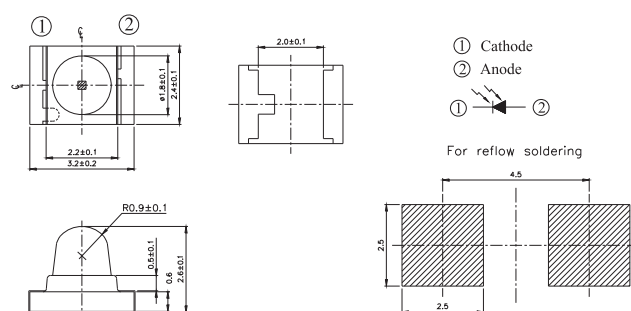


Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD42-21B/TR8	3.2x2.4x2.6	940	2	4	6 / 6	32	10
PD42-21C/TR8	3.2x2.4x2.6	940	2	5	6 / 6	32	10

Infrared LED and Silicon Detector | Photo Diode | SMD




UNIT : mm

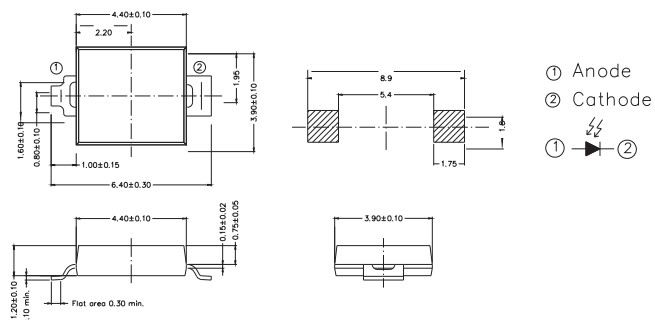

Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD70-01B/TR7	4.4x3.9x1.2	940	17	25	50 / 50	32	30
PD70-01C/TR7	4.4x3.9x1.2	940	17	25	50 / 50	32	30




UNIT : mm

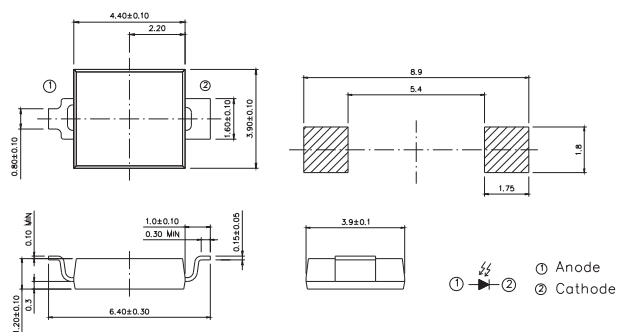

Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD70-01B/TR10	4.4x3.9x1.2	940	17	25	50 / 50	32	30
PD70-01C/TR10	4.4x3.9x1.2	940	17	25	50 / 50	32	30



UNIT : mm

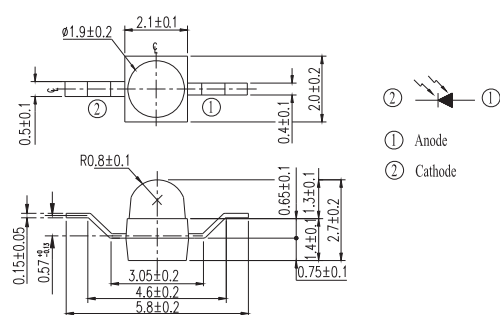


Product	Size (LXWXHmm)	λ_p (nm)	I_L Min (μA)	I_L Typ (μA)	Rise / Fall Time (ns)	BVR_Min.(V)	ID_Max (nA)
PD95-21B/TR10	2.1x2.0x2.7	940	--	4	6 / 6	32	10

Infrared LED and Silicon Detector I Photo Transistor I DIP




UNIT : mm

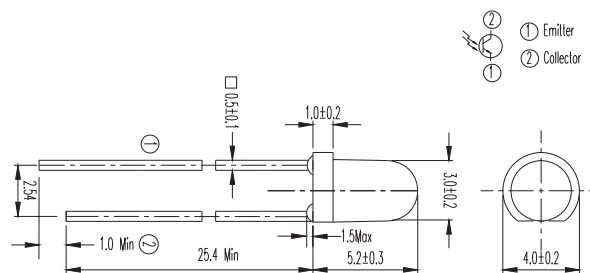


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT204-6C	3	940	15 / 15	0.4	0.7	2	--




UNIT : mm

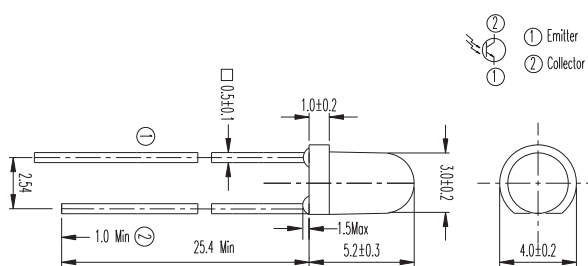


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT204-6B	3	940	15 / 15	0.4	0.7	--	5.07

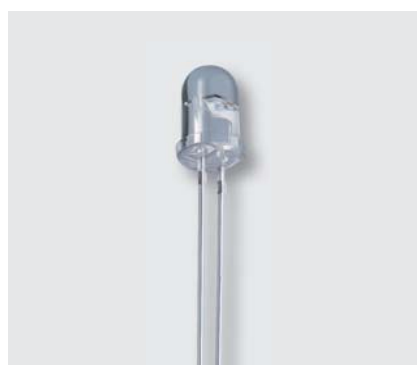


UNIT : mm

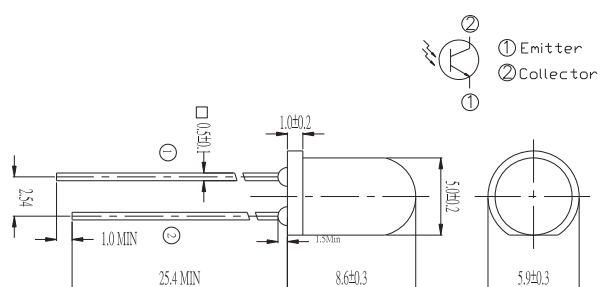


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT333-3C	5	940	15 / 15	0.4	0.7	4	--

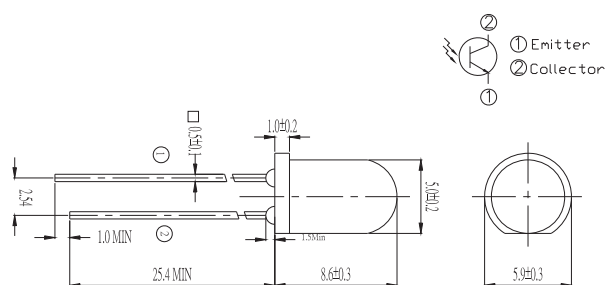

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT333-3B	5	940	15 / 15	0.4	0.7	3	--

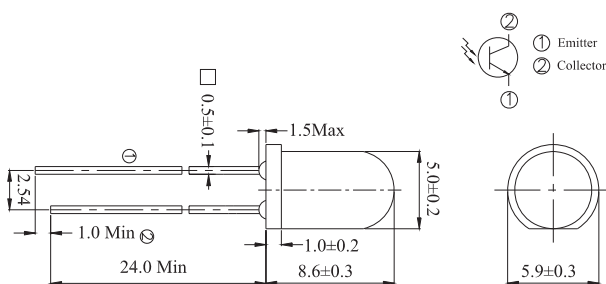

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT334-6C	5	940	15 / 15	0.4	1.77	3.5	--

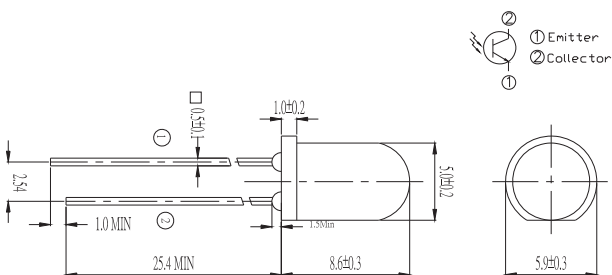


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT334-6B	5	940	15 / 15	0.4	0.7	2	--

Infrared LED and Silicon Detector ■ Photo Transistor ■ DIP




UNIT : mm

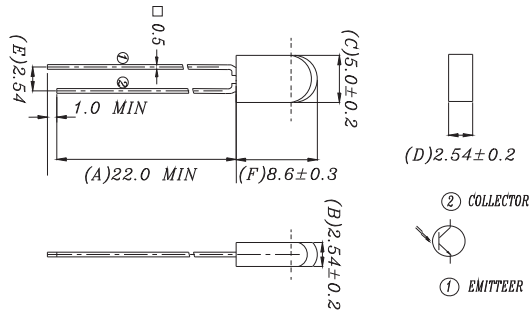

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μ s)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT534-6B	5	940	15 / 15	0.4	0.7	1.2	--



UNIT : mm

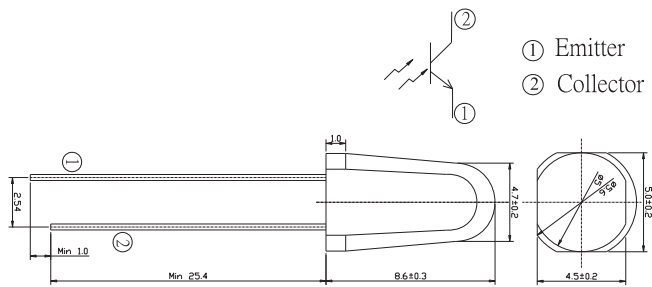


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μ s)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT1504-6B	5	940	15 / 15	0.4	1.77	4	--

Infrared LED and Silicon Detector | Photo Transistor | Side Look




UNIT : mm

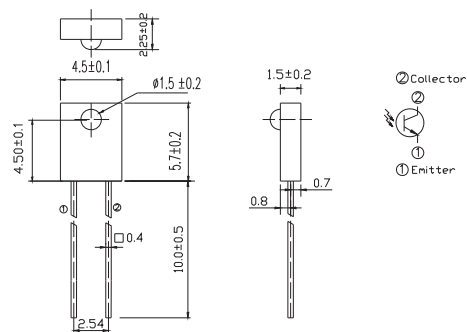

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT908-7B-F	4.5x2.25x5.7	940	15 / 15	0.4	0.8	--	5
PT908-7C-F	4.5x2.25x5.7	940	15 / 15	0.4	0.8	--	5




UNIT : mm

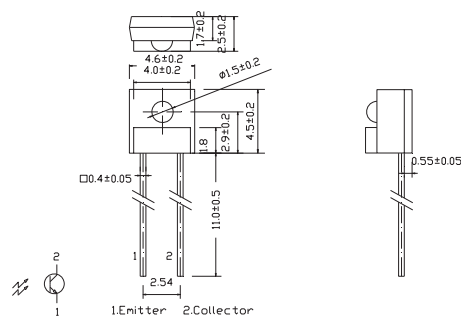

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT928-6B-F	4.6x2.5x4.5	940	15 / 15	0.4	0.53	--	3.41
PT928-6C-F	4.6x2.5x4.5	940	15 / 15	0.4	0.53	--	3.41



UNIT : mm


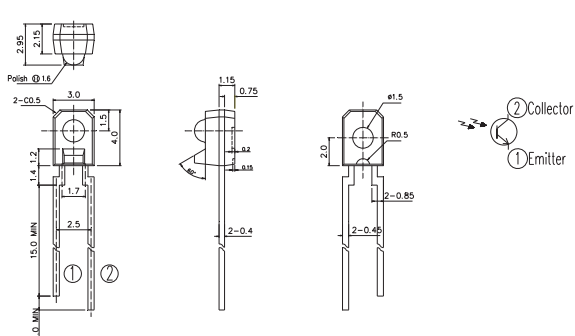


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT958-8C	3.0x2.95x4.0	940	15 / 15	0.4	0.53	--	3.41

Infrared LED and Silicon Detector | Photo Transistor | Side Look



UNIT : mm




Product	Size (mm)	λ_p (nm)	Rise / Fall Time (μ s)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT2559B-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.018
PT2559B/L2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085
PT2559B/L2/H2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085
PT5529B/L2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085
PT5529B/L2/H2-F	4.8x2.8x4.5	940	15 / 15	0.4	0.129	--	1.085

Infrared LED and Silicon Detector | Photo Transistor | SMD




UNIT : mm

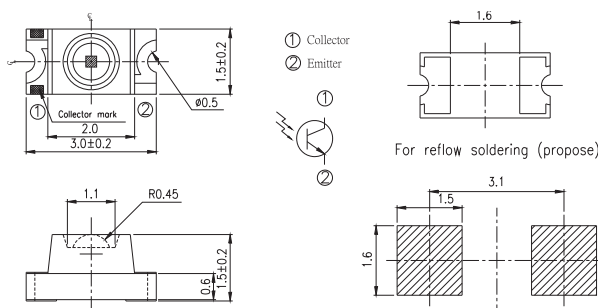

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT11-21C/L41/TR8	3.0x1.5x1.5	940	15 / 15	0.4	0.3	0.8	—




UNIT : mm

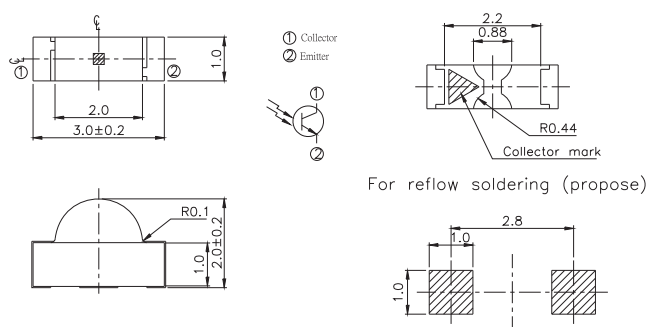

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT12-21B/TR8	3.0x1.0x2.0	940	15 / 15	0.4	0.3	1.14	—
PT12-21C/TR8	3.0x1.0x2.0	940	15 / 15	0.4	0.3	1.14	—




UNIT : mm

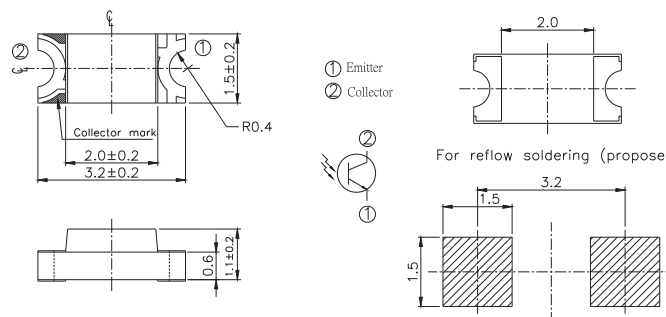


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT15-21B/TR8	3.2x1.5x1.1	940	15 / 15	0.4	0.1	0.3	—
PT15-21C/TR8	3.2x1.5x1.1	940	15 / 15	0.4	0.1	0.3	—

Infrared LED and Silicon Detector | Photo Transistor | SMD

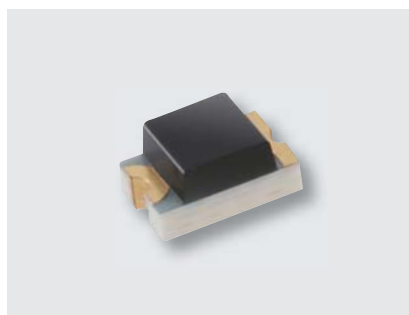


UNIT : mm

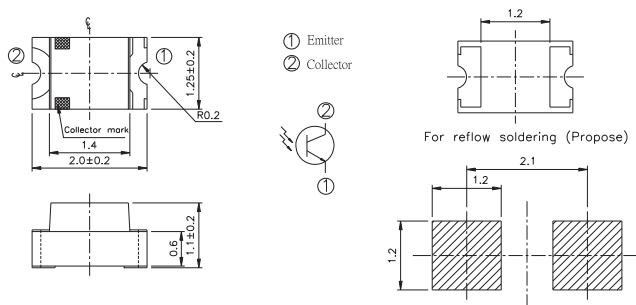

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT17-21B/L41/TR8	2.0x1.25x1.1	940	15 / 15	0.4	0.1	0.65	--
PT17-21C/L41/TR8	2.0x1.25x1.1	940	15 / 15	0.4	0.3	1	--




UNIT : mm

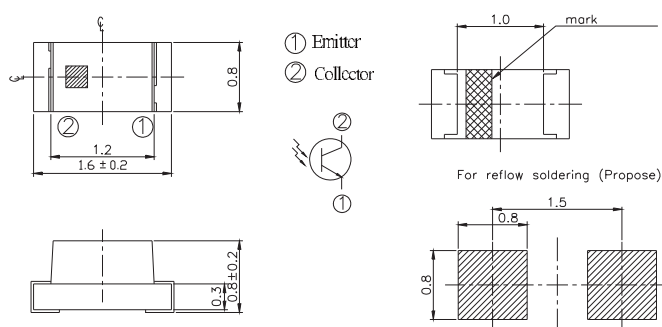

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT19-21B/L41/TR8	1.6x0.8x0.8	940	15 / 15	0.4	0.3	0.6	--
PT19-21C/L41/TR8	1.6x0.8x0.8	940	15 / 15	0.4	0.3	0.6	--




UNIT : mm

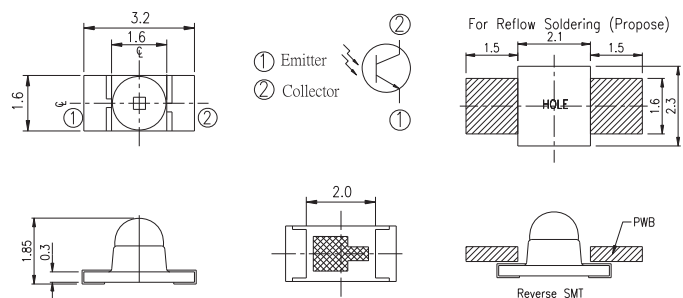


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT)}_{Max}$ (V)	$I_{C(ON)}_{Min}$ (mA)	$I_{C(ON)}_{Typ}$ (mA)	$I_{C(ON)}_{Max}$ (mA)
PT26-21B/TR8	3.2x1.6x1.85	940	15 / 15	0.4	--	1	--
PT26-21C/TR8	3.2x1.6x1.85	940	15 / 15	0.4	0.3	2.6	--

Infrared LED and Silicon Detector | Photo Transistor | SMD

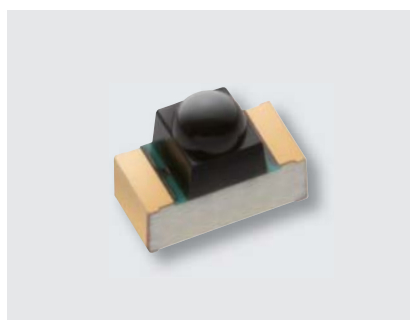


UNIT : mm

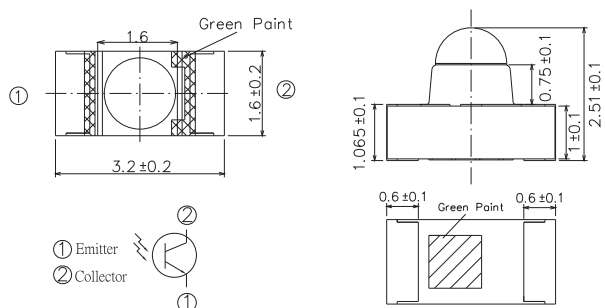

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT26-51B/TR8	3.2x1.6x2.5	940	15 / 15	0.4	--	1	--




UNIT : mm

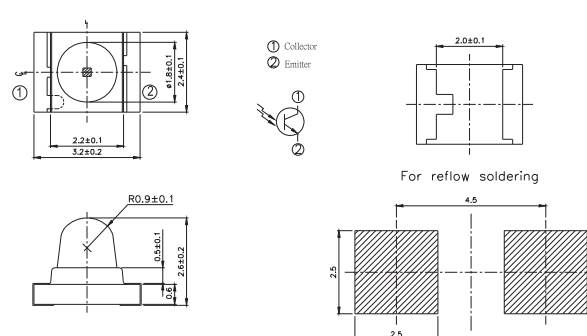

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT42-21B/TR8	3.2x2.4x2.6	940	15 / 15	0.4	1.77	3	--



UNIT : mm

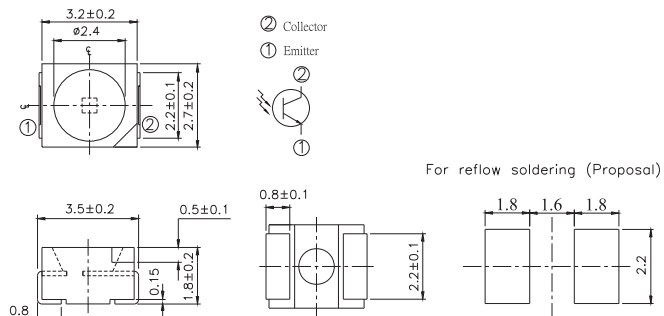


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT67-21B/C14/TR8	3.5x2.7x1.8	940	15 / 15	0.4	0.016	--	0.08

Infrared LED and Silicon Detector | Photo Transistor | SMD




UNIT : mm

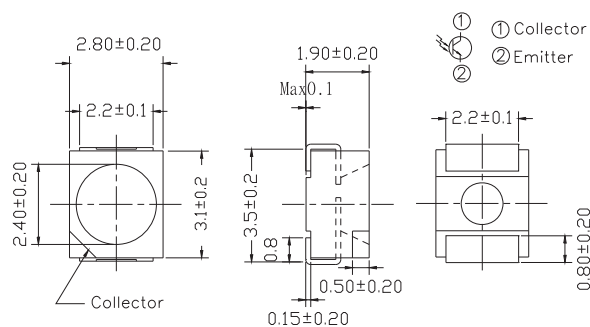

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT67-21C/L41/TR8	3.5x2.8x1.9	940	15 / 15	0.4	0.3	--	1




UNIT : mm

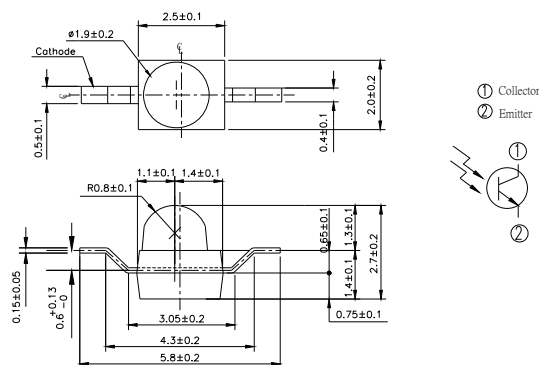

Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT91-21B	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21B/TR10	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21B/TR7	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21B/TR9	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--




UNIT : mm

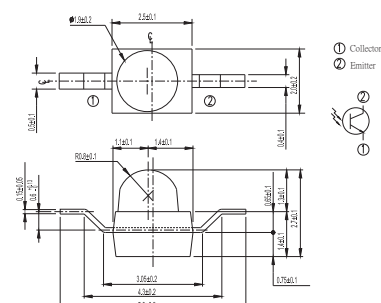


Product	Size (mm)	λ_P (nm)	Rise / Fall Time (μs)	$V_{CE(SAT_Max)}$ (V)	$I_{C(ON_Min)}$ (mA)	$I_{C(ON_Typ)}$ (mA)	$I_{C(ON_Max)}$ (mA)
PT91-21C	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21C/TR10	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--
PT91-21C/TR7	2.5x2.0x2.7	940	15 / 15	0.4	1	1.5	--

Infrared Receiver Module | 33KHz | IRM-8xxx Vo-GND-Vcc | Standard Burst

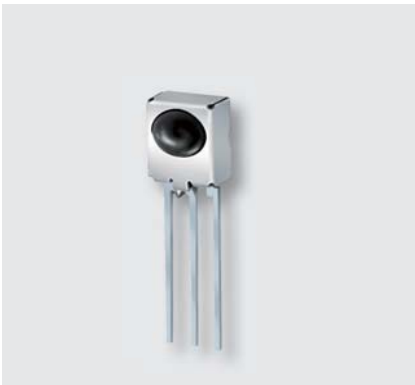


UNIT : mm

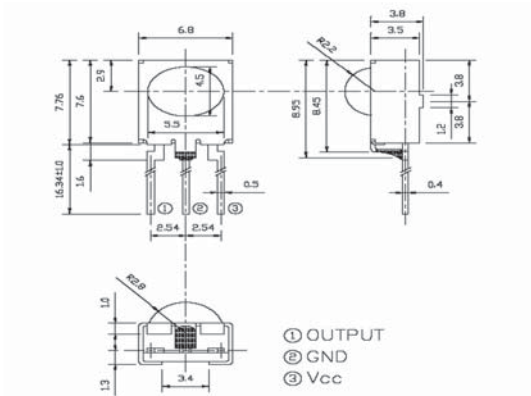

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8601K-1	9.2x6.8x6.0	940	33	5	--	8	4



UNIT : mm

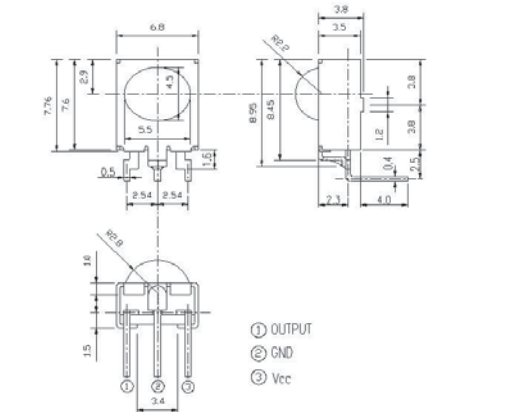


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8602K-1	10.1x6.8x6.0	940	33	5	--	8	4

Infrared Receiver Module ■ 33KHz ■ IRM-8xxx Vo-GND-Vcc ■ Standard Burst




UNIT : mm

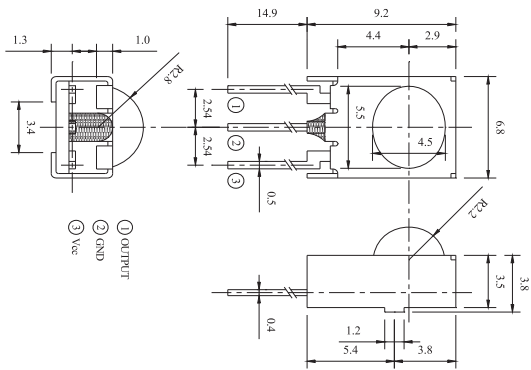

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8608K-1	9.2x6.8x6.0	940	33	5	-	8	4



UNIT : mm

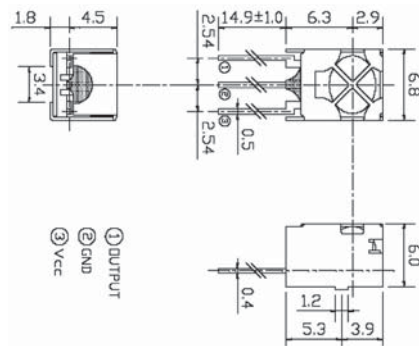


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8751K-1	9.2x6.8x6.0	940	33	5	--	8	4

Infrared Receiver Module ■ 33KHz ■ IRM-8xxx Vo-GND-Vcc ■ Standard Burst




UNIT : mm

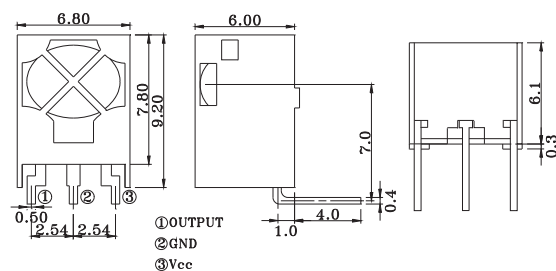

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8752K-1	9.2x6.8x6.0	940	33	5	-	8	4




UNIT : mm

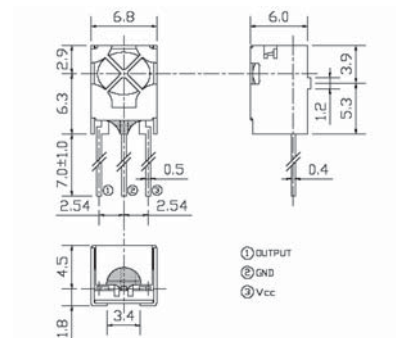

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8753K-1	9.2x6.8x6.0	940	33	5	-	8	4



UNIT : mm




Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8755K-1	9.2x6.8x6.0	940	33	5	-	8	4

Infrared Receiver Module | 36KHz | DIP-Vo-GND-Vcc | Standard Burst



UNIT : mm

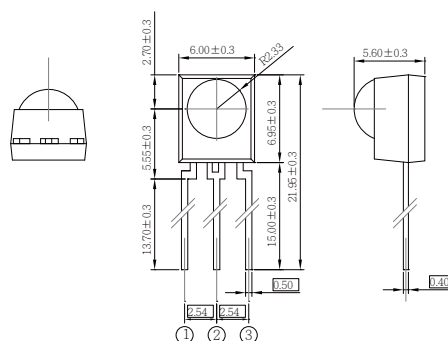


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3636M3	8.25x6.0x5.6	940	36	3~5	0.4	14	6
IRM-3636T	8.25x6.0x5.6	940	36	3~5	1	14	6

Infrared Receiver Module | 36KHz | DIP-Vo-GND-Vcc | Short Burtst



UNIT : mm

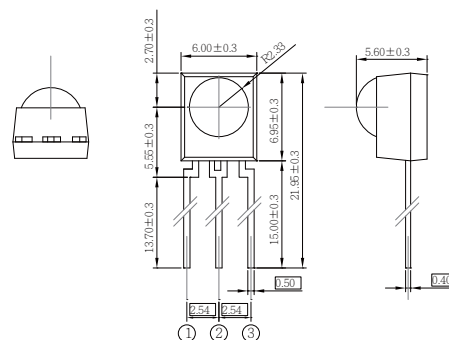


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3636M	8.25x6.0x5.6	940	36	3~5	0.4	14	6

Infrared Receiver Module ■ 36KHz ■ DIP-Vo-Vcc-GND ■ Standard Burst



UNIT : mm

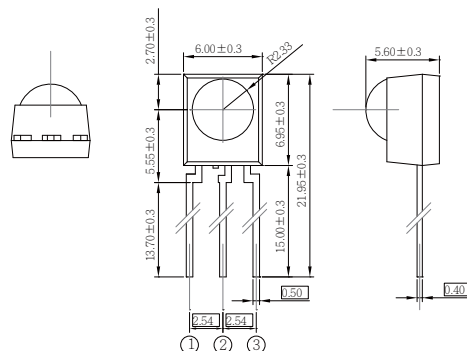


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3736M3	8.25x6.0x5.6	940	36	3~5	0.4	14	6

Infrared Receiver Module ■ 36KHz ■ DIP-Vo-Vcc-GND ■ Short Burtst



UNIT : mm

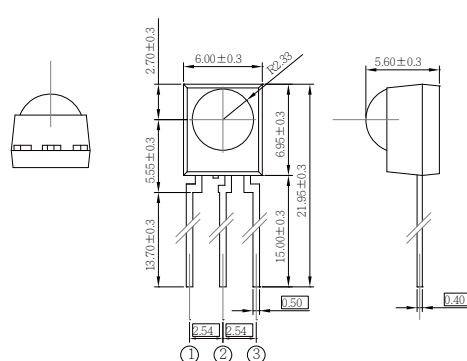


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3736M	8.25x6.0x5.6	940	36	3~5	0.4	14	6

Infrared Receiver Module ■ 36KHz ■ IRM-8xxx Vo-GND-Vcc ■ Standard Burst




UNIT : mm

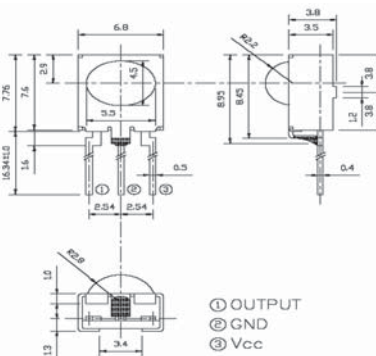

Product	Size (mm)	λ_P (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-8751K-2	9.2x6.8x6.0	940	36	5	-	8	4




UNIT : mm



Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-8752K-2	10.1x6.8x6.0	940	36	5	-	8	4




UNIT : mm

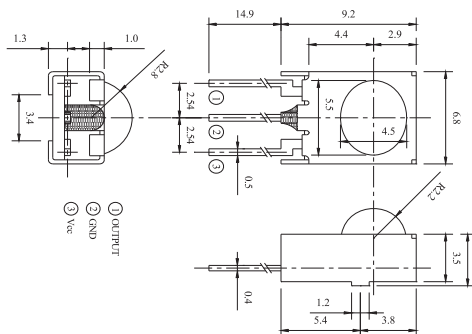

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-8753K-2	9.2x6.8x6.0	940	36	5	-	8	4



UNIT : mm




Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-8755K-2	9.2x6.8x6.0	940	36	5	-	8	4

Infrared Receiver Module | 38KHz | DIP-Vo-GND-Vcc | Standard Burst



UNIT : mm

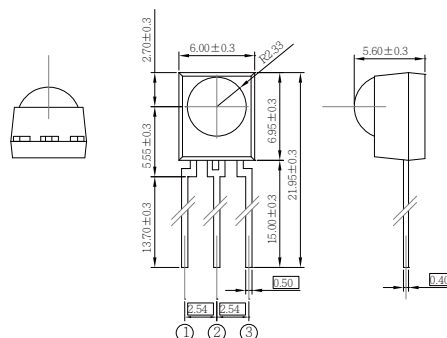


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-2638T	8.25x6.0x5.6	940	38	5	1.2	14	6
RM-3638L	8.25x6.0x5.6	940	38	3~5	0.33	14	6
IRM-3638M2	8.25x6.0x5.6	940	38	3~5	0.4	14	6
IRM-3638M3	8.25x6.0x5.6	940	38	3~5	0.4	14	6

Infrared Receiver Module | 38KHz | DIP-Vo-GND-Vcc | Short Burtst



UNIT : mm

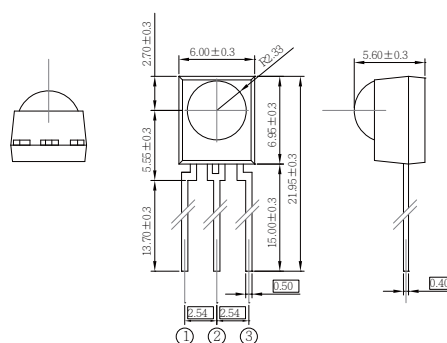


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3638M	8.25x6.0x5.6	940	38	3~5	0.4	14	6

Infrared Receiver Module | 38KHz | DIP-Vo-Vcc-GND | Standard Burst



UNIT : mm

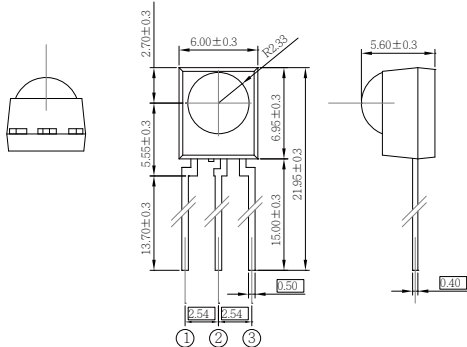


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Max (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-3738T	8.25x6.0x5.6	940	38	3~5	1	14	6

Infrared Receiver Module | 38KHz | DIP-Vo-Vcc-GND | Short Burtst



UNIT : mm

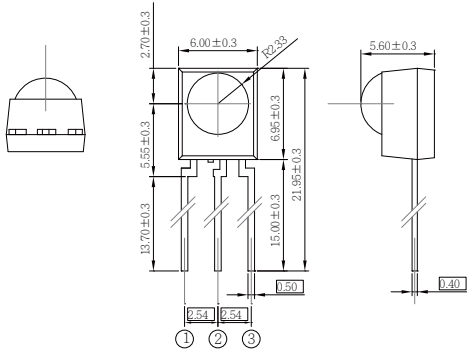


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I _{CC} Typ (mA)	L _{Center} (m)	L ₄₅ (m)
IRM-3738M	8.25x6.0x5.6	940	38	3~5	0.4	14	6

Infrared Receiver Module | 38KHz | SMD Top View | Standard Burst




UNIT : mm

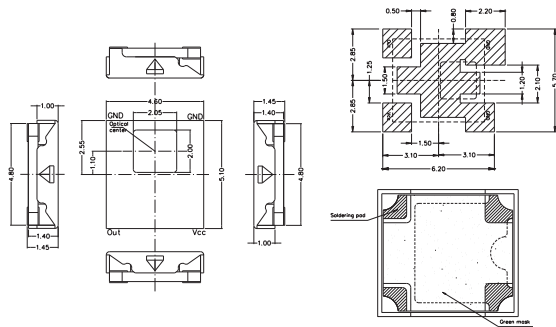

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Max (mA)	L_{Center} (m)	L_{45} (m)
IRM-H238T/TR2	5.1x4.6x1.45	940	38	3~5	3	8	5



UNIT : mm

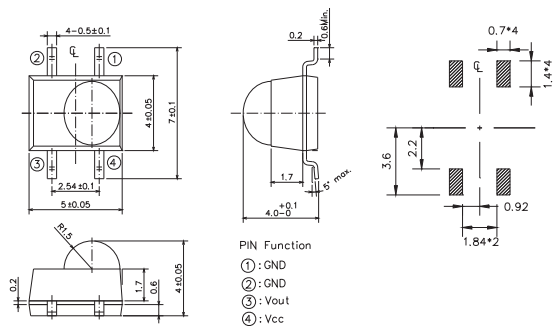


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Max (mA)	L_{Center} (m)	L_{45} (m)
IRM-H638T/TR2	5.0x4.0x4.0	940	38	3~5	1.2	8	5

Infrared Receiver Module | 38KHz | SMD Side View | Standard Burst



UNIT : mm

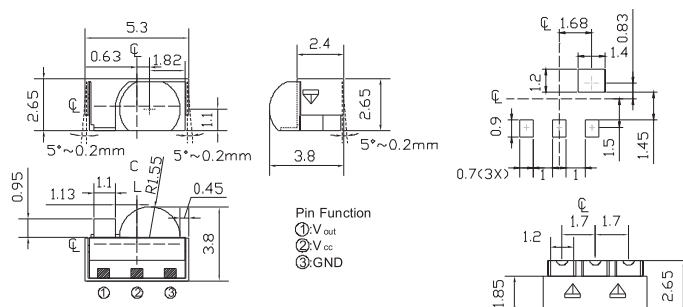


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Max (mA)	L_{Center} (m)	L_{45} (m)
IRM-V538T/TR1	5.3x3.8x2.65	940	38	3~5	1.2	8	5

Infrared Receiver Module | 40KHz | DIP-Vo-GND-Vcc | Standard Burst



UNIT : mm

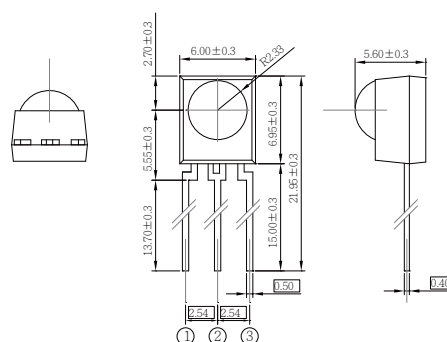


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-2640T	8.25x6.0x5.6	940	40	5	1.2	14	6
IRM-3640T	8.25x6.0x5.6	940	40	3~5	1	14	6
IRM-3640M2	8.25x6.0x5.6	940	40	3~5	0.4	14	6

Infrared Receiver Module | 56KHz | DIP-Vo-GND-Vcc | Standard Burst



UNIT : mm

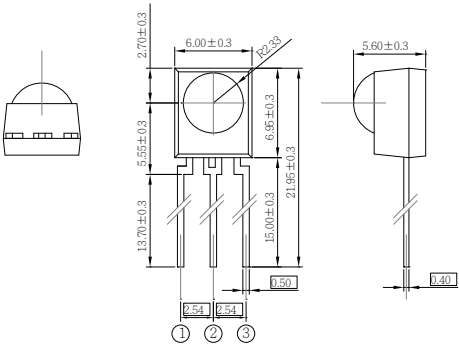


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-2656T	8.25x6.0x5.6	940	56	5	1.2	14	6
IRM-3656M3	8.25x6.0x5.6	940	56	3~5	0.4	14	6
IRM-3656T	8.25x6.0x5.6	940	56	3~5	1	14	6

Infrared Receiver Module | 56KHz | DIP-Vo-Vcc-GND | Standard Burst




UNIT : mm

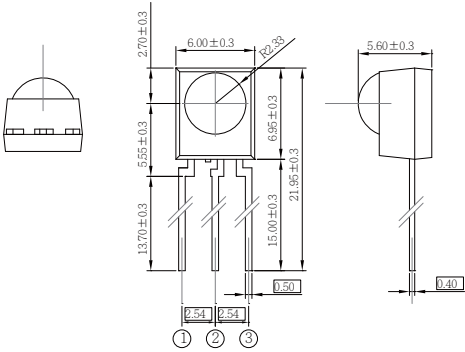


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-3756M3	8.25x6.0x5.6	940	56	3~5	0.4	14	6

Infrared Receiver Module ■ 56KHz ■ IRM-8xxx Vo-GND-Vcc ■ Standard Burst

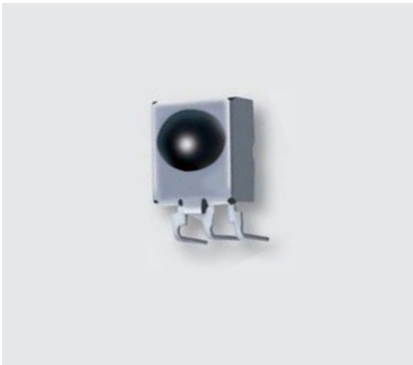


UNIT : mm

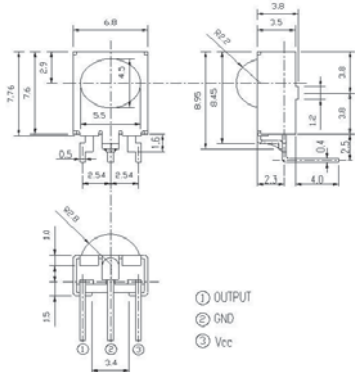

Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8602K-5	10.1x6.8x6.0	940	56	5	--	8	4



UNIT : mm

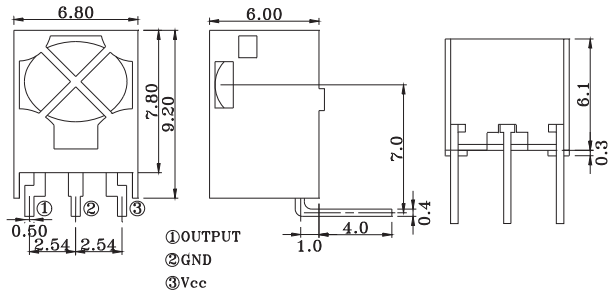


Product	Size (mm)	λ_p (nm)	Carrier Freq. (KHz)	Supply Voltage (V)	I_{CC} Typ (mA)	L_{Center} (m)	L_{45} (m)
IRM-8752K-5	10.1x6.8x6.0	940	56	5	--	8	4

Optic-Fiber Device (Photo Link) | Receiver (PLR) Component




UNIT : mm

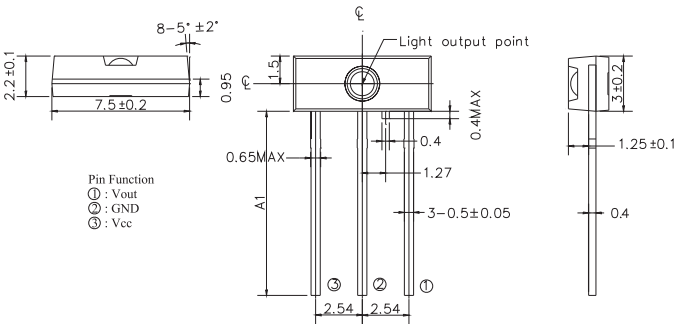

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135	7.5x3.0x2.2	-14	-27	2.4~5.5	None	16	0.4




UNIT : mm

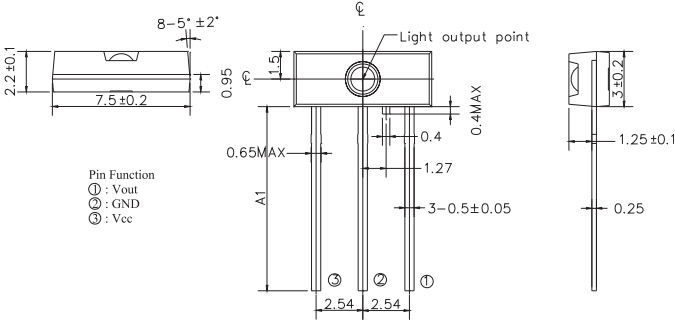

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR137	7.5x3.0x2.2	-14	-27	2.4~5.5	None	16	0.25



UNIT : mm

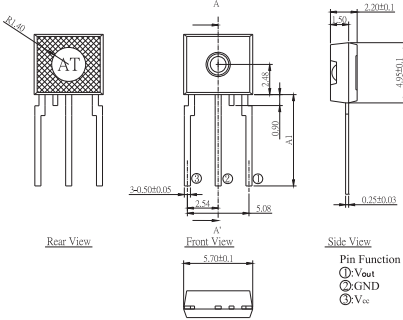


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR155	5.70x4.95x2.20	-14	-27	2.4~5.5	None	16	0.25

Optic-Fiber Device (Photo Link) | Receiver (PLR) Component




UNIT : mm

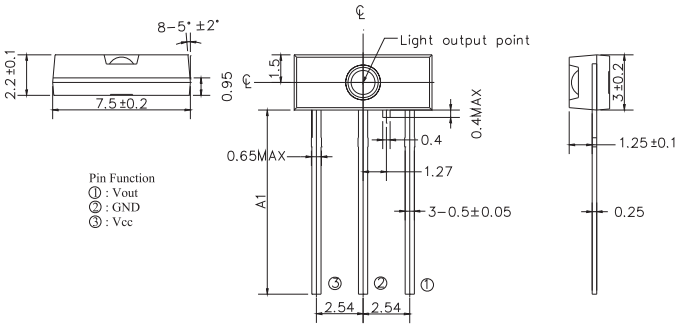

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR233	7.5x3.0x2.2	-14	-27	2.4~5.5	None	25	0.4



UNIT : mm

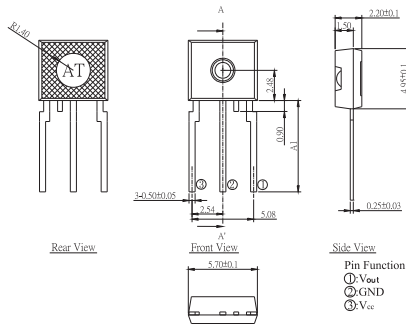


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR253	5.70x4.95x2.20	-14	-27	2.4~5.5	None	25	0.25

Optic-Fiber Device (Photo Link) | Receiver (PLR) Module




UNIT : mm

Package Dimensions

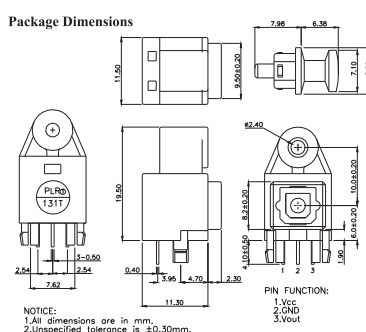

PCB Layout for Electrical Circuit



Notice:


1. Unit:mm
2. PCB tolerance:1.6mm

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T	11.5x13.6x19.5	-14	-27	2.4~5.5	Yes	16	0.4




UNIT : mm

Package Dimensions

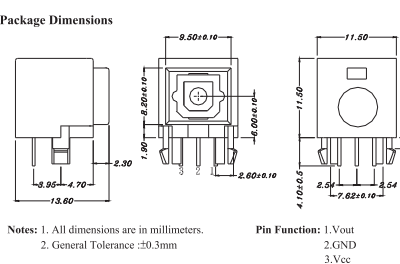

PCB Layout for Electrical Circuit



Notice:


1. Unit:mm
2. PCB tolerance:1.6mm

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T1	11.5x13.6x11.5	-14	-27	2.4~5.5	Yes	16	0.4




UNIT : mm

Package Dimensions



PCB Layout for Electrical Circuit



Notice:


1. Unit:mm
2. PCB tolerance:1.6mm

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T2	12x14x19	-14	-27	2.4~5.5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Receiver (PLR) Module




UNIT : mm

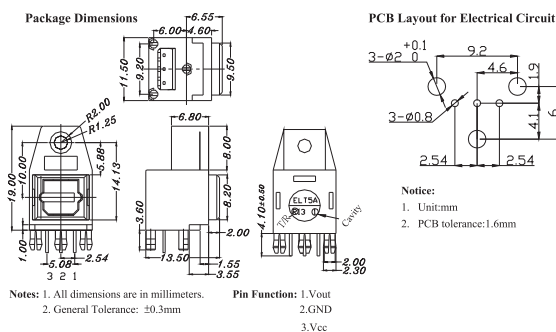

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T5A	11.5x13.5x19	-14	-27	2.4~5.5	Yes	16	0.4




UNIT : mm

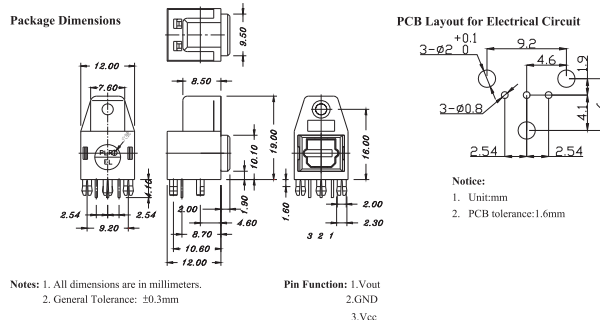

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T5P	12x14x19	-14	-27	2.4~5.5	Yes	16	0.4



UNIT : mm

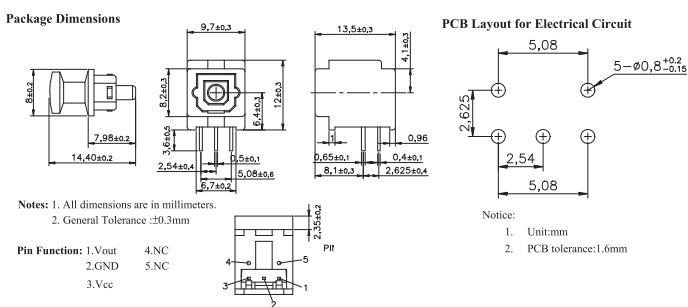


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T6	9.7x13.5x12	-14	-27	2.4~5.5	Yes	16	0.4


Optic-Fiber Device (Photo Link) ■ Receiver (PLR) Module



UNIT : mm



PCB Layout for Electrical Circuit




Notice:
 1. Unit:mm
 2. PCB tolerance:1.6mm


Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T7	9.9x13.6x11.1	-14	-27	2.4~5.5	Yes	16	0.4



UNIT : mm



PCB Layout for Electrical Circuit




Notice:
 1. Unit:mm
 2. PCB tolerance:1.6mm

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLR135/T8	9.7x13.5x10	-14	-27	2.4~5.5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Receiver (PLR) Module




UNIT : mm

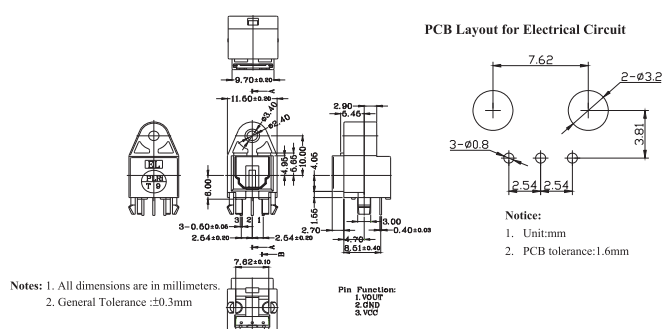

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T9	11.5x14x20	-14	-27	2.4~5.5	Yes	16	0.4




UNIT : mm

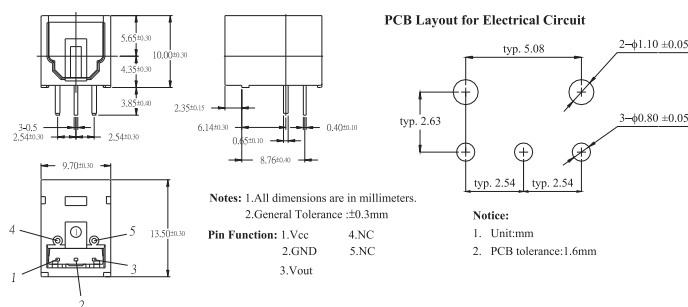

Product	Size (LXWXHmm)	Fiber Coupling Receiver Power_ Max (dBm)	Fiber Coupling Receiver Power_ Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLR135/T10	9.7x13.5x10	-14	-27	2.4~5.5	Yes	16	0.4


Optic-Fiber Device (Photo Link) | Transmitter (PLT) Component

UNIT : mm

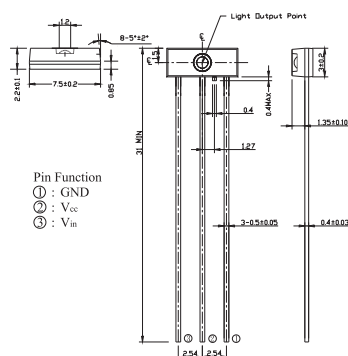


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT132	7.5x3.0x2.2	-15	-21	3~5	None	16	0.4

UNIT : mm

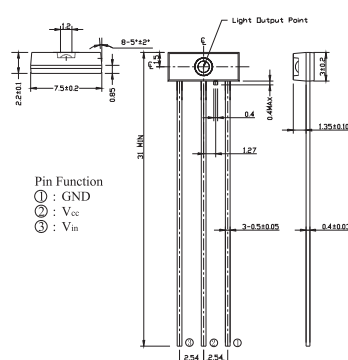


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133	7.5x3.0x2.2	-15	-21	3~5	None	16	0.4

Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Component

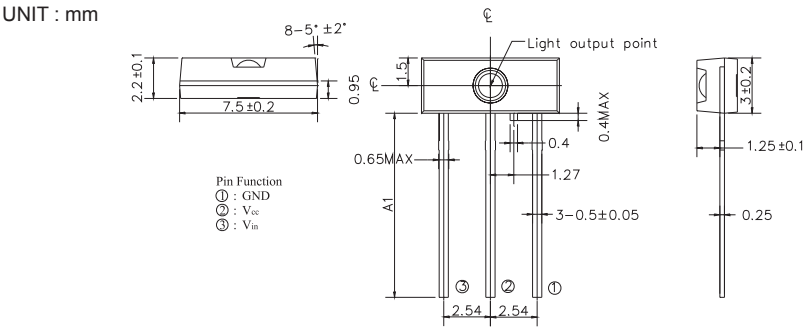

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT137	7.5x3.0x2.2	-15	-21	3~5	None	16	0.25

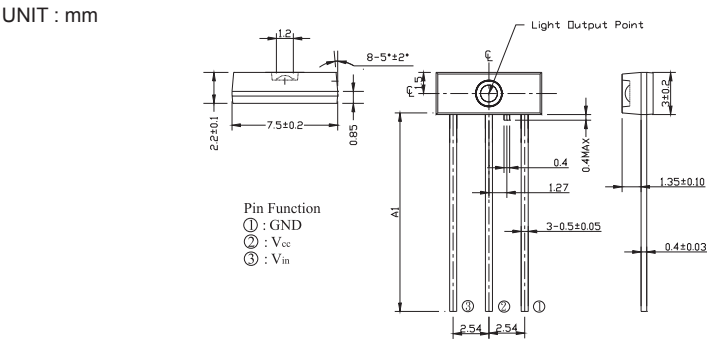


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT232/L5	7.5x3.0x2.2	-15	-21	3~5	None	25	0.4

Optic-Fiber Device (Photo Link) | Transmitter (PLT) Module




UNIT : mm

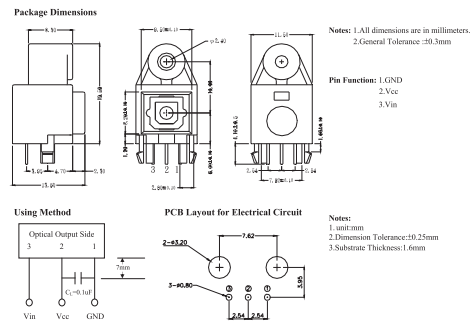

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T	11.5x13.6x19.5	-15	-21	3~5	Yes	16	0.4




UNIT : mm

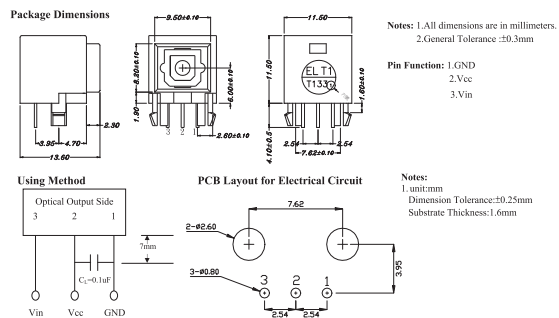

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T1	11.5x13.6x11.5	-15	-21	3~5	Yes	16	0.4



UNIT : mm

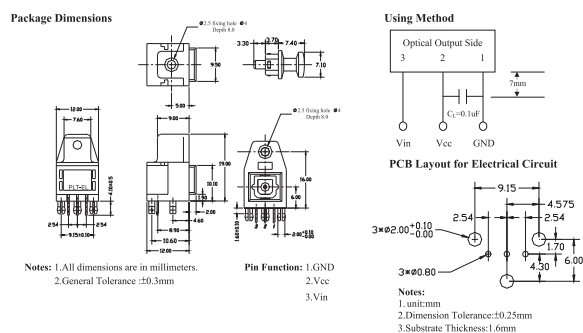


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T2	12x14x19	-15	-21	3~5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Module




UNIT : mm


Package Dimensions

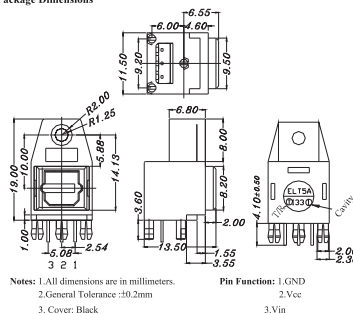

Using Method



PCB Layout for Electrical Circuit




Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T5A	11.5x13.5x19	-15	-21	3~5	Yes	16	0.4




UNIT : mm


Package



Using Method



PCB Layout for Electrical Circuit




Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T5P	12x14x19	-15	-21	3~5	Yes	16	0.4




UNIT : mm


Package Dimensions



Using Method



PCB Layout for Electrical Circuit




Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thickness (mm)
PLT133/T6	9.7x13.5x12	-15	-21	3~5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Module




UNIT : mm

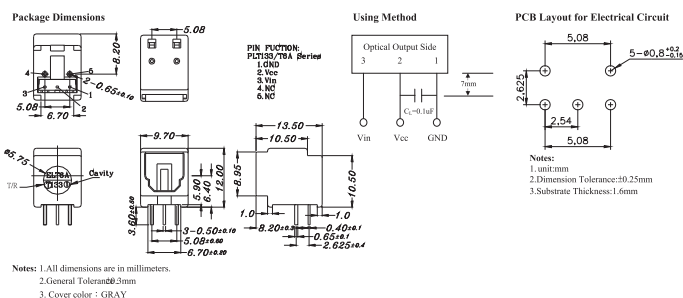

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133/T6A	9.7x13.5x12	-15	-21	3~5	Yes	16	0.4




UNIT : mm

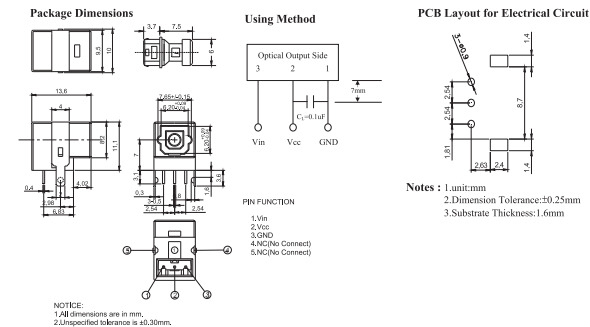

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133/T7	9.2x13.6x11.1	-15	-21	3~5	Yes	16	0.4



UNIT : mm

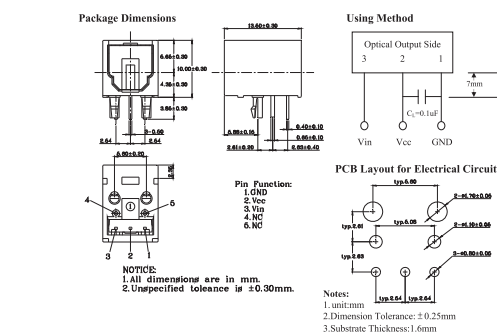


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133/T8	9.7x13.5x10	-15	-21	3~5	Yes	16	0.4

Optic-Fiber Device (Photo Link) ■ Transmitter (PLT) Module




UNIT : mm

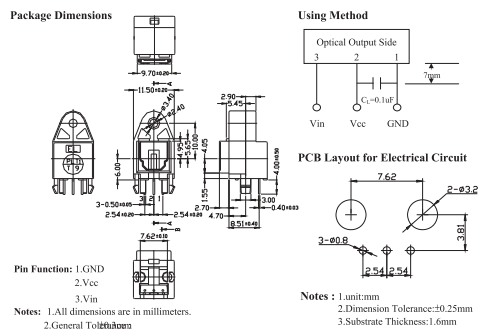

Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133/T9	11.5x13.7x20	-15	-21	3~5	Yes	16	0.4




UNIT : mm

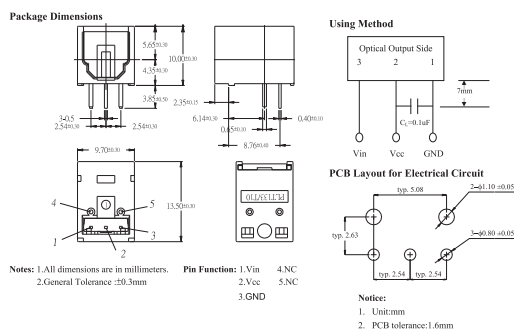


Product	Size (LXWXHmm)	Fiber Coupling Output Power_Max (dBm)	Fiber Coupling Output Power_Min (dBm)	Operation Voltage (V)	Plastic Holder	Trans - mission Speed (Mb/s)	L/F Thicknes (mm)
PLT133/T10W	9.7x13.5x10	-15	-21	3~5	Yes	16	0.4

Optical Sensors | Ambient Light Sensor | Analog

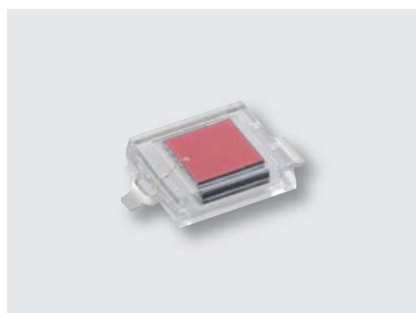


UNIT : mm

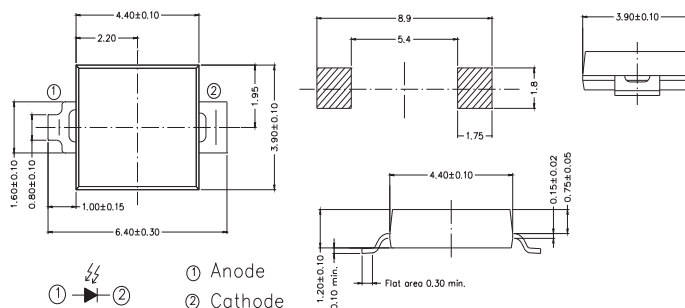


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (ns)
ALS-PD70-01C/TR7	4.4x3.9x1.2	2.5~5.5	630	390~700	1.1	0.01	--




UNIT : mm

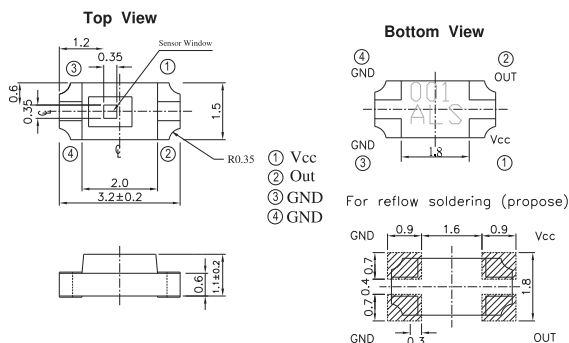

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC15-21B/TR8	3.2x1.5x1.1	1.5~5.5	580	390~700	17	0.1	100 / 500

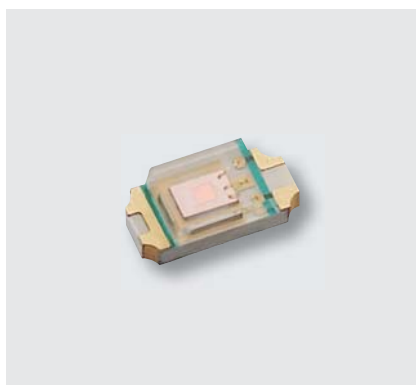

UNIT : mm

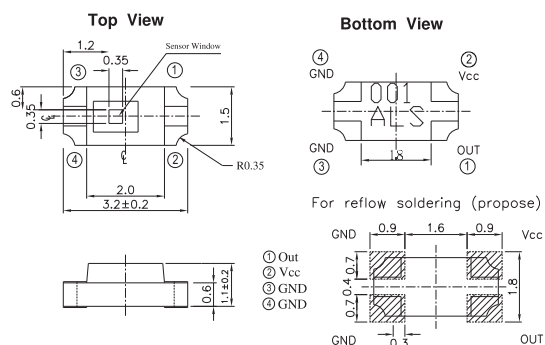


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC15-21C/L230/TR8	3.2x1.5x1.1	1.8~5.5	590	390~700	59	0.1	359 / 1110


Optical Sensors | Ambient Light Sensor | Analog




UNIT : mm

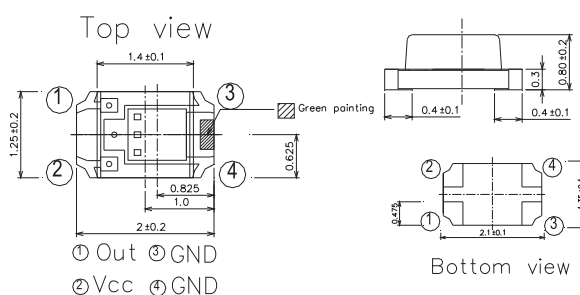


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC17-55C/TR8	2x1.25x0.8	1.8~5.5	590	390~700	60	0.1	6170 / 9510

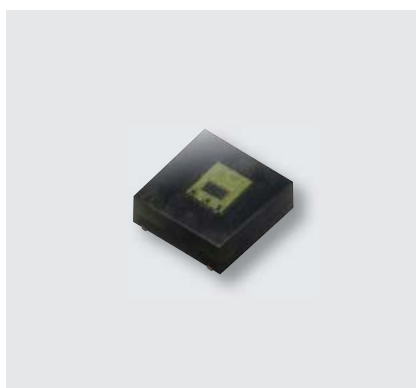


UNIT : mm

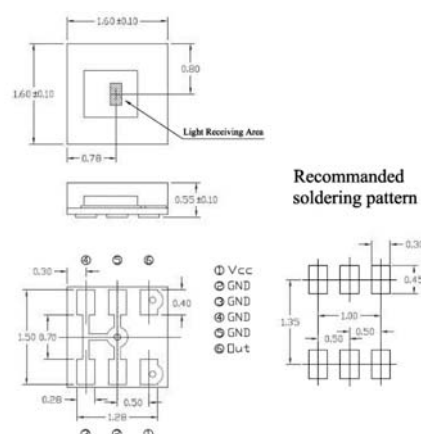

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC17-77B/TR8	1.6x1.6x0.55	1.8~5.5	600	390~700	40	0.1	11 / 400

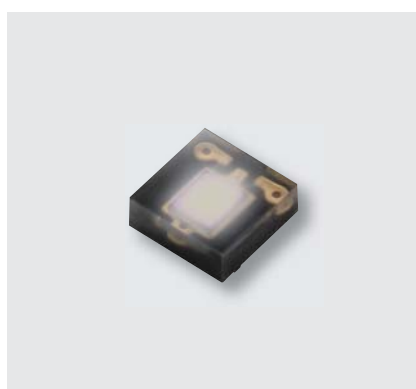

UNIT : mm

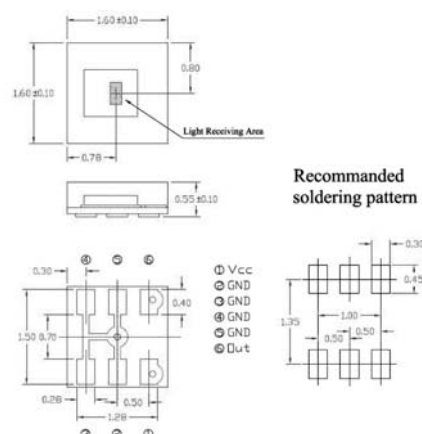


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (μA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC17-77C/TR8	1.6x1.6x0.55	1.8~5.5	600	390~700	40	0.1	11 / 400


Optical Sensors | Ambient Light Sensor | Analog




UNIT : mm

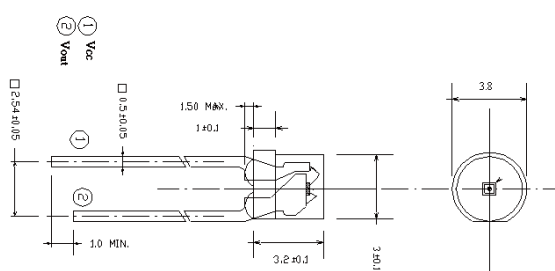


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC144-6B	3.4x3.0x3.2	1.8~5.5	570	390~700	50	0.1	360 / 1130

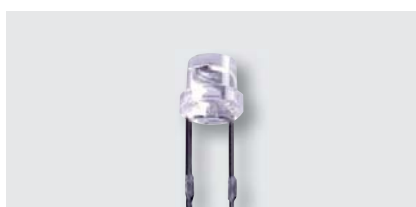


UNIT : mm

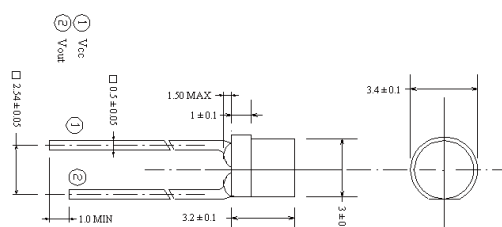


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC144-6C/L378	3.8x3.5x3.2	1.8~5.5	550	390~700	22	0.1	360 / 1130

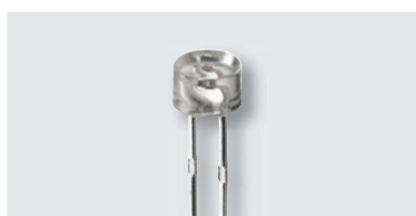


UNIT : mm

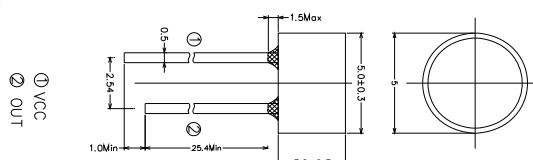

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PDIC243-3C	5.0x5.0x3.2	2.5~5.5	630	390~700	70	0.1	360 / 1130

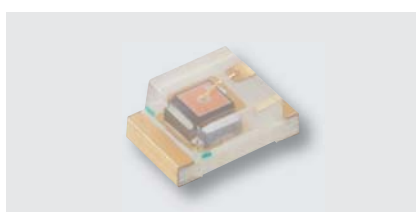

UNIT : mm

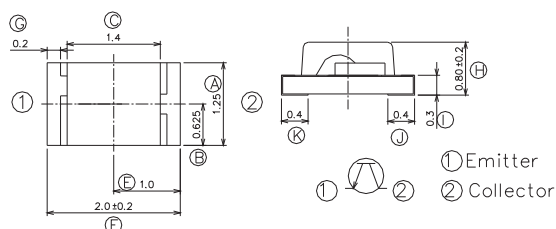


Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (uA) Ev=100lux	I _{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT17-51C/L177/TR8	2x1.25x0.8	2.5~5.5	630	390~700	15	0.1	110 / 220

Optical Sensors | Ambient Light Sensor | Analog




UNIT : mm

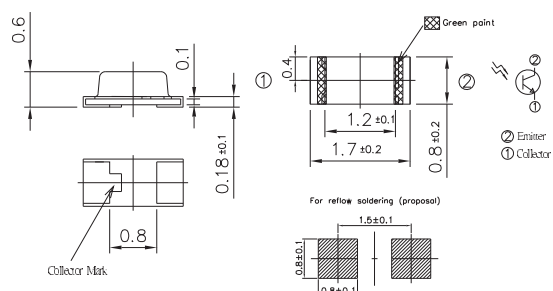

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (uA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT19-315C/L177/TR8	1.7x0.8x0.6	2.5~5.5	630	390~700	10	0.1	110 / 220




UNIT : mm

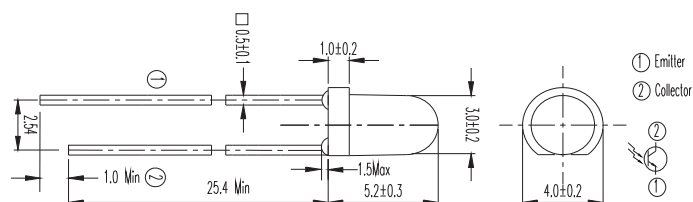

Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (uA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT204-6C/L177	3.0x3.0x5.2	2.5~5.5	630	390~700	200	0.1	110 / 220




UNIT : mm

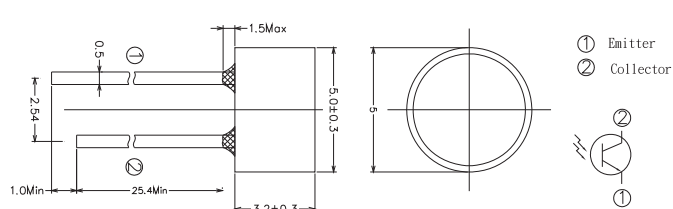



Product	Size (LXWXHmm)	Supply Voltage (V)	Sensitivity λ_p (nm)	Range λ (nm)	Photo current (uA) $E_v=100\text{lux}$	I_{D_Max} (μA)	Rise / Fall Time (μs)
ALS-PT243-3C/L177	5.0x5.0x3.2	2.5~5.5	630	390~700	70	0.1	110 / 220

Optical Sensors | Ambient Light Sensor | Digital

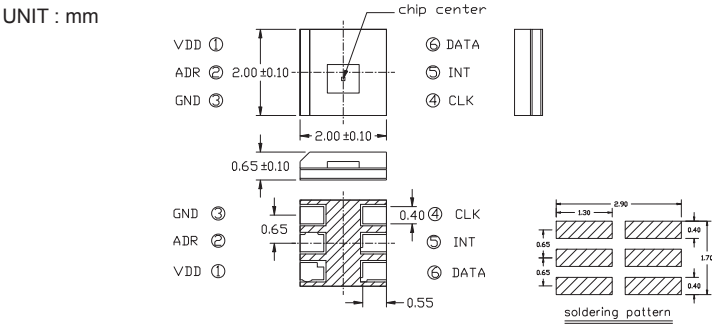


Product	Size (LXWXHmm)	Resloution (bit)	Interface	Peak sensitivity (nm)	Detection range (lux)
ALS-PDIC17-79NB/TR8	2.0x2.0x0.65	15	I ² C	550	110,000

Optical Sensors | Proximity Sensor | Digital

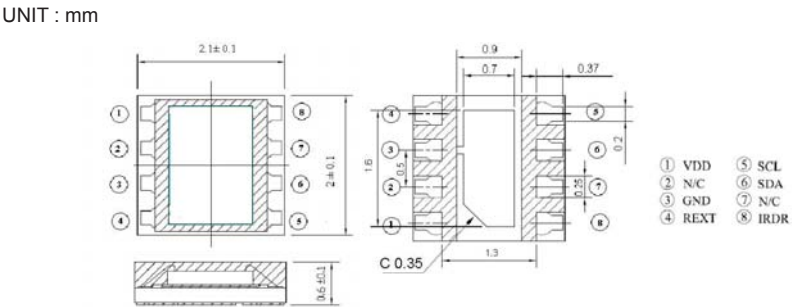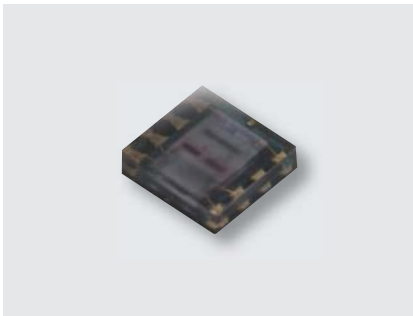


Product	Size (LXWXHmm)	Resloution (bit)	Interface	Ambient Light Detection range (lux)	IR LED Driving current (mA)
APS-12D-1-02/TR8	2.1 x 2.0 x 0.6	12	I ² C	0.24~64000	6.25 / 12.5 / 25 / 50


Optical Sensors ■ RGB Color Sensor ■ Single Color Sensor (Analog)

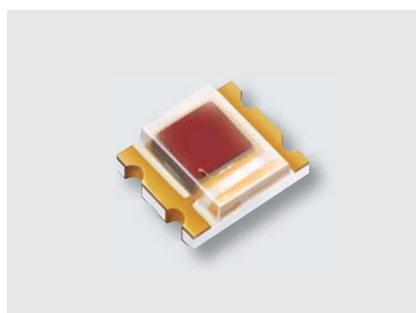


UNIT : mm

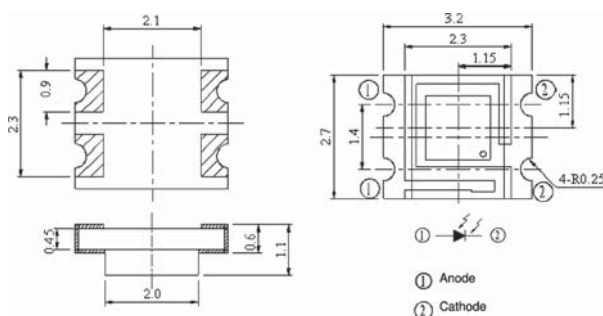


Product	Size (LXWXHmm)	Sensitivity λ_p (nm)	V_F (V)	Rever light current ($E_e=100\text{lux}$) / $IL^{(1)}$ (μA)	Rever light current ($E_e=1000\text{lux}$) $IL^{(2)}$ (μA)
CLS15-22C/L213R/TR8	3.2x2.7x1.1	620	0.5~1.3	0.091	0.83

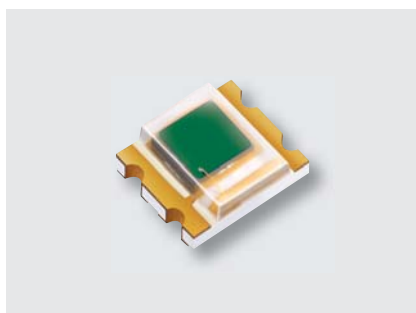


UNIT : mm

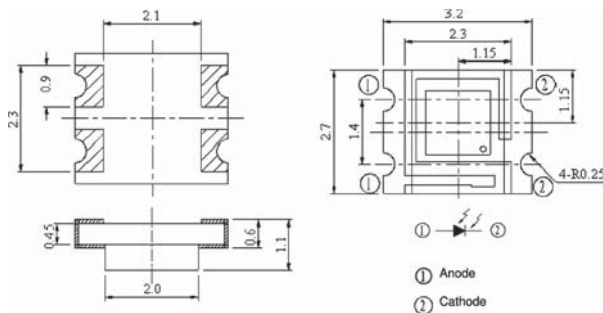

Product	Size (LXWXHmm)	Sensitivity λ_p (nm)	V_F (V)	Rever light current ($E_e=100\text{lux}$) / $IL^{(1)}$ (μA)	Rever light current ($E_e=1000\text{lux}$) $IL^{(2)}$ (μA)
CLS15-22C/L213G/TR8	3.2x2.7x1.1	550	0.5~1.3	0.082	0.72

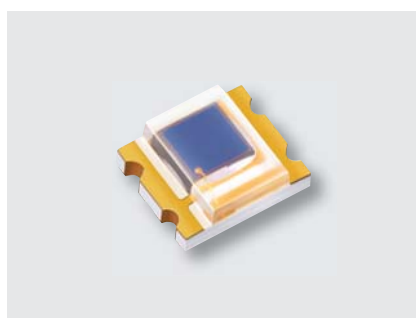

UNIT : mm

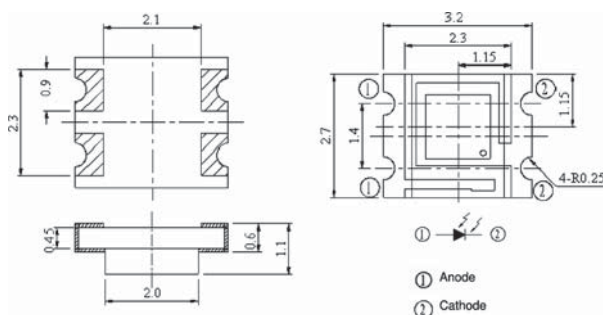


Product	Size (LXWXHmm)	Sensitivity λ_p (nm)	V_F (V)	Rever light current ($E_e=100\text{lux}$) / $IL^{(1)}$ (μA)	Rever light current ($E_e=1000\text{lux}$) $IL^{(2)}$ (μA)
CLS15-22C/L213B/TR8	3.2x2.7x1.1	470	0.5~1.3	0.046	0.39


Optical Sensors | Reflective Sensor




UNIT : mm

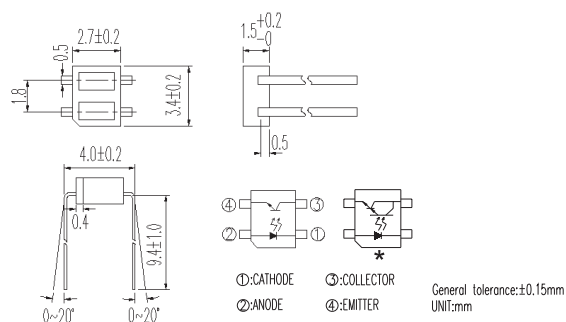

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307/F43	3.4x2.7x1.5	1.2	1.6	0.4	0.1	100
ITR8307/L24/F43	3.4x2.7x1.5	1.2	1.4	--	0.5	1000

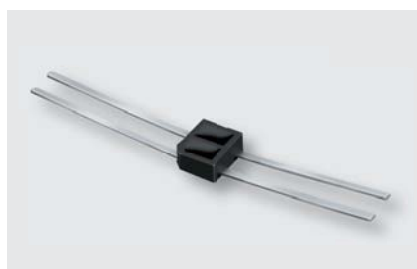


UNIT : mm

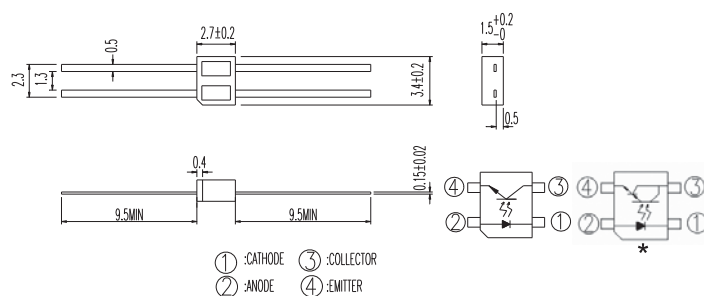




Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307	3.4x2.7x1.5	1.2	1.6	0.4	0.1	100
ITR8307/L24	3.4x2.7x1.5	1.2	1.4	--	0.5	1000



UNIT : mm

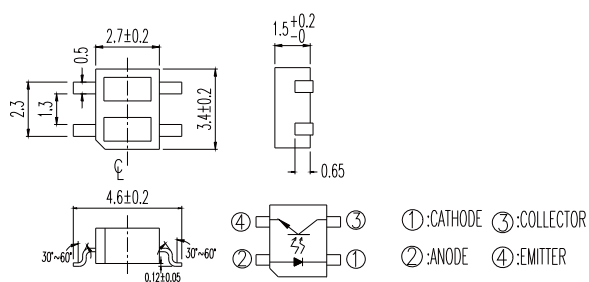

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR8307/L24/TR8	3.4x2.7x1.5	1.2	1.4	--	0.5	1000
ITR8307/TR8	3.4x2.7x1.5	1.2	1.6	0.4	0.1	100

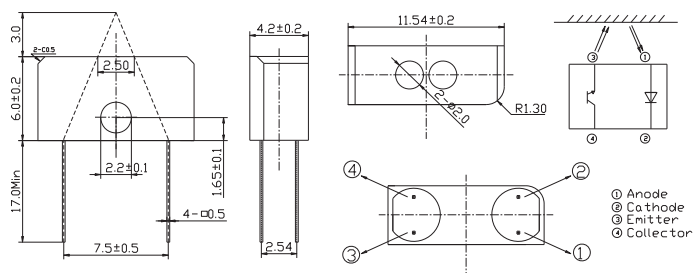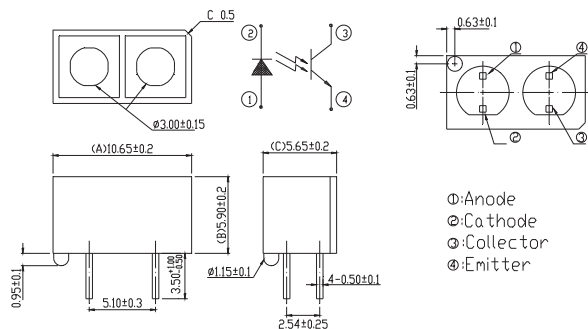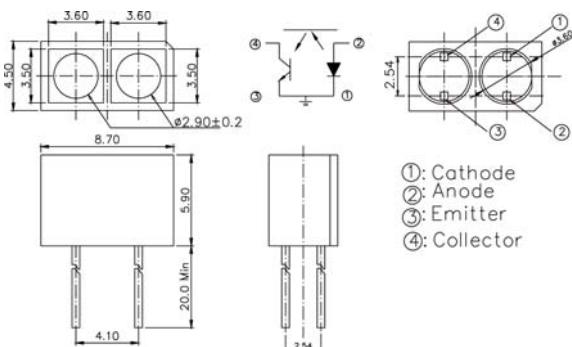
UNIT : mmUNIT : mm

Product	Size (LXWXHmm)	V _F _Typ (V)	V _F _Max (V)	V _{CE(SAT)} _Max (V)	I _{C(ON)} _Min (mA)	I _{CEO} _Max. (nA)
ITR9909	8.7x4.5x5.9	1.2	1.5	0.4	0.2	100

Optical Sensors ■ Reflective Sensor




UNIT : mm

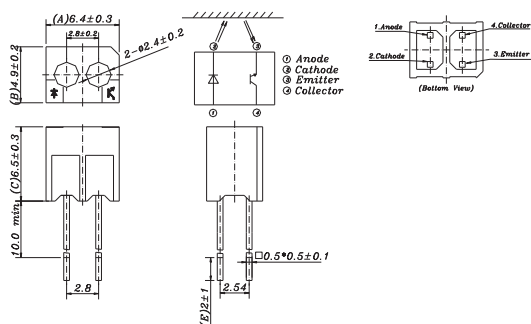

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20001/T	6.4x4.9x6.5	1.2	1.5	0.4	0.2	100




UNIT : mm

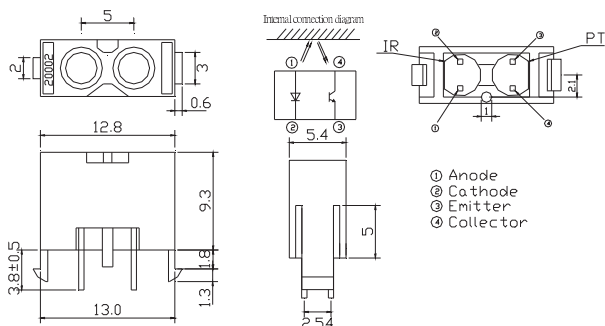

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20002	12.8x5.5x9.3	1.2	1.5	0.4	0.2	100



UNIT : mm

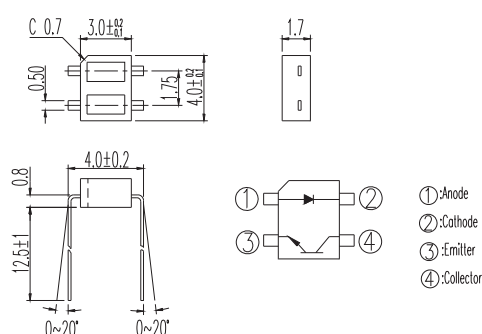


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20004	4.0x3.0x1.7	1.2	1.6	—	0.02	100

Optical Sensors | Reflective Sensor




UNIT : mm



Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20501	7.35x6.6x5.3	1.2	1.5	0.4	0.02	100




UNIT : mm

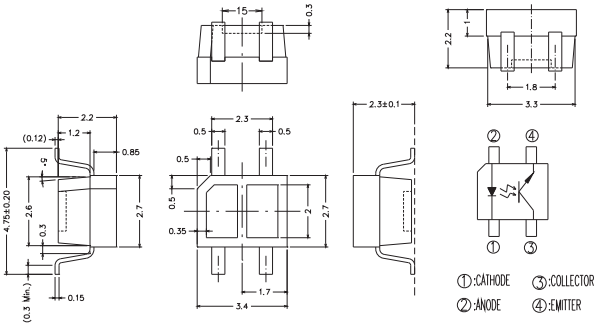

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20510/TR8	3.4x2.7x2.2	1.2	1.6	0.4	0.1	100



UNIT : mm

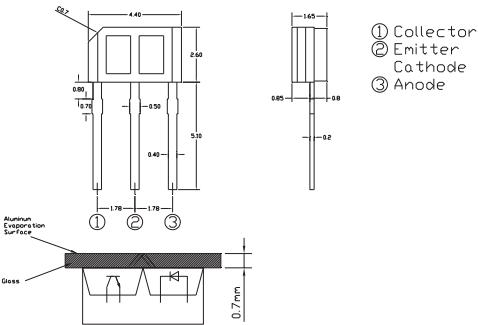


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)
ITR20904	4.4x2.6x1.65	--	1.4	--	0.05	200

Optical Sensors | Transmissive Sensor




UNIT : mm

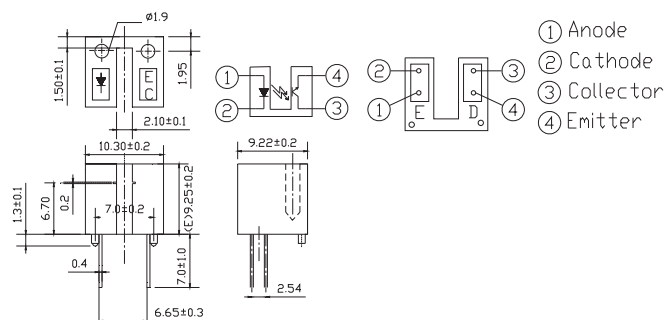

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8010	10.3x9.22x9.25	1.2	1.5	0.4	0.9	100	2.1




UNIT : mm

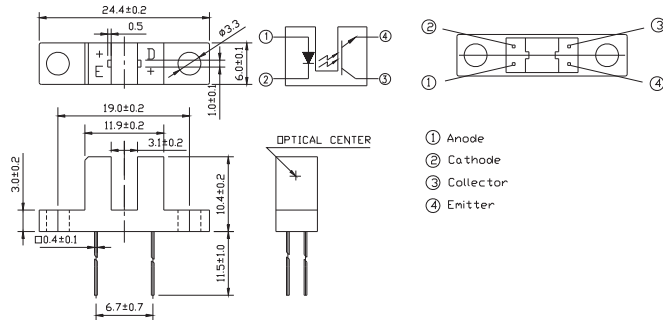

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8102	24.4x6.0x10.4	1.2	1.5	0.4	0.9	100	3




UNIT : mm

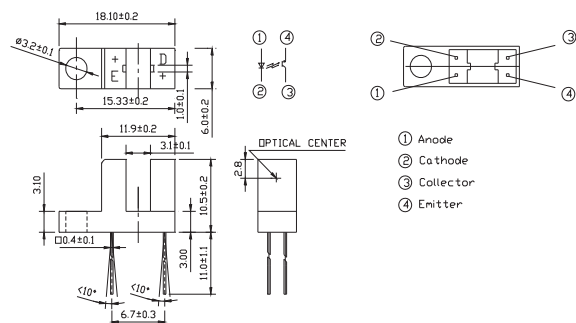


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8104	18.1x6.0x10.5	1.2	1.5	0.4	0.5	100	3


Optical Sensors | Transmissive Sensor

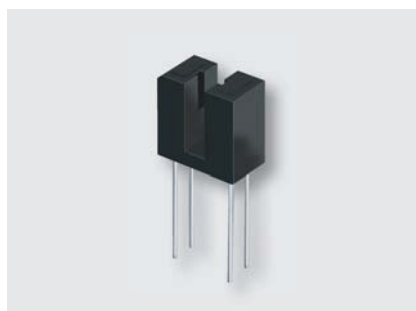


UNIT : mm

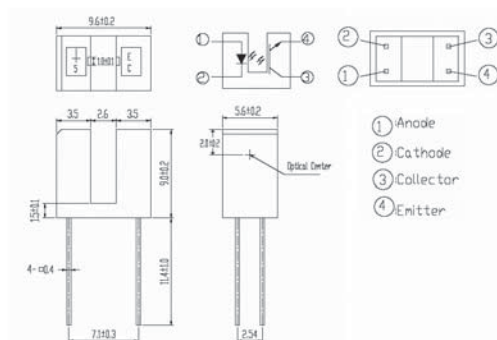

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8105	9.6x5.6x9.0	1.2	1.6	0.4	1	100	2.6

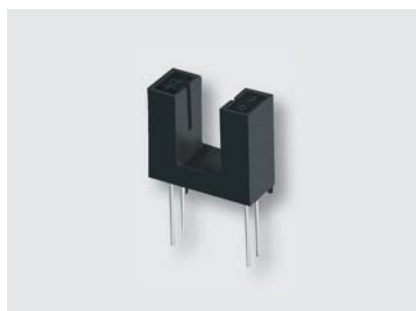


UNIT : mm

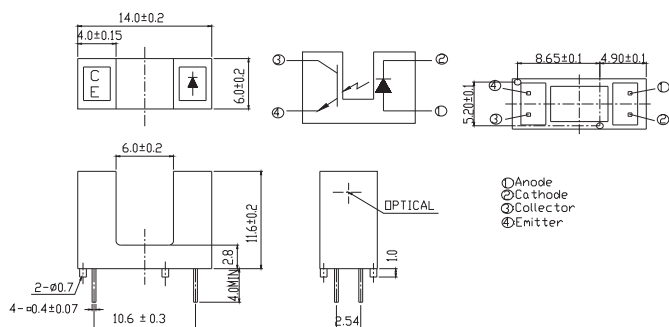

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR8402-F-A	14.0x6.0x11.6	1.2	1.5	0.4	0.5	100	6



UNIT : mm

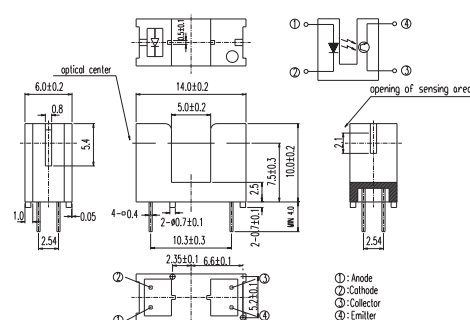


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9606-F	14.0x6.0x10.0	1.2	1.5	0.4	0.5	100	5

Optical Sensors | Transmissive Sensor



UNIT : mm

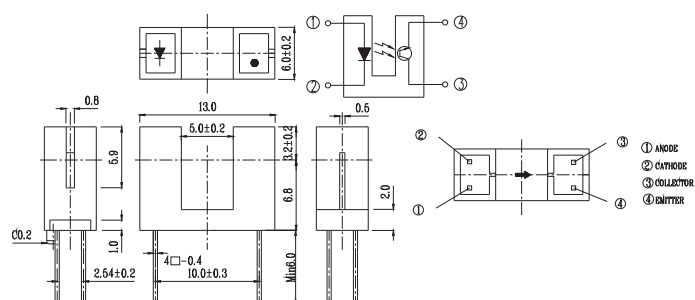

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9608-F	13.0x6.0x10.0	1.2	1.5	0.4	0.5	100	5



UNIT : mm


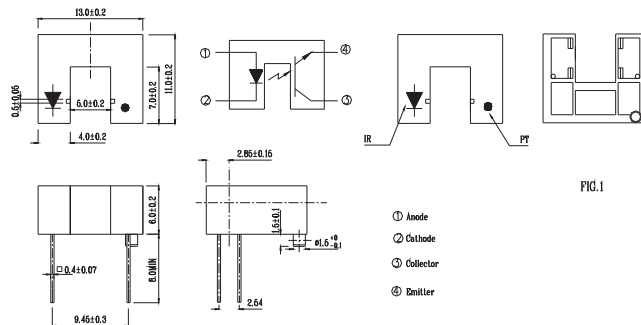


FIG.1

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9702-F	13.0x11.0x6.0	1.2	1.5	0.4	0.5	100	4



UNIT : mm

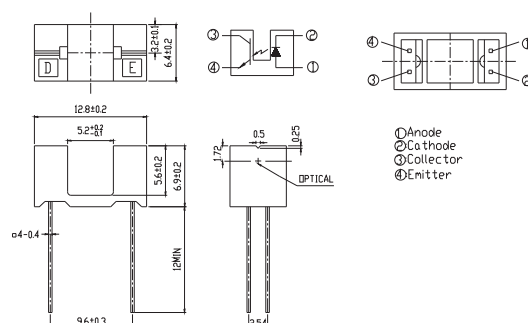


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9707	12.8x6.4x6.9	1.2	1.5	0.4	0.5	100	5.2


Optical Sensors | Transmissive Sensor




UNIT : mm

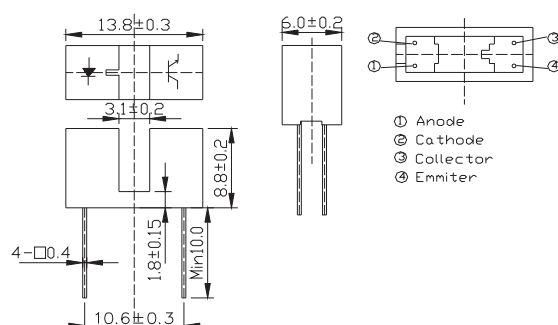

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9803	13.8x6.0x8.8	1.2	1.6	0.4	0.5	100	3.1

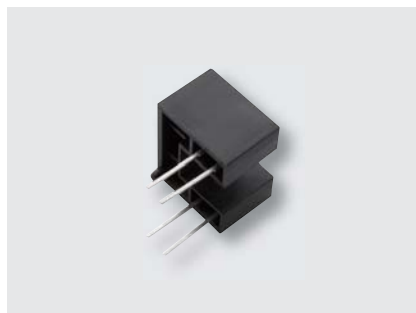


UNIT : mm

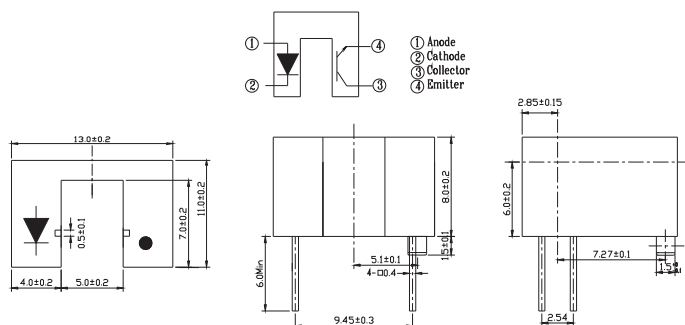

Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9809-F/T	11.54x4.2x6.0	1.2	1.5	0.4	1	100	5




UNIT : mm

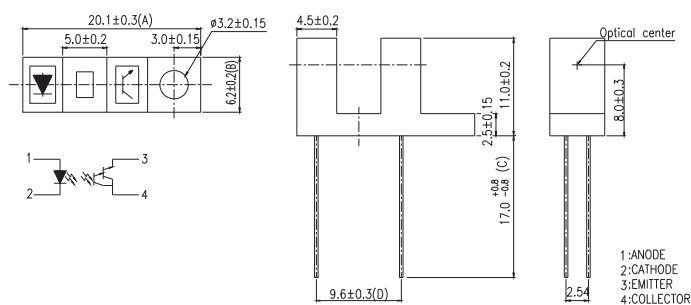


Product	Size (LXWXHmm)	V _{F_Typ} (V)	V _{F_Max} (V)	V _{CE(SAT)_Max} (V)	I _{C(ON)_Min} (mA)	I _{CEO_Max.} (nA)	Gap Distance (mm)
ITR9813	20.1x6.2x11.0	1.2	1.5	0.4	0.5	100	5

Optical Sensors | Transmissive Sensor

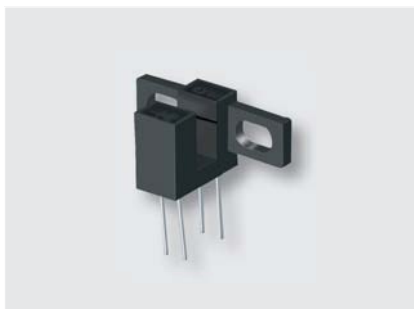


UNIT : mm

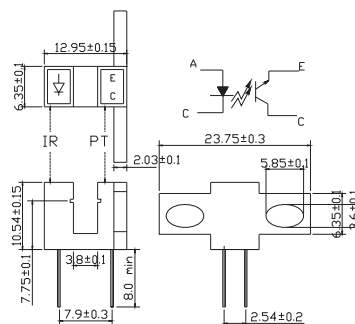


Product	Size (LXWXHmm)	V _F _Typ (V)	V _F _Max (V)	V _{CE(SAT)} _Max (V)	I _{C(ON)} _Min (mA)	I _{CEO} _Max. (nA)	Gap Distance (mm)
ITR20005-F	23.7x6.3x10.5	1.2	1.5	0.4	0.6	100	3.8




UNIT : mm

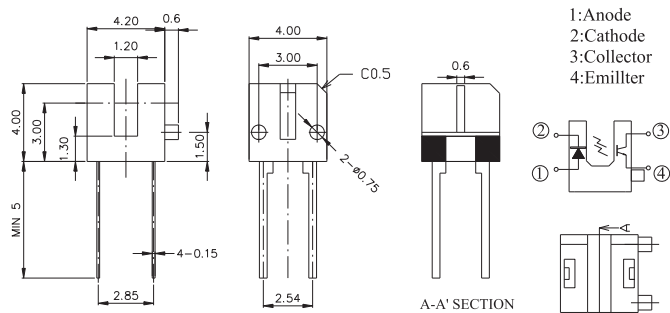

Product	Size (LXWXHmm)	V _F _Typ (V)	V _F _Max (V)	V _{CE(SAT)} _Max (V)	I _{C(ON)} _Min (mA)	I _{CEO} _Max. (nA)	Gap Distance (mm)
ITR20402	4.2x4.0x4.0	1.2	1.6	0.4	0.3	100	1.2

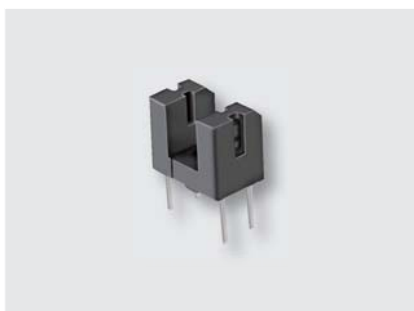

UNIT : mm

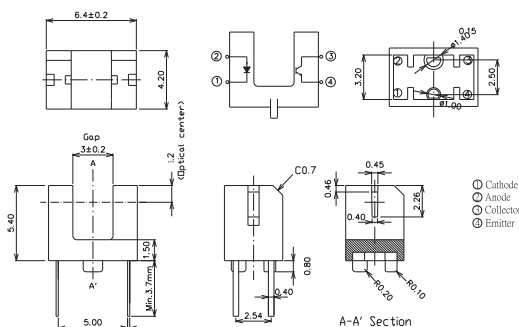


Product	Size (LXWXHmm)	V _F _Typ (V)	V _F _Max (V)	V _{CE(SAT)} _Max (V)	I _{C(ON)} _Min (mA)	I _{CEO} _Max. (nA)	Gap Distance (mm)
ITR20403	6.4x4.2x5.4	1.2	1.6	0.4	0.2	100	3

Photo Coupler | Darlington Transistor | 4Pin DIP-DC




UNIT : mm

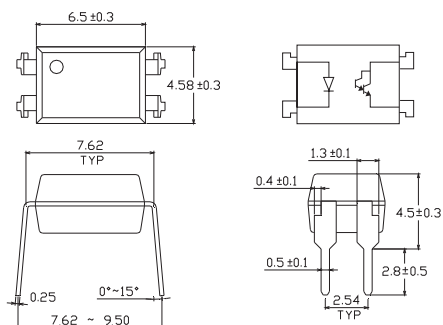


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL815	6.5x4.58x3.5	1.2	60.0 / 53.0	35	600~7500	5000	1

Photo Coupler | Darlington Transistor | 6Pin DIP-DC

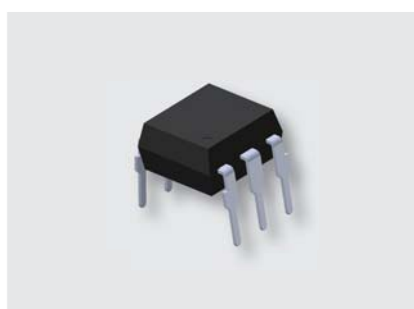


UNIT : mm

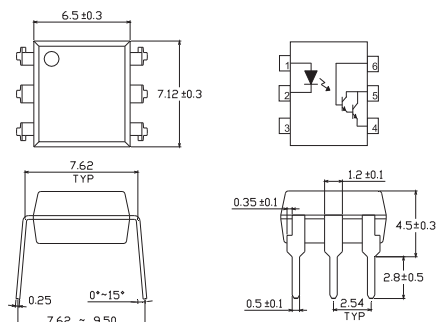


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
4N29	7.12x6.5x3.5	1.2	5.0 / 40.0	55	100 min.	5000	1
4N30	7.12x6.5x3.5	1.2	5.0 / 40.0	55	100 min.	5000	1
4N31	7.12x6.5x3.5	1.2	5.0 / 40.0	55	50 min.	5000	1.2
4N32	7.12x6.5x3.5	1.2	5.0 / 100.0	55	500 min.	5000	1
4N33	7.12x6.5x3.5	1.2	5.0 / 100.0	55	500 min.	5000	1
H11B1	7.12x6.5x3.5	1.2	25 / 18	55	500 min.	5000	1
H11B2	7.12x6.5x3.5	1.2	25 / 18	55	200 min.	5000	1
H11B3	7.12x6.5x3.5	1.2	25 / 18	55	100 min.	5000	1
H11B255	7.12x6.5x3.5	1.2	25 / 18	55	100 min.	5000	1
TIL113	7.12x6.5x3.5	1.2	5 / 100	55	300 min.	5000	1.2

Photo Coupler | Darlington Transistor | 8Pin DIP-DC

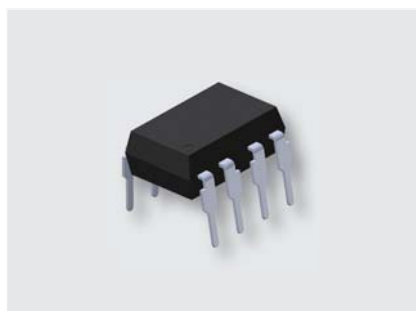


UNIT : mm

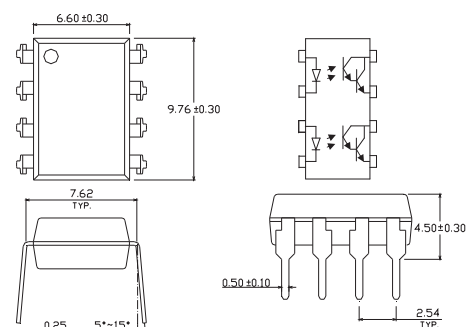


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO_Min} (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)_Max} (V)
EL825	9.76x6.6x3.5	1.2	60 / 53	40	600~7500	5000	1

Photo Coupler | High Speed | 8Pin SOP

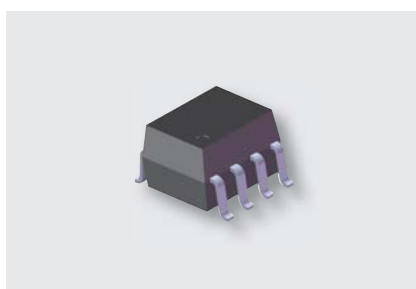


UNIT : mm

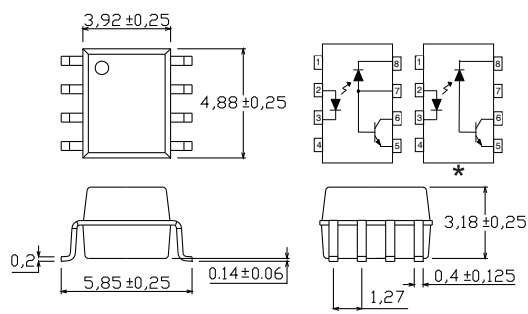


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
*EL0452	4.88x3.92x3.18	1000 / 1000	30 max	19-50	3750	1000	16 max
EL0500	4.88x3.92x3.18	2000 / 2000	30 max	7-50	3750	1000	16 max
EL0501	4.88x3.92x3.18	1000 / 1000	30 max	19-50	3750	1000	16 max

Star mark * : Please refer to the schematic of Pin configuration with "★" mark

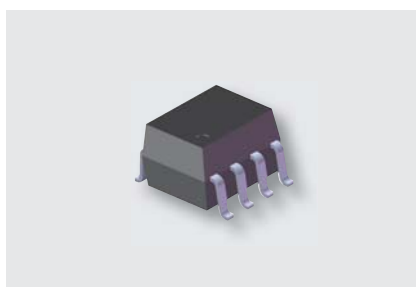


UNIT : mm

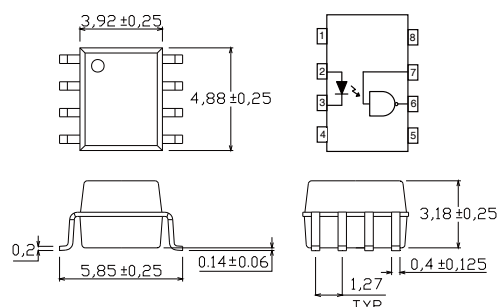


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
EL0600	4.88x3.92x3.18	75 / 75	7 max	--	3750	--	50 max
EL0601	4.88x3.92x3.18	75 / 75	7 max	--	3750	5000	50 max

Photo Coupler ■ High Speed ■ 8Pin DIP

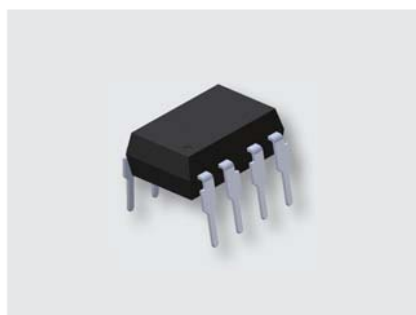


UNIT : mm

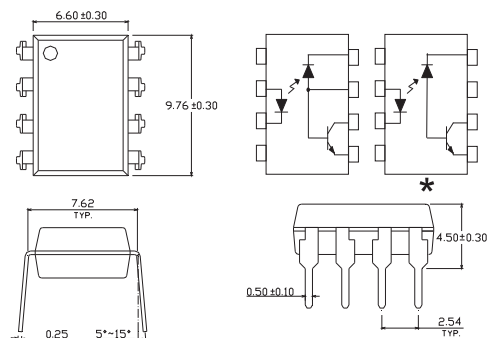


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
6N135	9.76x6.60x3.50	2000 / 2000	30 max.	7~50	5000	1000	8 max.
6N136	9.76x6.60x3.50	1000 / 1000	30 max.	19~50	5000	1000	8 max.
*EL4502	9.76x6.60x3.50	1000 / 1000	30 max.	15 min	5000	1000	8 max.


Star mark * : Please refer to the schematic of Pin configuration with "★" mark

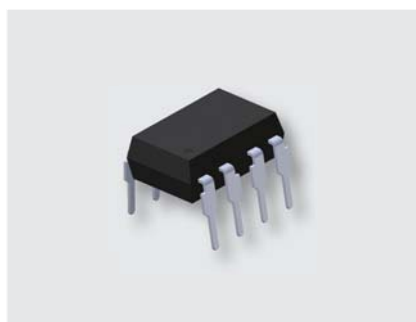


UNIT : mm

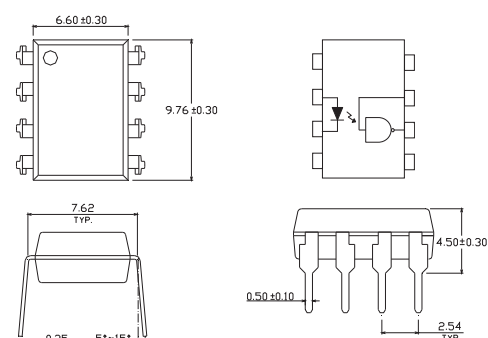

Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
6N137	9.76x6.60x3.50	75 / 75	7 max.	--	5000	1000	50 max.

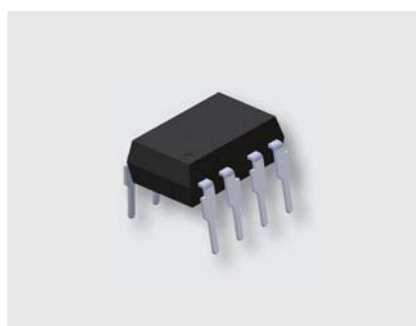

UNIT : mm

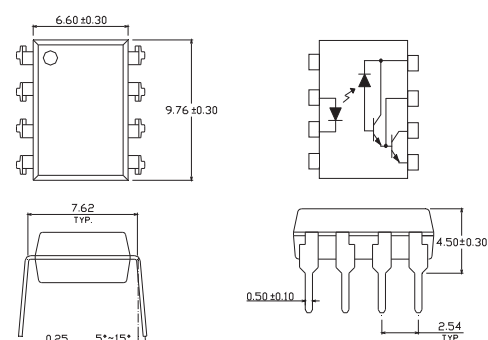


Product	Size (LXWXHmm)	tPHL / tPLH (ns)	Supply Voltage (V)	CTR (%)	Viso (V _{rms})	CMR (V/us)	I _O (mA)
6N138	9.76x6.60x3.50	15000 / 50000	7 max.	300 min.	5000	1000	60 max.
6N139	9.76x6.60x3.50	30000 / 90000	18 max.	500 min.	5000	1000	60 max.

Photo Coupler ■ Schmitt Trigger ■ 6Pin DIP



UNIT : mm

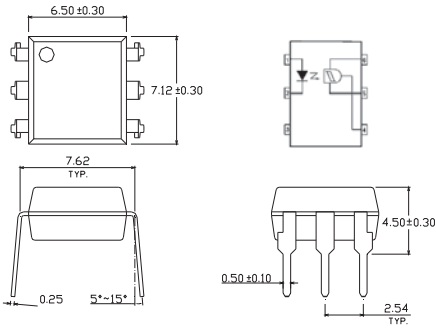


Product	Size (LXWXHmm)	Rise / Fall Time (μs)	Supply Voltage (V)	Viso (V _{rms})	I _{FT} (mA)	I _{CC_Max} (mA)	I _O (mA)
H11L1	7.12x6.5x3.5	0.1 / 0.1	3~15	5000	1.6	5	0.1

Photo Coupler ■ Transistor ■ 4Pin DIP-AC



UNIT : mm

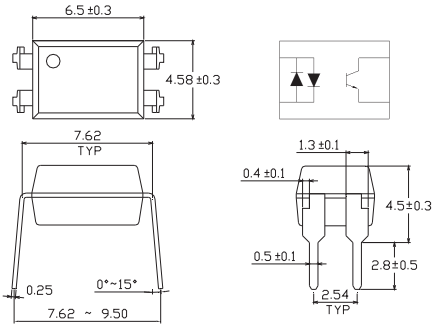


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL814	6.5x4.58x3.5	1.2	7.0 / 11.0	80	20~300	5000	0.4

Photo Coupler | Transistor | 4Pin DIP-DC



UNIT : mm

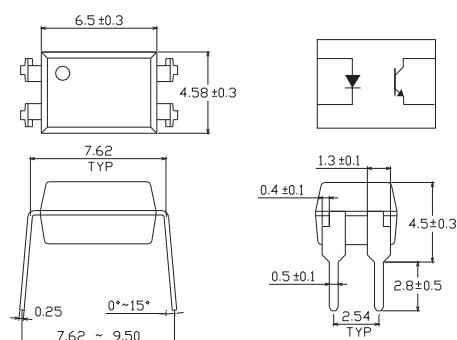


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL816	6.5x4.58x3.5	1.2	4.0 / 3.0	80	50~600	5000	0.4
EL817	6.5x4.58x3.5	1.2	3.0 / 4.0	35	50~600	5000	0.4
EL817-G	6.5x4.58x3.5	1.2	3.0 / 4.0	80	50~600	5000	0.4

Photo Coupler | Transistor | 4Pin High Isolation




UNIT : mm

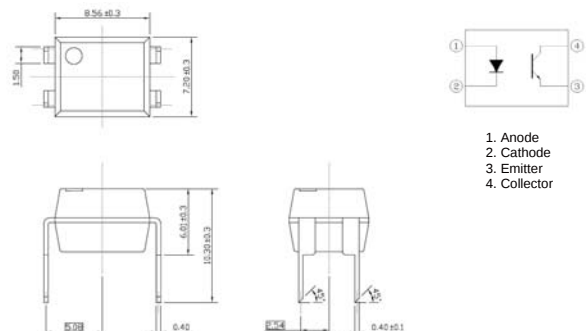

Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
CNY64	8.56x7.20x6.01	1.6	3.0 / 5.0	80	50~300	8200	0.3



UNIT : mm

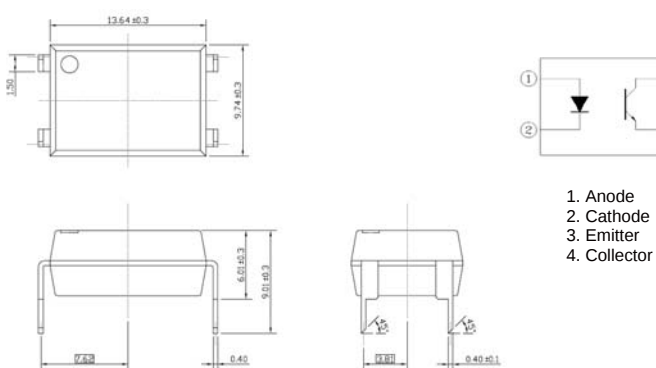


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
CNY65	13.64x9.74x6.01	1.6	3.0 / 5.0	80	50~300	8200	0.3

Photo Coupler | Transistor | 4Pin SOP-AC




UNIT : mm

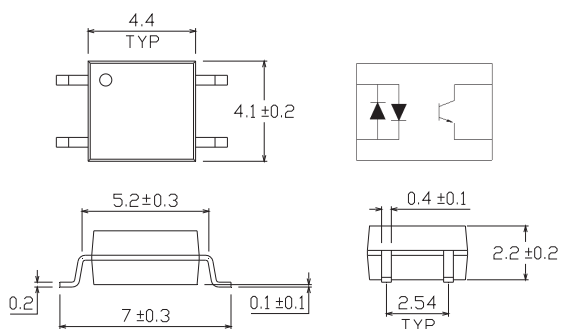


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL354	4.4x4.1x2.2	1.2	6.0/8.0	80	20~300	3750	0.4

Photo Coupler | Transistor | 4Pin SOP-DC

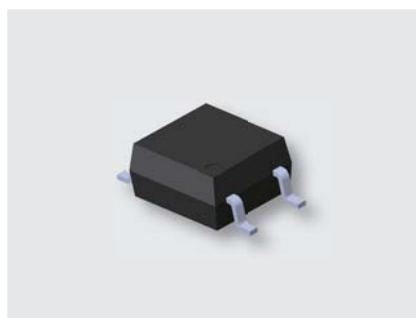


UNIT : mm

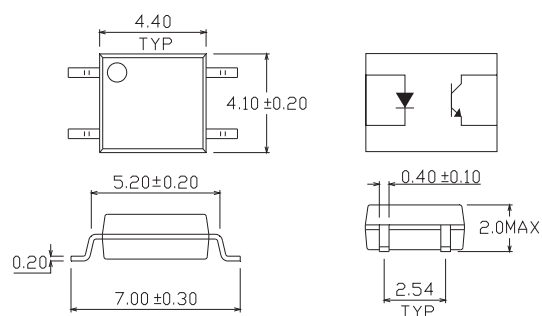


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL357N-G	4.4x4.1x2.0	1.2	3.0/4.0	80	50~600	3750	0.4

Photo Coupler | Transistor | 4Pin SSOP-DC

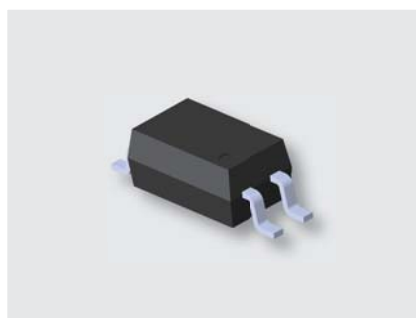


UNIT : mm

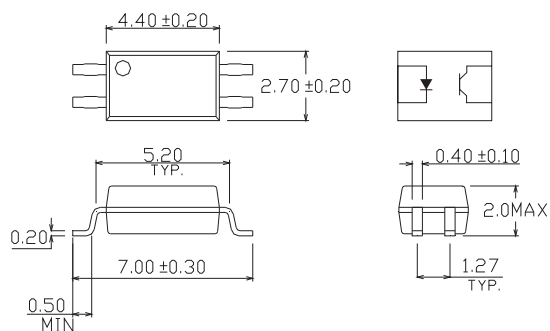


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL3H7-G	4.4x2.7x2.0	1.2	5.0/3.0	80	50~600	3750	0.4


Photo Coupler | Transistor | 4Pin / 5Pin Long Creepage

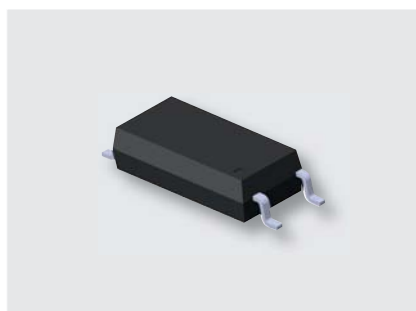


UNIT : mm

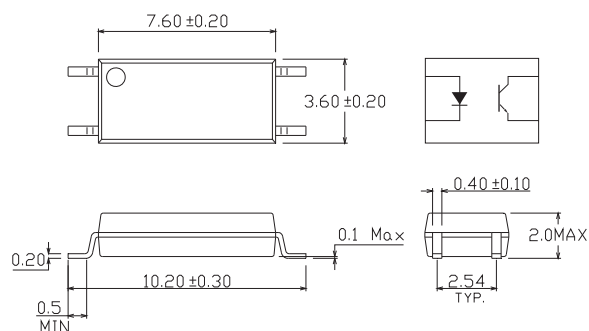

Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL1010-G	7.6x3.6x2.0	1.45	2 / 3	80	50~600	5000	0.3
EL1012-G	7.6x3.6x2.0	1.45	2 / 3	80	63~125	5000	0.3
EL1013-G	7.6x3.6x2.0	1.45	2 / 3	80	100~200	5000	0.3
EL1014-G	7.6x3.6x2.0	1.45	2 / 3	80	160~320	5000	0.3
EL1017-G	7.6x3.6x2.0	1.45	2 / 3	80	80~160	5000	0.3
EL1018-G	7.6x3.6x2.0	1.45	2 / 3	80	130~260	5000	0.3
EL1019-G	7.6x3.6x2.0	1.45	2 / 3	80	200~400	5000	0.3

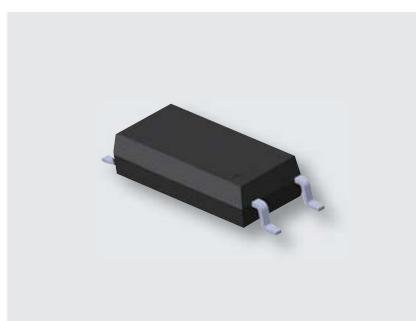


UNIT : mm

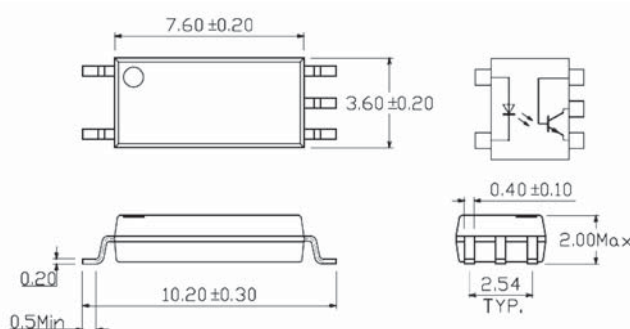


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL1110-G	7.6x3.6x2.0	1.45	2 / 3	80	50~600	5000	0.3
EL1112-G	7.6x3.6x2.0	1.45	2 / 3	80	63~125	5000	0.3
EL1113-G	7.6x3.6x2.0	1.45	2 / 3	80	100~200	5000	0.3
EL1114-G	7.6x3.6x2.0	1.45	2 / 3	80	160~320	5000	0.3
EL1116-G	7.6x3.6x2.0	1.45	2 / 3	80	100~300	5000	0.3
EL1117-G	7.6x3.6x2.0	1.45	2 / 3	80	80~160	5000	0.3
EL1118-G	7.6x3.6x2.0	1.45	2 / 3	80	130~260	5000	0.3
EL1119-G	7.6x3.6x2.0	1.45	2 / 3	80	200~400	5000	0.3

Photo Coupler | Transistor | 6Pin DIP-DC

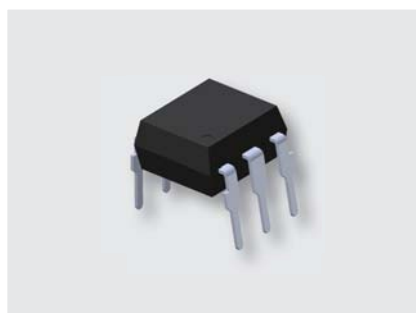


UNIT : mm

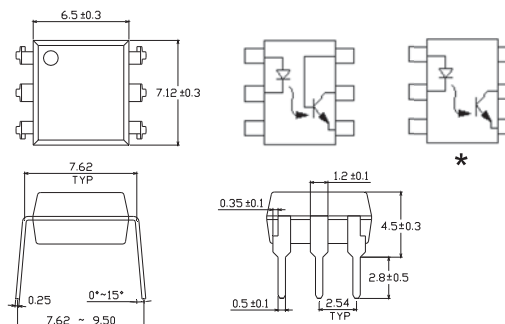


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
4N25	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
4N26	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
4N27	7.12x6.5x3.5	1.2	3.0/3.0	80	10 min.	5000	0.4
4N28	7.12x6.5x3.5	1.2	3.0/3.0	80	10 min.	5000	0.4
4N35	7.12x6.5x3.5	1.2	10.0/9.0	80	100 min.	5000	0.4
4N36	7.12x6.5x3.5	1.2	10.0/9.0	80	100 min.	5000	0.4
4N37	7.12x6.5x3.5	1.2	10.0/9.0	80	100 min.	5000	0.4
4N38	7.12x6.5x3.5	1.2	10.0/9.0	80	20 min.	5000	0.4
CNY17-1	7.12x6.5x3.5	--	6.0/8.0	80	40~80	5000	0.4
CNY17-2	7.12x6.5x3.5	--	6.0/8.0	80	63~125	5000	0.4
CNY17-3	7.12x6.5x3.5	--	6.0/8.0	80	100~200	5000	0.4
CNY17-4	7.12x6.5x3.5	--	6.0/8.0	80	160~320	5000	0.4
*CNY17F-1	7.12x6.5x3.5	--	6.0/8.0	80	40~80	5000	0.4
*CNY17F-2	7.12x6.5x3.5	--	6.0/8.0	80	63~125	5000	0.4
*CNY17F-3	7.12x6.5x3.5	--	6.0/8.0	80	100~200	5000	0.4
*CNY17F-4	7.12x6.5x3.5	--	6.0/8.0	80	160~320	5000	0.4
H11A1	7.12x6.5x3.5	1.2	3.0/3.0	80	50 min.	5000	0.4
H11A2	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
H11A3	7.12x6.5x3.5	1.2	3.0/3.0	80	20 min.	5000	0.4
H11A4	7.12x6.5x3.5	1.2	3.0/3.0	80	10 min.	5000	0.4
H11A5	7.12x6.5x3.5	1.2	3.0/3.0	80	30 min.	5000	0.4
MCT2E	7.12x6.5x3.5	1.23	3.0/3.0	80	20 min.	5000	0.4
TIL111	7.12x6.5x3.5	1.22	6.0/8.0	80	--	5000	0.4
TIL117	7.12x6.5x3.5	1.2	6.0/8.0	80	50 min.	5000	0.4

Star mark * : Please refer to the schematic of Pin configuration with "★" mark

Photo Coupler | Transistor | 6Pin DIP-AC

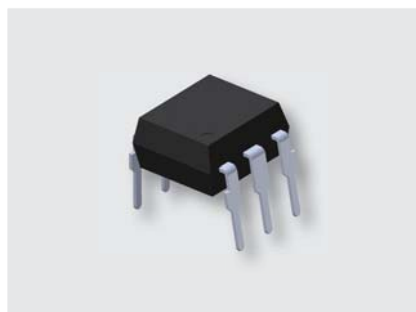


UNIT : mm

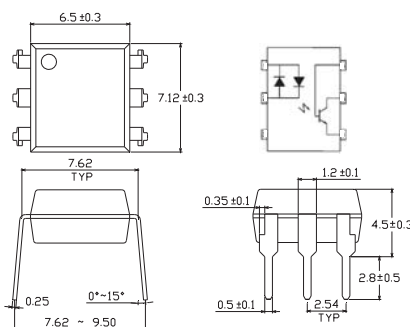


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
H11AA1	7.12x6.5x3.5	1.2	10.0 / 10.0	80	20 min.	5000	0.4
H11AA2	7.12x6.5x3.5	1.2	10.0 / 10.0	80	10 min.	5000	0.4
H11AA3	7.12x6.5x3.5	1.2	10.0 / 10.0	80	50 min.	5000	0.4
H11AA4	7.12x6.5x3.5	1.2	10.0 / 10.0	80	100 min.	5000	0.4

Photo Coupler | Transistor | 8Pin DIP-DC

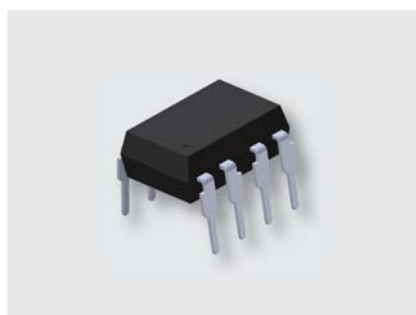


UNIT : mm

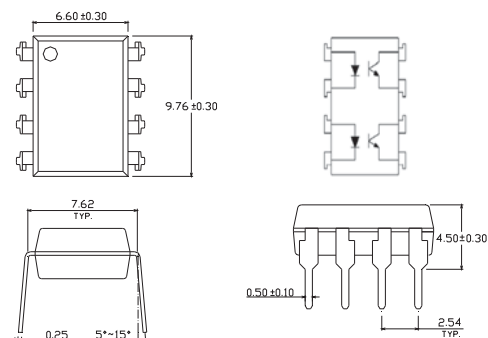


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL827	9.76x6.5x3.5	1.2	3.0 / 4.0	80	50~600	5000	0.4


Photo Coupler | Transistor | 8Pin SOP-DC

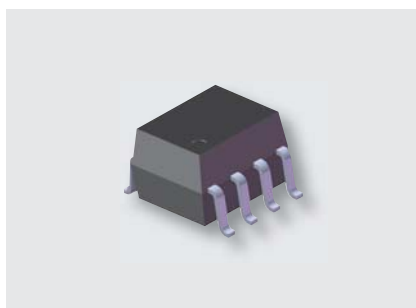


UNIT : mm

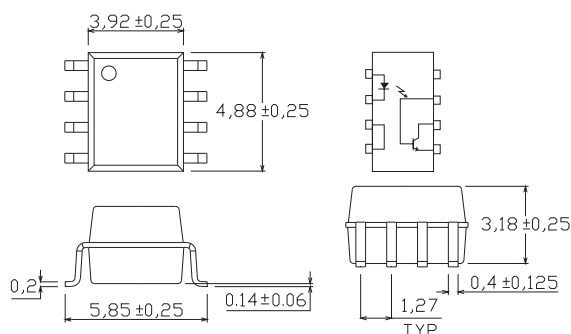

Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
EL205	4.88x3.92x3.18	1.2	1.6 / 2.2	80	40~80	3750	0.4
EL206	4.88x3.92x3.18	1.2	1.6 / 2.2	80	63~125	3750	0.4
EL207	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100~200	3750	0.4
EL208	4.88x3.92x3.18	1.2	1.6 / 2.2	80	160~320	3750	0.4
EL211	4.88x3.92x3.18	1.2	1.6 / 2.2	80	20 min.	3750	0.4
EL212	4.88x3.92x3.18	1.2	1.6 / 2.2	80	50 min.	3750	0.4
EL213	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4
EL215	4.88x3.92x3.18	1.2	1.6 / 2.2	80	10 min.	3750	0.4
EL216	4.88x3.92x3.18	1.2	1.6 / 2.2	80	50 min.	3750	0.4
EL217	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4

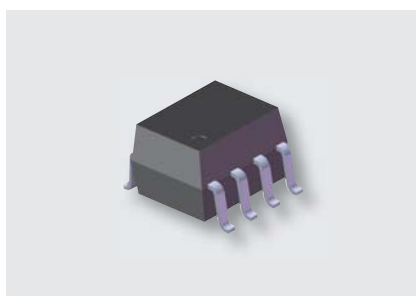


UNIT : mm

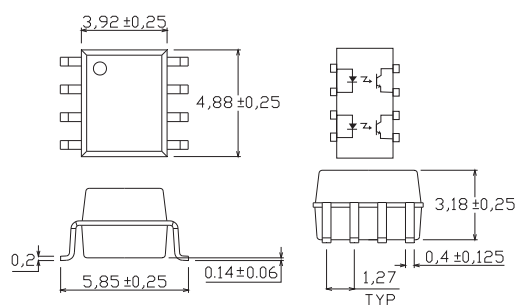


Product	Size (LXWXHmm)	V _{F_Typ} (V)	Rise / Fall Time (μs)	BV _{CEO} Min (V)	CTR (%)	Viso (V _{rms})	V _{CE(SAT)} Max (V)
ELD205	4.88x3.92x3.18	1.2	1.6 / 2.2	80	40~80	3750	0.4
ELD206	4.88x3.92x3.18	1.2	1.6 / 2.2	80	63~125	3750	0.4
ELD207	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100~200	3750	0.4
ELD211	4.88x3.92x3.18	1.2	1.6 / 2.2	80	20 min.	3750	0.4
ELD213	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4
ELD217	4.88x3.92x3.18	1.2	1.6 / 2.2	80	100 min.	3750	0.4

Photo Coupler | Triac | 4Pin SOP

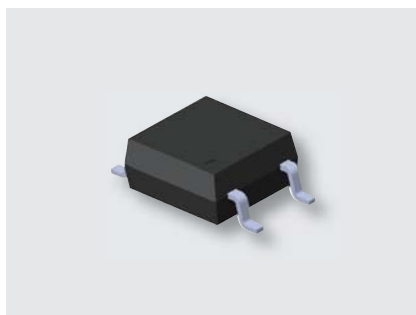


UNIT : mm

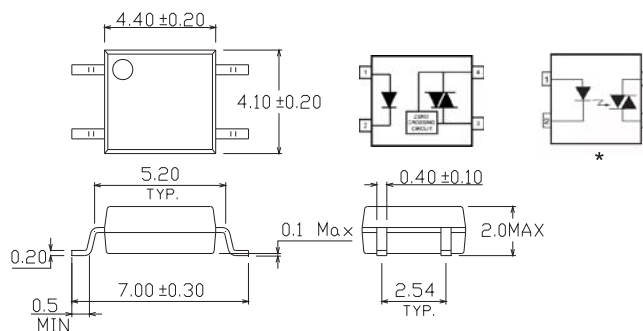


Product	Size (LXWXHmm)	V_{TM} (V)	V_{INH} (V)	V_{DRM} (V)	V_{F_Typ} (V)	V_{ISO} (V_{rms})	I_{FT} (mA)
ELM3042	4.40x4.10x2.0	3	20	400	1.5	3750	10
ELM3043	4.40x4.10x2.0	3	20	400	1.5	3750	5
ELM3044	4.40x4.10x2.0	3	20	400	1.5	3750	3
ELM3062	4.40x4.10x2.0	3	20	600	1.5	3750	10
ELM3063	4.40x4.10x2.0	3	20	600	1.5	3750	5
ELM3064	4.40x4.10x2.0	3	20	600	1.5	3750	3
ELM3082	4.40x4.10x2.0	3	20	800	1.5	3750	10
ELM3083	4.40x4.10x2.0	3	20	800	1.5	3750	5
ELM3084	4.40x4.10x2.0	3	20	800	1.5	3750	3
*ELM3022	4.40x4.10x2.0	2.5	--	400	1.2	3750	10
*ELM3023	4.40x4.10x2.0	2.5	--	400	1.2	3750	5
*ELM3024	4.40x4.10x2.0	2.5	--	400	1.2	3750	3
*ELM3052	4.40x4.10x2.0	2.5	--	600	1.2	3750	10
*ELM3053	4.40x4.10x2.0	2.5	--	600	1.2	3750	5
*ELM3054	4.40x4.10x2.0	2.5	--	600	1.2	3750	3

Star mark * : Please refer to the schematic of Pin configuration with "★" mark

Photo Coupler | Triac | 6Pin DIP

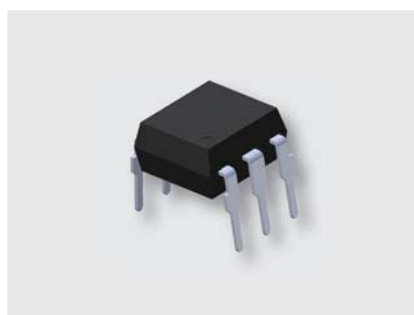

UNIT : mm

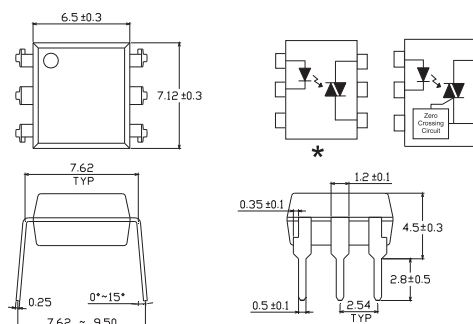

Product	Size (LXWXHmm)	V_{TM} (V)	V_{INH} (V)	V_{DRM} (V)	V_{F_Typ} (V)	Viso (V_{rms})	I_{FT} (mA)
EL3031	7.12x6.5x3.5	3	20	250	--	5000	15
EL3032	7.12x6.5x3.5	3	20	250	--	5000	10
EL3033	7.12x6.5x3.5	3	20	250	--	5000	5
EL3041	7.12x6.5x3.5	3	20	400	--	5000	15
EL3042	7.12x6.5x3.5	3	20	400	--	5000	10
EL3043	7.12x6.5x3.5	3	20	400	--	5000	5
EL3061	7.12x6.5x3.5	3	20	600	--	5000	15
EL3062	7.12x6.5x3.5	3	20	600	--	5000	10
EL3063	7.12x6.5x3.5	3	20	600	--	5000	5
EL3081	7.12x6.5x3.5	3	20	800	--	5000	15
EL3082	7.12x6.5x3.5	3	20	800	--	5000	10
EL3083	7.12x6.5x3.5	3	20	800	--	5000	5
*EL3010	7.12x6.5x3.5	2.5	--	250	1.18	5000	15
*EL3011	7.12x6.5x3.5	2.5	--	250	1.18	5000	10
*EL3012	7.12x6.5x3.5	2.5	--	250	1.18	5000	5
*EL3021	7.12x6.5x3.5	2.5	--	400	1.18	5000	15
*EL3022	7.12x6.5x3.5	2.5	--	400	1.18	5000	10
*EL3023	7.12x6.5x3.5	2.5	--	400	1.18	5000	5
*EL3051	7.12x6.5x3.5	2.5	--	600	1.18	5000	15
*EL3052	7.12x6.5x3.5	2.5	--	600	1.18	5000	10
*EL3053	7.12x6.5x3.5	2.5	--	600	1.18	5000	5

Star mark * : Please refer to the schematic of Pin configuration with "★" mark

ASIA

TAIWAN

TAICHUNG

EVERLIGHT ELECTRONICS CO., LTD.
No. 35, Lane Guoguang, 6th Neighborhood
Yutian Village, Yuanli Township,
Miaoli County 35874, Taiwan
TEL: 886-37-741000
FAX: 886-37-740776
EMAIL: marketing@everlight.com

TAINAN

EVERLIGHT ELECTRONICS CO., LTD.
16F.-1, No.389, Sec. 3, Zhonghua E. Rd.,
East Dist., Tainan City 701, Taiwan
TEL: +886-6-260-2357
EMAIL: robertchen@everlight.com

CHINA

HONG KONG

EVERLIGHT ELECTRONICS CO., LTD.
Units 1606-1608, 16/F., Prosperity Place,
6 Shing Yip Street, Kwun Tong, Kowloon,
Hong Kong
TEL: +852-23880602
FAX: +852-23881127, 23843092
EMAIL: hkcm@everlight.com

GUANGZHOU

EVERLIGHT ELECTRONICS (BVI) CO., LTD.
205 2F, Business Building Shatou,
East Yushan Rd., Panyu Town, Guangzhou,
PRC, China
Postcode: 511490
TEL: +86-(0)20-84663392
FAX: +86-(0)20-84663372
EMAIL: chcm@everlight.com

SUZHOU

EVERLIGHT ELECTRONICS (CHINA) CO., LTD.
Room 306-308, Block 1, Runjie Square, No. 9,
Road Dengwei, Suzhou (SND), Jiang Su, China
Postcode: 215011
TEL: +86-(0)512-68020883
EMAIL: chsha@everlight.com

TIANJIN

EVERLIGHT ELECTRONICS (BVI) CO., LTD.
Room. 2208, Vanke Center Building, No. 290,
Zhongshan Rd., Hebei District, Tianjin, China
Postcode: 300141
TEL: +86-22-26351122, 26351133
EMAIL: chsha@everlight.com

KOREA

EVERLIGHT OPTOELECTRONICS
KOREA CO., LTD.
5F, Yoksamdong 720-2, Kangnamku,
Seoul, Korea
TEL: +82-2-562-8088
FAX: +82-2-562-6588
EMAIL: danieljo@everlight.com

MALAYSIA

EVERLIGHT OPTOELECTRONICS
(M) SDN BHD
B-04-20 Krystal Point,
303 Jalan Sultan Azlan Shah,
11900 Penang, Malaysia
TEL: +60-4-646-4233
FAX: +60-4-646-5233
EMAIL: inquiry@everlight-pg.com.my

JAPAN

E&E JAPAN CO., LTD.
Kindaikagakysa 7F, 2-7-15, Ichigayatamachi,
Shinjuku-ku, Tokyo, 162-0843, Japan
TEL: +81-(0)3-3267-6761
FAX: +81-(0)3-5225-6771
EMAIL: eejp@eejp.co.jp
www.ee.jp

HEADQUARTERS

EVERLIGHT ELECTRONICS CO., LTD.
No. 25, Lane 76, Sec. 3, Chung Yang Rd. Tucheng Dist., New Taipei City, Taiwan 23671
TEL: +886-2-22672000 FAX: +886-2-2267-6244 2267-6189

www.everlight.com

AMERICA

TEXAS USA

EVERLIGHT AMERICAS INC.
3220 Commander Dr. Suite 100 Carrollton,
Texas, 75006, United States
TEL: +1-972-490-4008
FAX: +1-972-490-5009
EMAIL: salesmarketing@everlightamericas.com

CALIFORNIA USA

EVERLIGHT AMERICAS INC.
327 Piercy Road, San Jose, CA 95138, USA
TEL: +1-408-225-7800
FAX: +1-408-225-7800
EMAIL: salesmarketing@everlightamericas.com

CANADA

EVERLIGHT CANADA
P.O. Box 86056, 1011 Upper Middle Road,
Oakville,
Ontario, Canada L6H 5V6
TEL: +1-905-315-5050
FAX: +1-905-336-0040
EMAIL: everlightcanada@everlight.com

EUROPE

GERMANY, HQ

EVERLIGHT ELECTRONICS EUROPE GMBH
Siemensallee 84, Building 7302, 5F,
76187 Karlsruhe, Germany
TEL: +49-721-82447-3
FAX: +49-721-82447-40
EMAIL: Info@everlight-eu.de

GERMANY, MUNICH

EVERLIGHT ELECTRONICS EUROPE GMBH
Rote-Kreuz-Strasse 8, 85737 Ismaning, Germany
TEL: +49-89-9400336-0
FAX: +49-89-9400336-29
EMAIL: info@everlight-eu.de

NORDIC

EVERLIGHT ELECTRONICS EUROPE GMBH
Isafjordsgatan 22, 164 40 Kista, Stockholm,
Sweden
TEL: +46-8375618
EMAIL: nordic@everlight-eu.de

EVERLIGHT

HEADQUARTERS

EVERLIGHT ELECTRONICS CO., LTD.

No. 25, Lane 76, Sec. 3, Chung Yang Rd. Tucheng Dist., New Taipei City, Taiwan 23671
TEL: +886-2-22672000 FAX: +886-2-2267-6244 2267-6189

www.everlight.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.