

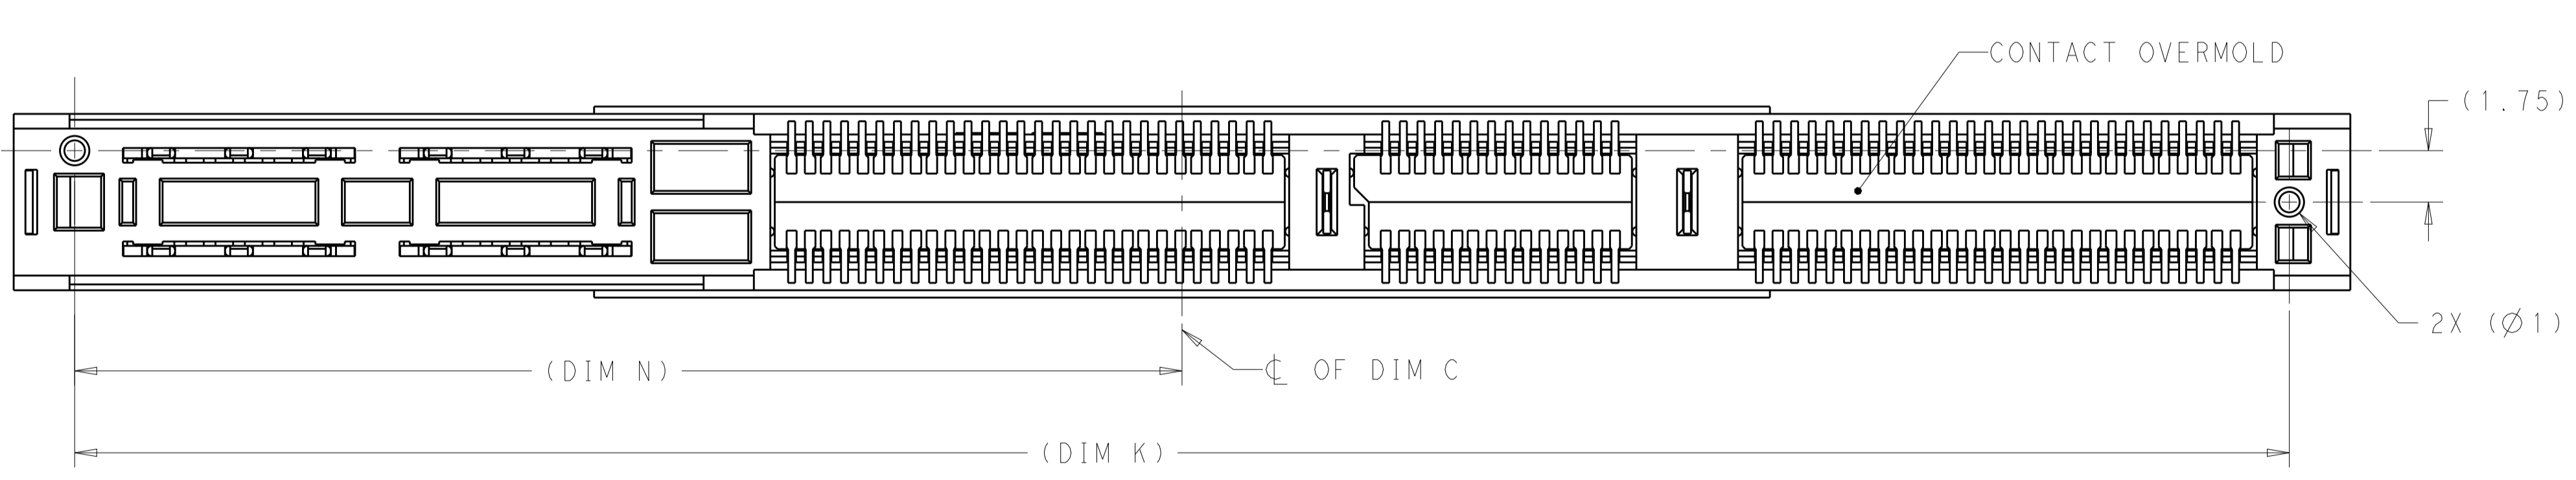
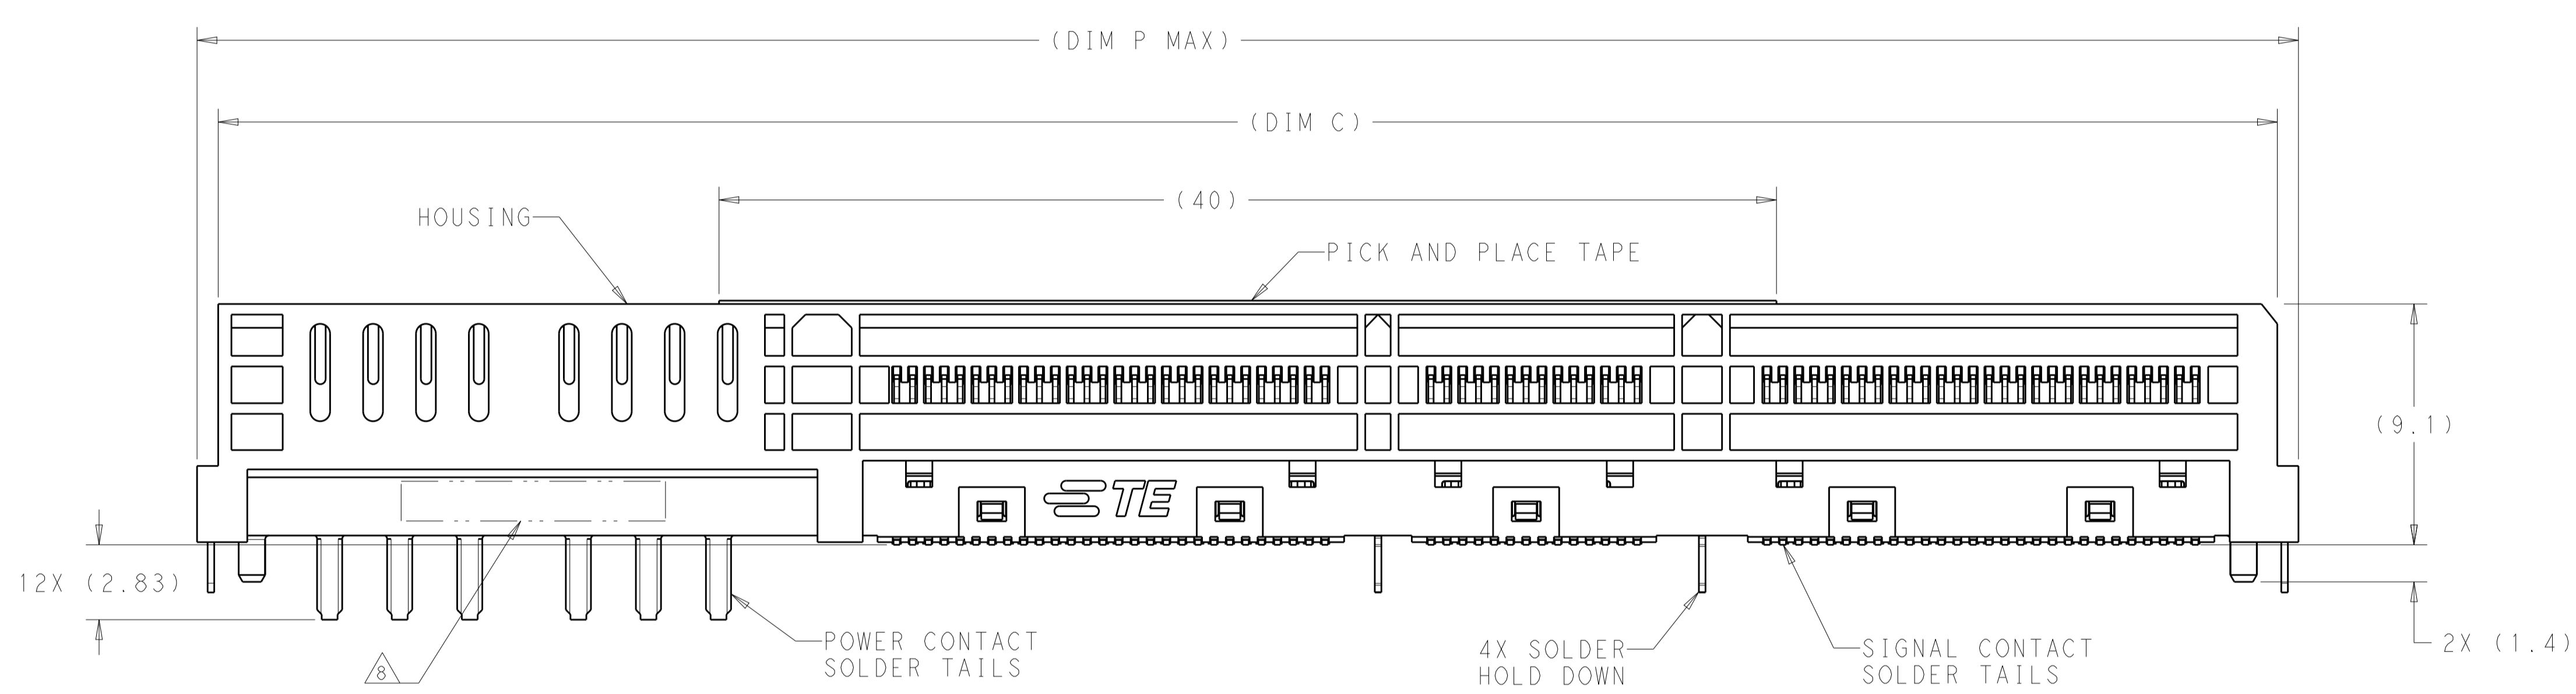


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
A		RELEASED	20MAY2019	CJV JW

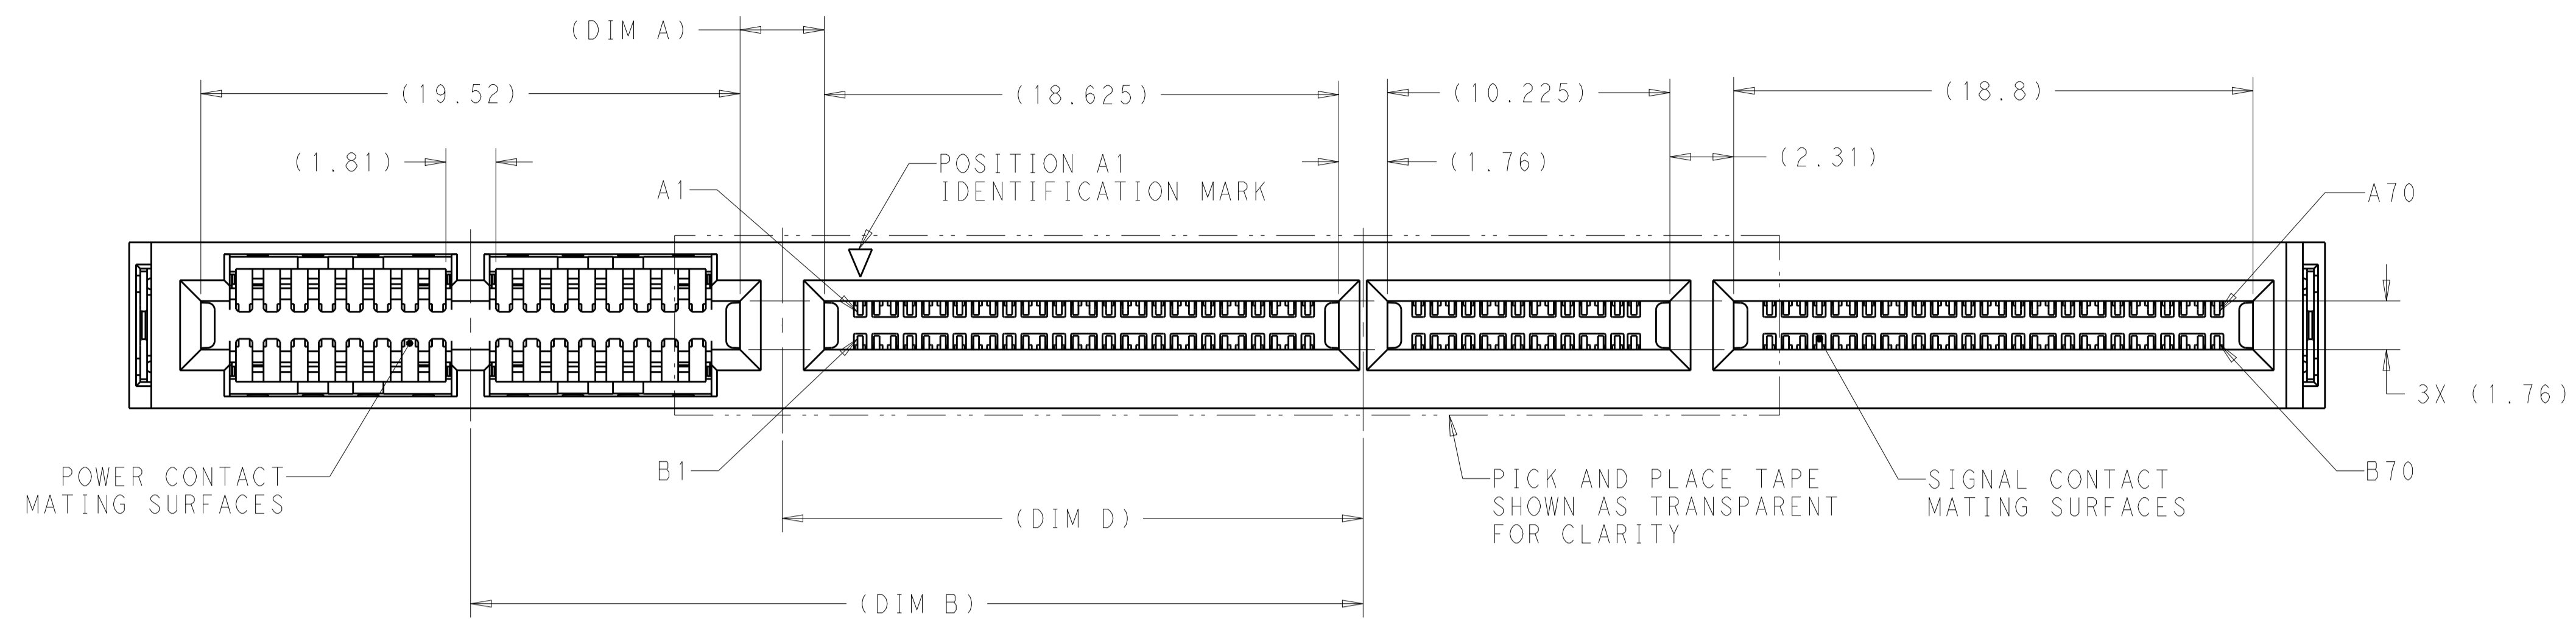

- ⚠ HOUSING AND CONTACT OVERMOLDS - LCP, BLACK. CONTACTS AND HOLD DOWNS - COPPER ALLOY. PICK AND PLACE TAPE - POLYIMIDE FILM.
- ⚠ CONTACTS - GOLD PLATE ON MATING SURFACES, TIN PLATE ON SOLDER TAILS. HOLD DOWNS - TIN PLATE.
- ⚠ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 4. MINIMUM HOST PCB THICKNESS: 1.5.
- ⚠ SEE MSA SPECIFICATION FOR ADDITIONAL PADDLE CARD LAYOUTS COMPATIBLE WITH THIS RECEPTACLE AND FOR OPTIONAL SPLIT CONTACT PAD LAYOUTS FOR THE PADDLE CARD. SPECIFICATION PINOUT MAY ALSO DESIGNATE PAD SEQUENCE DIFFERENT FROM ILLUSTRATION.
- ⚠ POSITIONS DESIGNATED AS "SIGNAL" ARE REQUIRED LOCATIONS FOR HIGH SPEED DIFFERENTIAL PAIR SIGNALING. THESE LOCATIONS MAY ALSO BE USED FOR SUPPORTING SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES. POSITIONS DESIGNATED AS "GROUND" ARE REQUIRED WHEN SUPPORTING HIGH SPEED DIFFERENTIAL SIGNALS. THESE LOCATIONS MAY ALSO BE USED FOR SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES.
- ⚠ COMPONENT AND TRACE KEEP OUT AREA. EACH EDGE 0.15 MIN FROM EDGE OF HOLE.
- ⚠ PART NUMBER AND DATE CODE MARKED IN APPROXIMATE AREA SHOWN.

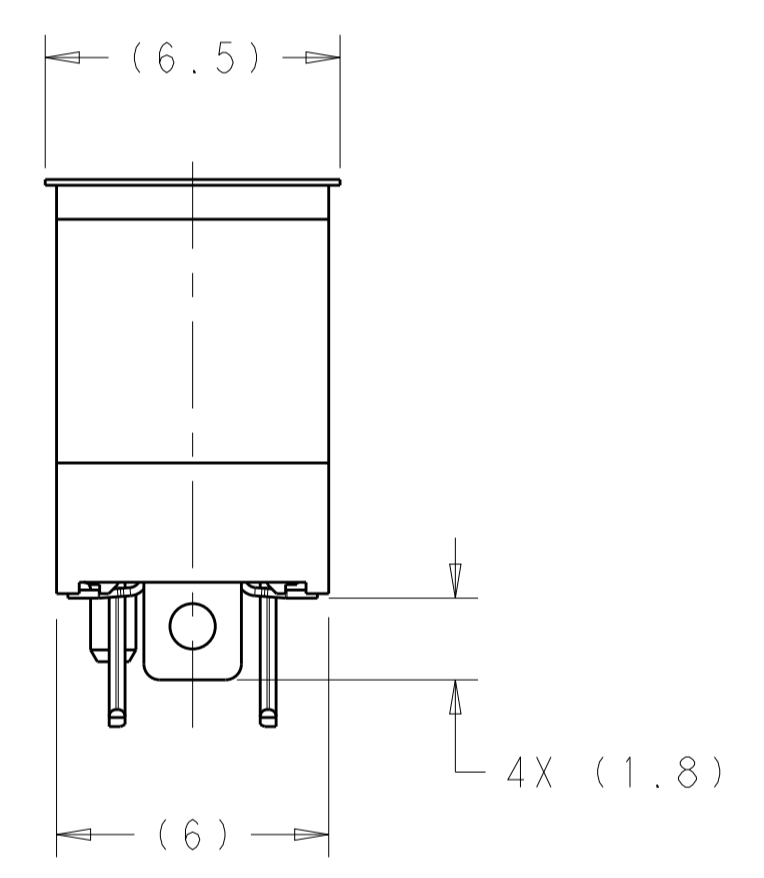

21.57	5.385	74.76	80.74	38.17	4.57	77.89	76.34	55.86	43.6	58.31	45.6	25.39	21.53	78.89	33.31	4.05	48V
21.07	4.885	73.76	79.74	37.67	3.57	76.89	75.34	54.86	42.6	57.31	44.6	24.39	21.03	77.89	32.31	3.05	12V
T	S	R	P	N	M	L	K	J	H	G	F	E	D	C	B	A	VOLTAGE RATING

HARD TRAY	48V	2338718-4
HARD TRAY	12V	2338718-3
SOFT TRAY	48V	2338718-2
SOFT TRAY	12V	2338718-1
PACKAGING	VOLTAGE RATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG: C. VALENTINE 22JUN2018
 CHK: H. ANDREWS 22JUN2018
 APVD: H. ANDREWS 22JUN2018





TE Connectivity

RECEPTACLE ASSEMBLY, 4C WITH HIGH POWER, SLIVER 2.0

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 2338718


SCALE: 6:1 SHEET 1 OF 4 REV A

REVISIONS				
P.	LTN	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

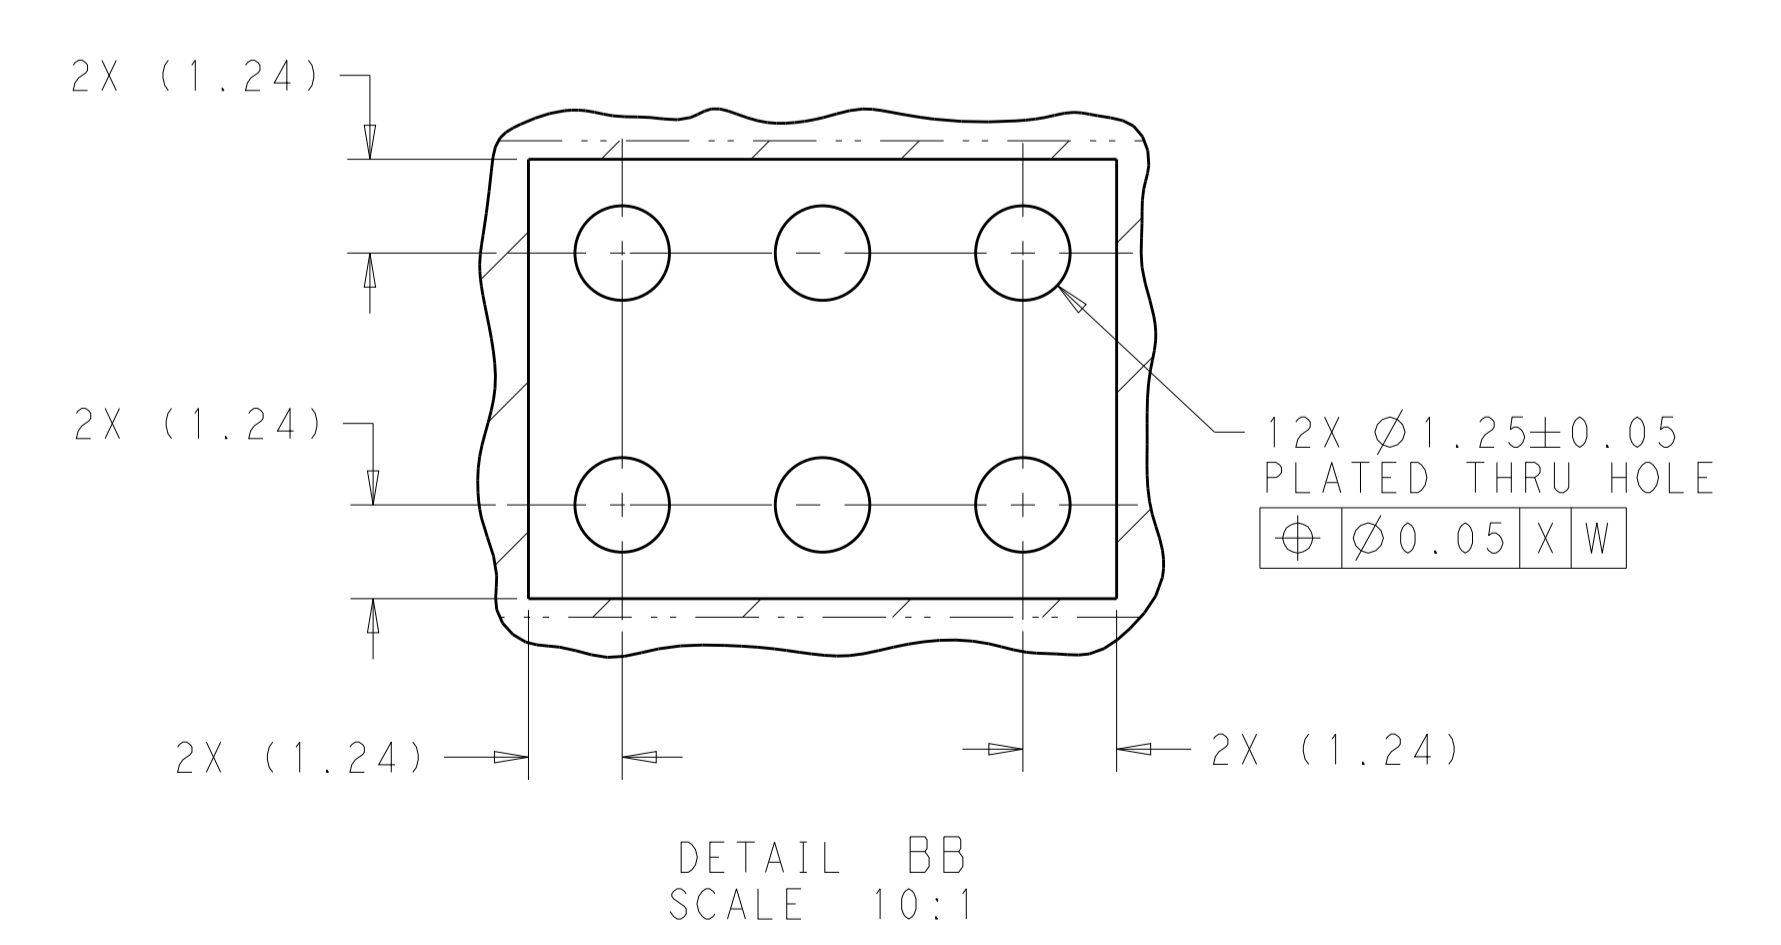
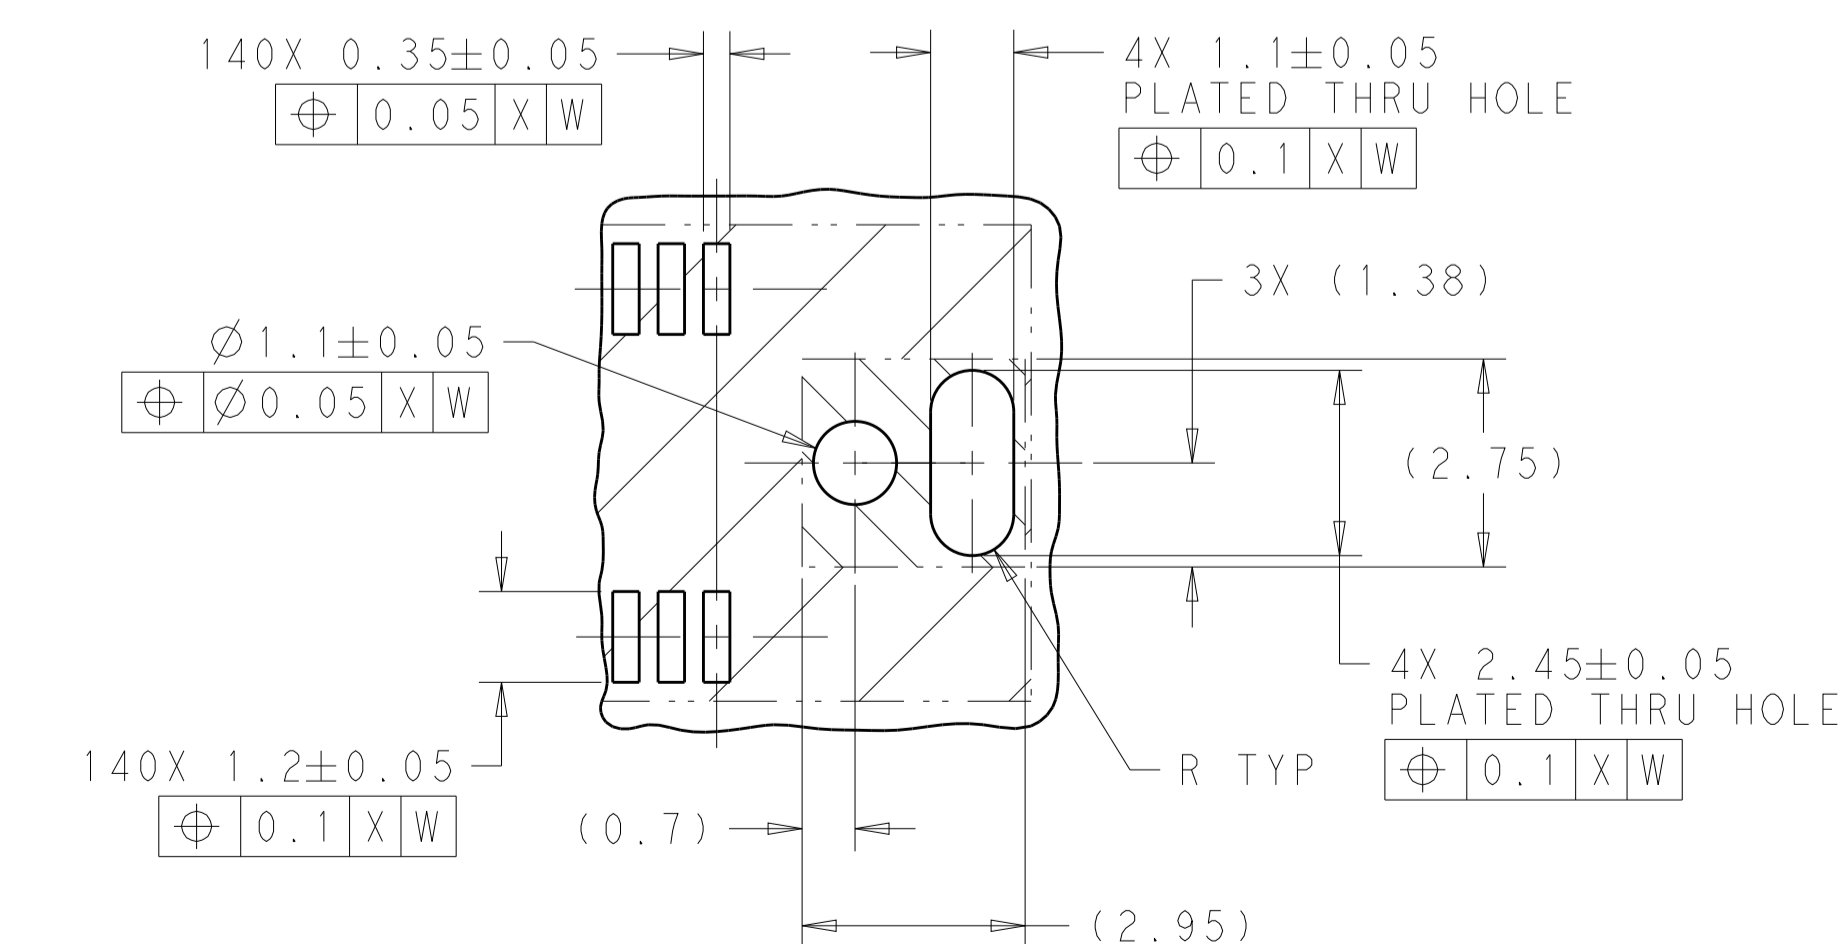
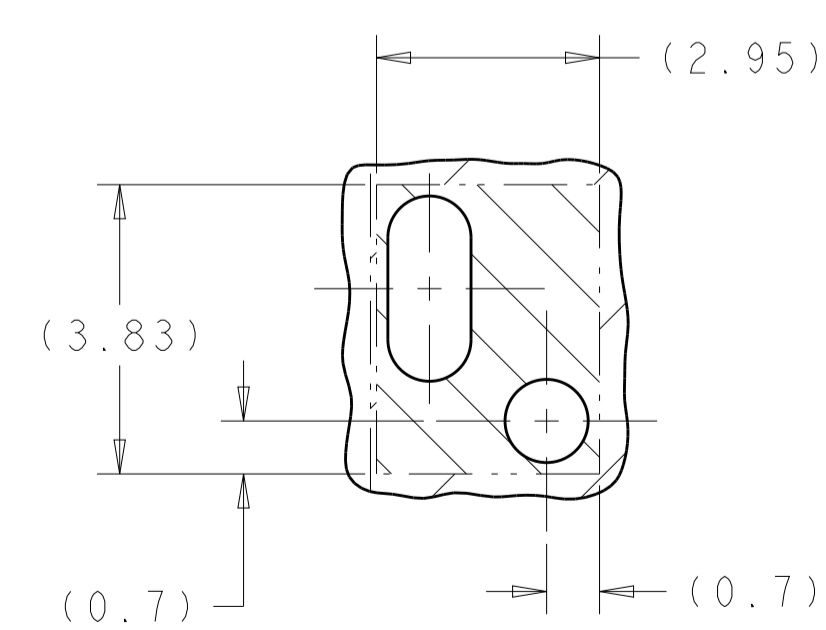
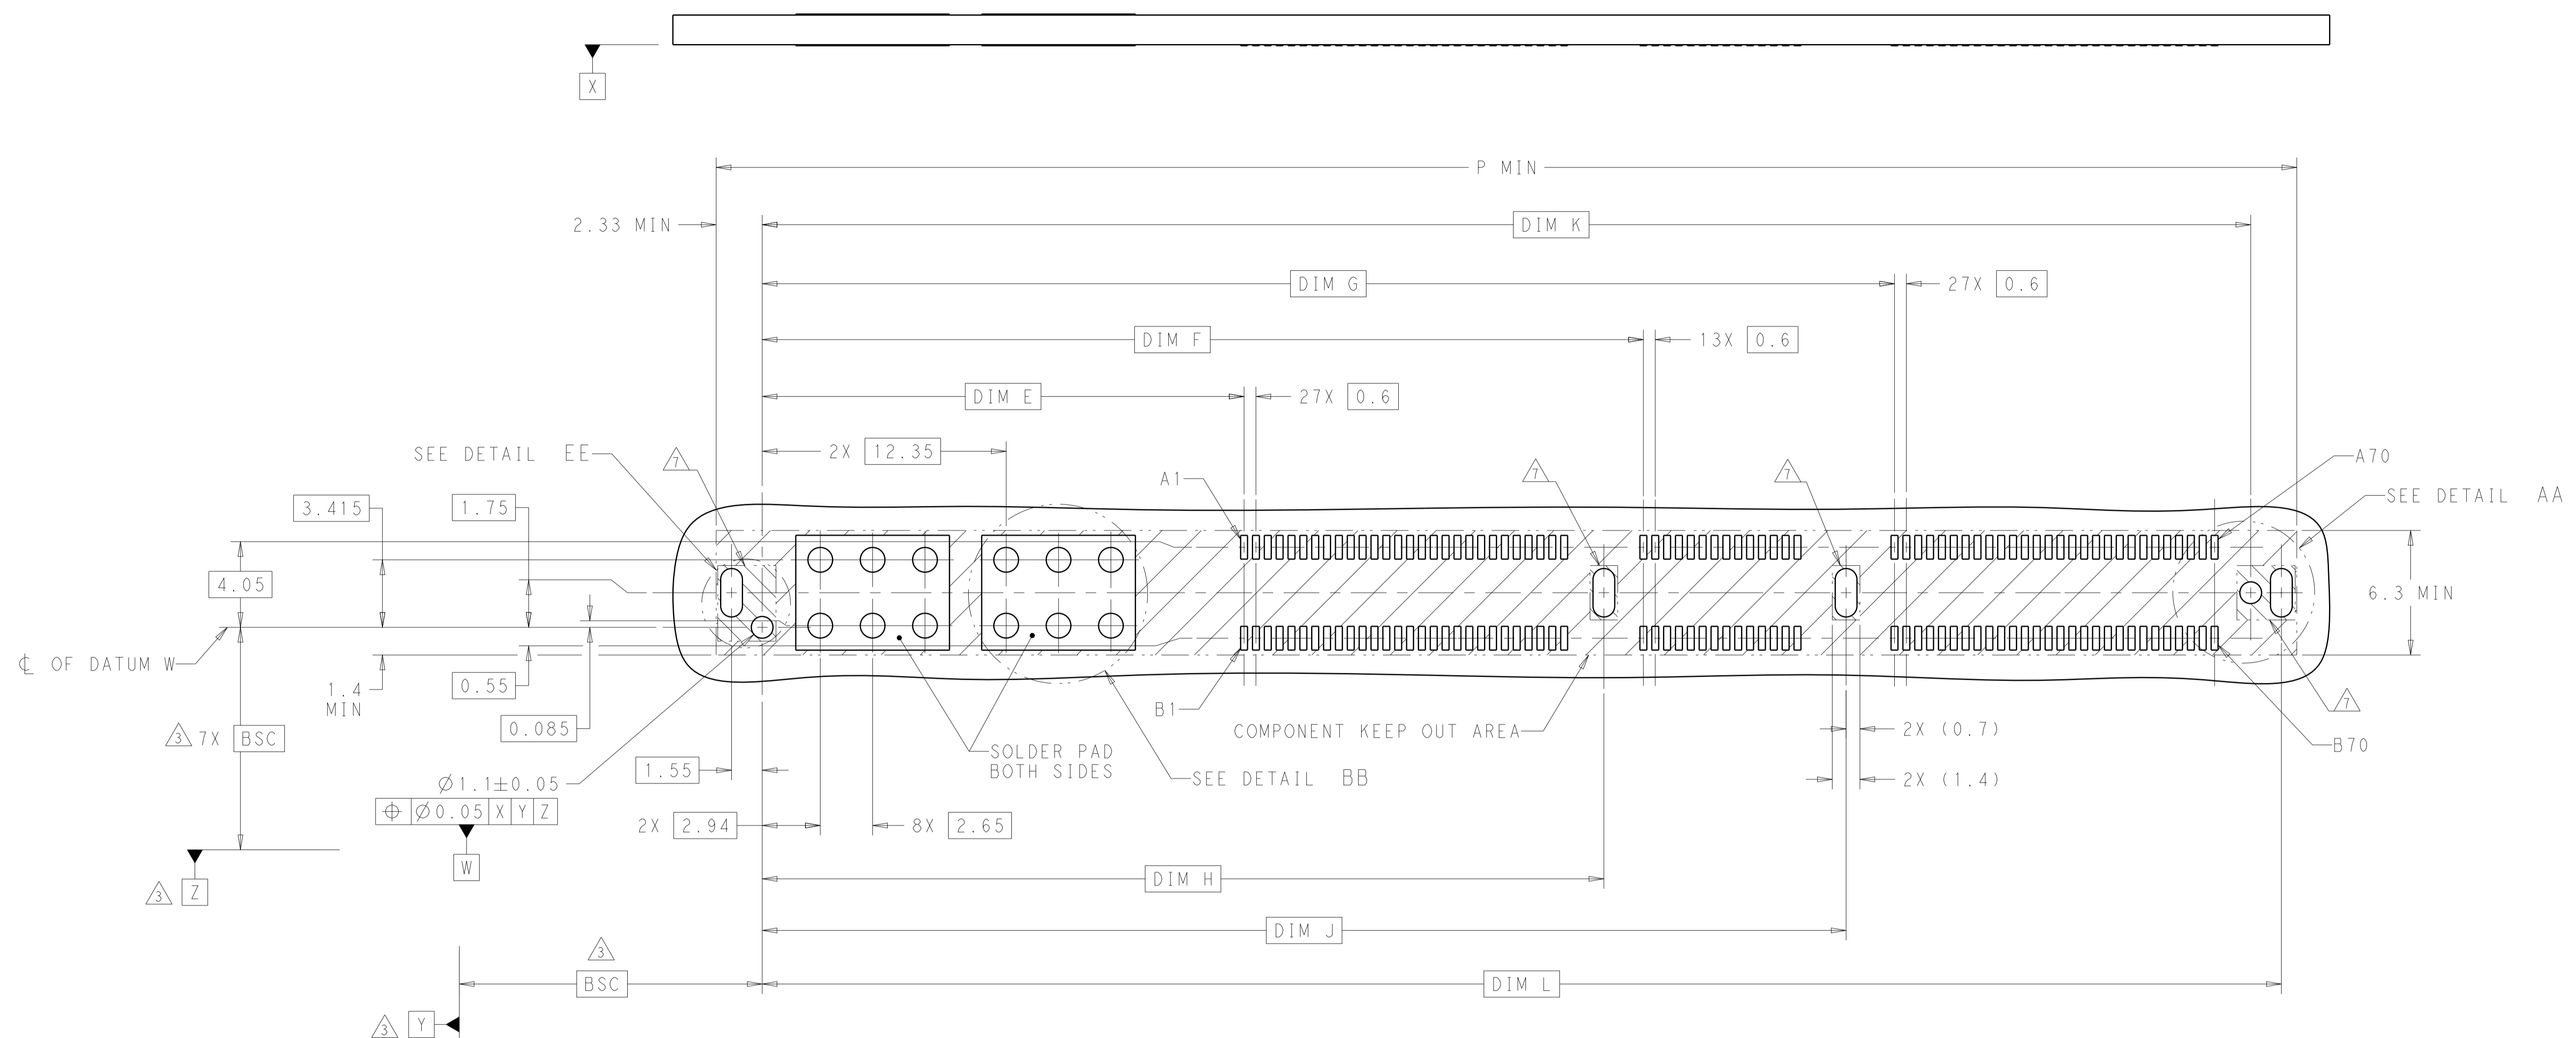


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. VALENTINE 22 JUN 2018	 TE Connectivity												
DIMENSIONS: mm		CHK H. ANDREWS 22 JUN 2018													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H. ANDREWS 22 JUN 2018	NAME RECEPTACLE ASSEMBLY, 4C WITH HIGH POWER, SLIVER 2.0												
<table border="0"> <tr> <td>0 PLC</td><td>±</td></tr> <tr> <td>1 PLC</td><td>±</td></tr> <tr> <td>2 PLC</td><td>±</td></tr> <tr> <td>3 PLC</td><td>±</td></tr> <tr> <td>4 PLC</td><td>±</td></tr> <tr> <td>ANGLES</td><td>±</td></tr> </table>		0 PLC	±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±	ANGLES	±	PRODUCT SPEC	SIZE A1
0 PLC	±														
1 PLC	±														
2 PLC	±														
3 PLC	±														
4 PLC	±														
ANGLES	±														
MATERIAL		APPLICATION SPEC	CAGE CODE 2338718												
FINISH		WEIGHT	RESTRICTED TO												
CUSTOMER DRAWING		SCALE 6:1	SHEET 2 OF 4												
			REV A												

REVISIONS				
P.	LTM	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

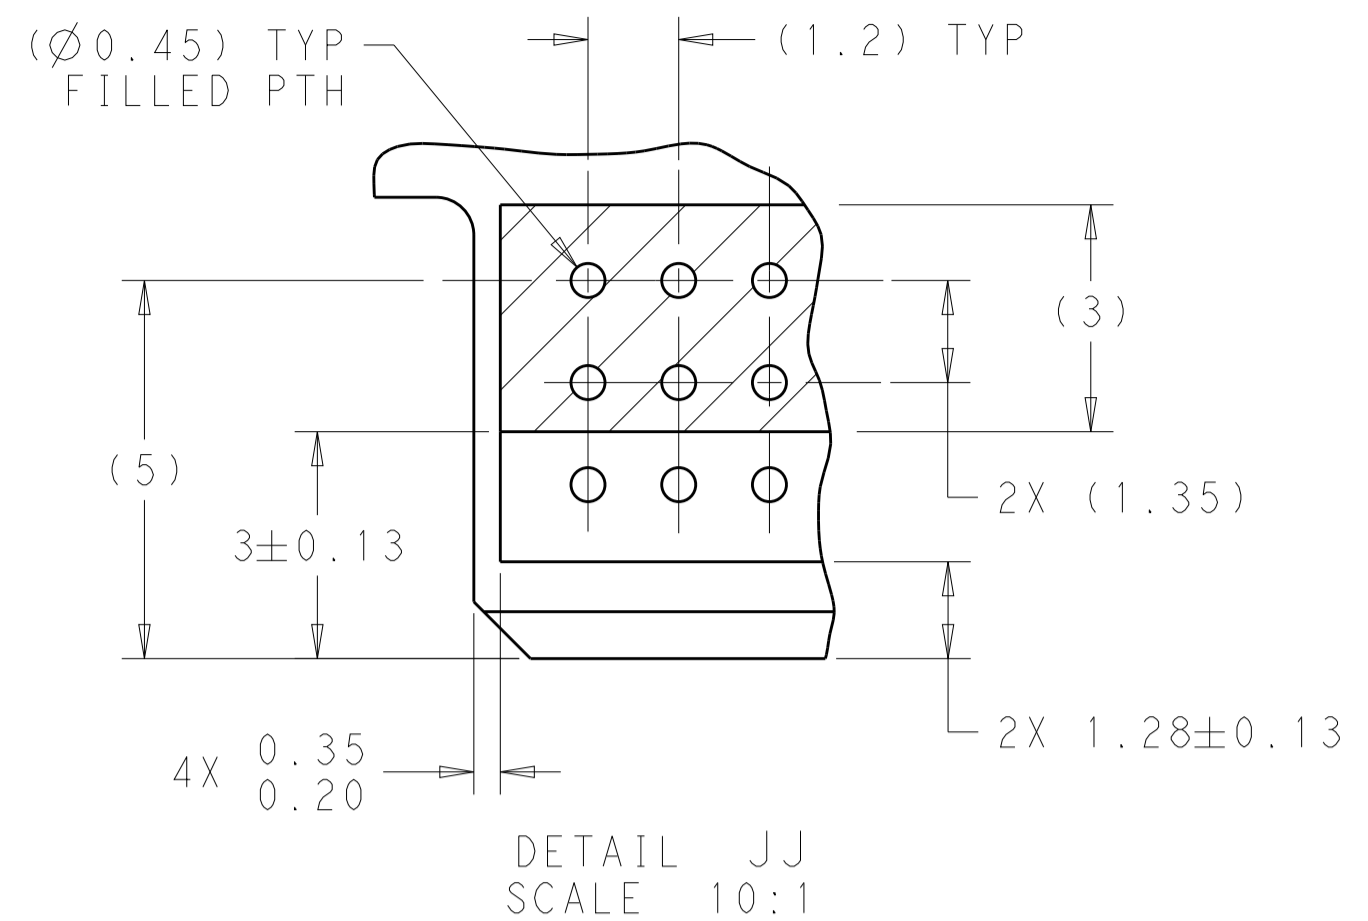

RECOMMENDED PCB OUTLINE DIMENSIONS.
TOLERANCE VALUES ARE CRITICAL. PLEASE BE SURE TO DESIGNATE TOLERANCES TO PCB SUPPLIER TO ENSURE OPTIMIZED FUNCTIONALITY.

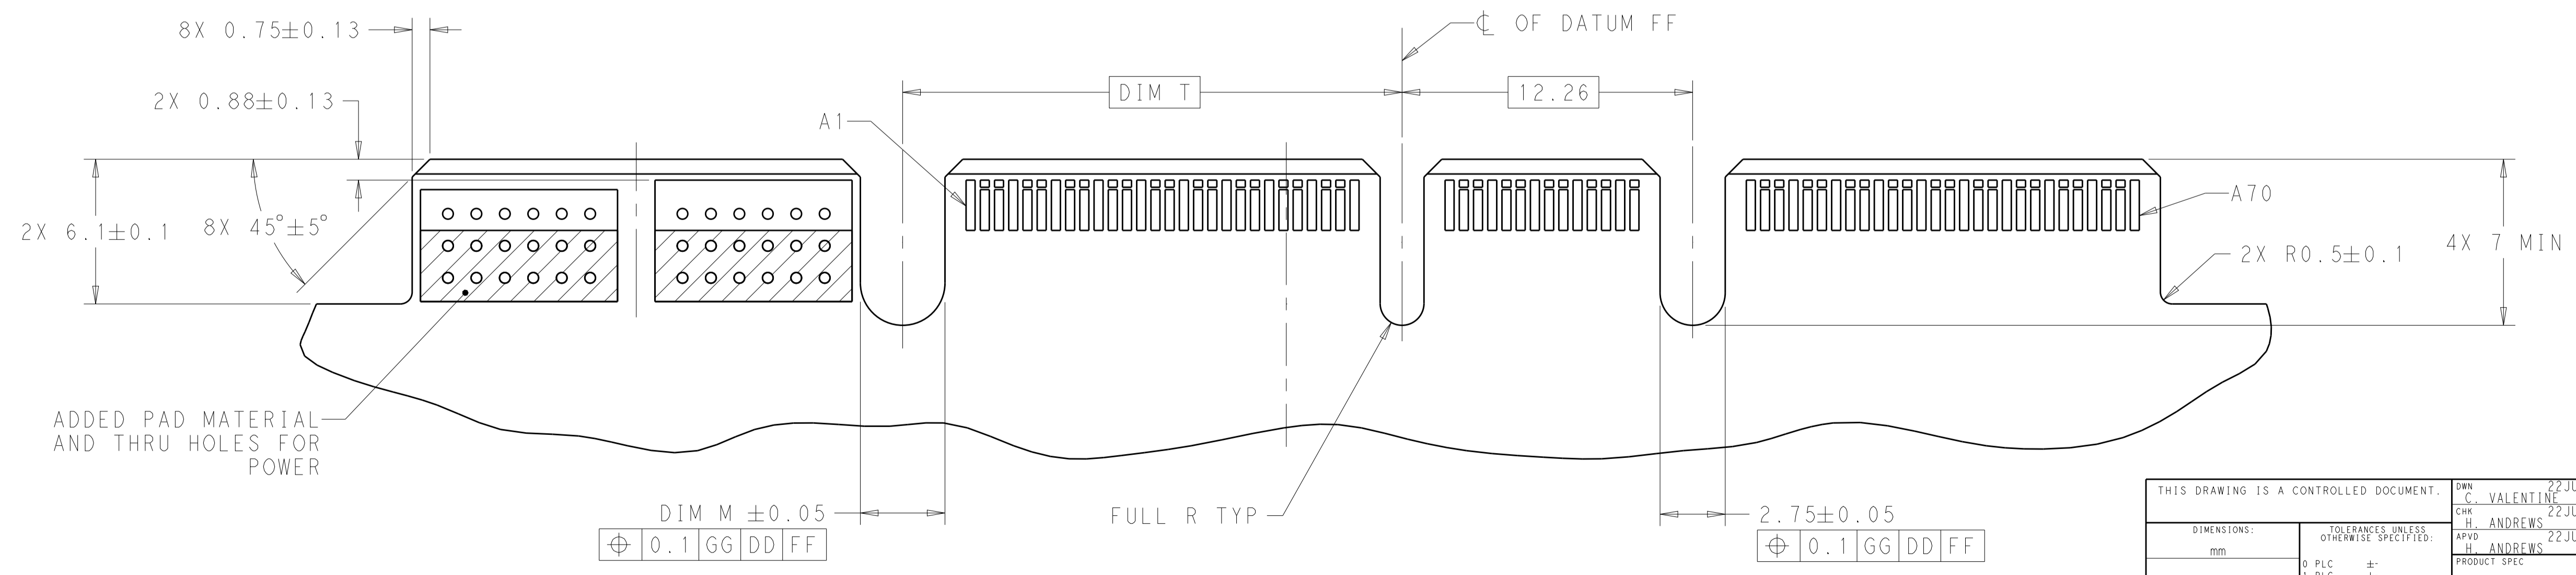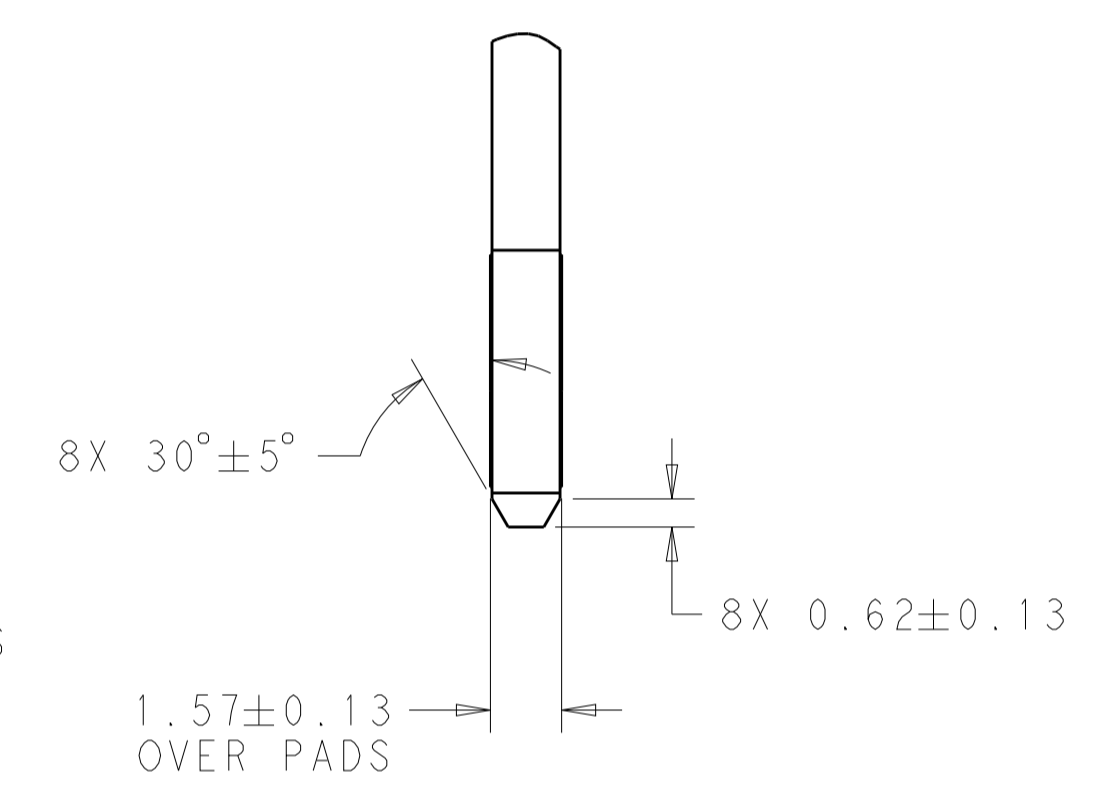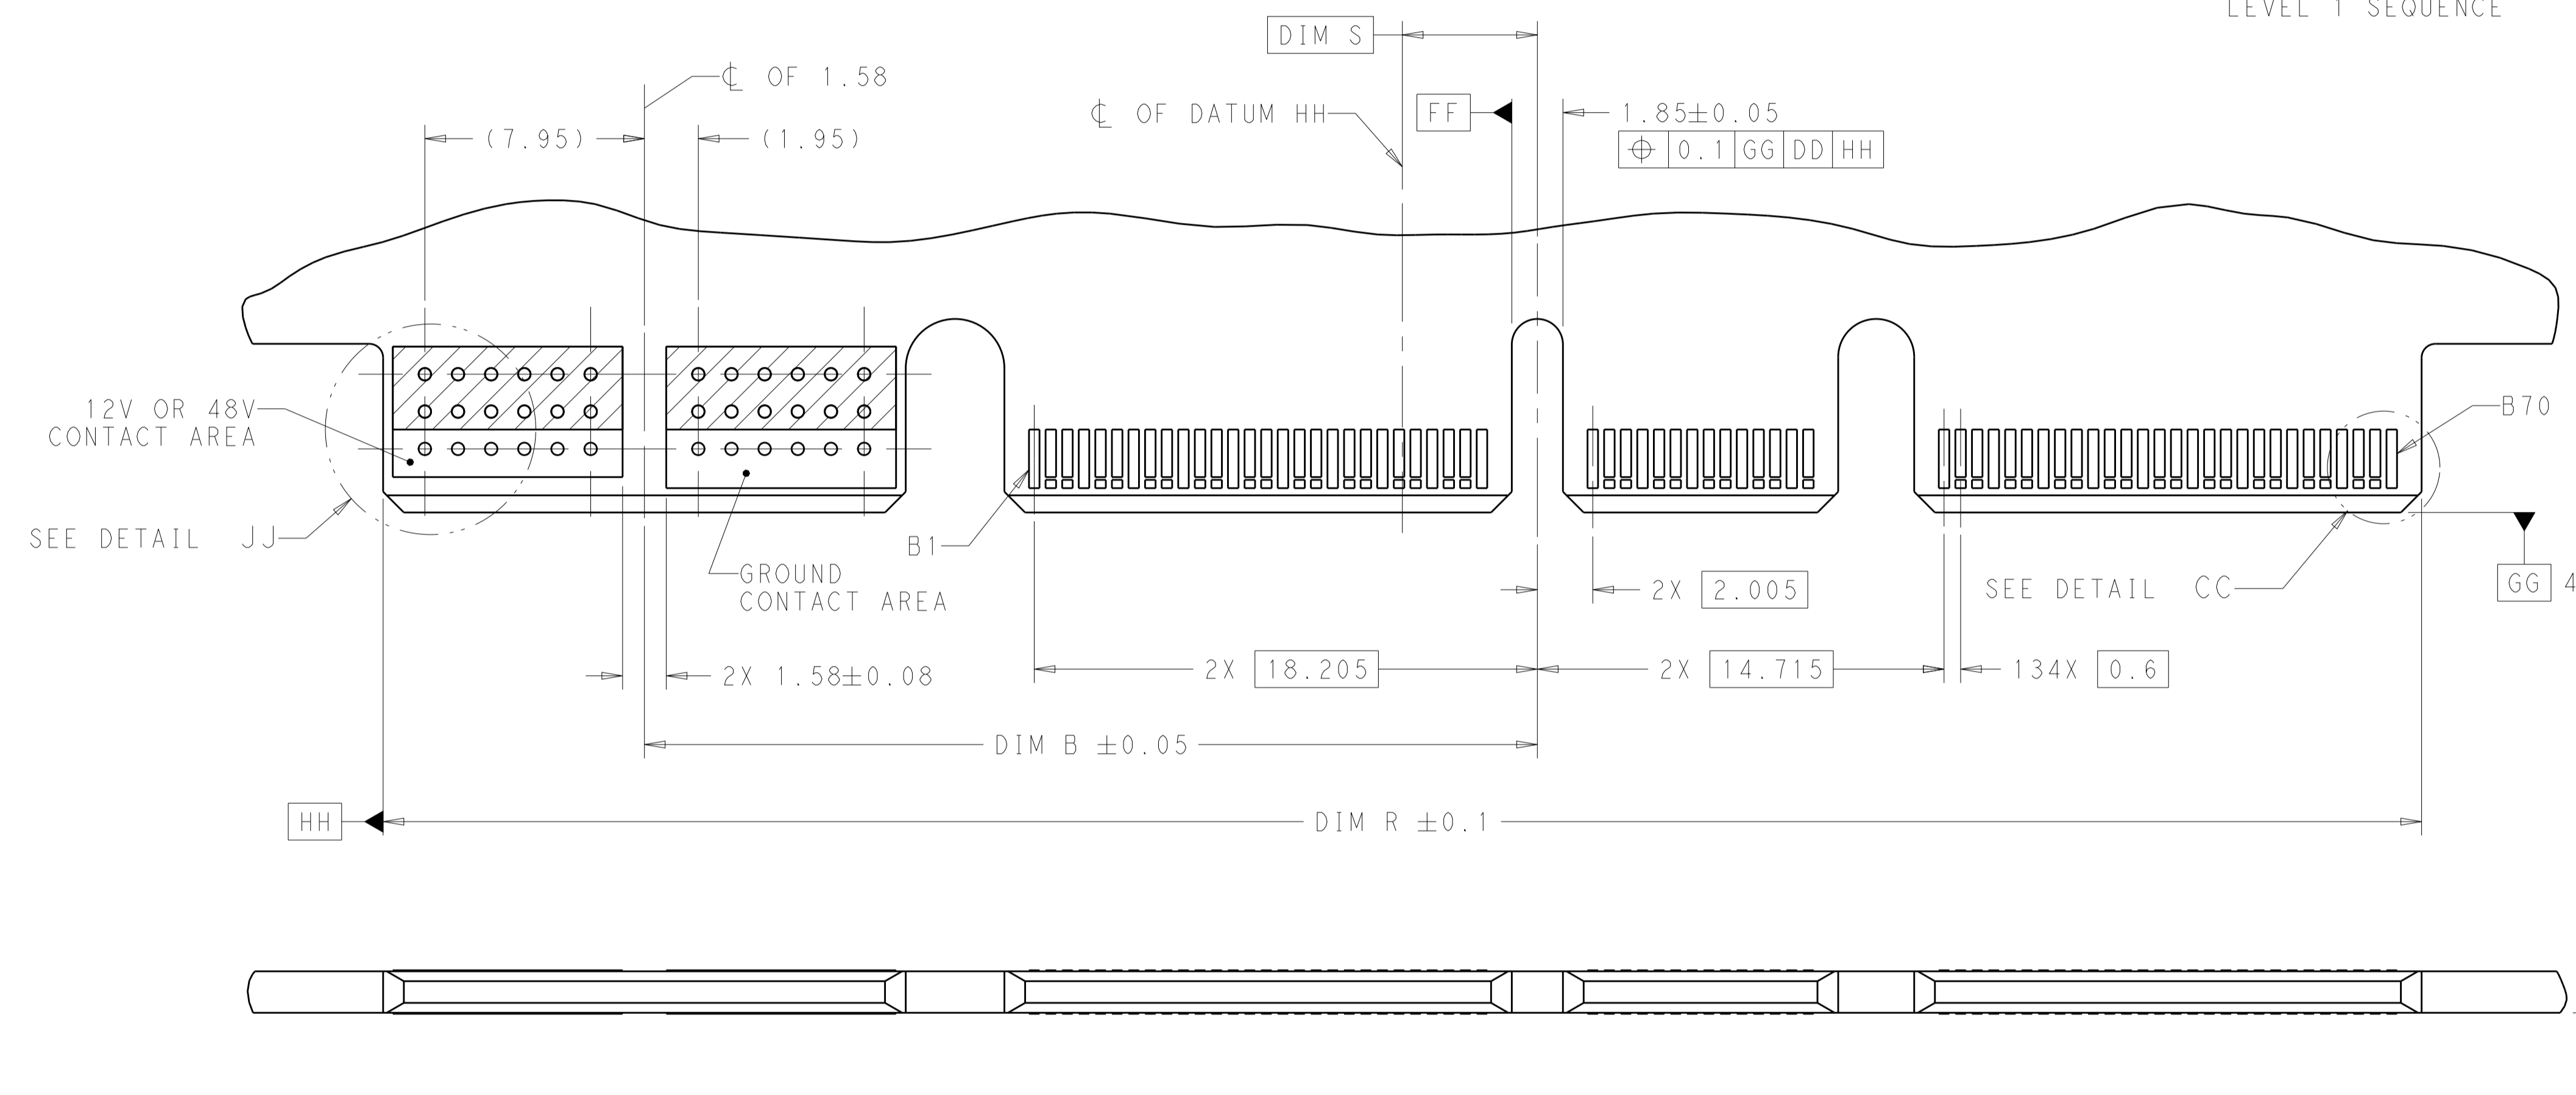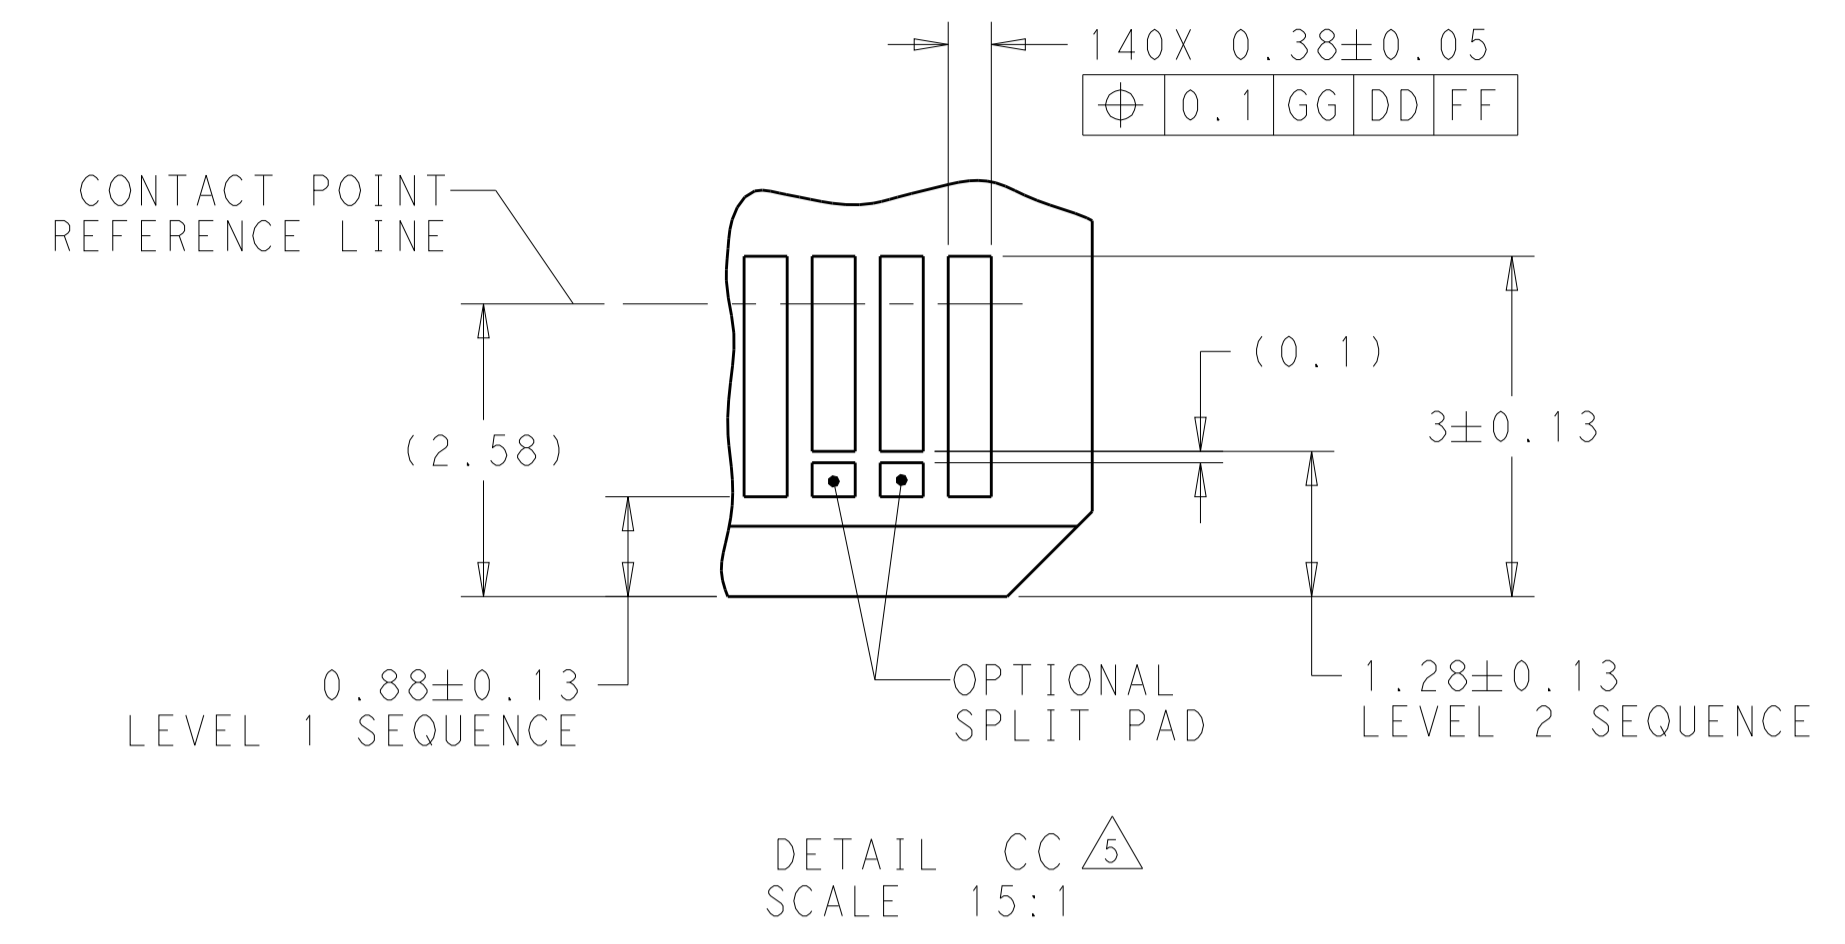


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: C. VALENTINE 22JUN2018	 TE Connectivity
DIMENSIONS: mm		CHK: H. ANDREWS 22JUN2018	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: H. ANDREWS 22JUN2018	NAME: RECEPTACLE ASSEMBLY, 4C WITH HIGH POWER, SLIVER 2.0 SIZE: A1 CAGE CODE: 00779 DRAWING NO: 2338718
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING	
MATERIAL:		FINISH:	RESTRICTED TO: - SCALE: 6:1 SHEET: 3 OF 4 REV: A


REVISIONS				
P.	LTN	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

CONTACT NUMBER	SIDE A	SIDE B
1	GROUND	GROUND
2	SIGNAL	SIGNAL
3	SIGNAL	SIGNAL
4	GROUND	GROUND
5	SIGNAL	SIGNAL
6	SIGNAL	SIGNAL
7	GROUND	GROUND
8	SIGNAL	SIGNAL
9	SIGNAL	SIGNAL
10	GROUND	GROUND
11	SIGNAL	SIGNAL
12	SIGNAL	SIGNAL
13	GROUND	GROUND
14	SIGNAL	SIGNAL
15	SIGNAL	SIGNAL
16	GROUND	GROUND
17	SIGNAL	SIGNAL
18	SIGNAL	SIGNAL
19	GROUND	GROUND
20	SIGNAL	SIGNAL
21	SIGNAL	SIGNAL
22	GROUND	GROUND
23	SIGNAL	SIGNAL
24	SIGNAL	SIGNAL
25	GROUND	GROUND
26	SIGNAL	SIGNAL
27	SIGNAL	SIGNAL
28	GROUND	GROUND
29	GROUND	GROUND
30	SIGNAL	SIGNAL
31	SIGNAL	SIGNAL
32	GROUND	GROUND
33	SIGNAL	SIGNAL
34	SIGNAL	SIGNAL
35	GROUND	GROUND

CONTACT NUMBER	SIDE A	SIDE B
36	SIGNAL	SIGNAL
37	SIGNAL	SIGNAL
38	GROUND	GROUND
39	SIGNAL	SIGNAL
40	SIGNAL	SIGNAL
41	GROUND	GROUND
42	GROUND	GROUND
43	GROUND	GROUND
44	SIGNAL	SIGNAL
45	SIGNAL	SIGNAL
46	GROUND	GROUND
47	SIGNAL	SIGNAL
48	SIGNAL	SIGNAL
49	GROUND	GROUND
50	SIGNAL	SIGNAL
51	SIGNAL	SIGNAL
52	GROUND	GROUND
53	SIGNAL	SIGNAL
54	SIGNAL	SIGNAL
55	GROUND	GROUND
56	SIGNAL	SIGNAL
57	SIGNAL	SIGNAL
58	GROUND	GROUND
59	SIGNAL	SIGNAL
60	SIGNAL	SIGNAL
61	GROUND	GROUND
62	SIGNAL	SIGNAL
63	SIGNAL	SIGNAL
64	GROUND	GROUND
65	SIGNAL	SIGNAL
66	SIGNAL	SIGNAL
67	GROUND	GROUND
68	SIGNAL	SIGNAL
69	SIGNAL	SIGNAL
70	GROUND	GROUND

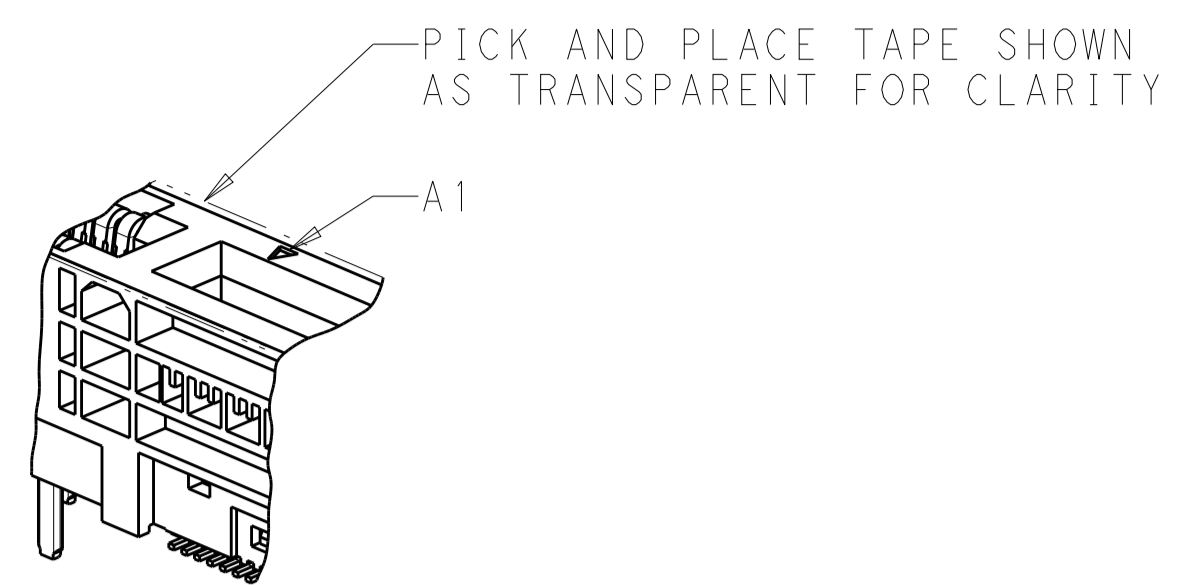



DETAIL KK
SCALE 4:1

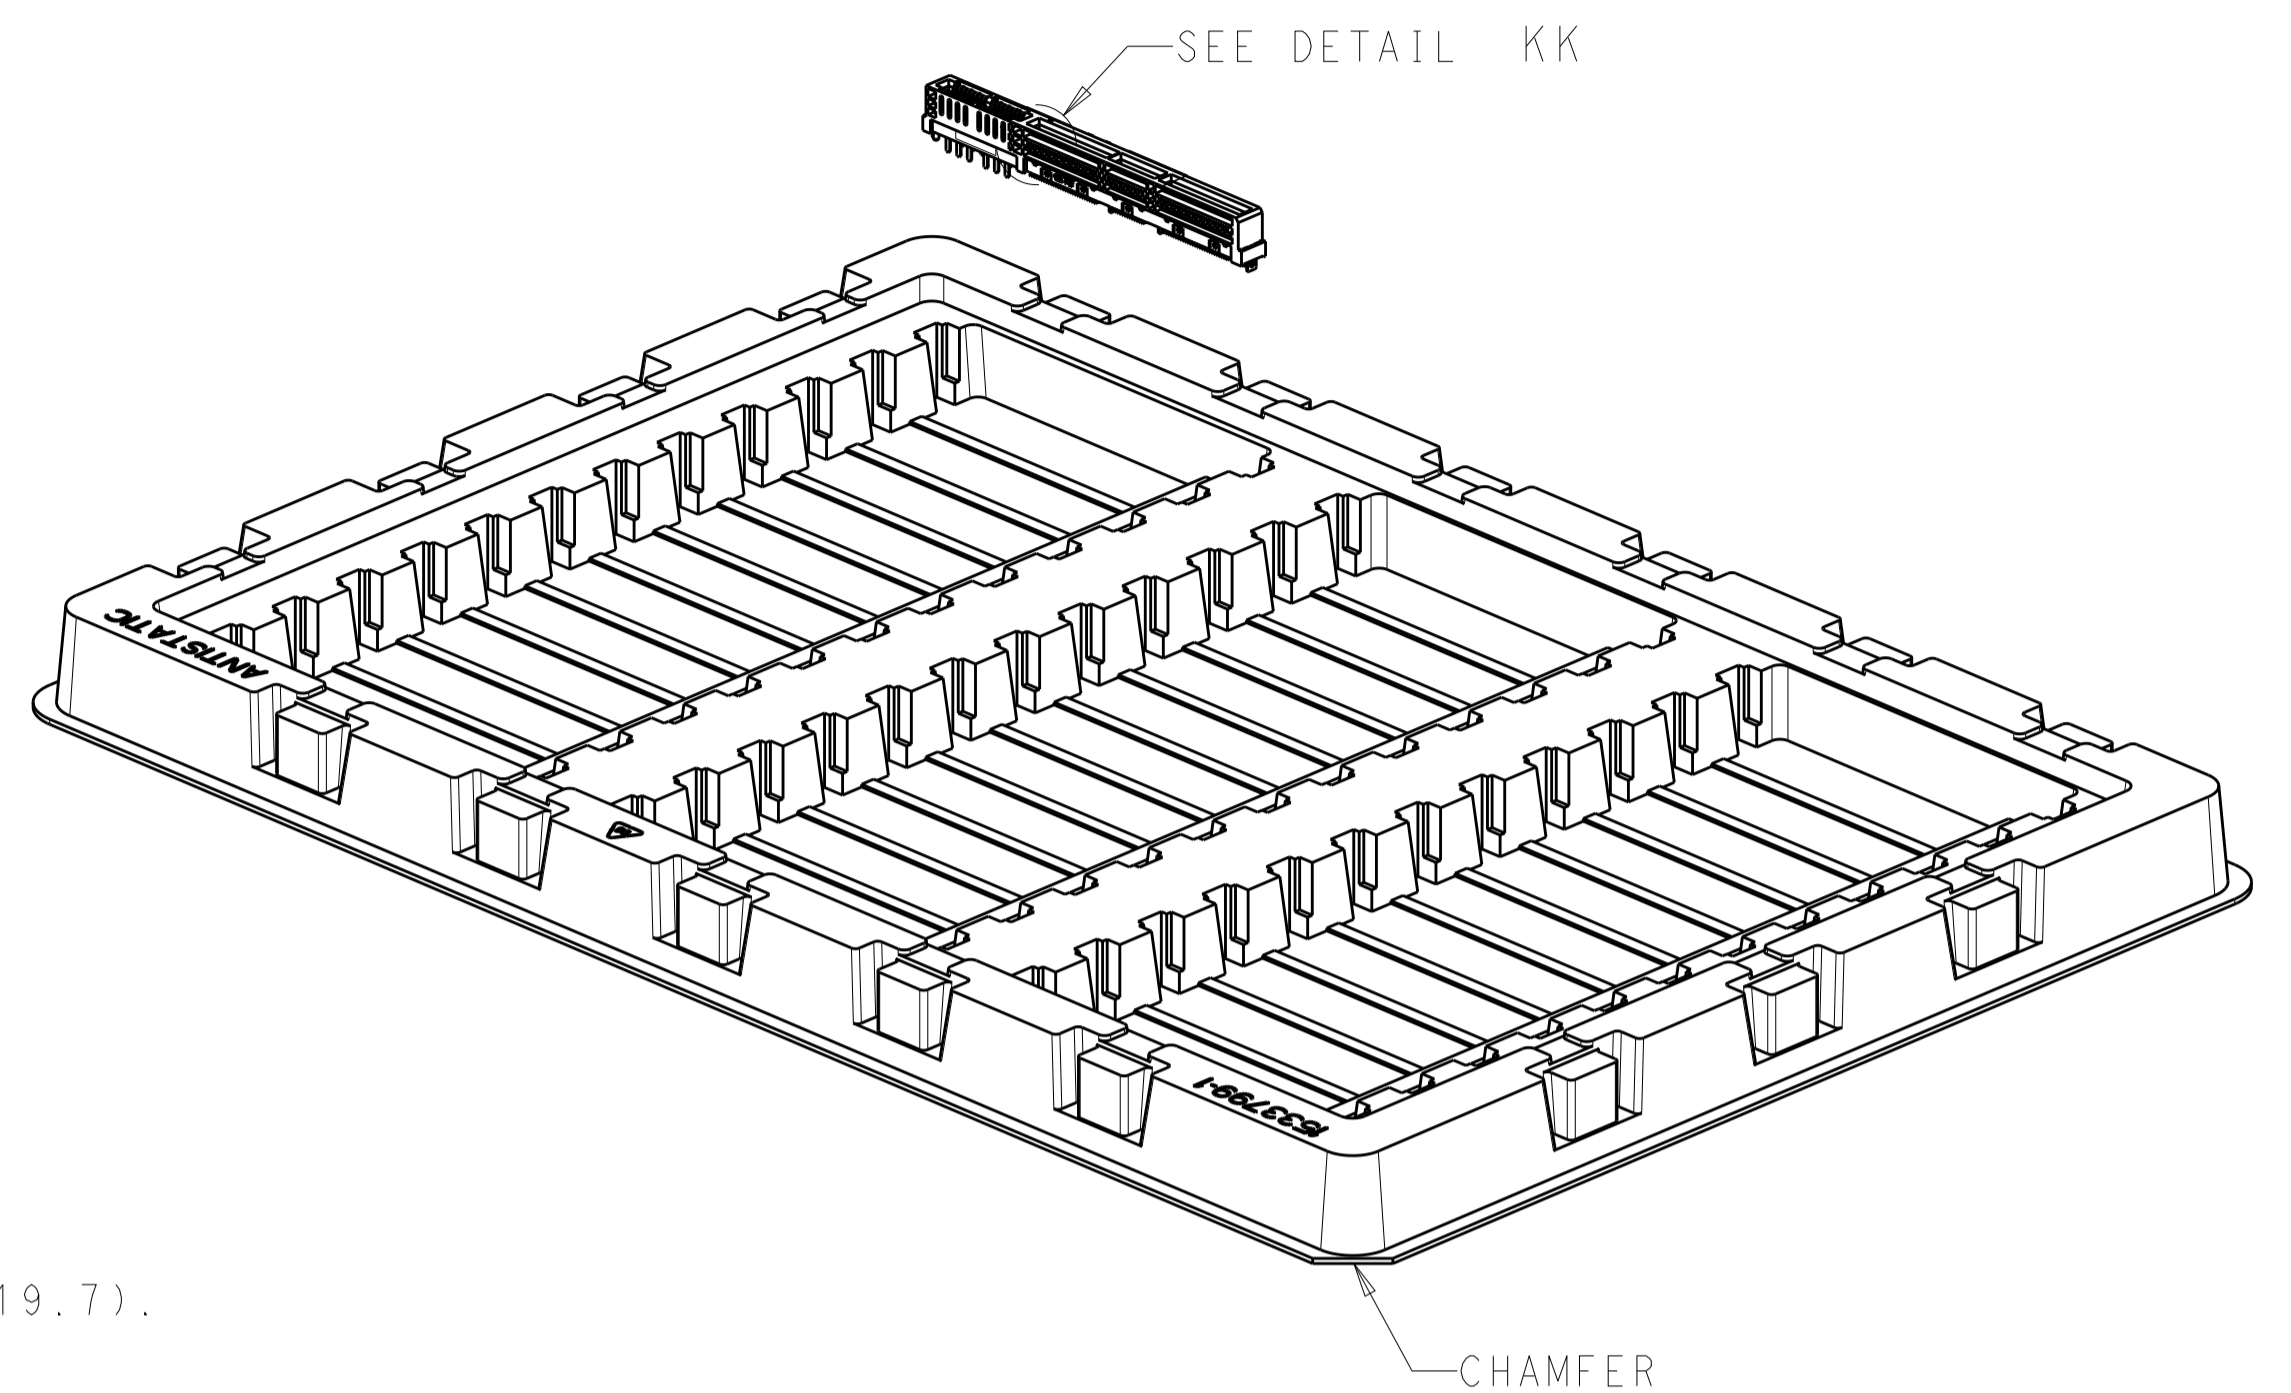


- SOFT TRAY**
- DIMENSIONS:
TRAY L= (335), W= (230), H= (19.7).
 - QUANTITY:
36 PIECES PER TRAY.

FIGURE 1
SOFT TRAY PACKAGING
2338718-1 AND 2338718-2
SCALE 3:4

CONNECTOR CONTACT IDENTIFICATION

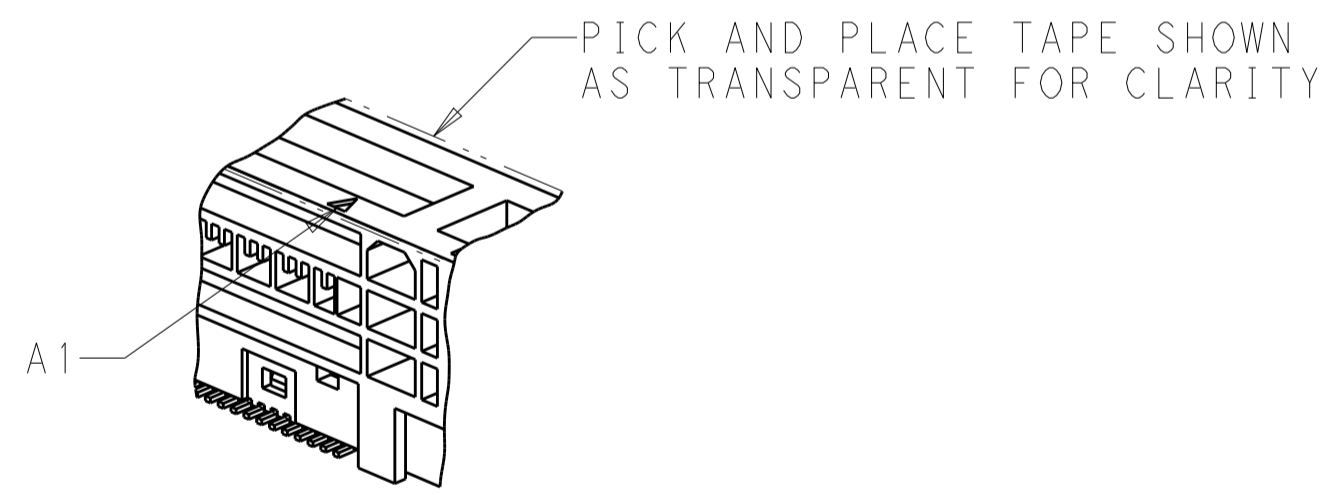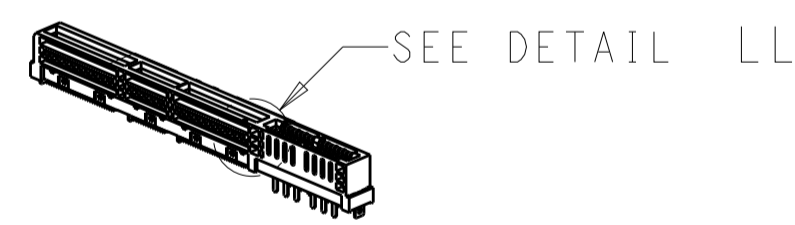

DETAIL LL
SCALE 4:1

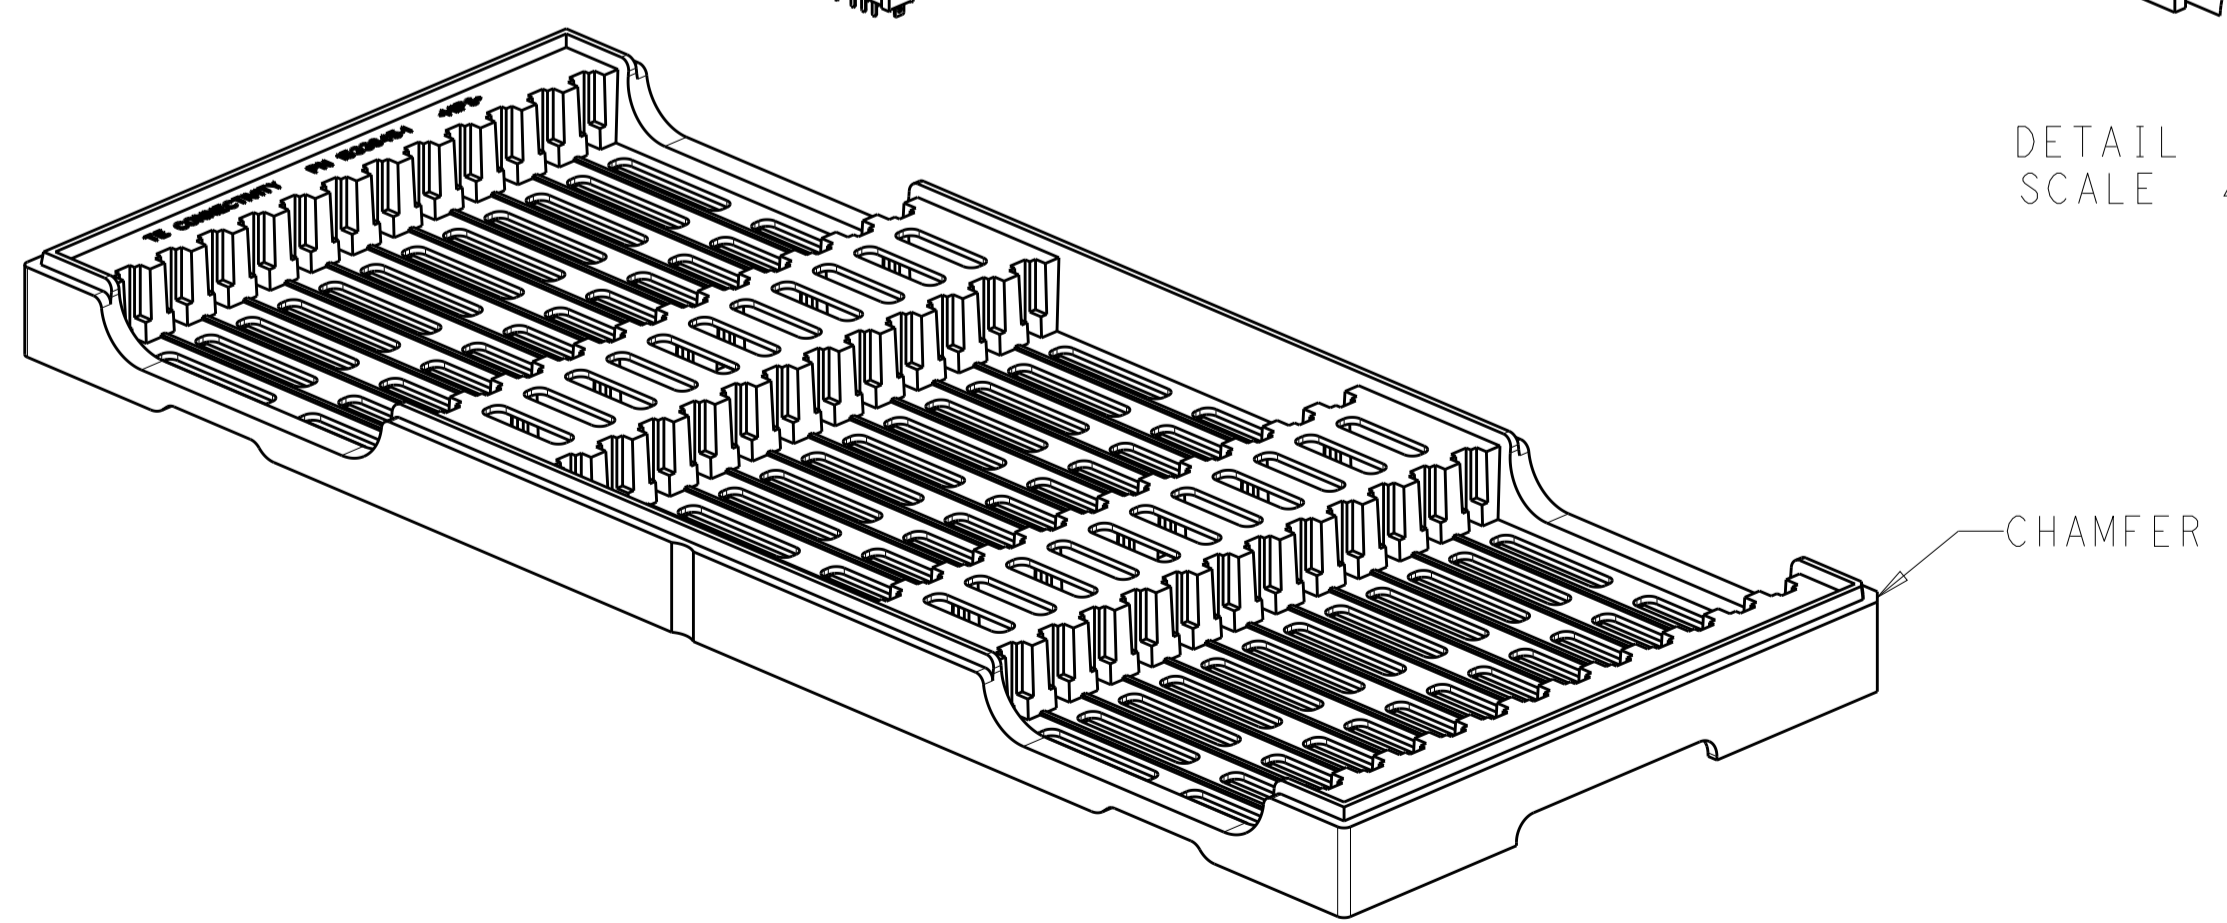

- HARD TRAY**
- MATERIAL:
TRAY- HIPS, COLOR: BLACK.
BOX- CORRUGATED FIBERBOARD.
TRANSPARENT BAG- PE.
 - DIMENSIONS:
TRAY- L= 330, W= 136, H= 17.5.
BOX- L= 13.75 IN, W= 11.75 IN, H= 5.75 IN.
 - QUANTITY:
24 PIECES PER TRAY.
288 PIECES PER BOX.

FIGURE 2
HARD TRAY PACKAGING
2338718-3 AND 2338718-4
SCALE 3:4

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN C. VALENTIN 22JUN2018	TE Connectivity
DIMENSIONS:		CHK H. ANDREWS 22JUN2018	
mm	0 PLC ±	APVD H. ANDREWS 22JUN2018	NAME RECEPTACLE ASSEMBLY, 4C WITH HIGH POWER, SLIVER 2.0
	1 PLC ±	PRODUCT SPEC	
	2 PLC ±	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO
	3 PLC ±	WEIGHT	A100779C=2338718
	4 PLC ±	CUSTOMER DRAWING	SCALE 6:1 SHEET 4 OF 4 REV A
	ANGLES		
MATERIAL	FINISH		



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.