

Series PVT312PbF

Microelectronic Power IC

HEXFET® Power MOSFET Photovoltaic Relay
Single Pole, Normally Open, 0-250V, 190mA AC/DC

General Description

The PVT312 Photovoltaic Relay is a single-pole, normally open solid-state relay that can replace electromechanical relays in many applications. It utilizes International Rectifier's proprietary HEXFET power MOSFET as the output switch, driven by an integrated circuit photovoltaic generator of novel construction. The output switch is controlled by radiation from a GaAlAs light emitting diode (LED) which is optically isolated from the photovoltaic generator.


This SSR is specifically designed for telecom applications. PVT312L employs an active current-limiting circuitry enabling it to withstand current surge transients. PVT312 Relays are packaged in a 6-pin, molded DIP package with either thru-hole or surface mount ("gull-wing") terminals. It is available in standard plastic shipping tubes or on tape-and-reel. Please refer to the Part Identification information opposite.

Applications

- On/Off Hook switch
- Dial-Out relay
- Ring injection relay
- Ground start
- General switching

Features

- HEXFET Power MOSFET output
- Bounce-free operation
- 4,000 V_{RMS} I/O isolation
- Load current limiting
- Linear AC/DC operation
- Solid-State Reliability
- UL recognized and BABT certified;
- ESD Tolerance:
 - 4000V Human Body Model
 - 500V Machine Model

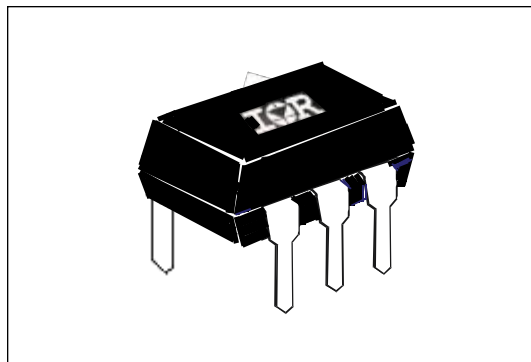

Part Identification

PVT312LPbF	current limit, thru-hole
PVT312LSPbF	current limit, surface-mount
PVT312LS-TPbF	current limit, surface-mount, tape and reel
PVT312PbF	no current limit, thru-hole
PVT312SPbF	no current limit, surface-mount
PVT312S-TPbF	no current limit, surface-mount, tape and reel

(HEXFET is the registered trademark for International Rectifier Power MOSFETs)

Electrical Specifications ($-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ unless otherwise specified)

INPUT CHARACTERISTICS		Part Numbers		Units
		PVT312L	PVT312	
Minimum Control Current (see figures 1 and 2)		2.0		mA
Maximum Control Current for Off-State Resistance @ $T_A=+25^{\circ}\text{C}$		0.4		mA
Control Current Range (Caution: current limit input LED, see figure 6)		2.0 to 25		mA
Maximum Reverse Voltage		6.0		V


OUTPUT CHARACTERISTICS		PVT312L	PVT312	
Operating Voltage Range		0 to ± 250		$V_{\text{(DC or AC peak)}}$
Maximum Load Current @ $T_A=+40^{\circ}\text{C}$, 5mA Control (see figures 1 and 2)				
A Connection		170	190	mA (AC or DC)
B Connection		190	210	mA (DC)
C Connection		300	320	mA (DC)
Maximum On-State Resistance @ $T_A=+25^{\circ}\text{C}$ for 50mA pulsed load				
5mA Control (see figure4)				
A Connection		15	10	Ω
B Connection		8	5.5	Ω
C Connection		4.25	3	Ω
Maximum Off-State Leakage @ $T_A=+25^{\circ}\text{C}$, $\pm 250\text{V}$ (see figure 5)		1.0		μA
Current Limit @ $T_A=+25^{\circ}\text{C}$, 5mA Control				
Connection:		A	C	
Minimum		190	330	n/a
Maximum		300	560	n/a
Maximum Turn-On Time @ $T_A=+25^{\circ}\text{C}$ (see figure 7)		3.0		ms
for 50mA, 100 V_{DC} load, 5mA Control				
Maximum Turn-Off Time @ $T_A=+25^{\circ}\text{C}$ (See Fig. 6)		0.5		ms
For 50mA, 100 V_{DC} load, 5mA Control				
Maximum Output Capacitance @ 50V _{DC}		50		pF

GENERAL CHARACTERISTICS		ALL MODELS		
Minimum Dielectric Strength, Input-Output		4000		V_{RMS}
Minimum Insulation Resistance, Input-Output @ $T_A=+25^{\circ}\text{C}$, 50%RH, 100V _{DC}		10^{12}		Ω
Maximum Capacitance, Input-Output		1.0		pF
Maximum Pin Soldering Temperature (10 seconds maximum)		+260		$^{\circ}\text{C}$
Ambient Temperature Range:		-40 to +85		$^{\circ}\text{C}$
Operating				
Storage		-40 to +100		


International Rectifier does not recommend the use of this product in aerospace, avionics, military or life support applications. Users of this International Rectifier product in such applications assume all risks of such use and indemnify International Rectifier against all damages resulting from such use.

Connection Diagrams

"A" Connection



"B" Connection

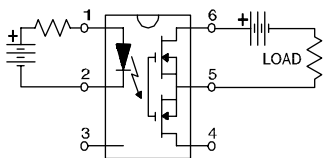

"C" Connection

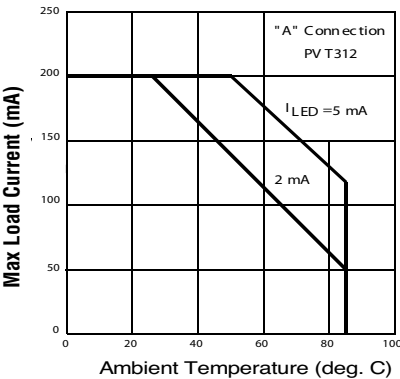



Figure 1. Typical Current Derating Curves

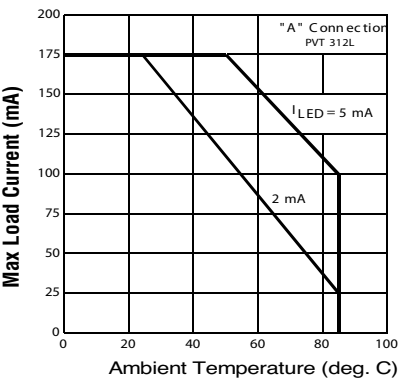


Figure 2. Typical Current Derating Curves

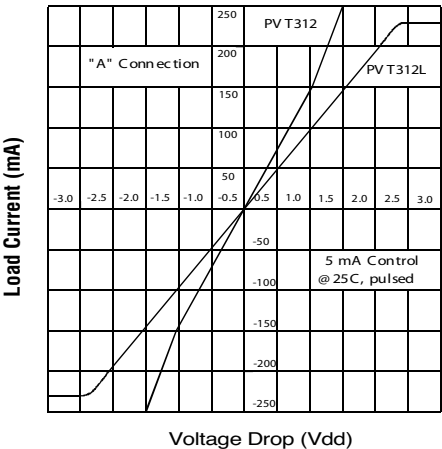


Figure 3. Linearity Characteristics

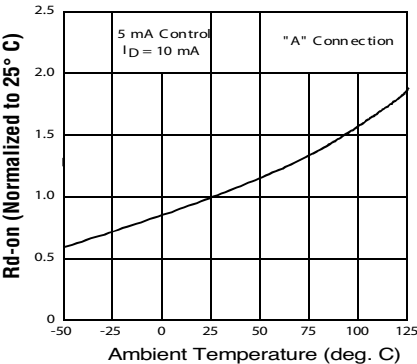


Figure 4. Typical Normalized On-Resistance

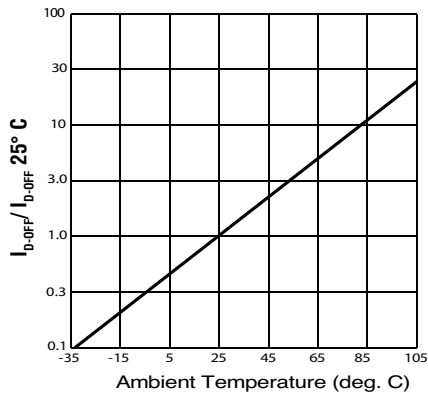


Figure 5. Typical Normalized Off-State Leakage

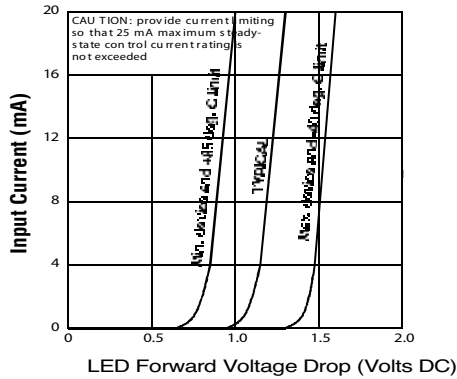


Figure 6. Input Characteristics (Current Controlled)

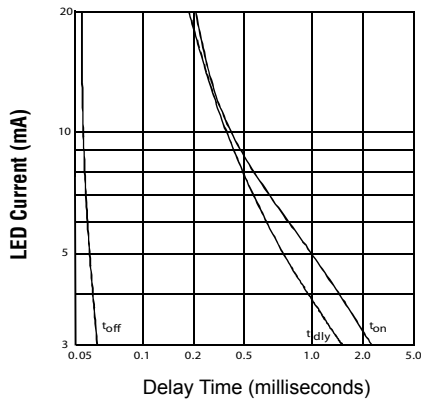


Figure 7. Typical Delay Times

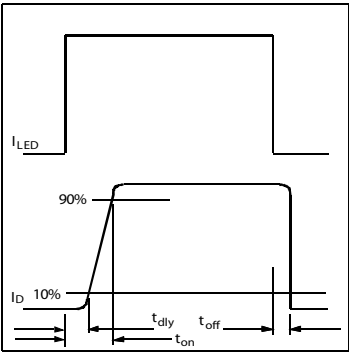


Figure 8. Delay Time Definitions



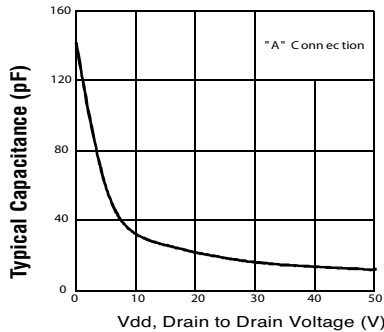


Figure 9. Typical Output Capacitance

Case Outlines

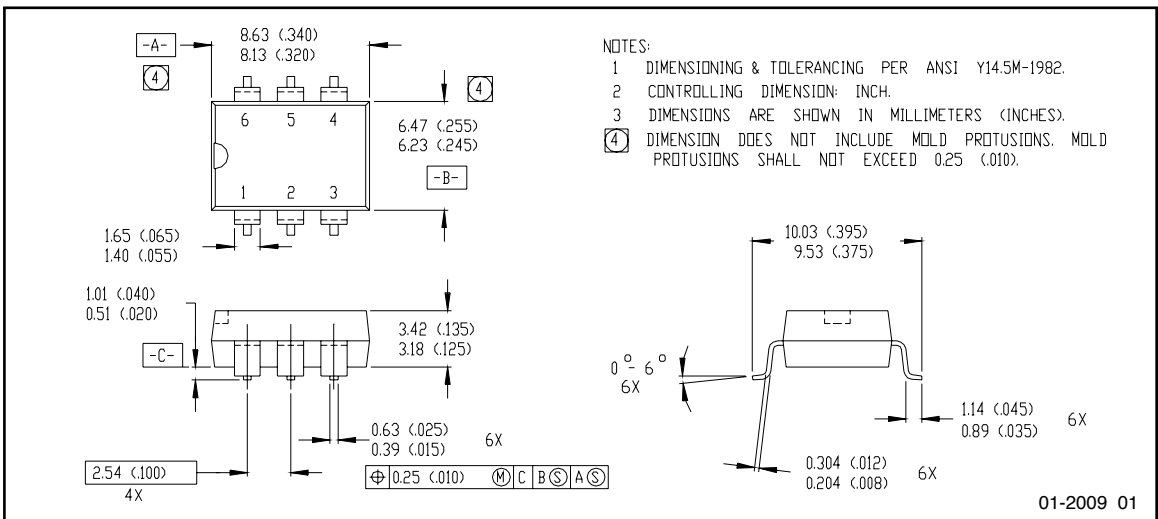

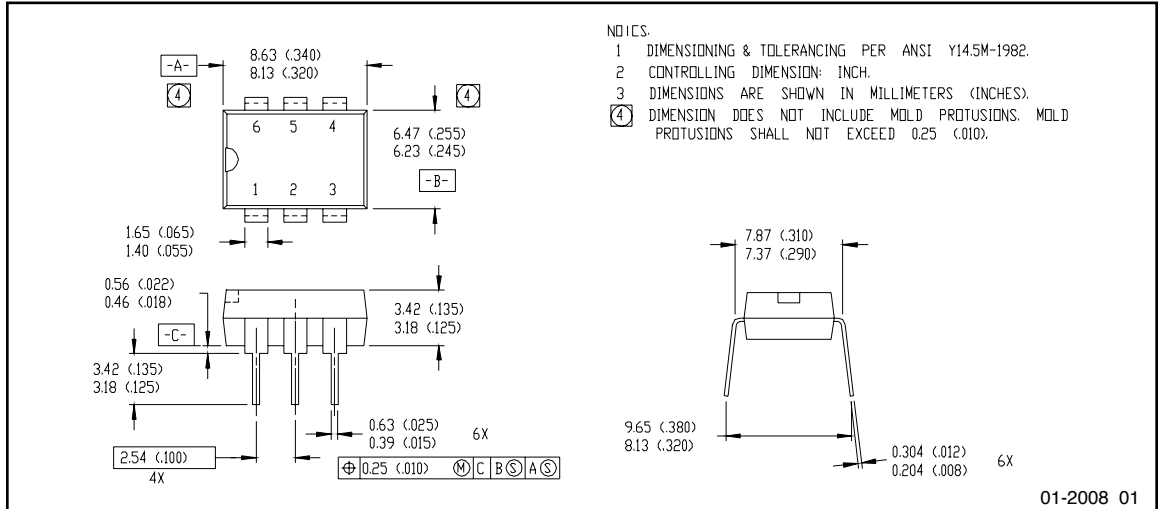

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.