

TABLE I

SHELL SIZE	E THREAD	F MAX
09	.6250 -0.1P-0.3L-TS	.906 (23.0)
11	.7500 -0.1P-0.3L-TS	1.102 (28.0)
13	.8750 -0.1P-0.3L-TS	1.220 (31.0)
15	1.0000 -0.1P-0.3L-TS	1.260 (32.0)
17	1.1875 -0.1P-0.3L-TS	1.457 (37.0)
19	1.2500 -0.1P-0.3L-TS	1.535 (39.0)
21	1.3750 -0.1P-0.3L-TS	1.654 (42.0)
23	1.5000 -0.1P-0.3L-TS	1.772 (45.0)
25	1.6250 -0.1P-0.3L-TS	1.929 (49.0)

TABLE II

SYM	FINISH DESCRIPTION
B	CADMIUM PLATE/OLIVE DRAB
C	ANODIZE/ BLACK
J	GOLD IRIDITE OVER CADMIUM PLATE OVER NICKEL
M	ELECTROLESS NICKEL
N	CADMIUM PLATE/OLIVE DRAB OVER NICKEL
MT	NICKEL-PTFE IAW GPS52-MT
NF	CAD/O. D. OVER ELECTROLESS NICKEL (1000 HOUR SALT SPRAY)
R	RED ANODIZE
T	CADMIUM PLATE/BRIGHT DIP OVER NICKEL
Z1	STAINLESS STEEL/PASSIVATE
Z16	ELECTROLESS NICKEL PER AMS-C-26074 GRADE B .0005/.0008 THK CLASS 4 WITH CHROMATE POST TREATMENT
Z17	ELECTRO DEPOSITED NICKEL/ STAINLESS STEEL
ZL	NICKEL PLATE/STAINLESS STEEL
ZN	ZINC NICKEL/OLIVE DRAB OVER ELECTROLESS NICKEL (1000 HOUR SALT SPRAY)

PART NUMBER DEVELOPMENT

EXAMPLE: 660-024 M 15 R 5 - 04 -186F

BASIC NO _____

FINISH, TABLE II _____

SHELL SIZE, TABLE I _____

ATTACHMENT TYPE, TABLE III _____


ATTACHMENT LENGTH IN INCHES _____

RING STYLE DASH NO, TABLE IV, V, VI OR VII
OMIT FOR STYLES SK & WS OPTIONS _____

POST BAKE GASKET
FOR SPACE APPLICATION
OMIT IF NOT REQUIRED _____

REVISIONS

SYM.	DESCRIPTION	DATE	APPROVED
A	RELEASED	01/22/97	T.L.
B	REVISED PER DCN 19728	08/30/02	T.L.
C	REVISED PER DCN 20806	05/12/03	T.L.
D	REVISED PER DCN 24557	09/06/05	T.L.
E	REVISED PER DCN 28933	02/06/08	T.L.
F	REVISED PER DCN 29025	02/20/08	T.L.
G	REVISED PER DCN 30799	11/03/08	T.L.
H	REVISED PER DCN 33712	09/28/09	T.L.
J	REVISED PER DCN 36854	10/05/10	SAC
K	REVISED PER DCN 37339	11/24/10	T.L.
L	REVISED PER DCN 39072	05/26/11	N.F.
M	REVISED PER DCN 39793	08/22/11	T.L.
N	REVISED PER DCN 47072	07/10/13	AR
P	REVISED PER DCN 62112	10/03/16	T.J.R.

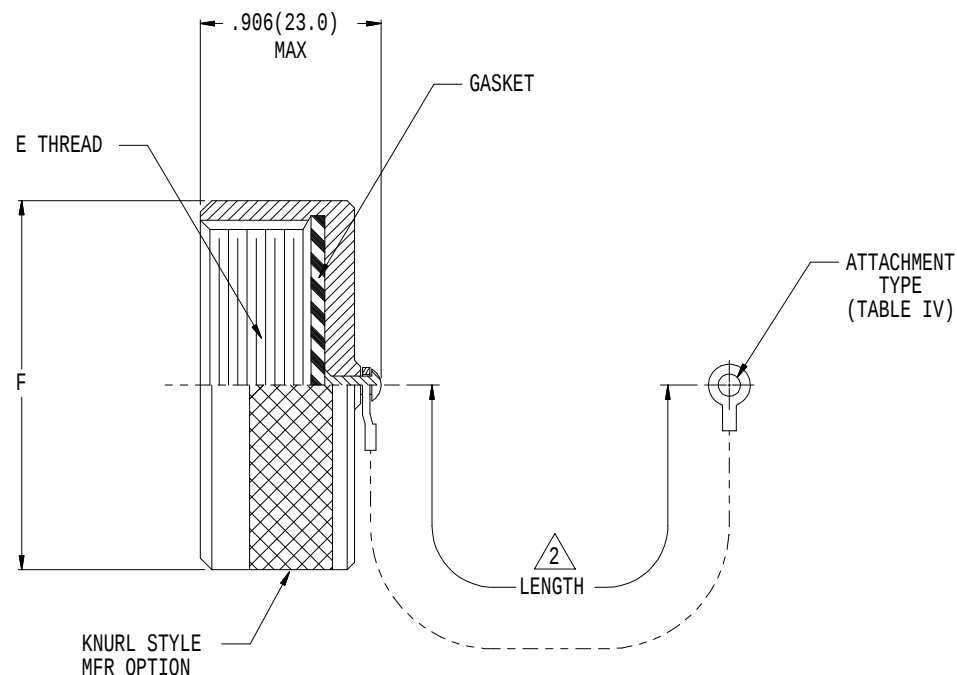

NOTES:


- ASSEMBLY IDENTIFIED WITH MANUFACTURER'S NAME AND P/N, SPACE PERMITTING.
- LENGTH TOLERANCE FOR LINK CHAIN (E) AND SASH CHAIN (S) IS $\pm$ ONE (1) LINK, FOR ALL OTHER ATTACHMENTS $\pm$.25.
- MATERIAL/FINISH:
COVER - AL ALLOY - SEE TABLE II
BEAD & CHAIN ATTACHMENT & TERMINALS - SEE TABLE III
LOCKWASHER, NUT, RINGS, RIVETS, SCREW, WIRE ROPE TERMINALS - CRES/PASSIVATE
WIRE ROPE - CRES - SEE TABLE III/PASSIVATE - N.A.
SEAL - SILICONE/N.A.
STRAP - NYLON / N.A.

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC. WITHOUT WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS $\pm$ 1/16 DECIMALS .XX $\pm$.03 .XXX $\pm$.015 ANGLES $\pm$ 2°	DRAWN	T. LE	01/21/97	GLENAIR, INC. CAD 1997 © 1211 AIR WAY - GLENDALE - CALIFORNIA 91201							
	CHECK	P. OAKES	01/21/97								
	ENGR	R. PAINTER	01/21/97								
	APPROVED APPROVED 			PROTECTIVE COVER FOR MIL-DTL-38999 SERIES III CONNECTOR							
DO NOT SCALE THIS DRAWING			RELEASE DATE	01/22/97	CODE IDENT. NO.	SIZE	660-024	REV.			
			ORIGINAL RELEASE DATE		06324	C		P			
B/F 97-3852 P/C 66			NON REPARABLE COMMERCIAL ITEM			SCALE	N/A	WEIGHT	N/A	SHEET	1 OF 2

TABLE III ATTACHMENT	
SYM	
D	BEAD CHAIN, CRES, PASSIVATED, WITH TERMINAL
E	LINK CHAIN, CRES, PASSIVATED, WITH CLEVIS TERMINAL
F	WIRE ROPE, NYLON JACKET W/TERMINAL
G	NYLON ROPE
H	WIRE ROPE, TEFLON JACKET W/TERMINAL
K	NYLON ROPE (OLIVE DRAB COLOR)
N	ATTACHMENT OMITED
R	WIRE ROPE, PVC JACKET W/TERMINAL
T	WIRE ROPE, NO JACKET, W/TERMINAL
S	#8 SASH CHAIN, CRES, PASSIVATE
U	WIRE ROPE, POLYURETHANE JACKET WITH TERMINAL
SK	NYLON ROPE (BLACK) WITH SLIP KNOT


TABLE IV	
DASH NO	P DIA ±.010 BEAD CHAIN LINK CHAIN WIRE ROPE SASH CHAIN
01	.140 (3.6)
02	.182 (4.6)
03	.191 (4.9)
04	.197 (5.0)
05	.167 (4.2)
06	.125 (3.2)
07	.218 (5.5)
09	.156 (4.0)
00	NO EYELET
WS	WITH STRAP



SPLIT RING



SOLID RING






SOLID RING


TABLE V	
DASH NO	L DIA
50	.425 (10.8)
52	.485 (12.3)
54	.640 (16.3)
56	.750 (19.1)
58	.890 (22.6)
60	1.015 (25.8)
62	1.095 (27.8)
64	1.130 (28.7)
66	1.250 (31.8)
68	1.350 (34.3)
70	1.375 (34.9)
72	1.485 (37.7)
74	1.625 (41.3)
76	1.750 (44.5)
78	1.875 (47.6)
80	1.980 (50.3)
82	2.060 (52.3)
84	2.235 (56.8)
86	2.310 (58.7)
88	2.475 (62.9)
90	2.655 (67.4)
92	2.810 (71.4)
94	3.045 (77.3)

TABLE VI	
DASH NO	M DIA
08	.468 (11.9)
10	.593 (15.1)
12	.718 (18.2)
13	.765 (19.4)
14	.844 (21.4)
15	.890 (22.6)
16	.968 (24.6)
17	1.015 (25.8)
18	1.093 (27.8)
19	1.140 (29.0)
20	1.203 (30.6)
21	1.265 (32.1)
22	1.343 (34.1)
23	1.453 (36.9)
24	1.484 (37.7)
25	1.577 (40.1)
27	1.640 (41.7)
28	1.687 (42.8)
29	1.765 (44.8)
30	1.890 (48.0)
31	1.953 (49.6)
32	1.968 (50.0)
33	2.077 (52.8)
35	2.140 (54.4)
36	2.187 (55.5)
40	2.406 (61.1)
44	2.656 (67.5)
48	3.031 (77.0)

TABLE VII	
DASH NO	N DIA
085	.265 (6.7)
095	.312 (7.9)
100	.391 (9.9)
101	.516 (13.1)
102	.583 (14.8)
103	.641 (16.3)
104	.708 (18.0)
105	.766 (19.5)
205	.788 (20.0)
106	.896 (22.2)
206	.907 (23.0)
107	1.016 (25.8)
207	1.025 (26.0)
108	1.141 (29.0)
308	1.188 (30.2)
208	1.203 (30.6)
109	1.266 (32.2)
209	1.312 (33.3)
110	1.391 (35.3)
210	1.438 (36.5)
111	1.521 (38.6)
211	1.536 (39.0)
112	1.641 (41.7)
113	1.766 (44.9)
213	1.812 (46.0)
114	1.891 (48.0)
214	1.938 (49.2)
115	2.078 (52.8)
116	2.406 (61.1)
117	2.510 (63.8)

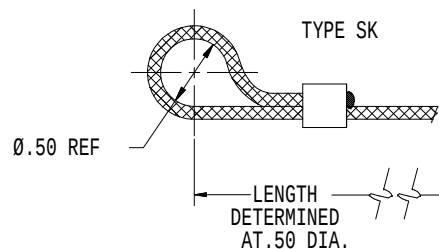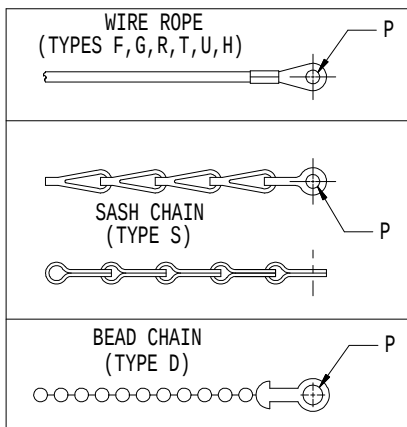

THIS COPYRIGHTED DOCUMENT IS THE PROPERTY OF GLENAIR, INC. AND IS FURNISHED ON THE CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED TO SOLICIT QUOTATIONS FROM COMPETITIVE SOURCES, OR USED FOR MANUFACTURE BY ANYONE OTHER THAN GLENAIR, INC. WITHOUT WRITTEN PERMISSION FROM GLENAIR, INC. THE INFORMATION HEREIN HAS BEEN DEVELOPED AT GLENAIR'S EXPENSE AND MAY BE USED FOR ENGINEERING EVALUATION AND INCORPORATION INTO TECHNICAL SPECIFICATIONS AND OTHER DOCUMENTS WHICH SPECIFY PROCUREMENT OF PRODUCTS FROM GLENAIR, INC.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS ± 1/16 DECIMALS .XX ±.03 .XXX ±.015 ANGLES ± 2°	DRAWN	T.LE	01/21/97
	CHECK	P.OAKES	01/21/97
	ENGR	R.PAINTER	01/21/97
	 APPROVED		
DO NOT SCALE THIS DRAWING	 APPROVED		
	RELEASE DATE 01/22/97 ORIGINAL RELEASE DATE		
B/F 97-3852	P/C 66	NON REPARABLE COMMERCIAL ITEM	

GLENAIR, INC.		CAD 1997	
1211 AIR WAY - GLENDALE - CALIFORNIA 91201			
PROTECTIVE COVER FOR			
MIL-DTL-38999 SERIES III CONNECTOR			
DE IDENT. NO.	SIZE	660-024	REV.
06324	C		P
SCALE N/A	WEIGHT N/A	SHEET 2	OF 2



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.