

# > em4

## em4 local

## em4 local


- > Very compact and easy to program nanoPLC
- > Save time in designing your application using the most intuitive graphical function block language of the market
- > Measure accurately your high end industrial sensors with the embedded configurable analog inputs (including 4-20 mA)
- > Integrate easily one of our three high tech designs in your machine
- > Adapt your application along the way of its lifecycle thanks to the enhanced controlling performances



em4 local - Robust



em4 local - Glossy black



em4 local - Glossy white

| Specific characteristics                            |  |  |                |
|---|--|--|----------------|
| Part number   | 88 981 102   | 88 981 103   | 88 981 104     |
| Type  | B26  |  |                |
| Inputs  | 16 digital inputs (including 4 High Speed, 8 analog 0-10 V / potentiometers and 4 analog 0-10 V / 4-20 mA)                               |  |                |
| Outputs   | 10 digital outputs (including 2 solid states 0.5 A PWM, 2 relays 6 A and 6 relays 8 A)   |  |                |
| Supply  | 24 VDC   |  |                |
| Finish  | Robust   | Glossy black   | Glossy white   |
| On front panel color                                | Black RAL 9011   |  | White RAL 9003 |
| On terminal block color                             | Blue RAL 5017  |  |                |
| Protection rating (in accordance with IEC/EN 60529) | IP 50 on front panel<br>IP 20 on terminal block  | IP 40 on front panel<br>IP 20 on terminal block  |                |
| Weight  | Without packing: 315 g<br>With packing: 360 g  | Without packing: 310 g<br>With packing: 355 g  |                |
| Dimensions  | Without packing:<br>124.6 x 90 x 62.6 mm /<br>4.91 x 3.54 x 2.46 inch<br>With packing:<br>148 x 103 x 65 mm /<br>5.83 x 4.06 x 2.56 inch | Without packing:<br>124.6 x 90 x 60.4 mm / 4.91 x 3.54 x 2.38 inch<br>With packing:<br>148 x 103 x 65 mm / 5.83 x 4.06 x 2.56 inch |                |

| General characteristics  |  |
|--|--|
| Products certification (in accordance with IEC/EN 60529)                     | CE, cULus Listed   |
| Conformity with the low voltage directive (in accordance with BT 2006/95/EC) | IEC/EN 61131-2 (Open equipment)  |
| Conformity with the EMC directive (in accordance with 2004/108/EC)           | IEC/EN 61000-6-1 (Residential, commercial and light-industrial environments)<br>IEC/EN 61000-6-2 (Industrial)<br>IEC/EN 61000-6-3 (Residential, commercial and light-industrial environments)<br>IEC/EN 61000-6-4 (Industrial) |
| Earthing   | None   |
| Overvoltage category   | 3 in accordance with IEC/EN 60664-1  |
| Pollution  | Degree: 2 in accordance with IEC/EN 61131-2  |
| Maximum utilization altitude   | Operation: 2000 m<br>Transport: 3000 m   |
| Mechanical resistance  | Immunity to vibrations IEC/EN 60068-2-6, Fc test<br>Immunity to shock IEC/EN 60068-2-27, Ea test   |
| Resistance to electrostatic discharge  | Immunity to ESD IEC/EN 61000-4-2, level 3  |

|   |   |
|---|---|
| Resistance to HF interference (Immunity)                                  | Immunity to radiated electrostatic fields IEC/EN 61000-4-3, level 3<br>Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3<br>Immunity to shock waves IEC/EN 61000-4-5<br>Radio frequency in common mode IEC/EN 61000-4-6, level 3   |
| Conducted and radiated emissions (in accordance with EN 55022/11 group 1) | Class B   |
| Operation temperature   | -20°C (-4°F) → +60°C (140°F) (+40°C (104°F) in a non-ventilated enclosure)  |
| Storage temperature   | -40°C (-40°F) → +80°C (176°F)   |
| Relative humidity   | 95% max. (no condensation or dripping water)  |
| Screw terminals connection capacity                                       | Flexible wire with ferrule: 1 conductor: 0.2 to 2.5 mm <sup>2</sup> (AWG 24-14)<br>Flexible wire with ferrule: 2 conductors: 0.2 to 0.75 mm <sup>2</sup> (AWG 24-18)<br>Rigid wire: 1 conductor: 0.2 to 2.5 mm <sup>2</sup> (AWG 24-14)<br>Rigid wire: 2 conductors: 0.2 to 0.75 mm <sup>2</sup> (AWG 24-18)<br>Tightening torque: 0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm)<br>Stripping length: 6 mm |

### Processing characteristics

|   |  |
|---|--|
| LCD display                                 | Display with 4 lines of 18 characters  |
| Programming method                          | FBD (Function Block Diagram), including SFC (Sequential Function Chart, Grafset)   |
| Program size                                | Function blocks: typically 1000 blocks<br>Macro blocks: 64 max. (256 blocks per macro)   |
| Program memory                              | Flash  |
| Removable memory                            | N.A  |
| Data memory                                 | 2 k octets   |
| Backup time (in the event of power failure) | Program and settings in the controller: 10 years<br>Data memory: 10 years  |
| Data backup                                 | Data backup in the flash memory is guaranteed if the product is powered on more than 10 seconds  |
| Cycle time                                  | From 2 ms to 90 ms, default value: 10 ms   |
| Clock data retention                        | 10 years (lithium battery) at 25°C (77°F)  |
| Clock drift                                 | Drift < 12 min/year (at 25°C (77°F))<br>6 s / month (at 25°C (77°F) with user-definable correction of drift).<br>Synchronizable by network   |
| Timer block accuracy                        | 0.5 % +/- 2 cycle time   |
| Start up time on power up                   | < 3 s base alone, < 1.5 s base + 2 expansions + accessory interface (USB or Modbus RS485)  |
| Self test                                   | Test firmware integrity (checksum memory)<br>Stability of the internal power supply<br>Check the conformity of the em4 device configuration with the configuration in the application program. |

### Supply

|  |  |
|--|--|
| Nominal voltage                        | 24 VDC (-15% / +20%)                               |
| Operating limits                       | 20.4 - 28.8 VDC                                    |
| Immunity from micro power cuts         | ≤ 1 ms (repetition 20 times)                       |
| Max. absorbed power                    | 4W @ 24 VDC, 5.3 W @ 28.8 V, - 0.3 W backlight OFF |
| Protection against polarity inversions | Yes  |

### Inputs

#### Digital and high speed digital inputs 24 VDC - 4 inputs from I1 to I4

##### Input used as digital input

|                                  |   |
|----------------------------------|---|
| Input voltage                    | 24 VDC (-15% / +20%)                                |
| Input current                    | 1.8 mA @ 20.4 V<br>2.1 mA @ 24 V<br>2.5 mA @ 28.8 V |
| Input impedance                  | 11.6 kΩ   |
| Logic 1 voltage threshold        | ≥ 15 VDC  |
| Making current at logic state 1  | ≥ 1.3 mA  |
| Logic 0 voltage threshold        | ≤ 10 VDC  |
| Release current at logic state 1 | ≤ 0.8 mA  |
| Response time                    | 1 to 2 cycle times                                  |
| Sensor type                      | Contact or 3-wire PNP                               |
| Conforming to IEC/EN 61131-2     | Type 1  |

|   |  |
|---|--|
| Input type  | Resistive  |
| Isolation between power supply and inputs   | None   |
| Isolation between inputs  | None   |
| Protection against polarity inversions  | Yes  |
| Status indicator  | On LCD screen  |
| Cable length  | ≤ 100 m  |
| <b>Input used as high speed digital input</b>   |  |
| Maximum counting frequency  | 3 channels encoder (I1, I2, I3): 20 kHz*<br>2 independent counters (I1, I2) (I3, I4) (Cumul, IND, DIR): 2 channels: 40 kHz*,<br>4 channels: 20 kHz*,<br>2 independent counters (I1, I2) (I3, I4) (PH, PH2): 2/4 channels: 20 kHz*<br>4 independent counters (I1, I2, I3, I4) (Up/Down): 1 channel: 60 kHz*, 2 channels:<br>40 kHz*, > 2 channels: 20 kHz*<br>* with a time cycle ≤ 10 ms and a ton / toff = 50% +/- 5%, level 0 < 2V and level 1 > 20,4V |
| Other functions   | 4 chronometers (I1, I2, I3, I4 )<br>4 tachometers (I1, I2, I3, I4 )  |
| Cable length  | ≤ 3 m with shielded twisted cable  |
| <b>Digital 24 VDC and analog inputs 12 bits / 28.8 V - potentiometer - 8 inputs from I5 to IC</b> |  |
| <b>Input used as digital input</b>  |  |
| Input voltage   | 24 VDC (-15% / +20%)   |
| Input current   | 1.8 mA @ 20.4 V<br>2.1 mA @ 24 V<br>2.5 mA @ 28.8 V  |
| Input impedance   | 11.6 kΩ  |
| Logic 1 voltage threshold   | ≥ 11 VDC   |
| Making current at logic state 1   | ≥ 1 mA   |
| Logic 0 voltage threshold   | ≤ 9 VDC  |
| Release current at logic state 1  | ≤ 0.7 mA   |
| Response time   | 1 to 2 cycle times   |
| Sensor type   | Contact or 3-wire PNP  |
| Conforming to IEC/EN 61131-2  | Type 1   |
| Input type  | Resistive  |
| Isolation between power supply and inputs   | None   |
| Isolation between inputs  | None   |
| Protection against polarity inversions  | Yes  |
| Status indicator  | On LCD screen  |
| Cable length  | ≤ 100 m  |
| <b>Input used as analog input</b>   |  |
| Measuring range   | 0 → 10 V or 0 → V power supply   |
| Input impedance   | 11.6 kΩ  |
| Maximum value without destruction   | 28.8 VDC max   |
| Input type  | Common mode  |
| Resolution  | 12 bit at maximum input voltage (10.5 bit at 10V)  |
| Value of LSB  | 7.03 mV  |
| Conversion time   | Controller cycle time  |
| Maximum error in 0-10V mode   | +/- 1.1 % of full scale at 25°C (77°F)<br>+/- 1.6 % of full scale at 55°C (131°F)  |
| Maximum error in 0-V power supply mode  | +/- 2 % of full scale at 25°C (77°F)<br>+/- 3 % of full scale at 55°C (131°F)  |
| Repeat accuracy at 55°C (131°F)   | +/- 0.5 %  |
| Isolation between analog channel and power supply   | None   |
| Protection against polarity inversions  | Yes  |
| Potentiometer control   | 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.   |
| Cable length  | ≤ 10 m with shielded twisted cable (sensor not isolated)   |



**Digital 24 VDC and analog inputs 12 bits / 10 V & 11 bits / 0-20 mA- potentiometer - 4 inputs from ID to IG**

| Input used as digital input (power off state)     |   |
|---|---|
| Input voltage                                     | 24 VDC (-15% / +20%)  |
| Input current                                     | 1.5 mA @ 20.4 V<br>1.7 mA @ 24 V<br>2.1 mA @ 28.8 V   |
| Input impedance                                   | 13.9 kΩ   |
| Logic 1 voltage threshold                         | ≥ 11 VDC  |
| Making current at logic state 1                   | ≥ 0.8 mA  |
| Logic 0 voltage threshold                         | ≤ 8 VDC   |
| Release current at logic state 1                  | ≤ 0.5 mA  |
| Response time                                     | 1 to 2 cycle times  |
| Sensor type                                       | Contact or 3-wire PNP   |
| Conforming to IEC/EN 61131-2                      | Type 1  |
| Input type  | Resistive   |
| Isolation between power supply and inputs         | None  |
| Isolation between inputs                          | None  |
| Protection against polarity inversions            | No  |
| Status indicator                                  | On LCD screen   |
| Cable length                                      | ≤ 100 m   |
| Input used as 0-10 V analog input                 |   |
| Measuring range                                   | 0 → 10 V  |
| Input impedance                                   | 13.9 kΩ   |
| Maximum value without destruction                 | 28.8 VDC max  |
| Input type  | Common mode   |
| Resolution  | 12 bit / 10V  |
| Value of LSB                                      | 2.45 mV   |
| Conversion time                                   | Controller cycle time   |
| Maximum error at 25°C (77°F)                      | +/- 0.8 % of full scale   |
| Maximum error at 55°C (131°F)                     | +/- 1.2 % of full scale   |
| Repeat accuracy at 55°C (131°F)                   | +/- 0.5 %   |
| Isolation between analog channel and power supply | None  |
| Protection against polarity inversions            | Yes for voltage ≤ 10 V  |
| Potentiometer control                             | 2.2 kΩ / 0.5 W (recommended), 10 KΩ max.  |
| Cable length                                      | ≤ 10 m with shielded twisted cable (sensor not isolated)                                      |
| Input used as 0-20 mA analog input                |   |
| Measuring range                                   | 0 → 20 mA (4 → 20 mA by the application)  |
| Input impedance                                   | 245 Ω   |
| Maximum value without destruction                 | 30 mA max   |
| Input type  | Common mode   |
| Resolution  | 11 bit (normalized at 0 - 2000) / 20 mA   |
| Value of LSB                                      | 10 μA   |
| Conversion time                                   | Controller cycle time   |
| Maximum error at 25°C (77°F)                      | +/- 1.2 % of full scale   |
| Maximum error at 55°C (131°F)                     | +/- 1.7 % of full scale   |
| Repeat accuracy at 55°C (131°F)                   | +/- 0.5 %   |
| Isolation between analog channel and power supply | None  |
| Protection against polarity inversions            | Yes   |
| Overvoltage protection                            | Yes If the input voltage is > 7 V, this one is automatically switched on 0-10V configuration. |
| Cable length                                      | ≤ 30 m with shielded twisted cable (sensor not isolated)                                      |

| Outputs   |   |         |        |       |
|---|---|---------|--------|-------|
| <b>Digital / PWM solid state output - 2 solid state outputs from O1 to O2</b> |   |         |        |       |
| <b>Output used as digital output</b>  |   |         |        |       |
| Breaking voltage  | 10 → 28.8 VDC   |         |        |       |
| Nominal voltage   | 12 / 24 VDC   |         |        |       |
| Nominal current   | 0.5 A on resistive load @ 25°C (77°F)   |         |        |       |
| Max. breaking current   | 0.625 A   |         |        |       |
| Non repetitive overload current   | 1 A   |         |        |       |
| Maximum breaking current in the common  | 1 A   |         |        |       |
| Voltage drop  | < 1 V for I = 0.5 A   |         |        |       |
| Response time   | Make = 1 cycle time + 30 μs typical<br>Release = 1 cycle time + 40 μs typical   |         |        |       |
| Built-in protections  | Against overloads and short-circuits: Yes<br>Against over voltages (*): Yes<br>Against inversions of power supply: Yes<br>(* In the absence of a potential free contact between the output of the programmable logic controller and the load  |         |        |       |
| Min. load   | 1 mA  |         |        |       |
| Galvanic isolation  | No  |         |        |       |
| Cable length  | ≤ 10 m  |         |        |       |
| Truth table of the default  |   | Command | Output | Fault |
|   | Normal condition  | 0       | 0      | No    |
|   |   | 1       | 1      | No    |
|   | Overheating   | 0       | 0      | No    |
|   |   | 1       | 0      | Yes   |
|   | Underpowered  | 0       | 0      | X     |
|   |   | 1       | 0      | X     |
|   | Short circuit (current limit)   | 0       | 0      | No    |
|   |   | 1       | 0      | Yes   |
| <b>Output used as PWM output</b>  |   |         |        |       |
| PWM frequency   | 14.11 Hz ; 56.45 Hz ; 112.90 Hz ; 225.80 Hz ; 451.59 Hz ; 1758.24 Hz  |         |        |       |
| PWM cyclic ratio  | 0 → 100 % 100 steps   |         |        |       |
| PWM Max. error  | ≤ 2 % (from 10 % → 90 %)  |         |        |       |
| Status indicator  | On LCD screen   |         |        |       |
| Cable length  | ≤ 10 m with shielded twisted cable  |         |        |       |
| Distance between the power source and the static outputs                      | ≤ 30 m  |         |        |       |
| <b>6 A relay output - 2 outputs from O3 to O4</b>                             |   |         |        |       |
| Breaking voltage  | 250 VAC max   |         |        |       |
| Breaking current  | 6 A   |         |        |       |
| Maximum breaking current in the common  | IEC @ 25°C (77°F): 12 A<br>IEC @ 60°C (140°F) or UL: 10 A   |         |        |       |
| Mechanical life   | 5 000 000 operations (cycles)   |         |        |       |
| Electrical durability for 50 000 operating cycles                             | 24 VDC tau = 0 ms: 6 A, tau = 7 ms: 3 A, tau = 15 ms: 1.8 A<br>Usage category DC-12: 24 V, 6 A<br>Usage category DC-14: 24 V, 1.8 A<br>250 VAC cos phi = 1: 6 A, cos phi = 0.7: 5 A, cos phi = 0.4: 2.5 A<br>Usage category AC-12: 250 V, 6 A<br>Usage category AC-13: 250 V, 5 A<br>Usage category AC-15: 250 V, 2 A |         |        |       |
| Minimum switching capacity  | 100 mA (at minimum voltage of 12V)  |         |        |       |
| Maximum operating rate  | Off load: 10 Hz<br>At operating current: 0.1 Hz   |         |        |       |
| Voltage for withstanding shocks   | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV  |         |        |       |
| Response time   | Make = 1 cycle time + 8 ms typical<br>Release = 1 cycle time + 4 ms typical   |         |        |       |
| Built-in protections  | Against short-circuits: None<br>Against over voltages and overload: None  |         |        |       |
| Status indicator  | On LCD screen   |         |        |       |
| Cable length  | ≤ 30 m  |         |        |       |

**8 A relay output - 6 outputs from O5 to OA**



|   |  |
|---|--|
| Breaking voltage                                  | 250 VAC max  |
| Breaking current                                  | 8 A, $\geq 55^{\circ}\text{C}$ : 6 A   |
| Maximum breaking current in the common            | IEC @ $25^{\circ}\text{C}$ ( $77^{\circ}\text{F}$ ): C3, C6: 8 A ; C4, C5: 16 A<br>IEC @ $60^{\circ}\text{C}$ ( $140^{\circ}\text{F}$ ) or UL: C3, C6: 8 A ; C4, C5: 10 A  |
| Mechanical life                                   | 20 000 000 operations (cycles)   |
| Electrical durability for 50 000 operating cycles | 24 VDC $\tau = 0$ ms: 8 A, $\tau = 7$ ms: 3 A, $\tau = 15$ ms: 1.5 A<br>Usage category DC-12: 24 V, 8 A<br>Usage category DC-14: 24 V, 1.5 A<br>250 VAC $\cos \phi = 1$ : 8 A, $\cos \phi = 0.7$ : 4.75 A, $\cos \phi = 0.4$ : 3 A<br>Usage category AC-12: 250 V, 8 A<br>Usage category AC-13: 250 V, 4.3 A<br>Usage category AC-15: 250 V, 1.5 A |
| Minimum switching capacity                        | 100 mA (at minimum voltage of 12V)   |
| Maximum operating rate                            | Off load: 10 Hz<br>At operating current: 0.1 Hz  |
| Voltage for withstanding shocks                   | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1: 4 kV   |
| Response time                                     | Make = 1 cycle time + 10 ms typical<br>Release = 1 cycle time + 5 ms typical   |
| Built-in protections                              | Against short-circuits: None<br>Against over voltages and overload: None   |
| Status indicator                                  | On LCD screen  |
| Cable length                                      | $\leq 30$ m  |

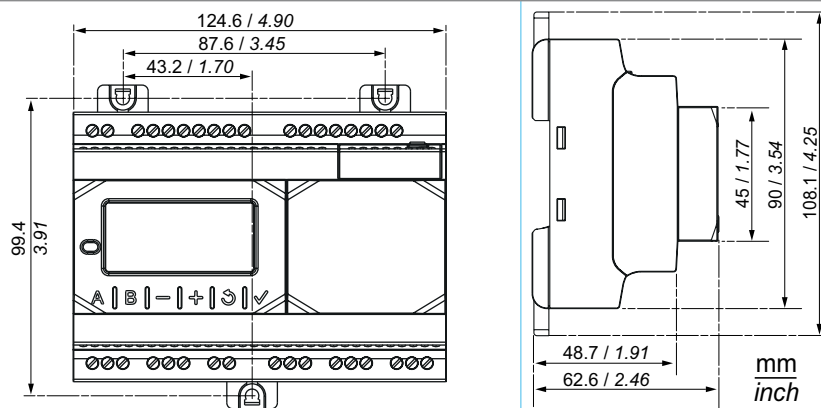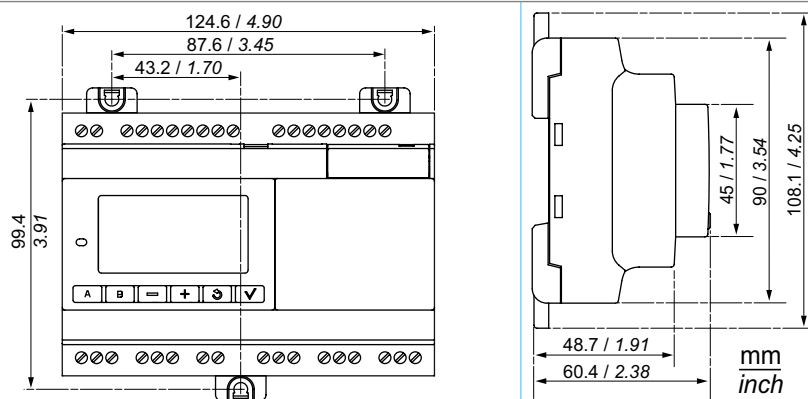**Schemes****Dimensions****B26 Robust****B26 Glossy**



Connections

Inputs



I1 ... IG 0/1

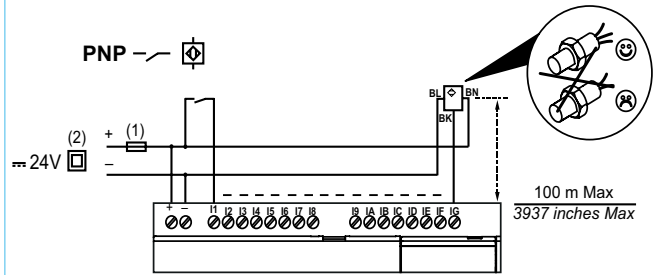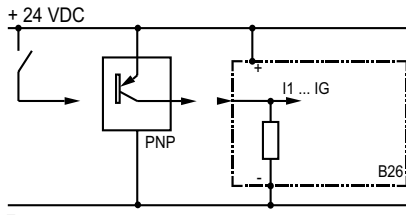



I5 ... IC U

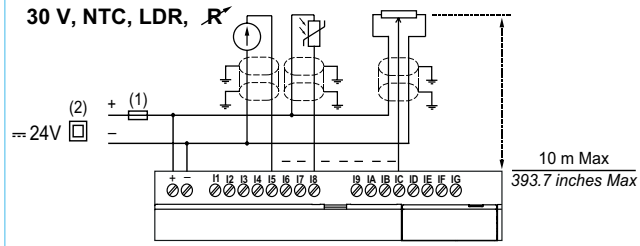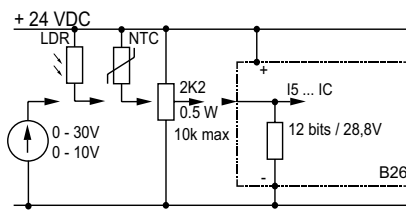



ID ... IG U / I

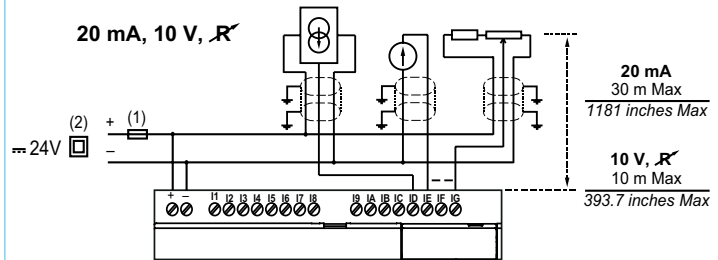
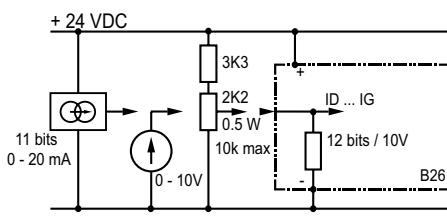


I1 ... I4 2604

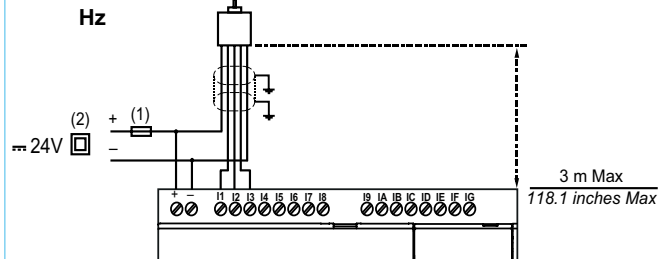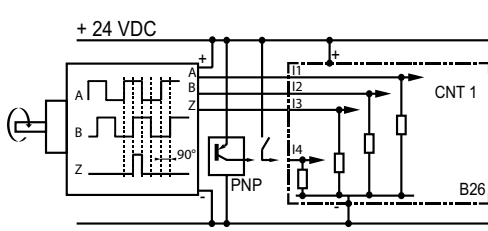

I1 ... I4 2604

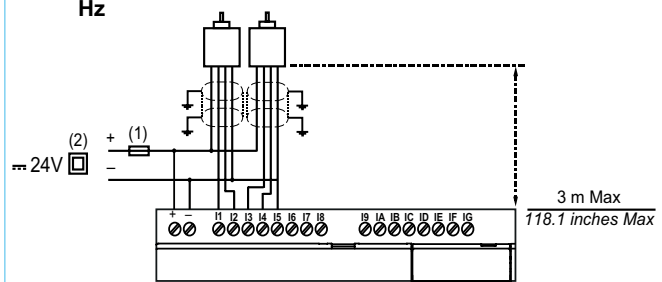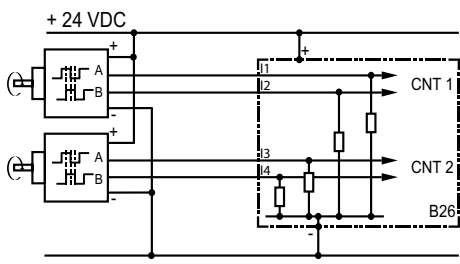


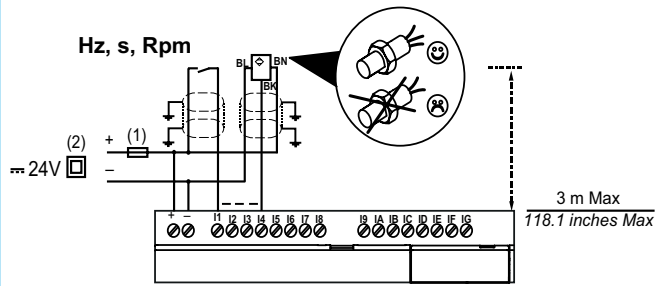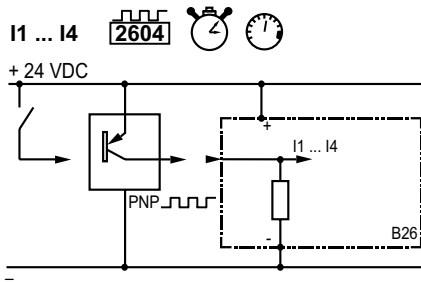


- (1) 1 A (UL248) quick-blowing fuse, circuit-breaker or circuit protector (US)
- (2) Isolating source

**Outputs**


**O1 & O2**

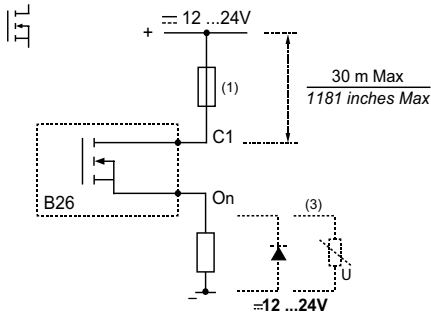


**0,5 A**

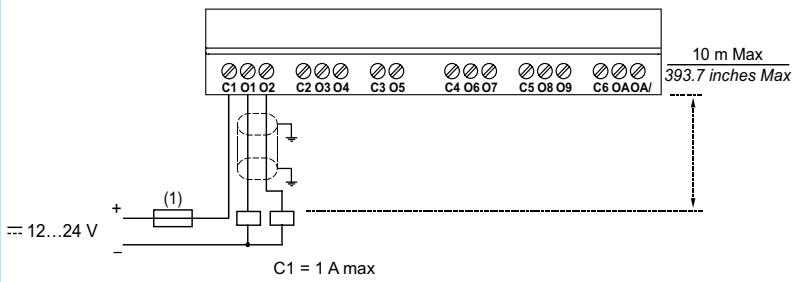

**O3 ... OA**

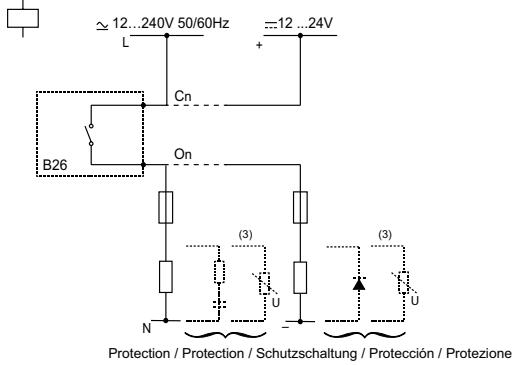


**6 A, 8 A**

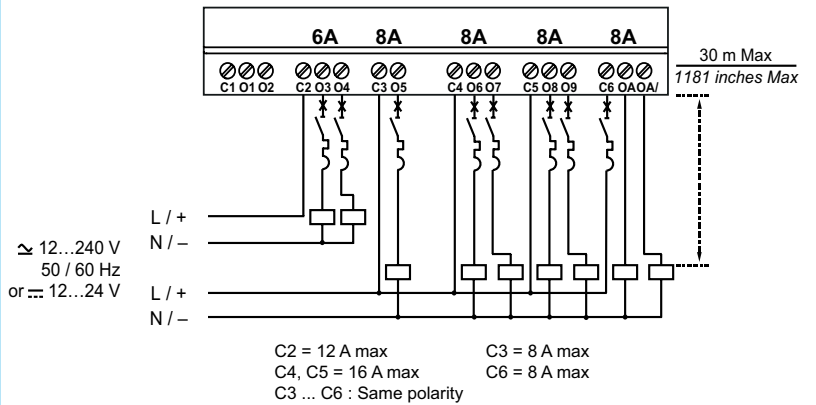

(3) Inductive load

**I/O installations**

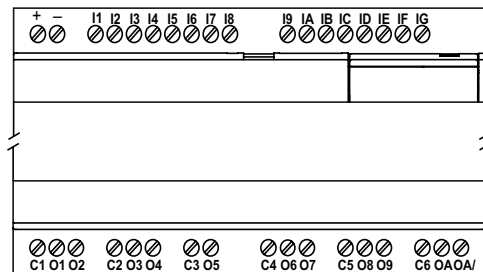





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.