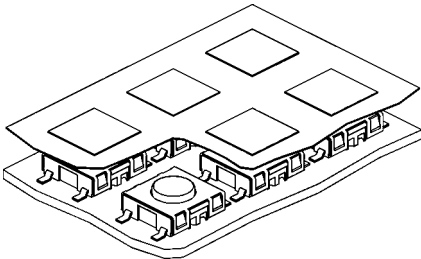



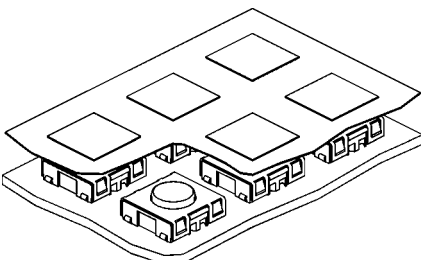






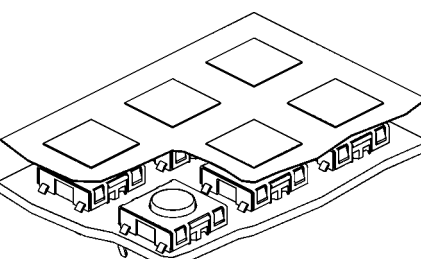






















Switches in momentary action SMS, PMS, PMK

Models	Construction	Dimensions		Solder pads
SMS Gullwing-leads  12				Solder pads Gullwing 
SMS J-leads  12				Solder pads J-leads 
Buttons in variable heights 		Overall height h variable 		
PMS Through hole mounting  12				Drilling diagram through hole 
PMS height variable 		Overall height h variable 		Circuit diagram 
PMK Shape 1  Shape 2 	 			








Technical Data SMS, PMS, PMK

1. Mechanical data		SMS	PMS	PMK
Actuating force	IP 40 IP 67	1,8 N ±0,4 N 2,2 N ±0,4 N	1,8 N ±0,4 N 2,2 N ±0,4 N	2,2 N ±0,4 N
Contact travel		0,35 mm ±0,1 mm	0,35 mm ±0,1 mm	0,30 mm ±0,1 mm
(DIN 41640 Teil 19) / End stop strength		> 100 N		
(IEC 512-5 Test 9a, actuating force 5 N) / Lifetime		> 10 ⁶ Operations		
2. Electrical data				
Switching voltage max.		30V AC / 42V DC		
Switching current max.		50mA		
Lifetime (at rated breaking capacity 0,12W)		> 10 ⁶ Cycles		
(IEC 512-2, mV-Method) Initial contact resistance, new		< 50 mΩ		
Initial contact resistance after 10 ⁶ cycles		< 150 mΩ		
(IEC 512-2) Insulation resistance		> 10 ⁸ Ω		
Contact bounce time		typ. 0,15 ms		
3. Other data		SMS	PMS	PMK
Solderability (CECC 00802 und IEC 68-2-20)		IR-Reflow		
(IEC 68-2-20 Test Tb, Method 1A) Soldering heat resistance (IEC 68-2-20 Test Tb, Method 2) (CECC 00802 Classification B) (CECC 00802 Classification C)		350 °C / 10s 215 °C / 40s 260 °C / 10s	260 °C / 10s 350 °C / 10s	260 °C / 10s 350 °C / 10s
Ambient temperature		-40 °C...+85 °C		
Storage temperature		-40 °C...+85 °C		
(IEC 68-2-45) Testmedium Cleaning agent proof		Zestron		
(DIN 41640 Teil 84) Flux-proof		—	given	given
Degree of protection		IP 40 / IP 67	IP 40 / IP 67	IP 67
4. Materials		SMS	PMS	PMK
Contact material gold		CuZn – 1,5µm Ni + 0,5µm Au		
Terminals		CuZn – 8µm SnPb		
Socket		Thermoplast PA 4.6		
Actuator		Thermoplast PPS		
Cover plate		X12CrNi17 7		
Sealing membrane		—	VMQ	VMQ
5. Packaging		SMS	PMS	PMK
		taped and reeled		
		loose in boxes	loose in boxes	loose in boxes

Switches in momentary action SMS, PMS

Models SMS		Variations			Part Number		
Gullwing-leads 	Degree of protection	IP 40			1241.1600.	XX	
		IP 67			1241.1606.	XX	
J-leads 		IP 40			1241.1601.	XX	
		IP 67			1241.1607.	XX	
Gullwing-leads 		IP 40			1241.1612.	XX	
		IP 67			1241.1618.	XX	
J-leads 		IP 40			1241.1613.	XX	
		IP 67			1241.1619.	XX	
Packaging		loose in boxes				11	
		taped and reeled				23	
Button in variable heights for long actuators (must be ordered separately) 	Overall height h 	8,50 mm	yellow)		0862.8101		
		9,25 mm	orange)		0862.8102		
		10,00 mm	red)		0862.8103		
		10,75 mm	blue)		0862.8104		
		11,50 mm	green)		0862.8105		
		12,25 mm	grey)		0862.8106		
		13,00 mm	black)		0862.8107		
		13,75 mm	white)		0862.8108		
	¹ additional key cap					0862.8226	
	¹ Starting with 14,50 mm, additional (second) key caps for midsizes (h +6mm) are necessary. Order separately.						
PMS							
Short actuator 	Degree of protection	IP 40			1241.1602		
		IP 67			1241.1608		
Long actuator 		IP 40			1241.1614		
		IP 67			1241.1620		
Height variable 	Degree of protection	IP 40			1241.1624.	XX	
		IP 67			1241.1625.	XX	
Overall height h 		yellow)	8,35 mm =	1	² 14,35 mm =	11	
		orange)	9,10 mm =	2	15,10 mm =	21	
		red)	9,85 mm =	3	15,85 mm =	31	
		blue)	10,60 mm =	4	16,60 mm =	41	
		green)	11,35 mm =	5	17,35 mm =	51	
		grey)	12,10 mm =	6	18,10 mm =	61	
		black)	12,85 mm =	7	18,85 mm =	71	
		white)	13,60 mm =	8	19,60 mm =	81	
² Starting with 14,35 mm the heights were realized with an additional (second) keycap.							

PMK and key caps for SMS, Illumination key caps

Models PMK		Variations				Part Number	
Shape 1 	Degree of protection	with legend				1241.1629. X .	XXX
		without legend				1241.1629. X .	XXX
	Shape 2 	with legend				1241.1633. X .	XXX
		without legend				1241.1633. X .	XXX
Shape 1 	for IP 67 with short actuator	with legend				0865.9541. X .	XXX
		without legend				0865.9541. X .	XXX
	Shape 2 	with legend				0865.9542. X .	XXX
		without legend				0862.800 X	
SMS Tastkappe Key cap		Color of key cap					
Shape 1 Insert plate  Key cap  Base module 		red				3	
		green				5	
		grey				6	
		black				7	
		white				8	
PMK Shape 2 Key cap  Base module 	Legend of key cap/insert plate (Type height/ type face see page 39)	A = 001	P = 016	4 = 031	↕ = 046	EIN = 061	
		B = 002	Q = 017	5 = 032	→ = 047	AUS = 062	
		C = 003	R = 018	6 = 033	← = 048	AUF = 063	
		D = 004	S = 019	7 = 034	↓ = 049	AB = 064	
		E = 005	T = 020	8 = 035	↑ = 050	ON = 065	
		F = 006	U = 021	9 = 036	% = 051	OFF = 066	
		G = 007	V = 022	+ = 037	√ = 052	UP = 067	
		H = 008	W = 023	- = 038	CTRL = 053	DOWN = 068	
		I = 009	X = 024	· = 039	RETURN = 054	HIGH = 069	
		J = 010	Y = 025	x = 040	SHIFT = 055	LOW = 070	
		K = 011	Z = 026	÷ = 041	LOCK = 056	ON/OFF = 071	
		L = 012	0 = 027	* = 042	STOP = 057	START = 072	
M = 013	1 = 028	= = 043	ENTER = 058				
N = 014	2 = 029	# = 044	BACK = 059				
O = 015	3 = 030	↔ = 045	LINE = 060				
Color of insert plate without legend shape 1	yellow	=	091	grey	=	096	
	orange	=	092	black	=	097	
	red	=	093	white	=	098	
	blue	=	094	anthracite	=	099	
	green	=	095				
Illumination key cap	In Preparation				0859.9335		
	Color of key cap	transparent					
Aufragsbezogene Fertigung / Order specific production							



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.