

# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000



- 8-Bit Resolution
- Easy Microprocessor Interface or Stand-Alone Operation
- Operates Ratiometrically or With 5-V Reference
- 4- or 8-Channel Multiplexer Options With Address Logic
- Input Range 0 to 5 V With Single 5-V Supply
- Remote Operation With Serial Data Link
- Inputs and Outputs Are Compatible With TTL and MOS
- Conversion Time of 32  $\mu$ s at  $f_{\text{clock}} = 250$  kHz
- Functionally Equivalent to the ADC0834 and ADC0838 Without the Internal Zener Regulator Network
- Total Unadjusted Error . . .  $\pm 1$  LSB

### description


These devices are 8-bit successive- approximation analog-to-digital converters, each with an input-configurable multichannel multiplexer and serial input/output. The serial input/output is configured to interface with standard shift registers or microprocessors. Detailed information on interfacing with most popular microprocessors is readily available from the factory.

The TLC0834 (4-channel) and TLC0838 (8-channel) multiplexer is software-configured for single-ended or differential inputs as well as pseudodifferential input assignments. The differential analog voltage input allows for common-mode rejection or offset of the analog zero input voltage value. In addition, the voltage reference input can be adjusted to allow encoding of any smaller analog voltage span to the full 8 bits of resolution.

The TLC0834C and TLC0838C are characterized for operation from 0°C to 70°C. The TLC0834I and TLC0838I are characterized for operation from –40°C to 85°C. The TLC0834Q is characterized for operation from –40°C to 125°C.

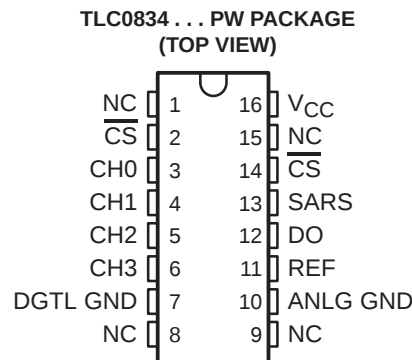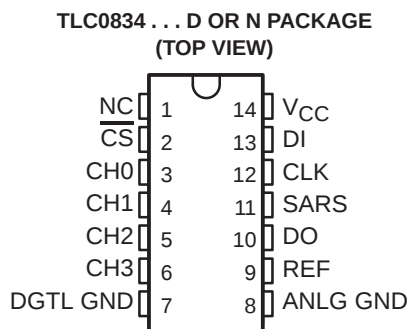

NC – No internal connection

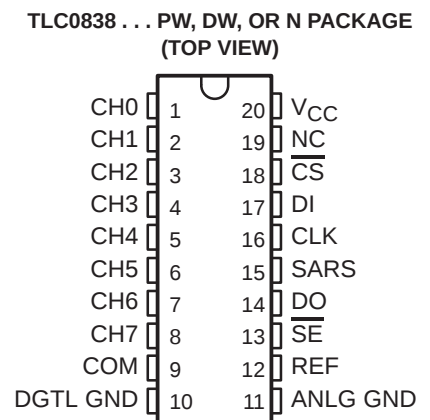

### AVAILABLE OPTIONS

| T <sub>A</sub> | PACKAGE           |                    |                     |                       |
|----------------|-------------------|--------------------|---------------------|-----------------------|
|                | SMALL OUTLINE (D) | SMALL OUTLINE (DW) | PLASTIC DIP (N)     | TSSOP (PW)            |
| 0°C to 70°C    | TLC0834CD         | TLC0838CDW         | TLC0834CN TLC0838CN | TLC0834CPW TLC0838CPW |
| –40°C to 85°C  | TLC0834ID         | TLC0838IDW         | TLC0834IN TLC0838IN | TLC0834IPW TLC0838IPW |
| –40°C to 125°C | —                 | —                  | TLC0834QN —         | —                     |



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

## functional block diagram

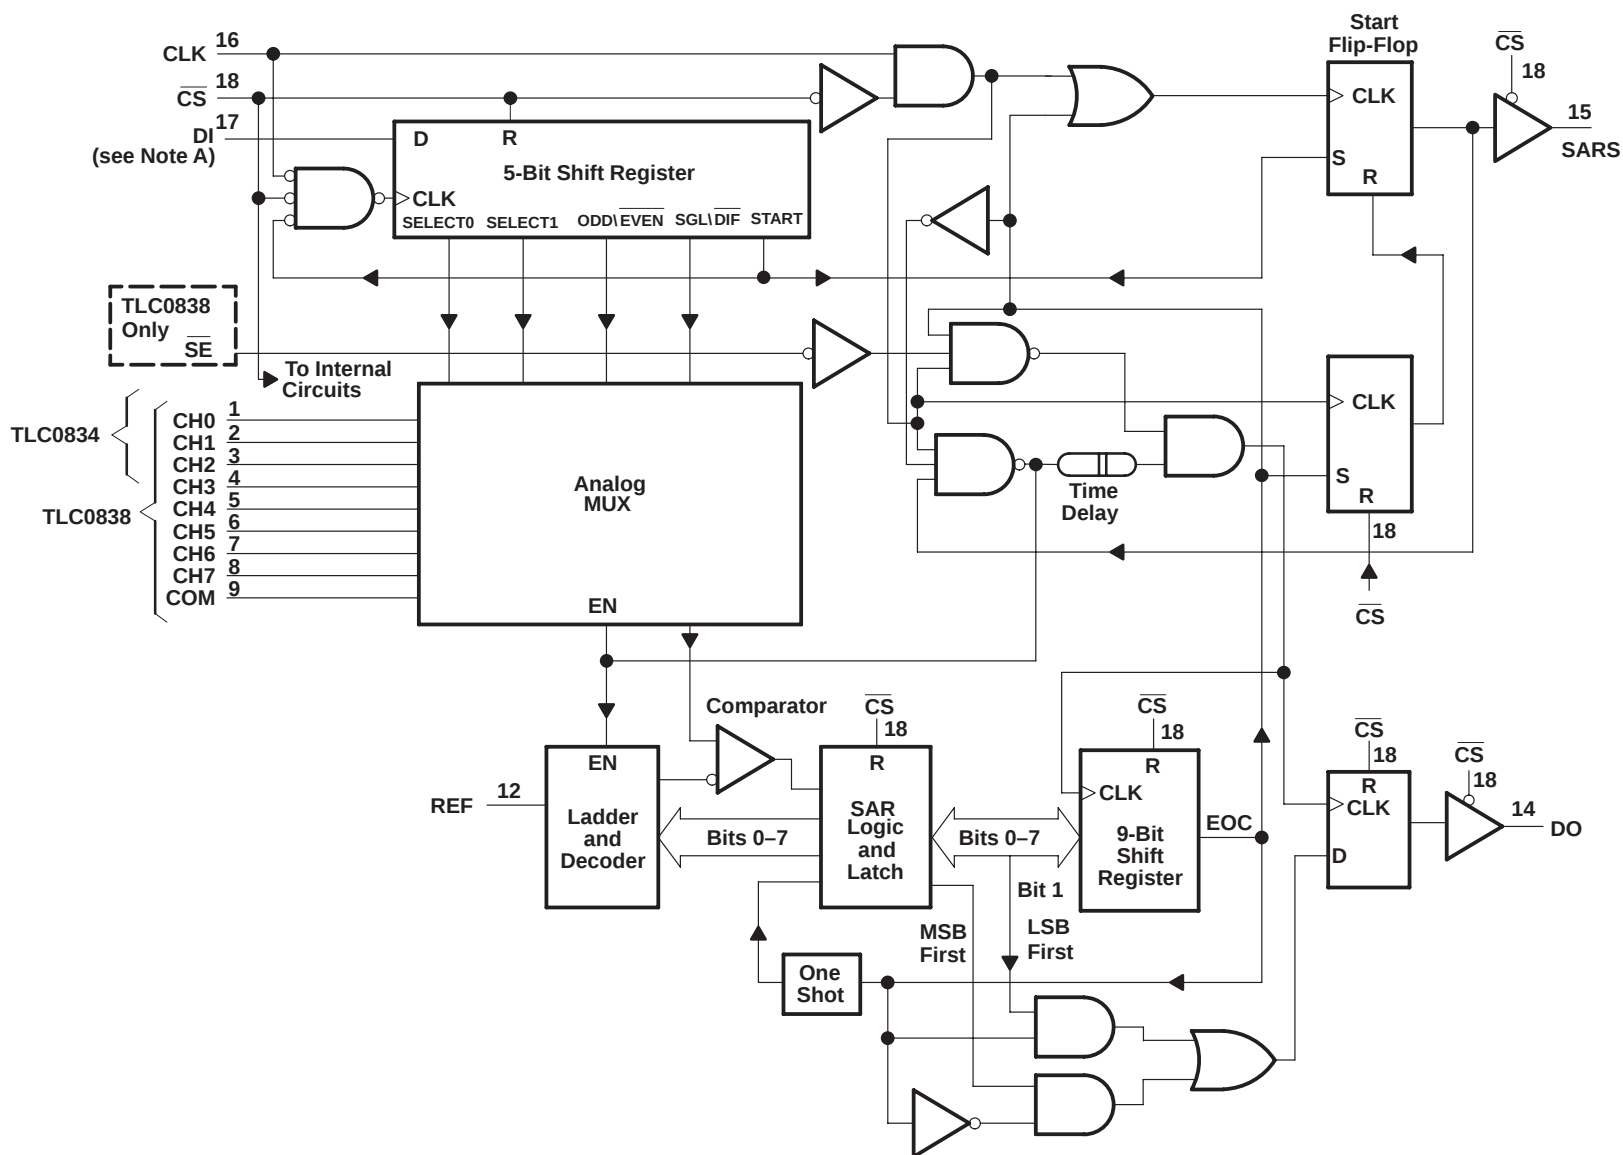

NOTES A: For the TLC0834, DI is input directly to the D input of SELECT1; SELECT0 is forced to a high.

B: Terminal numbers shown are for the DW or N package.

## functional description

The TLC0834 and TLC0838 use a sample-data-comparator structure that converts differential analog inputs by a successive-approximation routine. Operation of both devices is similar with the exception of  $\overline{SE}$ , an analog common input, and multiplexer addressing. The input voltage to be converted is applied to a channel terminal and is compared to ground (single ended), to an adjacent input (differential), or to a common terminal (pseudo differential) that can be an arbitrary voltage. The input terminals are assigned a positive (+) or negative (–) polarity. When the signal input applied to the assigned positive terminal is less than the signal on the negative terminal, the converter output is all zeros.

Channel selection and input configuration are under software control using a serial-data link from the controlling processor. A serial-communication format allows more functions to be included in a converter package with no increase in size. In addition, it eliminates the transmission of low-level analog signals by locating the converter at the analog sensor and communicating serially with the controlling processor. This process returns noise-free digital data to the processor.

A particular input configuration is assigned during the multiplexer-addressing sequence. The multiplexer address shifts into the converter through the data input (DI) line. The multiplexer address selects the analog inputs to be enabled and determines whether the input is single ended or differential. When the input is differential, the polarity of the channel input is assigned. Differential inputs are assigned to adjacent channel pairs. For example, channel 0 and channel 1 may be selected as a differential pair. These channels cannot act differentially with any other channel. In addition to selecting the differential mode, the polarity may also be selected. Either channel of the channel pair may be designated as the negative or positive input.

The common input on the TLC0838 can be used for a pseudodifferential input. In this mode, the voltage on the common input is considered to be the negative differential input for all channel inputs. This voltage can be any reference potential common to all channel inputs. Each channel input can then be selected as the positive differential input. This feature is useful when all analog circuits are biased to a potential other than ground.

A conversion is initiated by setting  $\overline{CS}$  low, which enables all logic circuits.  $\overline{CS}$  must be held low for the complete conversion process. A clock input is then received from the processor. On each low-to-high transition of the clock input, the data on DI is clocked into the multiplexer-address shift register. The first logic high on the input is the start bit. A 3- to 4-bit assignment word follows the start bit. On each successive low-to-high transition of the clock input, the start bit and assignment word are shifted through the shift register. When the start bit is shifted into the start location of the multiplexer register, the input channel is selected and conversion starts. The SAR status output (SARS) goes high to indicate that a conversion is in progress, and DI to the multiplexer shift register is disabled for the duration of the conversion.

An interval of one clock period is automatically inserted to allow the selected multiplexed channel to settle. DO comes out of the high-impedance state and provides a leading low for one clock period of multiplexer settling time. The SAR comparator compares successive outputs from the resistive ladder with the incoming analog signal. The comparator output indicates whether the analog input is greater than or less than the resistive-ladder output. As the conversion proceeds, conversion data is simultaneously output from DO, with the most significant bit (MSB) first. After eight clock periods, the conversion is complete and SARS goes low.


The TLC0834 outputs the least-significant-bit (LSB) first data after the MSB-first data stream. When  $\overline{SE}$  is held high on the TLC0838, the value of the LSB remains on the data line. When  $\overline{SE}$  is forced low, the data is then clocked out as LSB-first data. (To output LSB first,  $\overline{SE}$  must first go low, then the data stored in the 9-bit shift register outputs LSB first.) When  $\overline{CS}$  goes high, all internal registers are cleared. At this time, the output circuits go to the high-impedance state. If another conversion is desired,  $\overline{CS}$  must make a high-to-low transition followed by address information.

DI and DO can be tied together and controlled by a bidirectional processor I/O bit received on a single wire. This is possible because DI is only examined during the multiplexer-addressing interval and DO is still in the high-impedance state.

TLC0834C, TLC0834I, TLC0838C, TLC0838I  
8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

sequence of operation

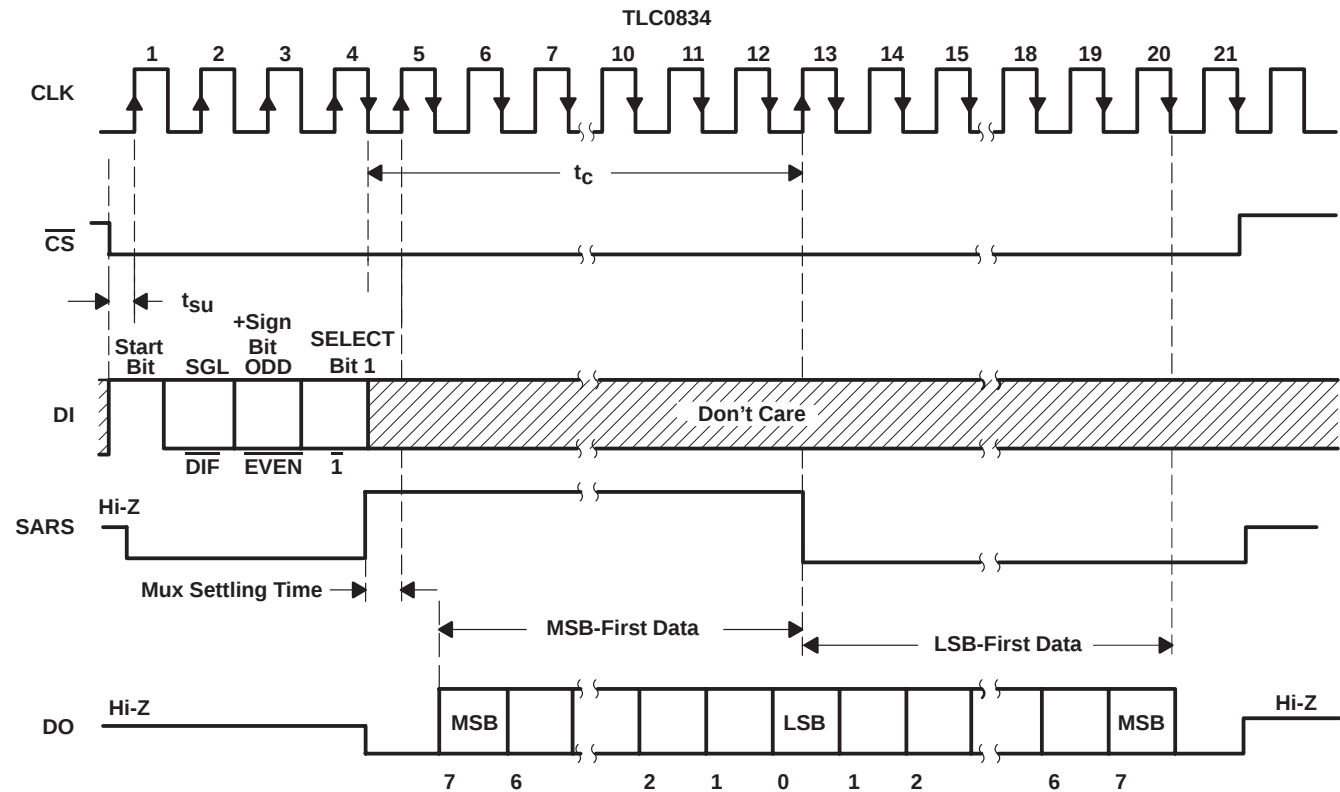

TLC0834 MUX-ADDRESS CONTROL LOGIC TABLE

| MUX ADDRESS           |                        |              | CHANNEL NUMBER |     |     |     |
|-----------------------|------------------------|--------------|----------------|-----|-----|-----|
| SGL/ $\overline{DIF}$ | ODD/ $\overline{EVEN}$ | SELECT BIT 1 | CH0            | CH1 | CH2 | CH3 |
| L                     | L                      | L            | +              | -   |     |     |
| L                     | L                      | H            |                |     | +   | -   |
| L                     | H                      | L            | -              | +   |     |     |
| L                     | H                      | H            |                |     | -   | +   |
| H                     | L                      | L            | +              |     |     |     |
| H                     | L                      | H            |                |     | +   |     |
| H                     | H                      | L            |                | +   |     |     |
| H                     | H                      | H            |                |     |     | +   |


H = high level, L = low level, - or + = terminal polarity for the selected input channel

# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

### sequence of operation

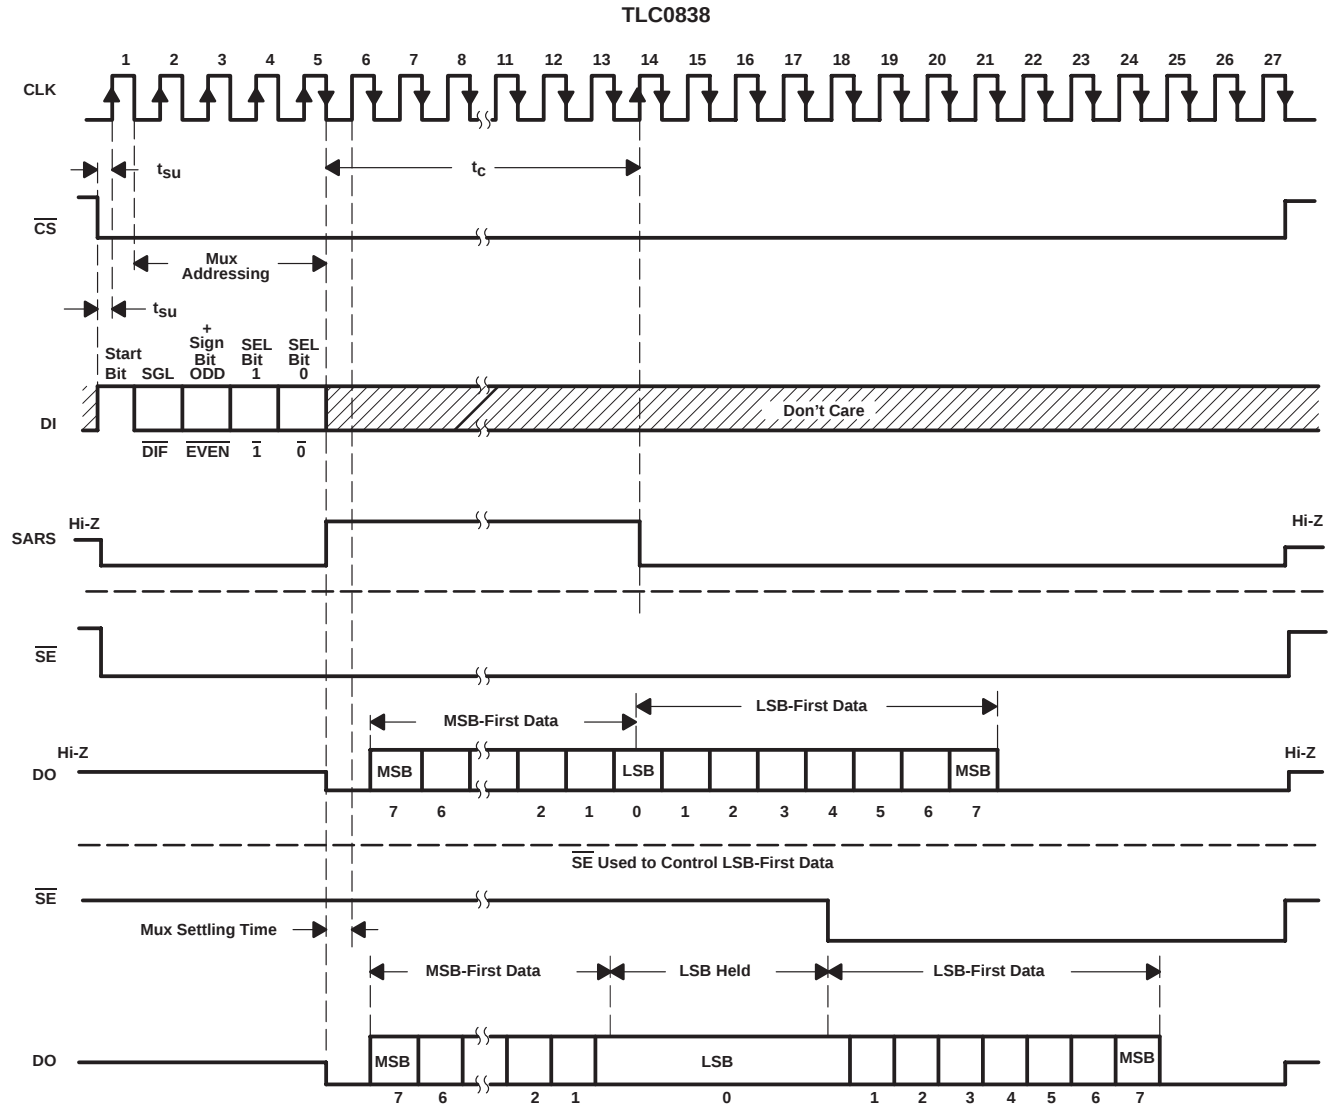

## SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

| MUX ADDRESS |          |        |   | SELECTED CHANNEL NUMBER |     |     |     |     |     |     |     | COM |   |
|-------------|----------|--------|---|-------------------------|-----|-----|-----|-----|-----|-----|-----|-----|---|
| SGL/DIF     | ODD/EVEN | SELECT |   | 0                       |     | 1   |     | 2   |     | 3   |     |     |   |
|             |          | 1      | 0 | CH0                     | CH1 | CH2 | CH3 | CH4 | CH5 | CH6 | CH7 |     |   |
| L           | L        | L      | L | +                       | -   |     |     |     |     |     |     |     |   |
| L           | L        | L      | H |                         |     | +   | -   |     |     |     |     |     |   |
| L           | L        | H      | L |                         |     |     |     | +   | -   |     |     |     |   |
| L           | L        | H      | H |                         |     |     |     |     |     | +   | -   |     |   |
| L           | H        | L      | L | -                       | +   |     |     |     |     |     |     |     |   |
| L           | H        | L      | H |                         |     | -   | +   |     |     |     |     |     |   |
| L           | H        | H      | L |                         |     |     |     | -   | +   |     |     |     |   |
| L           | H        | H      | H |                         |     |     |     |     |     | -   | +   |     |   |
| H           | L        | L      | L | +                       |     |     |     |     |     |     |     |     | - |
| H           | L        | L      | H |                         |     | +   |     |     |     |     |     |     | - |
| H           | L        | H      | L |                         |     |     |     | +   |     |     |     |     | - |
| H           | L        | H      | H |                         |     |     |     |     |     | +   |     |     | - |
| H           | H        | L      | L |                         | +   |     |     |     |     |     |     |     | - |
| H           | H        | L      | H |                         |     |     | +   |     |     |     |     |     | - |
| H           | H        | H      | L |                         |     |     |     |     | +   |     |     |     | - |
| H           | H        | H      | H |                         |     |     |     |     |     |     | +   |     | - |

**absolute maximum ratings over recommended operating free-air temperature range (unless otherwise noted)<sup>†</sup>**

|                                                                         |                            |
|-------------------------------------------------------------------------|----------------------------|
| Supply voltage, $V_{CC}$ (see Note 1)                                   | 6.5 V                      |
| Input voltage range: Logic                                              | -0.3 V to $V_{CC} + 0.3$ V |
| Analog                                                                  | -0.3 V to $V_{CC} + 0.3$ V |
| Input current, $I_I$                                                    | $\pm 5$ mA                 |
| Total input current                                                     | $\pm 20$ mA                |
| Operating free-air temperature range, $T_A$ : C suffix                  | 0°C to 70°C                |
| I suffix                                                                | -40°C to 85°C              |
| Storage temperature range, $T_{stg}$                                    | -65°C to 150°C             |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: N package | 260°C                      |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values, except differential voltages, are with respect to the network ground terminal.

# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

### recommended operating conditions

|                                                                                                                        |          | MIN | NOM | MAX | UNIT |
|------------------------------------------------------------------------------------------------------------------------|----------|-----|-----|-----|------|
| Supply voltage, V <sub>CC</sub>                                                                                        |          | 4.5 | 5   | 5.5 | V    |
| High-level input voltage, V <sub>IH</sub>                                                                              |          | 2   |     |     | V    |
| Low-level input voltage, V <sub>IL</sub>                                                                               |          |     |     | 0.8 | V    |
| Clock frequency, f <sub>(clock)</sub>                                                                                  |          | 10  |     | 600 | kHz  |
| Clock duty cycle (see Note 2)                                                                                          |          | 40% |     | 60% |      |
| Pulse duration, $\overline{CS}$ high, t <sub>w</sub>                                                                   |          | 220 |     |     | ns   |
| Setup time, $\overline{CS}$ low, $\overline{SE}$ low, or data valid before CLK↑, t <sub>su</sub> (see Figures 1 and 2) |          | 350 |     |     | ns   |
| Hold time, data valid after CLK↑, t <sub>h</sub> (see Figure 1)                                                        |          | 90  |     |     | ns   |
| Operating free-air temperature, T <sub>A</sub>                                                                         | C suffix | 0   |     | 70  | °C   |
|                                                                                                                        | I suffix | −40 |     | 85  |      |

NOTE 2: The clock-duty-cycle range ensures proper operation at all clock frequencies. When a clock frequency is used outside the recommended duty-cycle range, the minimum pulse duration (high or low) is 1  $\mu$ s.

### electrical characteristics over recommended range of operating free-air temperature, $V_{CC} = 5$ V, $f_{(clock)} = 250$ kHz (unless otherwise noted)

#### digital section

| PARAMETER                                                 | TEST CONDITIONS†                           | C SUFFIX |        |      | I SUFFIX |        |     | UNIT    |
|-----------------------------------------------------------|--------------------------------------------|----------|--------|------|----------|--------|-----|---------|
|                                                           |                                            | MIN      | TYP‡   | MAX  | MIN      | TYP‡   | MAX |         |
| $V_{OH}$ High-level output voltage                        | $V_{CC} = 4.75$ V, $I_{OH} = -360$ $\mu$ A | 2.8      |        |      | 2.4      |        |     | V       |
|                                                           | $V_{CC} = 4.75$ V, $I_{OH} = -10$ $\mu$ A  | 4.6      |        |      | 4.5      |        |     |         |
| $V_{OL}$ Low-level output voltage                         | $V_{CC} = 5.25$ V, $I_{OL} = 1.6$ mA       |          |        | 0.34 |          |        | 0.4 | V       |
| $I_{IH}$ High-level input current                         | $V_{IH} = 5$ V, $V_{IL} = 5$ V             |          | 0.005  | 1    |          | 0.005  | 1   | $\mu$ A |
| $I_{IL}$ Low-level input current                          | $V_{IL} = 0$ , $V_{IH} = 0$                |          | –0.005 | –1   |          | –0.005 | –1  | $\mu$ A |
| $I_{OH}$ High-level output (source) current               | $V_{OH} = 0$ , $T_A = 25^\circ$ C          | –6.5     | –24    |      | –6.5     | –24    |     | mA      |
| $I_{OL}$ Low-level output (sink) current                  | $V_{OL} = V_{CC}$ , $T_A = 25^\circ$ C     | 8        | 26     |      | 8        | 26     |     | mA      |
| $I_{OZ}$ High-impedance-state output current (DO or SARS) | $V_O = 5$ V, $T_A = 25^\circ$ C            |          | 0.01   | 3    |          | 0.01   | 3   | $\mu$ A |
|                                                           | $V_O = 0$ , $T_A = 25^\circ$ C             |          | –0.01  | –3   |          | –0.01  | –3  |         |
| $C_i$ Input capacitance                                   |                                            |          |        |      |          | 5      |     | pF      |
| $C_o$ Output capacitance                                  |                                            |          |        |      |          | 5      |     | pF      |

† All parameters are measured under open-loop conditions with zero common-mode input voltage (unless otherwise specified).

‡ All typical values are at  $V_{CC} = 5$  V,  $T_A = 25^\circ$ C.

# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

**electrical characteristics over recommended range of operating free-air temperature,  $V_{CC} = 5\text{ V}$ ,  $f_{\text{clock}} = 250\text{ kHz}$  (unless otherwise noted) (continued)**

### analog and converter section

| PARAMETER             |                                    | TEST CONDITIONS <sup>†</sup> | MIN                          | TYP <sup>‡</sup> | MAX | UNIT          |
|-----------------------|------------------------------------|------------------------------|------------------------------|------------------|-----|---------------|
| $V_{IC}$              | Common-mode input voltage          | See Note 3                   | -0.05<br>to<br>$V_{CC}+0.05$ |                  |     | V             |
| $I_{I(\text{stdby})}$ | Standby input current (see Note 4) | On channel                   | $V_I = 5\text{ V}$           |                  | 1   | $\mu\text{A}$ |
|                       |                                    | Off channel                  | $V_I = 0$                    |                  | -1  |               |
|                       |                                    | On channel                   | $V_I = 0$                    |                  | -1  |               |
|                       |                                    | Off channel                  | $V_I = 5\text{ V}$           |                  | 1   |               |
| $r_{i(\text{REF})}$   | Input resistance to REF            |                              | 1.3                          | 2.4              | 5.9 | k $\Omega$    |

<sup>†</sup> All parameters are measured under open-loop conditions with zero common-mode input voltage.

<sup>‡</sup> All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

- NOTES: 3. When channel IN- is more positive than channel IN+, the digital output code is 0000 0000. Connected to each analog input are two on-chip diodes that conduct forward current for analog input voltages one diode drop above  $V_{CC}$ . Care must be taken during testing at low  $V_{CC}$  levels (4.5 V) because high-level analog input voltage (5 V) can, especially at high temperatures, cause the input diode to conduct and cause errors for analog inputs that are near full scale. As long as the analog voltage does not exceed the supply voltage by more than 50 mV, the output code is correct. To achieve an absolute 0- to 5-V input range requires a minimum  $V_{CC}$  of 4.950 V for all variations of temperature and load.
4. Standby input currents go in or out of the on or off channels when the A/D converter is not performing conversion and the clock is in a high or low steady-state condition.

### total device

| PARAMETER |                | MIN | TYP <sup>‡</sup> | MAX  | UNIT |
|-----------|----------------|-----|------------------|------|------|
| $I_{CC}$  | Supply current |     | 0.6              | 1.25 | mA   |

<sup>‡</sup> All typical values are at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

**operating characteristics,  $V_{CC} = 5\text{ V}$ ,  $f_{\text{clock}} = 250\text{ kHz}$ ,  $t_r = t_f = 20\text{ ns}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted)**

| PARAMETER                           |                                                                                      | TEST CONDITIONS <sup>§</sup>                              | MIN        | TYP       | MAX  | UNIT          |
|-------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------|------------|-----------|------|---------------|
| Supply-voltage variation error      |                                                                                      | $V_{CC} = 4.75\text{ V to } 5.25\text{ V}$                | $\pm 1/16$ | $\pm 1/4$ |      | LSB           |
| Total unadjusted error (see Note 5) |                                                                                      | $V_{\text{ref}} = 5\text{ V}$ , $T_A = \text{MIN to MAX}$ |            | $\pm 1$   |      | LSB           |
| Common-mode error                   |                                                                                      | Differential mode                                         | $\pm 1/16$ | $\pm 1/4$ |      | LSB           |
| $t_{pd}$                            | Propagation delay time, output data after CLK $\downarrow$ (see Note 6 and Figure 2) | MSB-first data                                            |            |           | 1500 | ns            |
|                                     |                                                                                      | LSB-first data                                            |            |           | 600  |               |
| $t_{dis}$                           | Output disable time, DO or SARS after CS $\uparrow$ (see Figure 3)                   | $C_L = 10\text{ pF}$ , $R_L = 10\text{ k}\Omega$          |            |           | 250  | ns            |
|                                     |                                                                                      | $C_L = 100\text{ pF}$ , $R_L = 2\text{ k}\Omega$          |            |           | 500  |               |
| $t_c$                               | Conversion time (multiplexer-addressing time not included)                           |                                                           |            |           | 8    | clock periods |

<sup>§</sup> All parameters are measured under open-loop conditions with zero common-mode input voltage. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTES: 5. Total unadjusted error includes offset, full-scale, linearity, and multiplexer errors.

6. The MSB-first data is output directly from the comparator and, therefore, requires additional delay to allow for comparator response time.



# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

### PARAMETER MEASUREMENT INFORMATION



Figure 1. Data-Input Timing

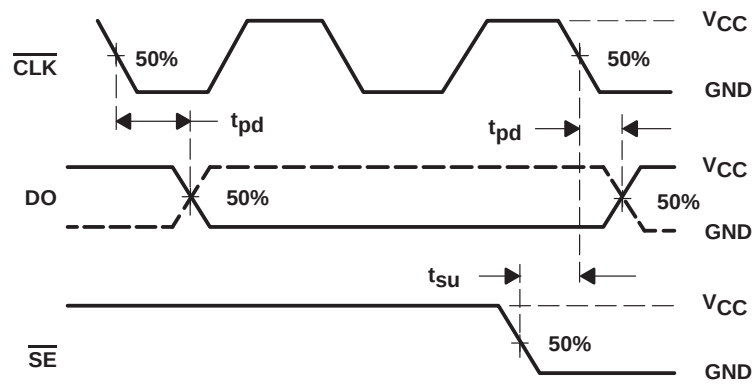



Figure 2. Data-Output Timing

# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

### PARAMETER MEASUREMENT INFORMATION

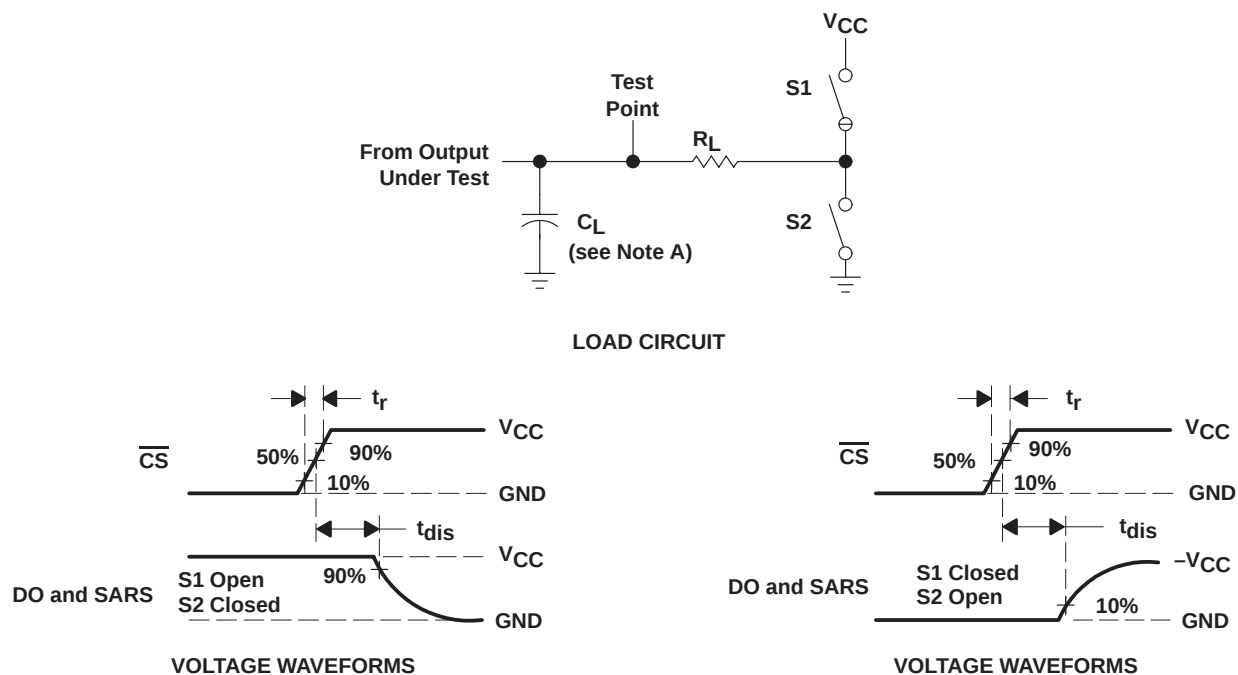

NOTE A:  $C_L$  includes probe and jig capacitance.

**Figure 3. Output Disable Time Test Circuit and Voltage Waveforms**

# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

### TYPICAL CHARACTERISTICS

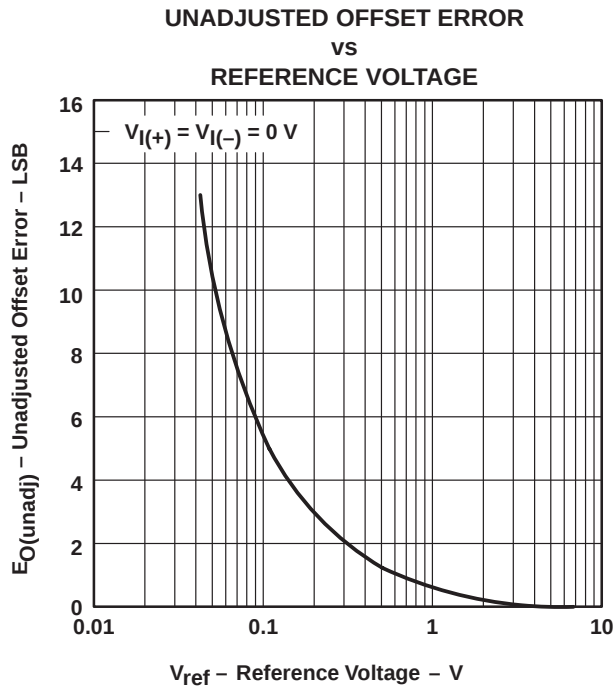


Figure 4

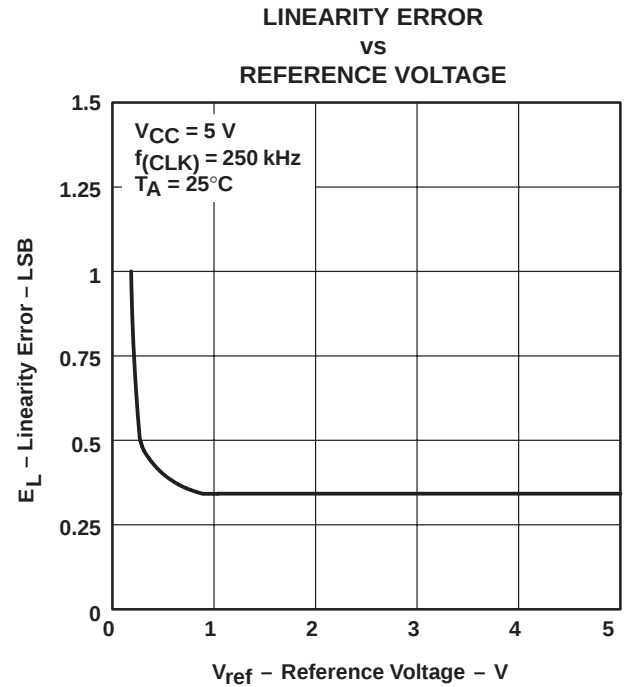


Figure 5

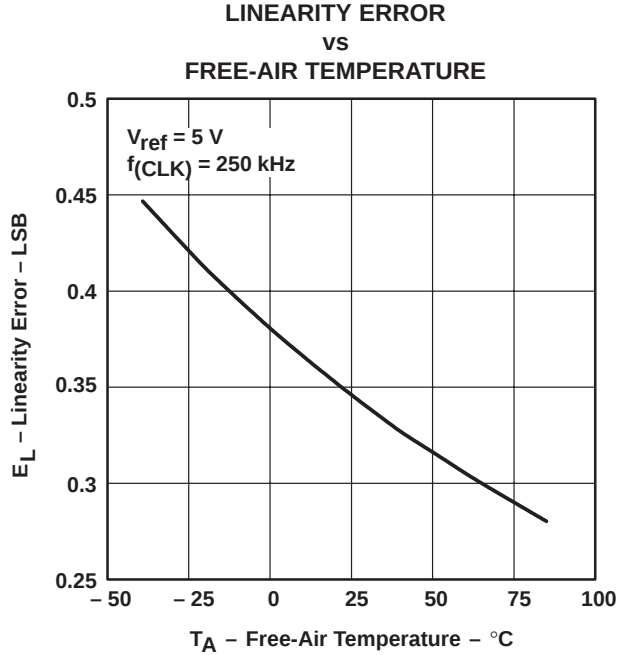


Figure 6

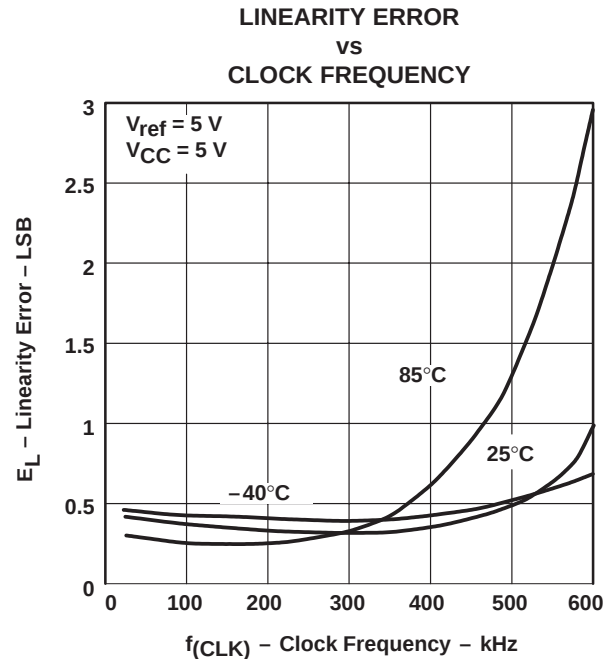


Figure 7

# TLC0834C, TLC0834I, TLC0838C, TLC0838I

## 8-BIT ANALOG-TO-DIGITAL CONVERTERS WITH SERIAL CONTROL

SLAS094E – MARCH 1995 – REVISED OCTOBER 2000

### TYPICAL CHARACTERISTICS

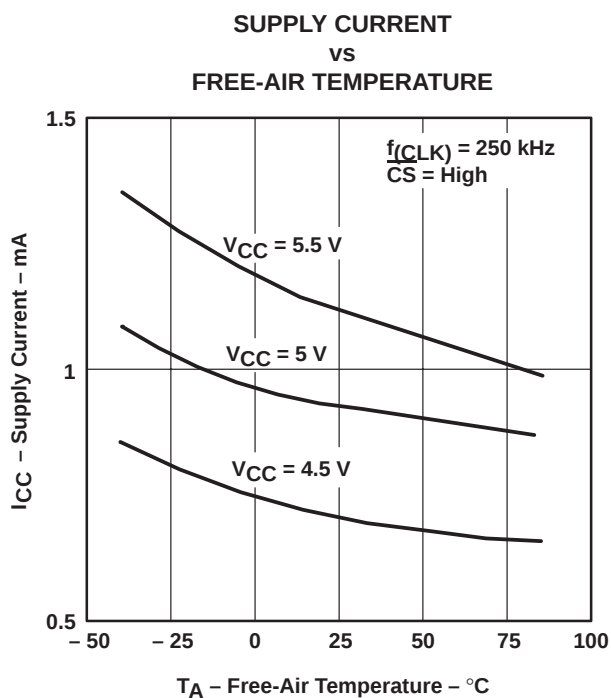


Figure 8

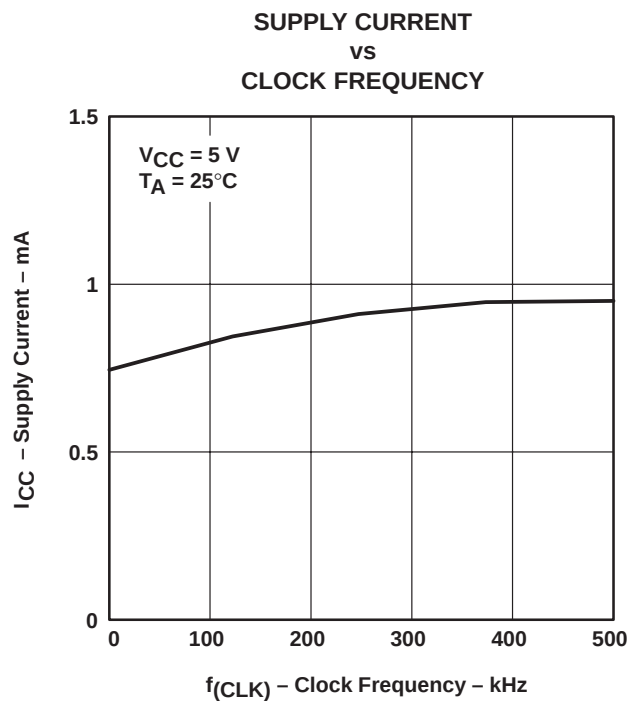


Figure 9

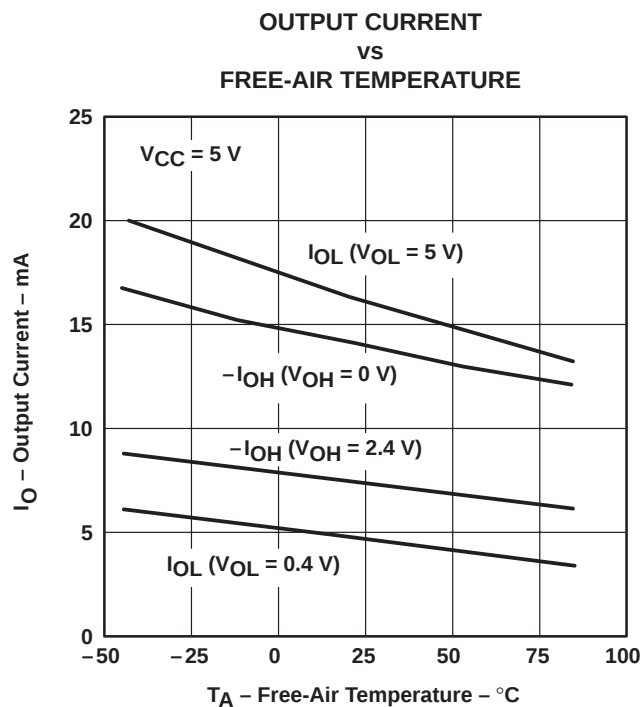


Figure 10

# TYPICAL CHARACTERISTICS

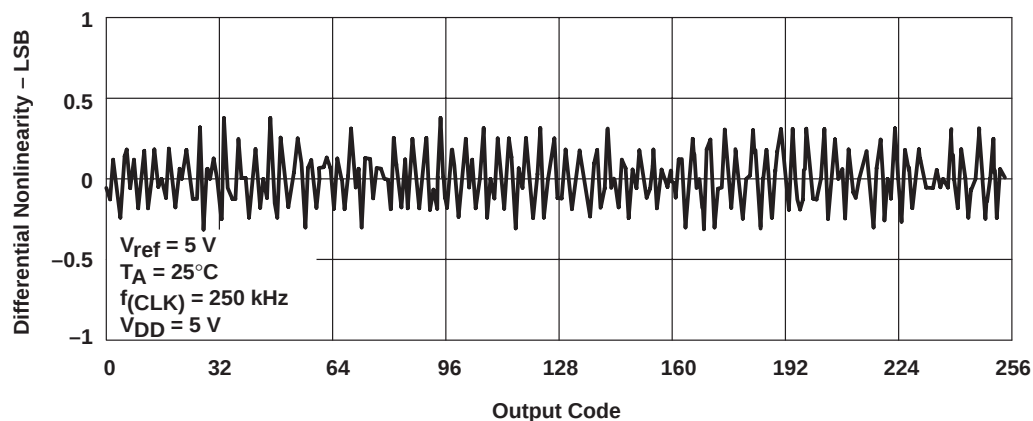


Figure 11. Differential Nonlinearity With Output Code

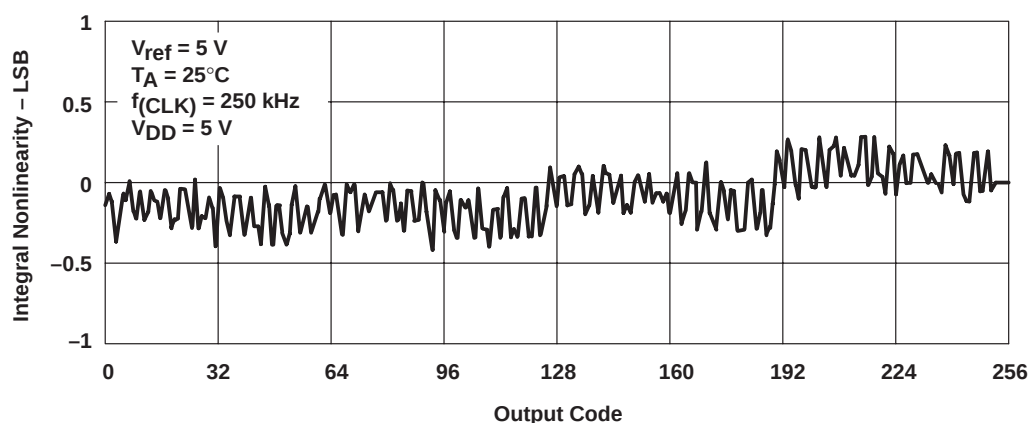


Figure 12. Integral Nonlinearity With Output Code

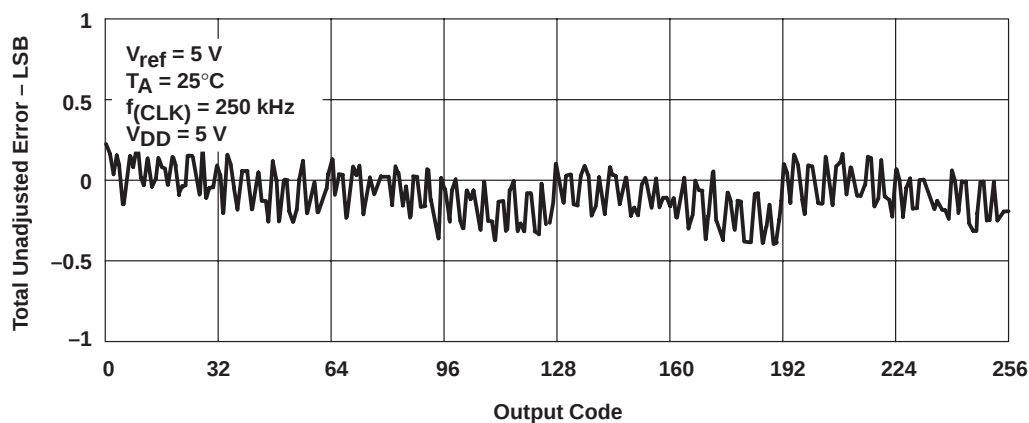


Figure 13. Total Unadjusted Error With Output Code

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TLC0834CD        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834C                 | <a href="#">Samples</a> |
| TLC0834CDG4      | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834C                 | <a href="#">Samples</a> |
| TLC0834CDR       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834C                 | <a href="#">Samples</a> |
| TLC0834CDRG4     | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834C                 | <a href="#">Samples</a> |
| TLC0834CN        | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |              | TLC0834CN                | <a href="#">Samples</a> |
| TLC0834CNE4      | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |              | TLC0834CN                | <a href="#">Samples</a> |
| TLC0834ID        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834I                 | <a href="#">Samples</a> |
| TLC0834IDG4      | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834I                 | <a href="#">Samples</a> |
| TLC0834IDR       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834I                 | <a href="#">Samples</a> |
| TLC0834IDRG4     | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0834I                 | <a href="#">Samples</a> |
| TLC0834IN        | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |              | TLC0834IN                | <a href="#">Samples</a> |
| TLC0834INE4      | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |              | TLC0834IN                | <a href="#">Samples</a> |
| TLC0834QN        | OBSOLETE      | PDIP         | N                  | 14   |             | TBD                        | Call TI          | Call TI              | -40 to 125   |                          |                         |
| TLC0838CDW       | ACTIVE        | SOIC         | DW                 | 20   | 25          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838C                 | <a href="#">Samples</a> |
| TLC0838CDWG4     | ACTIVE        | SOIC         | DW                 | 20   | 25          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838C                 | <a href="#">Samples</a> |
| TLC0838CDWR      | ACTIVE        | SOIC         | DW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838C                 | <a href="#">Samples</a> |
| TLC0838CDWRG4    | ACTIVE        | SOIC         | DW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838C                 | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| TLC0838CN        | ACTIVE        | PDIP         | N                  | 20   | 20          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |              | TLC0838CN                | <a href="#">Samples</a> |
| TLC0838CNE4      | ACTIVE        | PDIP         | N                  | 20   | 20          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |              | TLC0838CN                | <a href="#">Samples</a> |
| TLC0838CPW       | ACTIVE        | TSSOP        | PW                 | 20   | 70          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TLC0838C                 | <a href="#">Samples</a> |
| TLC0838CPWG4     | ACTIVE        | TSSOP        | PW                 | 20   | 70          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TLC0838C                 | <a href="#">Samples</a> |
| TLC0838CPWR      | ACTIVE        | TSSOP        | PW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TLC0838C                 | <a href="#">Samples</a> |
| TLC0838CPWRG4    | ACTIVE        | TSSOP        | PW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | TLC0838C                 | <a href="#">Samples</a> |
| TLC0838IDW       | ACTIVE        | SOIC         | DW                 | 20   | 25          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838I                 | <a href="#">Samples</a> |
| TLC0838IDWG4     | ACTIVE        | SOIC         | DW                 | 20   | 25          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838I                 | <a href="#">Samples</a> |
| TLC0838IDWR      | ACTIVE        | SOIC         | DW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838I                 | <a href="#">Samples</a> |
| TLC0838IDWRG4    | ACTIVE        | SOIC         | DW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |              | TLC0838I                 | <a href="#">Samples</a> |
| TLC0838IN        | ACTIVE        | PDIP         | N                  | 20   | 20          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TLC0838IN                | <a href="#">Samples</a> |
| TLC0838INE4      | ACTIVE        | PDIP         | N                  | 20   | 20          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 85    | TLC0838IN                | <a href="#">Samples</a> |
| TLC0838IPW       | ACTIVE        | TSSOP        | PW                 | 20   | 70          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TLC0838I                 | <a href="#">Samples</a> |
| TLC0838IPWG4     | ACTIVE        | TSSOP        | PW                 | 20   | 70          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TLC0838I                 | <a href="#">Samples</a> |
| TLC0838IPWR      | ACTIVE        | TSSOP        | PW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TLC0838I                 | <a href="#">Samples</a> |
| TLC0838IPWRG4    | ACTIVE        | TSSOP        | PW                 | 20   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 85    | TLC0838I                 | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

---

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> Only one of markings shown within the brackets will appear on the physical device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLC0834CDR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLC0834IDR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLC0838CPWR | TSSOP        | PW              | 20   | 2000 | 330.0              | 16.4               | 6.95    | 7.1     | 1.6     | 8.0     | 16.0   | Q1            |
| TLC0838IDWR | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.3    | 2.7     | 12.0    | 24.0   | Q1            |
| TLC0838IDWR | SOIC         | DW              | 20   | 2000 | 330.0              | 24.4               | 10.8    | 13.3    | 2.7     | 12.0    | 24.0   | Q1            |
| TLC0838IPWR | TSSOP        | PW              | 20   | 2000 | 330.0              | 16.4               | 6.95    | 7.1     | 1.6     | 8.0     | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLC0834CDR  | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| TLC0834IDR  | SOIC         | D               | 14   | 2500 | 367.0       | 367.0      | 38.0        |
| TLC0838CPWR | TSSOP        | PW              | 20   | 2000 | 367.0       | 367.0      | 38.0        |
| TLC0838IDWR | SOIC         | DW              | 20   | 2000 | 367.0       | 367.0      | 45.0        |
| TLC0838IDWR | SOIC         | DW              | 20   | 2000 | 367.0       | 367.0      | 45.0        |
| TLC0838IPWR | TSSOP        | PW              | 20   | 2000 | 367.0       | 367.0      | 38.0        |

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.