

# ALMD-LL36, ALMD-LG36, ALMD-LM36, ALMD-LB36

## High Brightness SMT Oval LED Lamps

Amber, Red, Green and Blue



### Data Sheet



Lead (Pb) Free  
RoHS 6 fully  
compliant



#### Description




The Avago ALMD-Lx36 oval LED series has the same or just slightly less luminous intensity than conventional high brightness, through-hole LEDs.

The new oval LED lamps can be assembled using common SMT assembly processes and are compatible with industrial reflow soldering processes.

The LEDs are made with an advanced optical grade epoxy for superior performance in outdoor sign applications. The surface mount Oval LEDs are specifically designed for full color/video signs and indoor or outdoor passenger information sign applications.

For easy pick-and-place assembly, the LEDs are shipped in EIA-compliant tape and reel. Every reel is shipped from a single intensity and color bin—except the red color—for better uniformity.

#### Package Dimensions

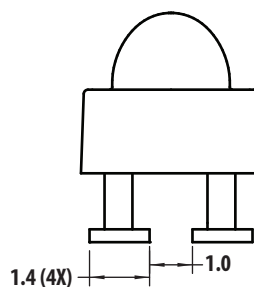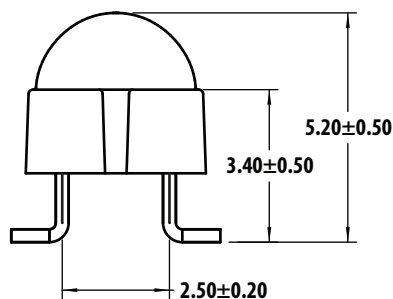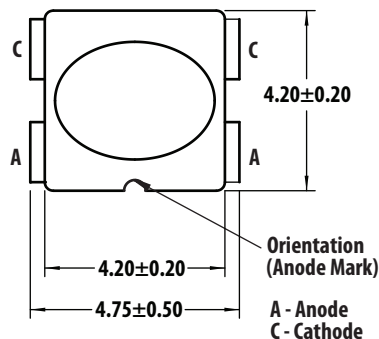

#### Features

- Well defined spatial radiation pattern
- High brightness material
- Available in Red, Amber, Green and Blue color:
  - Red AlInGaP 626 nm
  - Amber AlInGaP 590 nm
  - Green InGaN 525 nm
  - Blue InGaN 470 nm
- JEDEC MSL 2A
- Compatible with reflow soldering process
- Tinted and diffused lens
- Wide viewing angle: 40° x 100°

#### Applications

- Full color signs
- Mono color signs

#### Notes:

1. All dimensions in millimeters (inches).
2. Tolerance is  $\pm 0.20$  mm unless other specified.

**CAUTION:** InGaN devices are Class 1C HBM ESD sensitive, AlInGaP devices are Class 1B ESD sensitive per JEDEC Standard. Please observe appropriate precautions during handling and processing. Refer to Application Note AN-1142 for additional details.

**CAUTION:** Customer is advised to keep the LED in the MBB when not in use as prolonged exposure to environment might cause the silver plated leads to tarnish, which might cause difficulties in soldering.

## Device Selection Guide


| Part Number     | Color and Dominant Wavelength<br>$\lambda_d$ (nm) Typ | Luminous Intensity $I_v$ (mcd) [1,2,5] |      | Viewing Angle<br>Typ - ° [4] |
|-----------------|---|--|------|------------------------------|
|                 |   | Min                                    | Max  |                              |
| ALMD-LG36-WZ002 | Red 626   | 1380                                   | 2900 | 40° x 100°                   |
| ALMD-LL36-WZ002 | Amber 590   | 1380                                   | 2900 | 40° x 100°                   |
| ALMD-LM36-14002 | Green 525   | 2900                                   | 6050 | 40° x 100°                   |
| ALMD-LB36-SV002 | Blue 470  | 660                                    | 1380 | 40° x 100°                   |

### Notes:

1. The luminous intensity is measured on the mechanical axis of the lamp package and it is tested with pulsing condition.
2. The optical axis is closely aligned with the package mechanical axis.
3. Dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.
4.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is half the on-axis intensity.
5. Tolerance for each bin limit is  $\pm 15\%$

## Part Numbering System

ALMD - X X 3 6 - x x x xx

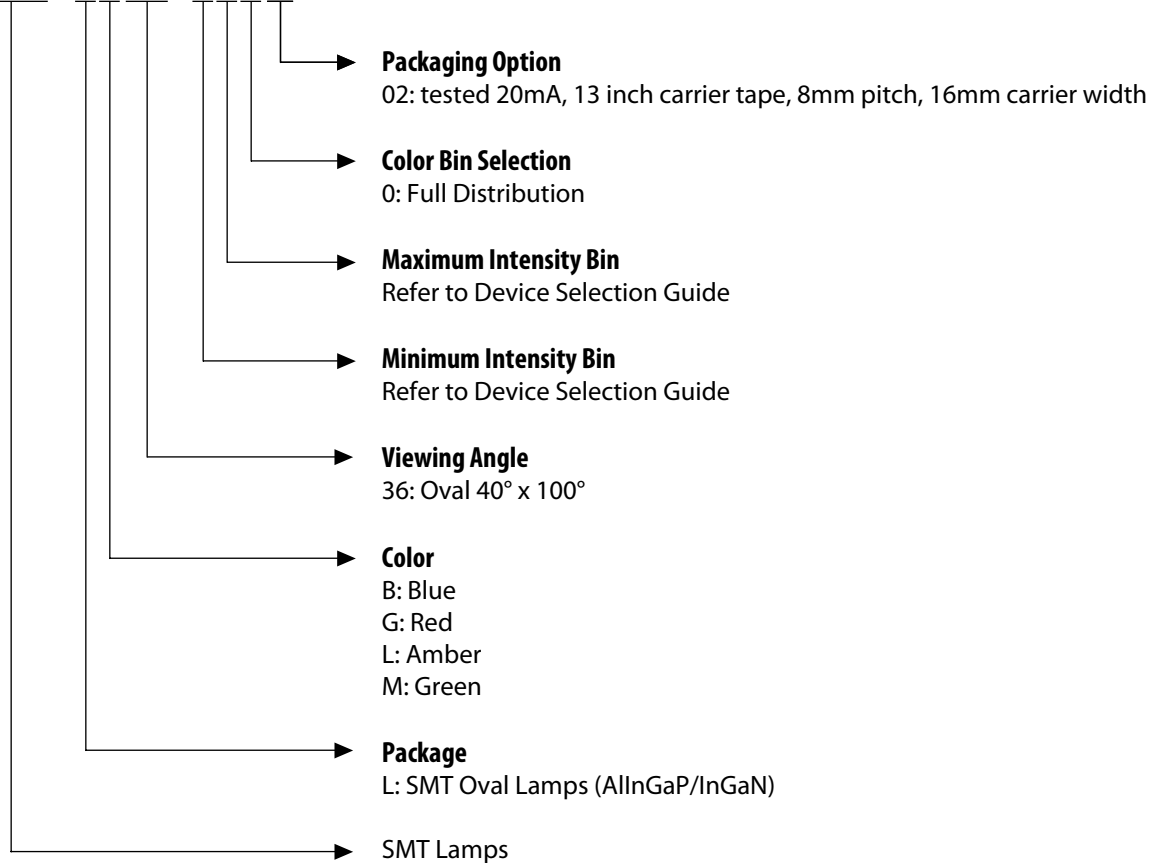

### Absolute Maximum Rating, $T_J = 25\text{ }^\circ\text{C}$

| Parameter                         | Red and Amber                                       | Blue and Green                                     | Unit             |
|-----------------------------------|---|--|------------------|
| DC Forward Current <sup>[1]</sup> | 50  | 30   | mA               |
| Peak Forward Current              | 100 <sup>[2]</sup>                                  | 100 <sup>[3]</sup>                                 | mA               |
| Power Dissipation                 | 120   | 114  | mW               |
| Reverse Voltage                   | 5 ( $I_R = 100\text{ }\mu\text{A}$ ) <sup>[4]</sup> | 5 ( $I_R = 10\text{ }\mu\text{A}$ ) <sup>[4]</sup> | V                |
| LED Junction Temperature          | 110   |  | $^\circ\text{C}$ |
| Operating Temperature Range       | -40 to +85  |  | $^\circ\text{C}$ |
| Storage Temperature Range         | -40 to +100   |  | $^\circ\text{C}$ |

Notes:

1. Derate linearly as shown in Figure 4 and Figure 9.
2. Duty Factor 30%, frequency 1 kHz.
3. Duty Factor 10%, frequency 1 kHz.
4. Indicates product final testing; long-term reverse bias is not recommended.

### Electrical / Optical Characteristics, $T_J = 25\text{ }^\circ\text{C}$

| Parameter                          | Symbol            | Min.  | Typ.  | Max.  | Units                     | Test Conditions  |
|------------------------------------|-------------------|-------|-------|-------|---------------------------|--|
| Forward Voltage                    | $V_F$             |       |       |       | V                         | $I_F = 20\text{ mA}$   |
| Red                                |                   | 1.8   | 2.1   | 2.4   |                           |  |
| Amber                              |                   | 1.8   | 2.1   | 2.4   |                           |  |
| Green                              |                   | 2.8   | 3.2   | 3.8   |                           |  |
| Blue                               |                   | 2.8   | 3.2   | 3.8   |                           |  |
| Reverse Voltage                    | $V_R$             |       |       |       | V                         | $I_F = 100\text{ }\mu\text{A}$   |
| Red & Amber                        |                   | 5     |       |       |                           | $I_F = 10\text{ }\mu\text{A}$  |
| Green & Blue                       |                   | 5     |       |       |                           |  |
| Dominant Wavelength <sup>[1]</sup> | $\lambda_d$       |       |       |       |                           | $I_F = 20\text{ mA}$   |
| Red                                |                   | 618.0 | 626.0 | 630.0 |                           |  |
| Amber                              |                   | 584.5 | 590.0 | 594.5 |                           |  |
| Green                              |                   | 519.0 | 525.0 | 539.0 |                           |  |
| Blue                               |                   | 460.0 | 470.0 | 480.0 |                           |  |
| Peak Wavelength                    | $\lambda_{PEAK}$  |       |       |       | nm                        | Peak of Wavelength of Spectral Distribution at $I_F = 20\text{ mA}$                      |
| Red                                |                   |       | 634   |       |                           |  |
| Amber                              |                   |       | 594   |       |                           |  |
| Green                              |                   |       | 516   |       |                           |  |
| Blue                               |                   |       | 464   |       |                           |  |
| Thermal Resistance                 | $R\theta_{J-PIN}$ |       | 130   |       | $^\circ\text{C}/\text{W}$ | LED Junction-to-Pin  |
| Luminous Efficacy <sup>[2]</sup>   | $\eta_V$          |       |       |       | lm/W                      | Emitted Luminous Power/Emitted Radiant Power   |
| Red                                |                   |       | 200   |       |                           |  |
| Amber                              |                   |       | 520   |       |                           |  |
| Green                              |                   |       | 530   |       |                           |  |
| Blue                               |                   |       | 65    |       |                           |  |
| Thermal coefficient of $\lambda_d$ |                   |       |       |       | nm/ $^\circ\text{C}$      | $I_F = 20\text{ mA}; +25\text{ }^\circ\text{C} \leq T_J \leq +100\text{ }^\circ\text{C}$ |
| Red                                |                   |       | 0.059 |       |                           |  |
| Amber                              |                   |       | 0.103 |       |                           |  |
| Green                              |                   |       | 0.028 |       |                           |  |
| Blue                               |                   |       | 0.024 |       |                           |  |

Notes:

1. The dominant wavelength is derived from the Chromaticity Diagram and represents the color of the lamp.
2. The radiant intensity,  $I_e$  in watts per steradian, may be found from the equation  $I_e = I_V/\eta_V$  where  $I_V$  is the luminous intensity in candelas and  $\eta_V$  is the luminous efficacy in lumens/watt.

# AlInGaP

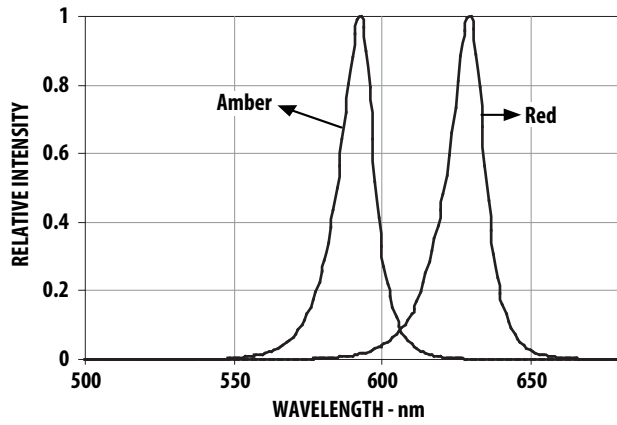


Figure 1. Relative Intensity vs Wavelength

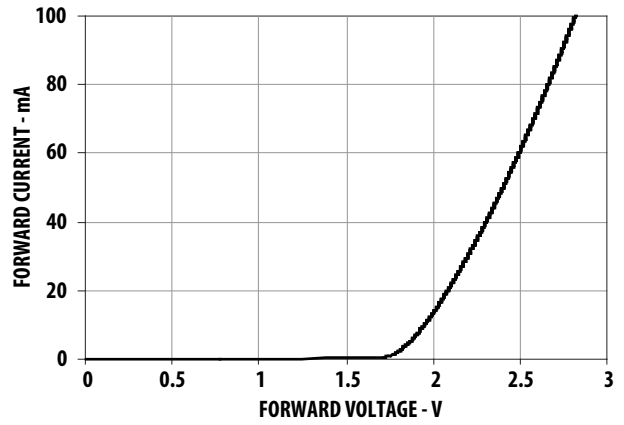


Figure 2. Forward Current vs Forward Voltage


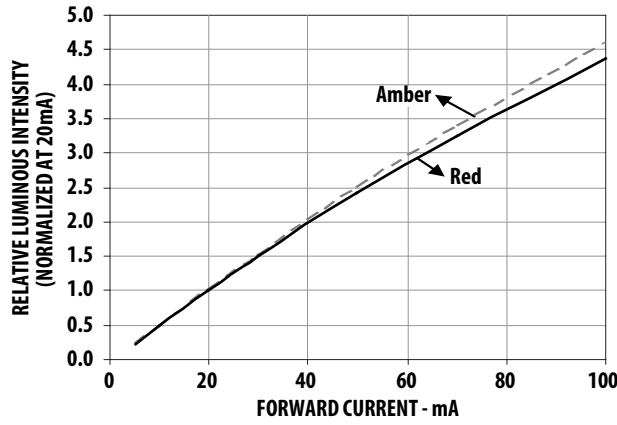


Figure 3. Relative Intensity vs Forward Current

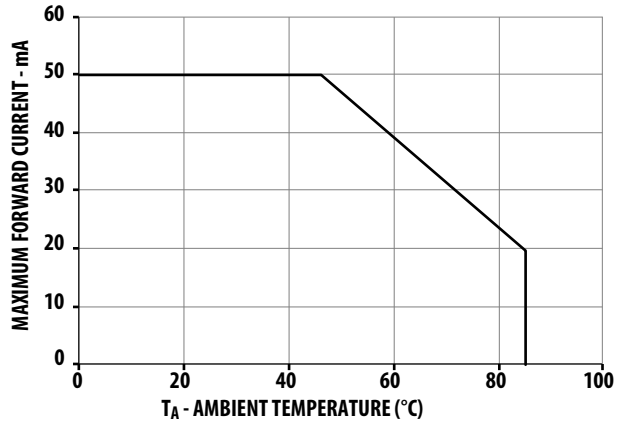

Note:  $R\theta_{J-A} = 460\text{ }^{\circ}\text{C/W}$

Figure 4. Maximum Forward Current vs Ambient Temperature

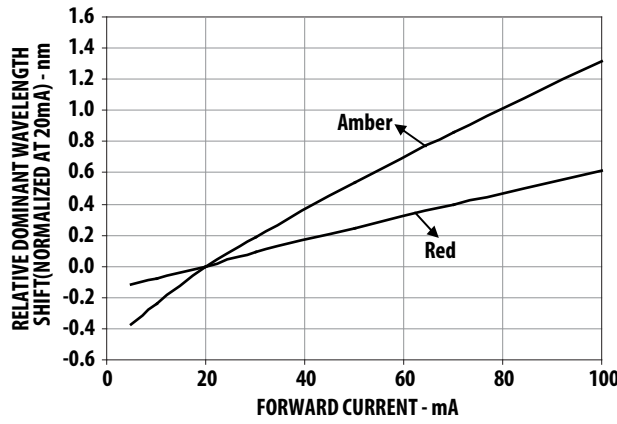


Figure 5. Relative Dominant Wavelength Shift vs Forward Current

# InGaN

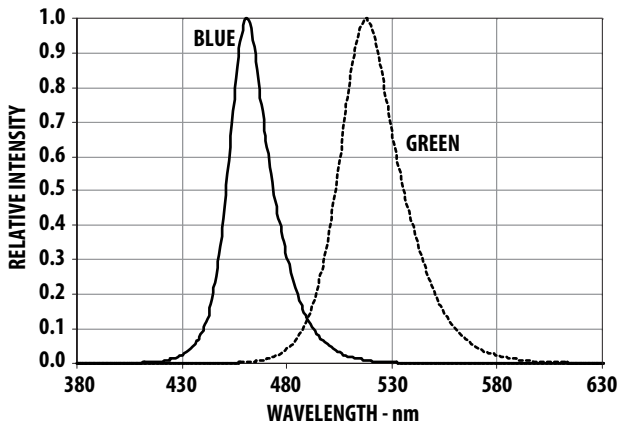


Figure 6. Relative Intensity vs Wavelength

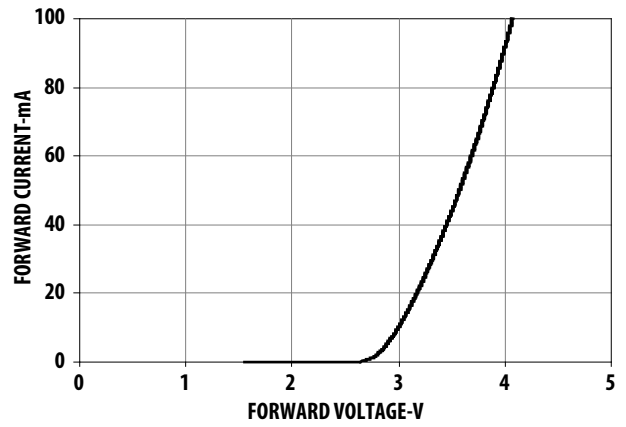


Figure 7. Forward Current vs Forward Voltage

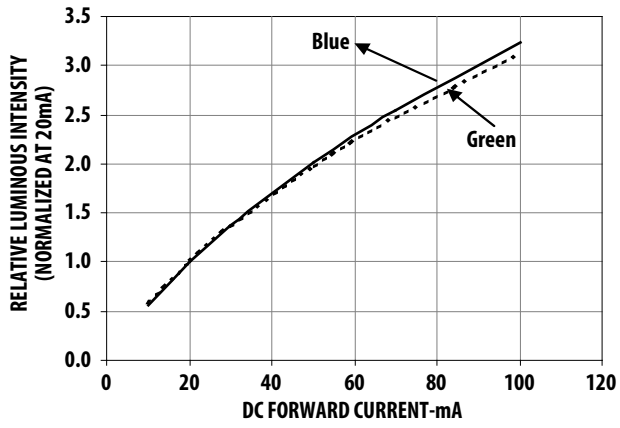


Figure 8. Relative Intensity vs Forward Current

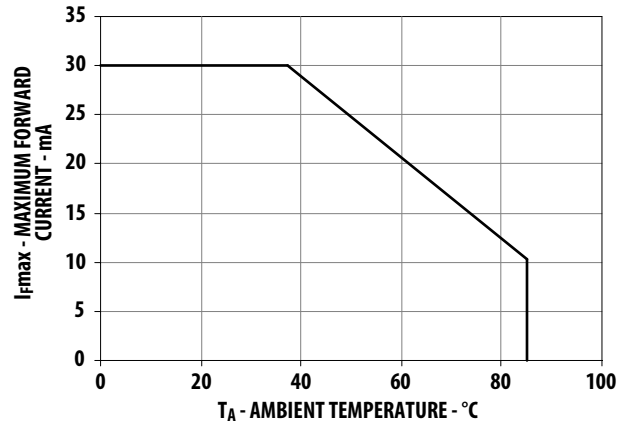


Figure 9. Maximum Forward Current vs Ambient Temperature

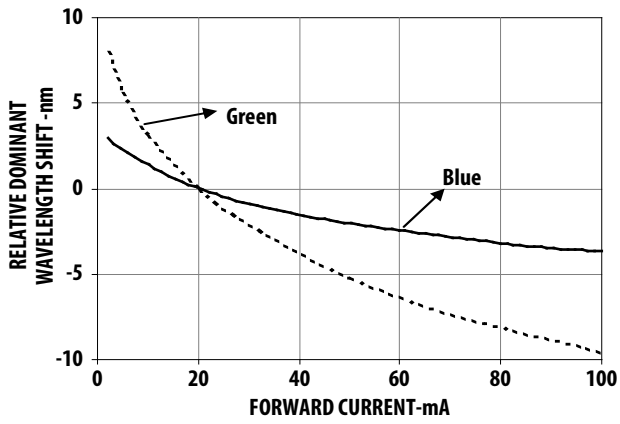


Figure 10. Dominant Wavelength Shift vs Forward Current

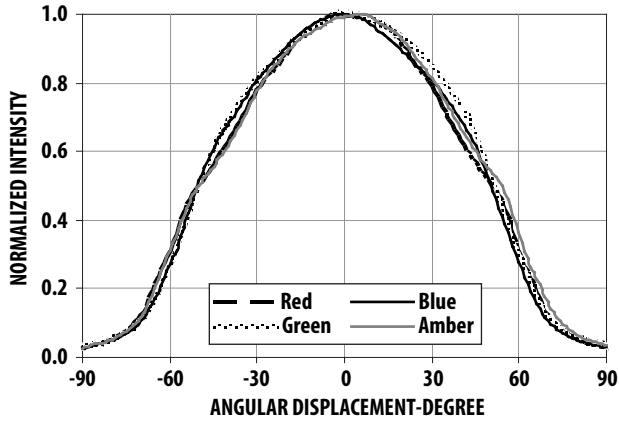


Figure 11a. Radiation Pattern for Major Axis

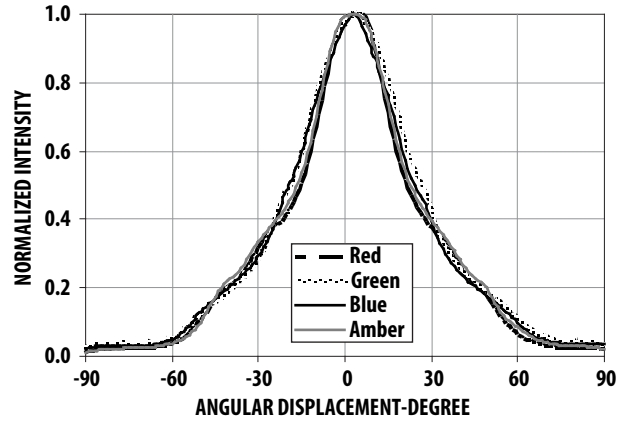


Figure 11b. Radiation Pattern for Minor Axis

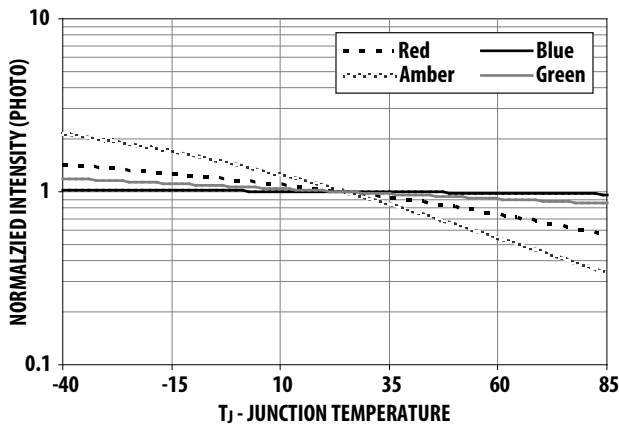


Figure 12. Relative Intensity Shift vs Junction Temperature

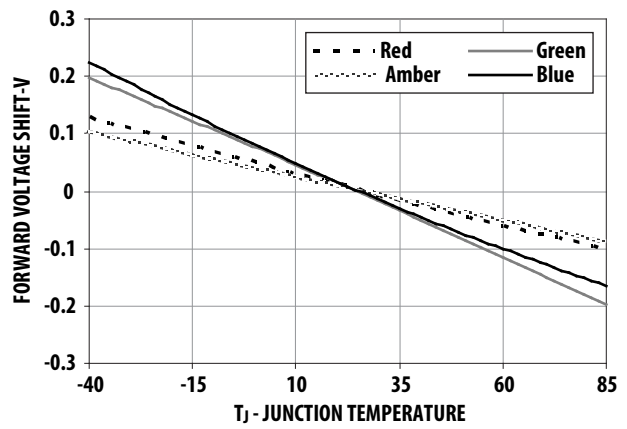


Figure 13. Forward Voltage Shift vs Junction Temperature


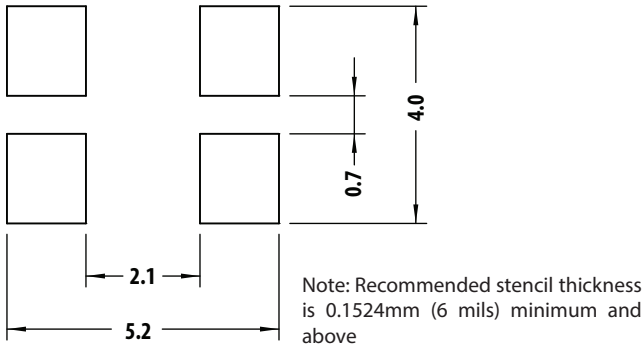


Figure 14. Recommended Soldering Land Pattern

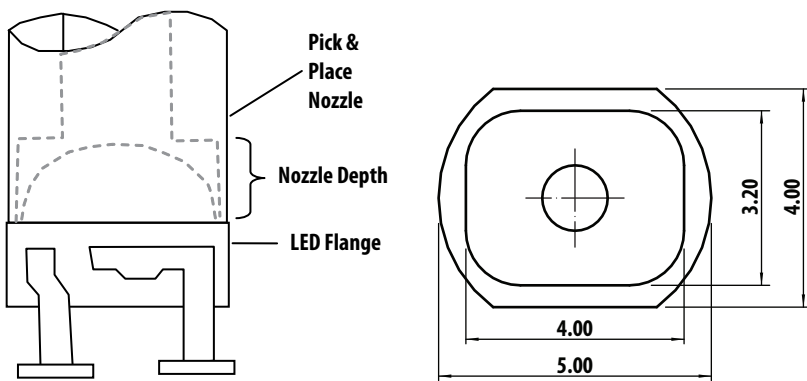

**Note:**

1. Nozzle depth should be touching LED flange during pick and place.
2. Nozzle width should be able to fit into LED carrier tape

Figure 15. Recommended Pick and Place Nozzle Tip (Urethane PAD Tip)

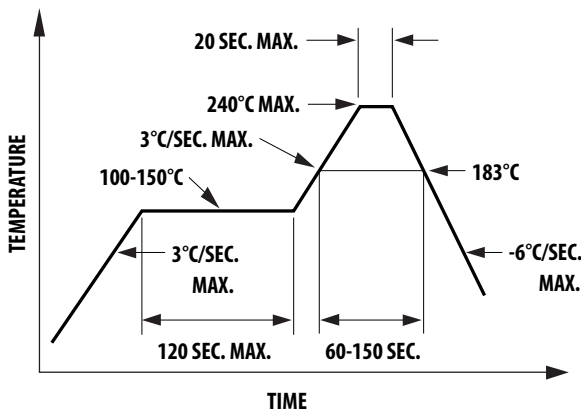


Figure 16. Recommended Lead Reflow Soldering Profile

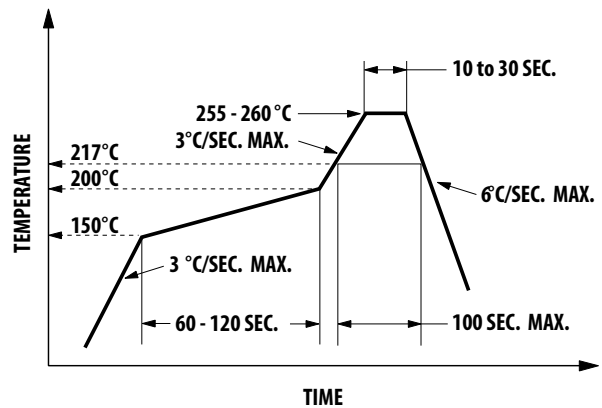


Figure 17. Recommended Pb-Free Reflow Soldering Profile

Note: For detailed information on reflow soldering of Avago Surface Mount LED, refer to Avago Application Note AN1060 Surface Mounting SMT LED Indicator Components.

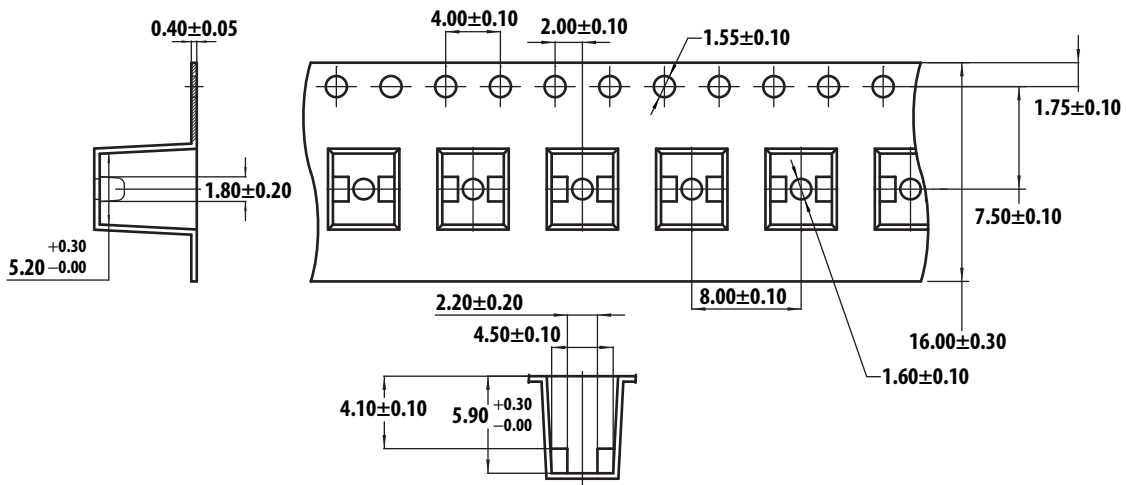


Figure 18. Carrier Tape Dimension

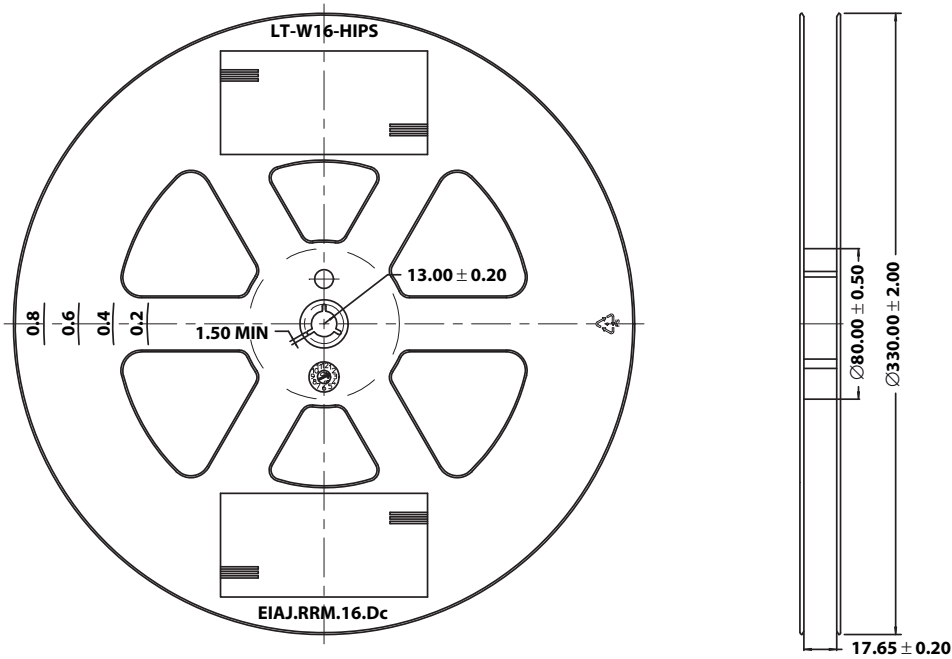


Figure 19. Reel Dimension

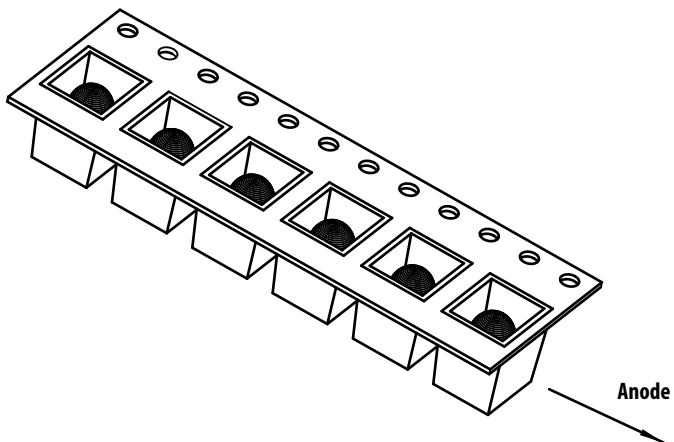


Figure 20. Unit Orientation from reel



**Intensity Bin Limit Table (1.2:1 Iv bin ratio)**

| Bin | Intensity (mcd) at 20 mA |      |
|-----|--------------------------|------|
|     | Min                      | Max  |
| S   | 660                      | 800  |
| T   | 800                      | 960  |
| U   | 960                      | 1150 |
| V   | 1150                     | 1380 |
| W   | 1380                     | 1660 |
| X   | 1660                     | 1990 |
| Y   | 1990                     | 2400 |
| Z   | 2400                     | 2900 |
| 1   | 2900                     | 3500 |
| 2   | 3500                     | 4200 |
| 3   | 4200                     | 5040 |
| 4   | 5040                     | 6050 |

Tolerance for each bin limit is  $\pm 15\%$

**VF Bin Table (V at 20 mA) for Red & Amber**

| Bin ID | Min | Max |
|--------|-----|-----|
| VD     | 1.8 | 2.0 |
| VA     | 2.0 | 2.2 |
| VB     | 2.2 | 2.4 |

Tolerance for each bin limit is  $\pm 0.05V$

**Red Color Range**

| Min Dom | Max Dom | X min  | Y Min  | X max  | Y max  |
|---------|---------|--------|--------|--------|--------|
| 618.0   | 630.0   | 0.6872 | 0.3126 | 0.6890 | 0.2943 |
|         |         | 0.6690 | 0.3149 | 0.7080 | 0.2920 |

Tolerance for each bin limit is  $\pm 0.5nm$

**Amber Color Range**

| Bin | Min Dom | Max Dom | Xmin   | Ymin   | Xmax   | Ymax   |
|-----|---------|---------|--------|--------|--------|--------|
| 1   | 584.5   | 587.0   | 0.5420 | 0.4580 | 0.5530 | 0.4400 |
|     |         |         | 0.5370 | 0.4550 | 0.5570 | 0.4420 |
| 2   | 587.0   | 589.5   | 0.5570 | 0.4420 | 0.5670 | 0.4250 |
|     |         |         | 0.5530 | 0.4400 | 0.5720 | 0.4270 |
| 4   | 589.5   | 592.0   | 0.5720 | 0.4270 | 0.5820 | 0.4110 |
|     |         |         | 0.5670 | 0.4250 | 0.5870 | 0.4130 |
| 6   | 592.0   | 594.5   | 0.5870 | 0.4130 | 0.5950 | 0.3980 |
|     |         |         | 0.5820 | 0.4110 | 0.6000 | 0.3990 |

Tolerance for each bin limit is  $\pm 0.5nm$

### Green Color Range

| Bin | Min Dom | Max Dom | Xmin   | Ymin   | Xmax   | Ymax   |
|-----|---------|---------|--------|--------|--------|--------|
| 1   | 519.0   | 523.0   | 0.0667 | 0.8323 | 0.1450 | 0.7319 |
|     |         |         | 0.1200 | 0.7375 | 0.0979 | 0.8316 |
| 2   | 523.0   | 527.0   | 0.0979 | 0.8316 | 0.1711 | 0.7218 |
|     |         |         | 0.1450 | 0.7319 | 0.1305 | 0.8189 |
| 3   | 527.0   | 531.0   | 0.1305 | 0.8189 | 0.1967 | 0.7077 |
|     |         |         | 0.1711 | 0.7218 | 0.1625 | 0.8012 |
| 4   | 531.0   | 535.0   | 0.1625 | 0.8012 | 0.2210 | 0.6920 |
|     |         |         | 0.1967 | 0.7077 | 0.1929 | 0.7816 |
| 5   | 535.0   | 539.0   | 0.1929 | 0.7816 | 0.2445 | 0.6747 |
|     |         |         | 0.2210 | 0.6920 | 0.2233 | 0.7600 |

Tolerance for each bin limit is  $\pm 0.5$  nm

### Blue Color Range

| Bin | Min Dom | Max Dom | Xmin   | Ymin   | Xmax   | Ymax   |
|-----|---------|---------|--------|--------|--------|--------|
| 1   | 460.0   | 464.0   | 0.1440 | 0.0297 | 0.1766 | 0.0966 |
|     |         |         | 0.1818 | 0.0904 | 0.1374 | 0.0374 |
| 2   | 464.0   | 468.0   | 0.1374 | 0.0374 | 0.1699 | 0.1062 |
|     |         |         | 0.1766 | 0.0966 | 0.1291 | 0.0495 |
| 3   | 468.0   | 472.0   | 0.1291 | 0.0495 | 0.1616 | 0.1209 |
|     |         |         | 0.1699 | 0.1062 | 0.1187 | 0.0671 |
| 4   | 472.0   | 476.0   | 0.1187 | 0.0671 | 0.1517 | 0.1423 |
|     |         |         | 0.1616 | 0.1209 | 0.1063 | 0.0945 |
| 5   | 476.0   | 480.0   | 0.1063 | 0.0945 | 0.1397 | 0.1728 |
|     |         |         | 0.1517 | 0.1423 | 0.0913 | 0.1327 |

Tolerance for each bin limit is  $\pm 0.5$  nm

## Moisture Sensitivity and Handling

The ALMD-Lx36 series oval package has a Moisture Sensitive Level 2a rating per JEDEC J-STD-020. Refer to Avago Application Note AN5305, Handling of Moisture Sensitive Surface Mount Devices, for additional details and a review of proper handling procedures.

### A. Storage before use

- An unopened moisture barrier bag (MBB) can be stored at < 40 °C/90% RH for 12 months. If the actual shelf life has exceeded 12 months and the humidity indicator card (HIC) indicates that baking is not required then it is safe to reflow solder the LEDs per the original MSL rating.
- It is recommended that the MBB not be opened prior to assembly (e.g., for IQC).

### B. Control after opening the MBB

- The humidity indicator card (HIC) shall be read immediately upon opening of the MBB.
- The LEDs must be kept at < 30 °C/60% RH at all times, and all high temperature related processes including soldering, curing or rework need to be completed within 672 hours.

### C. Control for unfinished tape and reel parts

- Unused LEDs must be stored in a sealed MBB with a desiccant or desiccator at < 5% RH.

### D. Control of assembled boards

- If the PCB soldered with the LEDs is to be subjected to other high temperature processes, the PCB needs to be stored in a sealed MBB with desiccant or desiccator at < 5% RH to ensure that all LEDs have not exceeded their floor life of 672 hours

### E. Baking is required if:

- The HIC indicator is not BROWN at 10% and is AZURE at 5%
- The LEDs are exposed to a condition of > 30 °C/60% RH at any time.
- The LED floor life exceeded 672 hours.

The recommended baking condition is: 60 ± 5 °C for 20 hours.

**DISCLAIMER:** Avago's products and software are not specifically designed, manufactured or authorized for sale as parts, components or assemblies for the planning, construction, maintenance or direct operation of a nuclear facility or for use in medical devices or applications. Customer is solely responsible, and waives all rights to make claims against avago or its suppliers, for all loss, damage, expense or liability in connection with such use.

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2013 Avago Technologies. All rights reserved. AV02-2377EN - February 26, 2013

**AVAGO**  
TECHNOLOGIES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.