

2 OUTPUT PCIE GEN1/2 SYNTHESIZER

IDT5V41065

Recommended Applications

2 Output synthesizer for PCIe Gen1/2 and Ethernet

General Description

The IDT5V41065 is a PCIe Gen2 compliant spread spectrum capable clock generator. The device has 2 differential HCSL outputs and can be used in communication or embedded systems to substantially reduce electro-magnetic interference (EMI). The spread amount and output frequency are selectable via select pins. The IDT5V41065 can also supply 25 MHz, 125 MHz and 200 MHz outputs for applications such as Ethernet.

Output Features

- 2 - 0.7V current mode differential HCSL output pairs

Features/Benefits

- 16-pin TSSOP and QFN packages; small board footprint
- Spread-spectrum capable; reduces EMI
- Outputs can be terminated to LVDS; can drive a wider variety of devices
- 25 MHz, 125 MHz and 200 MHz output frequencies; TSSOP only
- 100MHz and 200MHz output frequencies; VFQFPN package
- OE control pin; greater system power management
- Spread% and frequency pin selection; no software required to configure device
- Industrial temperature range available; supports demanding embedded applications
- **For PCIe Gen3 applications, see the 5V41235**

Key Specifications

- Cycle-to-cycle jitter < 100 ps
- Output-to-output skew < 50 ps
- PCIe Gen2 phase jitter < 3.0ps RMS

Block Diagram



Pin Assignment



16-pin (173 mil) TSSOP



16-pin VFQFPN

Output Select Table 1 (MHz)–TSSOP only

| S1 | S0 | CLK(1:0), CLK(1:0) |
|----|----|--------------------|
| 0 | 0 | 25M |
| 0 | 1 | 100M |
| 1 | 0 | 125M |
| 1 | 1 | 200M |

Spread Selection Table 2–TSSOP only

| SS1 | SS0 | Spread% |
|-----|-----|------------|
| 0 | 0 | No Spread |
| 0 | 1 | Down -0.5 |
| 1 | 0 | Down -0.75 |
| 1 | 1 | No Spread |

Output/Spread Select Table 3 - VFQFPN Only

| S1 | S0 | SS1 | SS0 | Output | Spread% |
|----|----|-----|-----|----------|-----------|
| 0 | 0 | 0 | 0 | 100MHz | -0.5 |
| 0 | 0 | 0 | 1 | 200MHz | -0.5 |
| 0 | 0 | 1 | 0 | 100MHz | No spread |
| 0 | 0 | 1 | 1 | Reserved | |
| 0 | 1 | 0 | 0 | 100MHz | -1 |
| 0 | 1 | 0 | 1 | 200MHz | -1 |
| 0 | 1 | 1 | 0 | Reserved | |
| 0 | 1 | 1 | 1 | Reserved | |
| 1 | 0 | 0 | 0 | 100MHz | -1.5 |
| 1 | 0 | 0 | 1 | 200MHz | -1.5 |
| 1 | 0 | 1 | 0 | Reserved | |
| 1 | 0 | 1 | 1 | Reserved | |
| 1 | 1 | 0 | 0 | Reserved | |
| 1 | 1 | 0 | 1 | 200MHz | No spread |
| 1 | 1 | 1 | 0 | Reserved | |
| 1 | 1 | 1 | 1 | Reserved | |

Pin Descriptions

| VFQFPN Pin Number | TSSOP Pin Number | Pin Name | Pin Type | Pin Description |
|-------------------------|------------------------|-------------|-------------|---|
| 16 | 1 | S0 | Input | Select pin 0. See Table1. Internal pull-up resistor. |
| 1 | 2 | S1 | Input | Select pin 1. See Table 1. Internal pull-up resistor. |
| 2 | 3 | SS0 | Input | Spread Select pin 0. See Table 2. Internal pull-up resistor. |
| 3 | 4 | X1/ICLK | Input | Crystal or clock input. Connect to a 25 MHz crystal or single ended clock. |
| 4 | 5 | X2 | Output | Crystal connection. Leave unconnected for clock input. |
| 5 | 6 | OE | Input | Output enable. Tri-states outputs and device is not shut down. Internal pull-up resistor. |
| 6 | 7 | GNDXD | Power | Connect to ground. |
| 7 | 8 | SS1 | Input | Spread Select pin 1. See Table 2. Internal pull-up resistor. |
| 8 | 9 | IREF | Output | Precision resistor attached to this pin is connected to the internal current reference. |
| 9 | 10 | CLK1 | Output | HCSL complementary clock output 1. |
| 10 | 11 | CLK1 | Output | HCSL true clock output 1. |
| 11 | 12 | VDDODA | Power | Connect to voltage supply +3.3 V for output driver and analog circuits |
| 12 | 13 | GNDODA | Power | Connect to ground. |
| 13 | 14 | CLK0 | Output | HCSL complementary clock output 0. |
| 14 | 15 | CLK0 | Output | HCSL true clock output 0. |
| 15 | 16 | VDDXD | Power | Connect to voltage supply +3.3 V for crystal oscillator and digital circuit. |

Applications Information

External Components

A minimum number of external components are required for proper operation.

Decoupling Capacitors

Decoupling capacitors of 0.01 μF should be connected between each VDD pin and the ground plane, as close to the VDD pin as possible. Do not share ground vias between components. Route power from power source through the capacitor pad and then into ICS pin.

Crystal

A 25 MHz fundamental mode parallel resonant crystal should be used. This crystal must have less than 300 ppm of error across temperature in order for the IDT5V41065 to meet PCI Express specifications.

Crystal Capacitors

Crystal capacitors are connected from pins X1 to ground and X2 to ground to optimize the accuracy of the output frequency.

C_L = Crystal's load capacitance in pF

Crystal Capacitors (pF) = $(C_L - 8) * 2$

For example, for a crystal with a 16 pF load cap, each external crystal cap would be 16 pF. $(16 - 8) * 2 = 16$.

Current Source (Iref) Reference Resistor - R_R

If board target trace impedance (Z) is 50 Ω , then $R_R = 475 \Omega$ (1%), providing IREF of 2.32 mA. The output current (I_{OH}) is equal to 6*IREF.

Output Termination

The PCI-Express differential clock outputs of the IDT5V41065 are open source drivers and require an external series resistor and a resistor to ground. These resistor values and their allowable locations are shown in detail in the **PCI-Express Layout Guidelines** section.

The IDT5V41065 can also be configured for LVDS compatible voltage levels. See the **LVDS Compatible Layout Guidelines** section.

Output Structures



General PCB Layout Recommendations

For optimum device performance and lowest output phase noise, the following guidelines should be observed.

1. Each 0.01 μF decoupling capacitor should be mounted on the component side of the board as close to the VDD pin as possible.
2. No vias should be used between decoupling capacitor and VDD pin.
3. The PCB trace to VDD pin should be kept as short as possible, as should the PCB trace to the ground via. Distance of the ferrite bead and bulk decoupling from the device is less critical.
4. An optimum layout is one with all components on the same side of the board, minimizing vias through other signal layers (any ferrite beads and bulk decoupling capacitors can be mounted on the back). Other signal traces should be routed away from the IDT5V41065. This includes signal traces just underneath the device, or on layers adjacent to the ground plane layer used by the device.

Layout Guidelines

| SRC Reference Clock | | | |
|---|--------------------|------|--------|
| Common Recommendations for Differential Routing | Dimension or Value | Unit | Figure |
| L1 length, route as non-coupled 50ohm trace | 0.5 max | inch | 1 |
| L2 length, route as non-coupled 50ohm trace | 0.2 max | inch | 1 |
| L3 length, route as non-coupled 50ohm trace | 0.2 max | inch | 1 |
| Rs | 33 | ohm | 1 |
| Rt | 49.9 | ohm | 1 |

| Down Device Differential Routing | | | |
|--|---------------------|------|---|
| L4 length, route as coupled microstrip 100ohm differential trace | 2 min to 16 max | inch | 1 |
| L4 length, route as coupled stripline 100ohm differential trace | 1.8 min to 14.4 max | inch | 1 |

| Differential Routing to PCI Express Connector | | | |
|--|-----------------------|------|---|
| L4 length, route as coupled microstrip 100ohm differential trace | 0.25 to 14 max | inch | 2 |
| L4 length, route as coupled stripline 100ohm differential trace | 0.225 min to 12.6 max | inch | 2 |



Alternative Termination for LVDS and other Common Differential Signals (figure 3)

| Vdiff | Vp-p | Vcm | R1 | R2 | R3 | R4 | Note |
|-------|-------|------|----|------|------|-----|--------------------------------|
| 0.45v | 0.22v | 1.08 | 33 | 150 | 100 | 100 | |
| 0.58 | 0.28 | 0.6 | 33 | 78.7 | 137 | 100 | |
| 0.80 | 0.40 | 0.6 | 33 | 78.7 | none | 100 | ICS874003i-02 input compatible |
| 0.60 | 0.3 | 1.2 | 33 | 174 | 140 | 100 | Standard LVDS |


R1a = R1b = R1

R2a = R2b = R2



Cable Connected AC Coupled Application (figure 4)

| Component | Value | Note |
|-----------|-------------|------|
| R5a, R5b | 8.2K 5% | |
| R6a, R6b | 1K 5% | |
| Cc | 0.1 μF | |
| Vcm | 0.350 volts | |

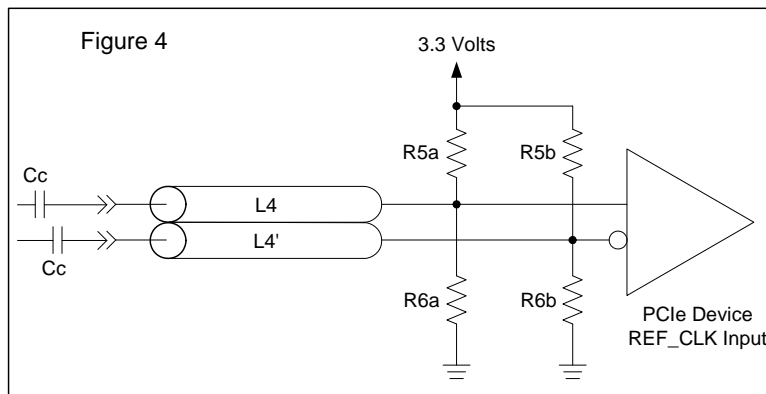

Typical PCI-Express (HCSL) Waveform



Typical LVDS Waveform



Absolute Maximum Ratings

Stresses above the ratings listed below can cause permanent damage to the IDT5V41065. These ratings are stress ratings only. Functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods can affect product reliability. Electrical parameters are guaranteed only over the recommended operating temperature range.

| Item | Rating |
|--|---------------------|
| Supply Voltage, VDDXD, VDDODA | 4.6 V |
| All Inputs and Outputs | -0.5 V to VDD+0.5 V |
| Ambient Operating Temperature (commercial) | 0 to +70°C |
| Ambient Operating Temperature (industrial) | -40 to +85°C |
| Storage Temperature | -65 to +150°C |
| Junction Temperature | 125°C |
| Soldering Temperature | 260°C |
| ESD Protection (Input) | 2000 V min. (HBM) |

DC Electrical Characteristics

Unless stated otherwise, VDD = 3.3 V \pm 5%, Ambient Temperature -40 to +85°C

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|------------------------------------|-------------------|--|---------|------|----------|------------|
| Supply Voltage | V | | 3.135 | 3.3 | 3.465 | V |
| Input High Voltage ¹ | V _{IH} | S0, S1, OE, ICLK, SS0, SS1 | 2.2 | | VDD +0.3 | V |
| Input Low Voltage ¹ | V _{IL} | S0, S1, OE, ICLK, SS0, SS1 | VSS-0.3 | | 0.8 | V |
| Input Leakage Current ² | I _{IL} | 0 < V _{in} < VDD | -5 | | 5 | μ A |
| Operating Supply Current @ 100 MHz | I _{DD} | R _S =33 Ω , R _P =50 Ω , C _L =2 pF | | 63 | 85 | mA |
| | I _{DDOE} | OE =Low | | 42 | 50 | mA |
| Input Capacitance | C _{IN} | Input pin capacitance | | | 7 | pF |
| Output Capacitance | C _{OUT} | Output pin capacitance | | | 6 | pF |
| X1, X2 Capacitance | C _{INX} | | | | 5 | pF |
| Pin Inductance | L _{PIN} | | | | 5 | nH |
| Output Impedance | Z _O | CLK outputs | 3.0 | | | k Ω |
| Pull-up Resistor | R _{PU} | S0, S1, OE, SS0, SS1 | | 100 | | k Ω |

1. Single edge is monotonic when transitioning through region.
2. Inputs with pull-ups/-downs are not included.

AC Electrical Characteristics - CLK0/CLK1, $\overline{\text{CLK0/CLK1}}$

Unless stated otherwise, VDD=3.3 V \pm 5%, Ambient Temperature -40 to +85°C

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|---|---------------------|--|------|------|------|-------|
| Input Frequency | | | | 25 | | MHz |
| Output Frequency | | HCSL termination | 25 | | 200 | MHz |
| | | LVDS termination | 25 | | 100 | MHz |
| Output High Voltage ^{1,2} | V _{OH} | HCSL | | | 850 | mV |
| Output Low Voltage ^{1,2} | V _{OL} | HCSL | -150 | | | mV |
| Crossing Point Voltage ^{1,2} | | Absolute | 250 | | 550 | mV |
| Crossing Point Voltage ^{1,2,4} | | Variation over all edges | | | 140 | mV |
| Jitter, Cycle-to-Cycle ^{1,3} | | | | | 100 | ps |
| Frequency Synthesis Error | | All outputs | | 0 | | ppm |
| Modulation Frequency | | Spread spectrum | 30 | 32.9 | 33 | kHz |
| Rise Time ^{1,2} | t _{OR} | From 0.175 V to 0.525 V | 175 | | 700 | ps |
| Fall Time ^{1,2} | t _{OF} | From 0.525 V to 0.175 V | 175 | | 700 | ps |
| Rise/Fall Time Variation ^{1,2} | | | | | 125 | ps |
| Output to Output Skew | | | | | 50 | ps |
| Duty Cycle ^{1,3} | | | 45 | | 55 | % |
| Output Enable Time ⁵ | | All outputs | | 50 | 100 | ns |
| Output Disable Time ⁵ | | All outputs | | 50 | 100 | ns |
| Stabilization Time | t _{STABLE} | From power-up VDD=3.3 V | | | 1.8 | ms |
| Spread Spectrum Transition Time | t _{SPREAD} | Stabilization time after spread spectrum changes | 7 | | 30 | ms |

Note 1: Test setup is R_S=33Ω, R_P=50Ω with C_L=2 pF, R_r = 475Ω (1%).

Note 2: Measurement taken from a single-ended waveform.

Note 3: Measurement taken from a differential waveform.

Note 4: Measured at the crossing point where instantaneous voltages of both CLK and $\overline{\text{CLK}}$ are equal.

Note 5: CLK pins are tri-stated when OE is low asserted. CLK is driven differential when OE is high.

Electrical Characteristics - Differential Phase Jitter

| Parameter | Symbol | Conditions | Min | Typ | Max | Units | Notes |
|---------------|-------------------------|---|-----|-----|-----|----------|-------|
| Jitter, Phase | t _{jphasePLL} | PCIe Gen1 | | 32 | 86 | ps (p-p) | 1,2,3 |
| | t _{jphaseLO} | PCIe Gen2, 10 kHz < f < 1.5 MHz | | 0.8 | 3 | ps (RMS) | 1,2,3 |
| | t _{jphaseHIGH} | PCIe Gen2, 1.5 MHz < f < Nyquist (50 MHz) | | 2.3 | 3.1 | ps (RMS) | 1,2,3 |

Note 1. Guaranteed by design and characterization, not 100% tested in production.

Note 2. See <http://www.pcisig.com> for complete specs.

Note 3: Applies to 100MHz, spread off and 0.5% down spread only.

Thermal Characteristics (16TSSOP)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|--|---------------|----------------|------|------|------|-------|
| Thermal Resistance Junction to Ambient | θ_{JA} | Still air | | 78 | | °C/W |
| | θ_{JA} | 1 m/s air flow | | 70 | | °C/W |
| | θ_{JA} | 3 m/s air flow | | 68 | | °C/W |
| Thermal Resistance Junction to Case | θ_{JC} | | | 37 | | °C/W |

Thermal Characteristics(16VFQFPN)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Units |
|--|---------------|----------------|------|------|------|-------|
| Thermal Resistance Junction to Ambient | θ_{JA} | Still air | | 63.2 | | °C/W |
| | θ_{JA} | 1 m/s air flow | | 55.9 | | °C/W |
| | θ_{JA} | 3 m/s air flow | | 51.4 | | °C/W |
| Thermal Resistance Junction to Case | θ_{JC} | | | 65.8 | | °C/W |

Marking Diagram (5V41065PGG)




Marking Diagram (5V41065PGGI)




Notes:

1. Line 1 and 2: IDT part number.
2. Line 3: YYWW – Date code; \$ – Assembly location.
3. “G” after the two-letter package code designates RoHS compliant package.
4. “I” at the end of part number indicates industrial temperature range.
5. Bottom marking: country of origin if not USA.

Marking Diagram (5V41065NLGI)



Marking Diagram (5V41065NLGI)



Notes:


1. Line 1: Lot number.
2. Line 2: YWW – Date code; \$ – Assembly location.
3. “G” designates RoHS compliant package.
4. “I” at the end of part number indicates industrial temperature range.

Package Outline and Package Dimensions (16-pin QFN)

| REVISIONS | | | |
|-----------|----------------------------|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 00 | INITIAL RELEASE | 10/15/08 | RC |
| 01 | COMBINE POD & LAND PATTERN | 9/17/13 | KS |



TOP VIEW

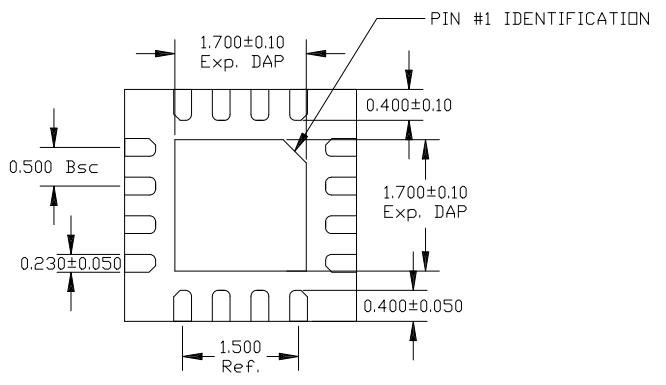

BOTTOM VIEW



TOP VIEW

16LD QFN 3X3 (0.5MM PITCH)

| | | |
|-----------------------------|----------|---|
| TOLERANCES UNLESS SPECIFIED | |  6024 Silver Creek Valley Road San Jose, CA 95138 PHONE: (408) 284-8200 FAX: (408) 284-8591 |
| DECIMAL | ANGULAR | |
| XX± | ± | www.IDT.com |
| XXX± | | |
| XXXX± | | |
| APPROVALS | DATE | TITLE |
| DRAWN <i>RC</i> | 10/15/08 | NL/NLG16 PACKAGE OUTLINE |
| CHECKED | | 3.0 x 3.0 mm BODY |
| | | 0.5 mm PITCH QFN |
| | SIZE | DRAWING No. |
| | C | PSC-4169 |
| | | REV |
| | | 01 |
| DO NOT SCALE DRAWING | | SHEET 1 OF 2 |

Package Outline and Package Dimensions (16-pin QFN), cont.

| REVISIONS | | | |
|-----------|----------------------------|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 00 | INITIAL RELEASE | 10/15/08 | RC |
| 01 | COMBINE POD & LAND PATTERN | 9/17/13 | KS |



NOTES:


1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
2. TOP DOWN VIEW, AS VIEWED ON PCB.
3. COMPONENT OUTLINE SHOW FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

| | | |
|--------------------------------|----------|---|
| TOLERANCES UNLESS SPECIFIED | |  6024 Silver Creek Valley Road San Jose, CA 95138 PHONE: (408) 284-8200 FAX: (408) 284-8591 www.IDT.com |
| DECIMAL | ANGULAR | |
| XX± | ± | |
| XXX± | | |
| XXXX± | | |
| APPROVALS | DATE | TITLE |
| DRAWN <i>RC</i> | 10/15/08 | NL/NLG16 PACKAGE OUTLINE |
| CHECKED | | 3.0 x 3.0 mm BODY |
| | | 0.5 mm PITCH QFN |
| | SIZE | DRAWING No. |
| | C | PSC-4169 |
| | | REV |
| | | 01 |
| DO NOT SCALE DRAWING | | SHEET 2 OF 2 |

Package Outline and Package Dimensions (16-pin TSSOP)

| DATE CREATED | | REVISIONS | | |
|--------------|----------------------------------|-----------|--|--|
| REV | DESCRIPTION | AUTHOR | | |
| 02 | ADD 14 & 16 LD | T. VU | | |
| 03 | ADD 8 LD | T. VU | | |
| 04 | ADDED TOPMARK TO TITLE | | | |
| 05 | ADD "GREEN" PGG NOMENCLATURE | TU VU | | |
| 06 | ADDED PACKAGE CODE | RAC | | |
| 07 | ADD TOLERANCE FOR A, A1, E AND b | CK LEE | | |
| 08 | ADD OPTION T1 | R.TANH | | |

NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE

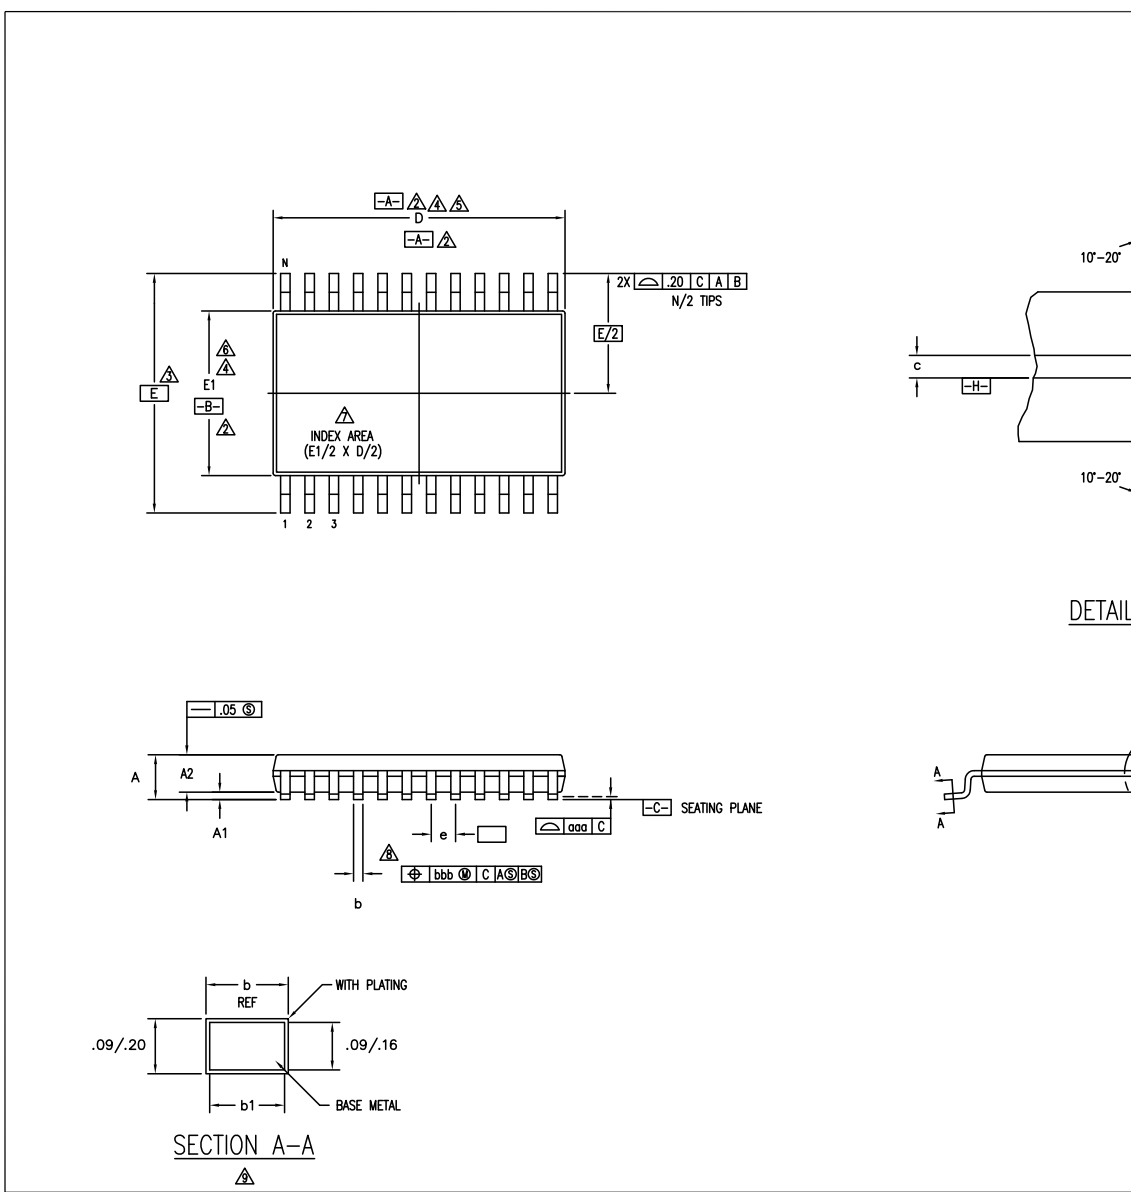

| | | | |
|--|-----------------------------|-----------------------------|---|
| TOLERANCES UNLESS SPECIFIED DECIMAL ± XX± XXX± XXXX± | ANGULAR ± | | 2975 Stender Way Santa Clara, CA 95054 PHONE: (408) 727-6116 FAX: (408) 492-8674 |
| | | | www.IDT.com |
| TITLE PG/PGG PACKAGE OUTLINE (PG OR PA TOPMARK CODE) 4.4 mm BODY WIDTH TSSOP .65 mm PITCH | | | REV 08 |
| SIZE C | DRAWING No. PSC-4056 | DO NOT SCALE DRAWING | |
| SHEET 1 OF 3 | | | REV 08 |

Package Outline and Package Dimensions (16-pin TSSOP), cont.

| DATE CREATED | | REVISIONS | |
|--------------|-------------------------------------|-----------|--|
| REV | DESCRIPTION | AUTHOR | |
| 08/25/98 | 02 ADD 14 & 16 LD | T. VU | |
| 07/10/99 | 03 ADD 8 LD | T. VU | |
| 5/23/01 | 04 ADDED TOPMARK TO TITLE | | |
| 10/14/04 | 05 ADD "GREEN" PGG NOMENCLATURE | TU VU | |
| 3/8/13 | 06 ADDED PACKAGE CODE | RAC | |
| 9/3/14 | 07 ADD TOLERANCE FOR A, A1, E AND b | CK LEE | |
| 3/10/17 | 08 ADD OPTION T1 | R.TANH | |


NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE

| SYMBOL | PG/PGG8 | | | | PG/PGG14 | | | | PG/PGG16 | | | | PG/PGG20 | | | | PG/PGG24 | | | | PG/PGG28 | | | |
|--------|-----------------|------|------|------|-----------------|------|------|------|-----------------|------|------|------|-----------------|------|------|------|-----------------|------|------|------|-----------------|------|------|------|
| | JEDEC VARIATION | | | NOTE | JEDEC VARIATION | | | NOTE | JEDEC VARIATION | | | NOTE | JEDEC VARIATION | | | NOTE | JEDEC VARIATION | | | NOTE | JEDEC VARIATION | | | NOTE |
| | AA | | | | AB-1 | | | | AB | | | | AC | | | | AD | | | | AE | | | |
| | MIN | NOM | MAX | | MIN | NOM | MAX | | MIN | NOM | MAX | | MIN | NOM | MAX | | MIN | NOM | MAX | | MIN | NOM | MAX | |
| A | .85 | 1.10 | 1.20 | | .85 | 1.10 | 1.20 | | .85 | 1.10 | 1.20 | | .85 | 1.10 | 1.20 | | .85 | 1.10 | 1.20 | | .85 | 1.10 | 1.20 | |
| A1 | .05 | .10 | .15 | | .05 | .10 | .15 | | .05 | .10 | .15 | | .05 | .10 | .15 | | .05 | .10 | .15 | | .05 | .10 | .15 | |
| A2 | .80 | 1.00 | 1.05 | | .80 | 1.00 | 1.05 | | .80 | 1.00 | 1.05 | | .80 | 1.00 | 1.05 | | .80 | 1.00 | 1.05 | | .80 | 1.00 | 1.05 | |
| D | 2.90 | 3.00 | 3.10 | 4,5 | 4.90 | 5.00 | 5.10 | 4,5 | 4.90 | 5.00 | 5.10 | 4,5 | 6.40 | 6.50 | 6.60 | 4,5 | 7.70 | 7.80 | 7.90 | 4,5 | 9.60 | 9.70 | 9.80 | 4,5 |
| E | 6.20 | 6.40 | 6.60 | 3 | 6.20 | 6.40 | 6.60 | 3 | 6.20 | 6.40 | 6.60 | 3 | 6.20 | 6.40 | 6.60 | 3 | 6.20 | 6.40 | 6.60 | 3 | 6.20 | 6.40 | 6.60 | 3 |
| E1 | 4.30 | 4.40 | 4.50 | 4,6 | 4.30 | 4.40 | 4.50 | 4,6 | 4.30 | 4.40 | 4.50 | 4,6 | 4.30 | 4.40 | 4.50 | 4,6 | 4.30 | 4.40 | 4.50 | 4,6 | 4.30 | 4.40 | 4.50 | 4,6 |
| e | .65 BSC | | | | .65 BSC | | | | .65 BSC | | | | .65 BSC | | | | .65 BSC | | | | .65 BSC | | | |
| b | .19 | .25 | .30 | | .19 | .25 | .30 | | .19 | .25 | .30 | | .19 | .25 | .30 | | .19 | .25 | .30 | | .19 | .25 | .30 | |
| b1 | .19 | .22 | .25 | | .19 | .22 | .25 | | .19 | .22 | .25 | | .19 | .22 | .25 | | .19 | .22 | .25 | | .19 | .22 | .25 | |
| aaa | - | - | .10 | | - | - | .10 | | - | - | .10 | | - | - | .10 | | - | - | .10 | | - | - | .10 | |
| bbb | - | - | .10 | | - | - | .10 | | - | - | .10 | | - | - | .10 | | - | - | .10 | | - | - | .10 | |
| N | 8 | | | | 14 | | | | 16 | | | | 20 | | | | 24 | | | | 28 | | | |

NOTES:

- ALL DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5M-1994
- DATUMS \square -A- AND \square -B- TO BE DETERMINED AT DATUM PLANE \square -H-
- DIMENSION E TO BE DETERMINED AT SEATING PLANE \square -C-
- DIMENSIONS D AND E1 ARE TO BE DETERMINED AT DATUM PLANE \square -H-
- DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED .15 mm PER SIDE
- DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED .25 mm PER SIDE
- DETAIL OF PIN 1 IDENTIFIER IS OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED
- LEAD WIDTH DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION IS .08 mm IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT
- THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .10 AND .25 mm FROM THE LEAD TIP
- ALL DIMENSIONS ARE IN MILLIMETERS
- THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-153, VARIATION AA, AB-1, AB, AC, AD & AE

| OPTION T1 | | | | |
|-----------|-----------------|------|------|------|
| PGG14T1 | | | | |
| SYMBOL | JEDEC VARIATION | | | NOTE |
| | AB-1 | | | |
| | MIN | NOM | MAX | |
| A | .90 | 1.10 | 1.20 | |
| A1 | .05 | .10 | .15 | |
| A2 | .80 | 1.00 | 1.05 | |
| D | 4.90 | 5.00 | 5.10 | 4,5 |
| E | 6.20 | 6.40 | 6.60 | 3 |
| E1 | 4.30 | 4.40 | 4.50 | 4,6 |
| e | .65 BSC | | | |
| b | .19 | .25 | .30 | |
| b1 | .19 | .22 | .25 | |
| c | .09 | - | .20 | |
| aaa | - | - | .10 | |
| bbb | - | - | .10 | |
| N | 14 | | | |


| | | | | |
|---|-------------|---|-----------------------|--|
| TOLERANCES UNLESS SPECIFIED | |  | 2975 Stender Way | |
| DECIMAL | ANGULAR | | Santa Clara, CA 95054 | |
| XX± | ± | PHONE: (408) 727-6116 | | |
| XXX± | | FAX: (408) 492-8674 | | |
| XXXX± | | www.IDT.com | | |
| TITLE PG/PGG PACKAGE OUTLINE (PG OR PA TOPMARK CODE) 4.4 mm BODY WIDTH TSSOP .65 mm PITCH | | | | |
| SIZE | DRAWING No. | REV | | |
| C | PSC-4056 | 08 | | |
| DO NOT SCALE DRAWING | | | SHEET 2 OF 3 | |

Package Outline and Package Dimensions (16-pin TSSOP), cont.

| DATE CREATED | REV | REVISIONS | |
|-----------------|-----|----------------------------------|--------|
| | | DESCRIPTION | AUTHOR |
| 08/25/98 | 02 | ADD 14 & 16 LD | T. VU |
| 07/10/99 | 03 | ADD 8 LD | T. VU |
| 5/23/01 | 04 | ADDED TOPMARK TO TITLE | |
| 10/14/04 | 05 | ADD "GREEN" PGG NOMENCLATURE | TU VU |
| 3/9/13 | 06 | ADDED PACKAGE CODE | RAC |
| 9/3/14 | 07 | ADD TOLERANCE FOR A, A1, E AND b | CK LEE |
| 3/10/17 | 08 | ADD OPTION T1 | R.TANH |

NOTE: REFER TO DCP FOR OFFICIAL RELEASE DATE

LAND PATTERN DIMENSIONS

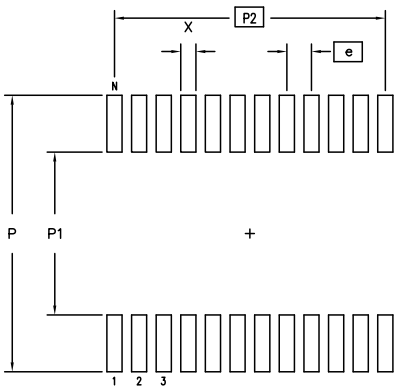

| | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX | MIN | MAX |
|----|----------|------|----------|------|----------|------|----------|------|----------|------|----------|------|
| P | 7.20 | 7.40 | 7.20 | 7.40 | 7.20 | 7.40 | 7.20 | 7.40 | 7.20 | 7.40 | 7.20 | 7.40 |
| P1 | 4.20 | 4.40 | 4.20 | 4.40 | 4.20 | 4.40 | 4.20 | 4.40 | 4.20 | 4.40 | 4.20 | 4.40 |
| P2 | 1.95 BSC | | 3.90 BSC | | 4.55 BSC | | 5.85 BSC | | 7.15 BSC | | 8.45 BSC | |
| X | .30 | .50 | .30 | .50 | .30 | .50 | .30 | .50 | .30 | .50 | .30 | .50 |
| e | .65 BSC | | .65 BSC | | .65 BSC | | .65 BSC | | .65 BSC | | .65 BSC | |
| N | 8 | | 14 | | 16 | | 20 | | 24 | | 28 | |

| | | | |
|---|---|---|--------------|
| TOLERANCES UNLESS SPECIFIED DECIMAL ANGULAR XX± ± XXX± XXXX± |  | 2975 Stender Way Santa Clara, CA 95054 PHONE: (408) 727-6116 FAX: (408) 492-8674 | |
| | | www.IDT.com | |
| TITLE PGG/PGG PACKAGE OUTLINE (PG OR PA TOPMARK CODE) 4.4 mm BODY WIDTH TSSOP .65 mm PITCH | | | |
| SIZE | DRAWING No. | REV | |
| C | PSC-4056 | 08 | |
| DO NOT SCALE DRAWING | | | SHEET 3 OF 3 |

Ordering Information

| Part / Order Number | Marking | Shipping Packaging | Package | Temperature |
|---------------------|-------------|--------------------|--------------|---------------|
| 5V41065PGG | See Page 11 | Tubes | 16-pin TSSOP | 0 to +70° C |
| 5V41065PGG8 | | Tape and Reel | 16-pin TSSOP | 0 to +70° C |
| 5V41065PGGI | | Tubes | 16-pin TSSOP | -40 to +85° C |
| 5V41065PGGI8 | | Tape and Reel | 16-pin TSSOP | -40 to +85° C |
| 5V41065NLG | See Page 11 | Trays | 16-pin QFN | 0 to +70° C |
| 5V41065NLG8 | | Tape and Reel | 16-pin QFN | 0 to +70° C |
| 5V41065NLGI | | Trays | 16-pin QFN | -40 to +85° C |
| 5V41065NLGI8 | | Tape and Reel | 16-pin QFN | -40 to +85° C |

“G” after the two-letter package code are the Pb-Free configuration, RoHS compliant.

While the information presented herein has been checked for both accuracy and reliability, Integrated Device Technology (IDT) assumes no responsibility for either its use or for the infringement of any patents or other rights of third parties, which would result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by IDT. IDT reserves the right to change any circuitry or specifications without notice. IDT does not authorize or warrant any IDT product for use in life support devices or critical medical instruments.

Revision History

| Rev. | Originator | Date | Description of Change |
|------|------------|----------|--|
| A | | 07/15/08 | New datasheet; Preliminary initial release. |
| B | RDW | 01/13/10 | Added Gen2 to title; update Electrical tables per char; added Differential Phase Jitter table. |
| C | RDW | 04/27/10 | Updated electrical tables per char; VDD is now 3.3 ±5%; released to final. |
| D | RDW | 07/19/10 | 1. Updated title and general description 2. Updated cycle-to-cycle jitter spec from 125 to 100 ps. |
| E | RDW | 11/21/11 | 1. Changed title to “2 Output PCIe GEN1/2 Synthesizer” 2. Added note to Features section: “For PCIe Gen3 applications, see 5V41235” 3. Updated Differential Phase Jitter table. |
| F | J, Chao | 08/26/13 | 1. Added 16VFQFPN notes in Features section 2. Added pinout and “Output/Spread Selection” table for 16VFQFPN. 3. Updated Pin Description table to include VFQFPN pin descriptions. 4. Added Thermal Characteristics table for 16VFQFPN. 5. Added marking diagrams for 16VFQFPN. 6. Added Package Dimensions/Drawing for 16VFQFPN. 7. Updated Ordering Information to include 16VFQFPN. |
| G | C.P. | 04/17/17 | 1. Replaced package outline drawings with latest NLG16 and PGG16 drawings. 2. Updated legal disclaimer. |

IDT5V41065

2 OUTPUT PCIE GEN1/2 SYNTHESIZER

Innovate with IDT and accelerate your future networks. Contact:

www.IDT.com

For Sales

www.idt.com/go/sales

For Tech Support

www.idt.com/go/support

Corporate Headquarters

Integrated Device Technology, Inc.

www.idt.com



DISCLAIMER Integrated Device Technology, Inc. (IDT) and its affiliated companies (herein referred to as "IDT") reserve the right to modify the products and/or specifications described herein at any time, without notice, at IDT's sole discretion. Performance specifications and operating parameters of the described products are determined in an independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of IDT's products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of IDT or any third parties.

IDT's products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of an IDT product can be reasonably expected to significantly affect the health or safety of users. Anyone using an IDT product in such a manner does so at their own risk, absent an express, written agreement by IDT.

Integrated Device Technology, IDT and the IDT logo are trademarks or registered trademarks of IDT and its subsidiaries in the United States and other countries. Other trademarks used herein are the property of IDT or their respective third party owners. For datasheet type definitions and a glossary of common terms, visit www.idt.com/go/glossary. Integrated Device Technology, Inc.. All rights reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.