

# SMT Power Inductors

Flat Coils - PG0077NL and PG0084NL Series



-  **Height:** 6.5mm Max (PG0077) and 4.40mm Max (PG0084)
-  **Footprint:** 14.5mm x 13.0mm Max
-  **Current Rating:** up to 45A
-  **Inductance Range:** 0.38μH to 2.65μH

Electrical Specifications @ 25°C - Operating Temperature -40°C to +95°C<sup>1</sup>

| Part <sup>8,9</sup><br>Number | Inductance <sup>2</sup><br>@ I <sub>rated</sub><br>(μH TYP) | I <sub>rated</sub> <sup>3</sup><br>(A) | DCR (mΩ) |      | Inductance<br>@ OADC<br>(μH ±20%) | Saturation <sup>4</sup><br>Current<br>I <sub>sat</sub> (A) | Heating <sup>5</sup><br>Current I <sub>DC</sub><br>(A) | Core Loss <sup>6</sup><br>Factor |      |
|-------------------------------|-------------------------------------------------------------|----------------------------------------|----------|------|-----------------------------------|------------------------------------------------------------|--------------------------------------------------------|----------------------------------|------|
|                               |                                                             |                                        | TYP      | MAX  |                                   |                                                            |                                                        | K1                               | K2   |
| PG0077.401NL                  | 0.34                                                        | 45                                     | 0.75     | 0.80 | 0.45                              | 48                                                         | 45                                                     | 1.68E-9                          | 33.5 |
| PG0077.801NL                  | 0.68                                                        | 35                                     | 1.20     | 1.30 | 0.80                              | 38                                                         | 35                                                     | 1.68E-9                          | 42.5 |
| PG0077.142NL                  | 1.16                                                        | 27                                     | 2.00     | 2.10 | 1.40                              | 28                                                         | 27                                                     | 1.68E-9                          | 57.8 |
| PG0077.202NL                  | 1.66                                                        | 23                                     | 2.80     | 2.90 | 2.00                              | 24                                                         | 23                                                     | 1.68E-9                          | 67.6 |
| PG0077.282NL                  | 2.32                                                        | 19                                     | 4.10     | 4.20 | 2.80                              | 20                                                         | 19                                                     | 1.68E-9                          | 80.1 |
| PG0084.351NL                  | 0.28                                                        | 40                                     | 1.30     | 1.80 | 0.35                              | 40                                                         | 61                                                     | 1.27E-9                          | 28.7 |
| PG0084.651NL                  | 0.52                                                        | 32                                     | 2.30     | 2.80 | 0.65                              | 32                                                         | 45                                                     | 1.27E-9                          | 38.1 |
| PG0084.112NL                  | 0.88                                                        | 24                                     | 3.60     | 4.20 | 1.10                              | 24                                                         | 34                                                     | 1.27E-9                          | 50.1 |

## Notes:

- The temperature of the component (ambient plus temperature rise) must be within the standard operating temperature range.
- Inductance at I<sub>rated</sub> is a typical inductance value for the component taken at rated current.
- The rated current listed is the lower of the saturation current @ 25°C or the heating current.
- The saturation current, I<sub>sat</sub>, is the current at which the component inductance drops by 20% (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
- The heating current, I<sub>DC</sub>, is the DC current required to raise the component temperature by approximately 40°C. The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test. Take note that the component's performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- Core Loss approximation is based on published core data:  

$$\text{Core Loss} = K1 \cdot (f)^{1.035} \cdot (K2 \Delta I)^{2.263}$$
**Where:** Core Loss = in Watts  
 $f$  = switching frequency in kHz  
 $K1$  &  $K2$  = core loss factors  
 $\Delta I$  = delta I across the component in Ampere  
 $K2 \Delta I$  = one half of the peak to peak flux density across the component in Gauss
- Unless otherwise specified, all testing is made at 100kHz, 0.1V<sub>AC</sub>.
- Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PG0077.401NL becomes PG0077.401NLT). Pulse complies to industry standard tape and reel specification EIA481.

\* Contact Pulse for availability



# SMT Power Inductors

Flat Coils - PG0077NL and PG0084NL Series


## Mechanical

## Schematic

PG0077.XXX, PG0084.XXX

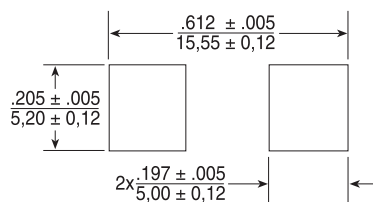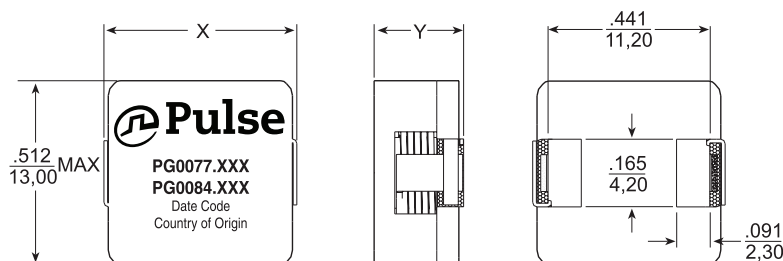


SUGGESTED PAD LAYOUT



|                   | PG0077    | PG0084    |
|-------------------|-----------|-----------|
| Weight .....      | 5.5 grams | 3.5 grams |
| Tape & Reel ..... | 300/reel  | 400/reel  |


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are:  $\pm \frac{.010}{0,25}$

| Part Number | Max. Length<br>"X" (in./mm) | Max. Height<br>"Y" (in./mm) | Max. Height<br>"Z" (in./mm) |
|-------------|-----------------------------|-----------------------------|-----------------------------|
| PG0077.401  | .571/14,50                  | .256/6,50                   | .276/7,00                   |
| PG0077.801  | .571/14,50                  | .256/6,50                   | .276/7,00                   |
| PG0077.142  | .551/14,00                  | .256/6,50                   | .276/7,00                   |
| PG0077.202  | .551/14,00                  | .256/6,50                   | .276/7,00                   |
| PG0077.282  | .551/14,00                  | .256/6,50                   | .276/7,00                   |
| PG0084.351  | .551/14,00                  | .173/4,40                   | .173/4,40                   |
| PG0084.651  | .551/14,00                  | .173/4,40                   | .173/4,40                   |
| PG0084.112  | .543/13,80                  | .173/4,40                   | .173/4,40                   |

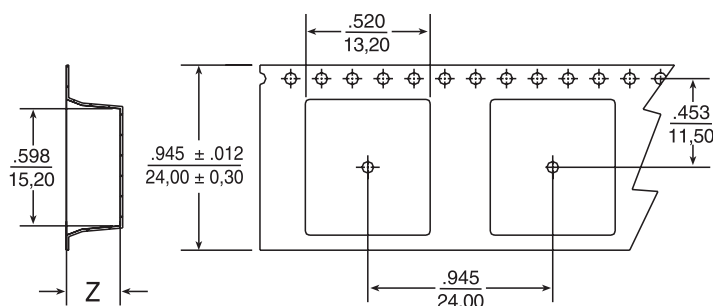

TAPE & REEL LAYOUT

## Inductance vs Current Characteristics

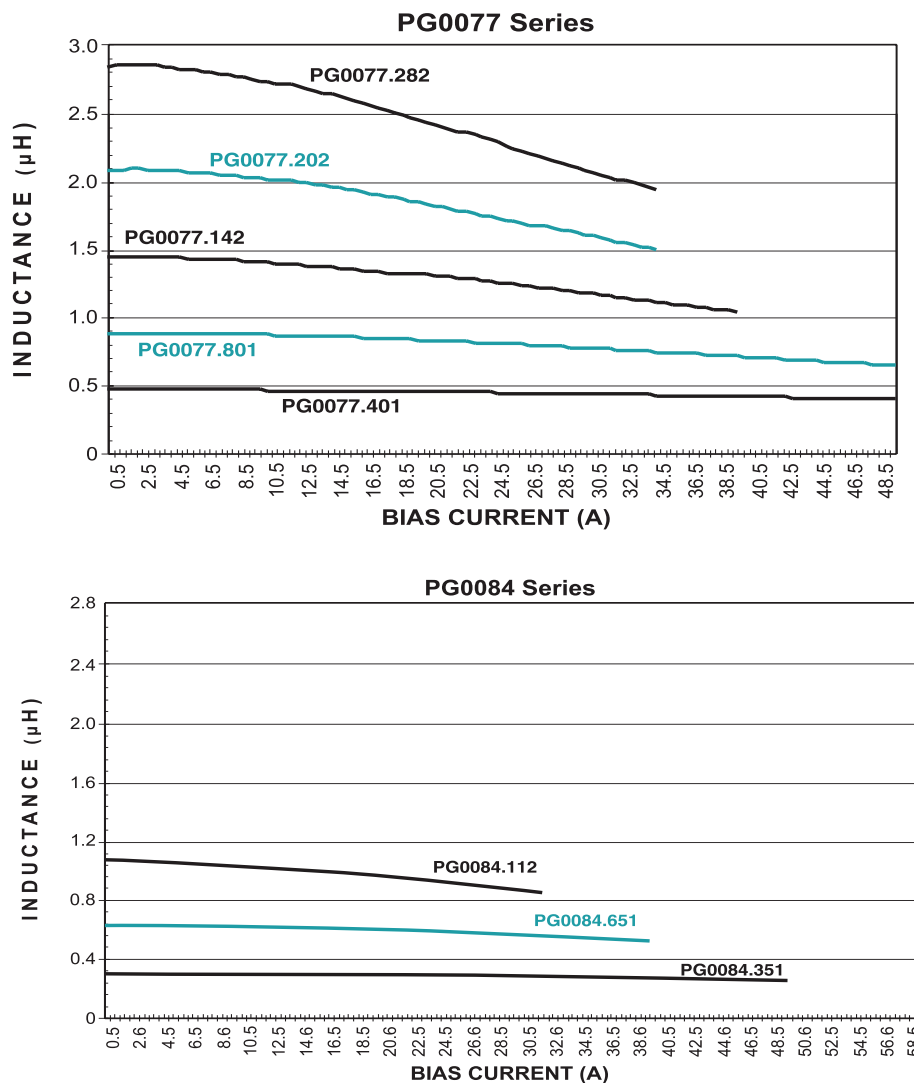

### For More Information

#### Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

#### Pulse Europe

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

#### Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

#### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

#### Pulse South Asia

3 Fraser Street 0428  
DUO Tower  
Singapore 189352

#### Pulse North Asia

1F., No.111 Xiyuan Road  
Zhongli District  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 858 674 8100  
Fax: 858 674 8262

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

Tel: 86 755 33966678  
Fax: 86 755 33966700

Tel: 86 21 62787060  
Fax: 86 21 62786973

Tel: 65 6287 8998  
Fax: 65 6280 0080

Tel: 886 3 4356768  
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019. Pulse Electronics, Inc. All rights reserved.




Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.